



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 486 876 B1

(12)

EUROPEAN PATENT SPECIFICATION

- (49) Date of publication of patent specification: **14.09.94** (51) Int. Cl.⁵: **F01L 1/04**, B23P 11/00,
F16D 1/06
- (21) Application number: **91118912.4**
- (22) Date of filing: **06.11.91**

(54) Machine element with at least a fitting member pressure-fitted on a shaft.

- (30) Priority: **19.11.90 JP 311431/90**
- (43) Date of publication of application:
27.05.92 Bulletin 92/22
- (45) Publication of the grant of the patent:
14.09.94 Bulletin 94/37
- (84) Designated Contracting States:
DE FR GB IT
- (56) References cited:
EP-A- 0 190 841
EP-A- 0 278 292
DE-A- 2 336 241
DE-A- 3 401 057
DE-A- 3 717 190

- (73) Proprietor: **NIPPON PISTON RING CO., Ltd.**
2-6 Kudankita 4-chome
Chiyoda-Ku Tokyo 102 (JP)
- (72) Inventor: **Umezawa, Koji, c/o Tochigi Factory**
of Nippon Piston Ring Co., Ltd.,
1111, Nogi
Nogi-machi, Shimotsuga-gun, Tochigi-ken
(JP)
Inventor: **Sakurai, Tamio, c/o Tochigi Factory**
of Nippon Piston Ring Co., Ltd.,
1111, Nogi
Nogi-machi, Shimotsuga-gun, Tochigi-ken
(JP)
- (74) Representative: **Altenburg, Udo, Dipl.-Phys. et**
al
Patent- und Rechtsanwälte
Bardehle . Pagenberg . Dost . Altenburg .
Frohwitter . Geissler & Partner
Galileiplatz 1
D-81679 München (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 486 876 B1

Description

The present invention relates to a machine element of the type having at least a fitting member pressure-fitted on a shaft, such as a camshaft for use in internal combustion engines, a shaft-supported gear, and a shaft-supported rotor. The fitting member has a bore for receiving the shaft, which is eccentric to the center of the fitting member for use in the camshaft or the like and concentric in the shaft-supported gear or the like. At least one portion of the area of the shaft in which the fitting member is to be provided has a diameter which is greater than the remaining areas of the shaft. The bore has at least a narrow portion defining a spacing diametrically smaller than the increased diameter portion of the shaft. The fitting member is forced onto the increased diameter portion of the shaft with the narrow portion of the bore cutting and/or deforming the increased diameter portion. The present invention also relates to a method of manufacturing the above-described machine element.

Machine elements are known in which the fitting members and the shafts, separately manufactured, are assembled by a press, fit accompanying a chip-removing operation. DE-OS 3717190 which represents the closest prior art document, describes a camshaft includes a shaft and at least one cam slid onto and connected to the shaft in an area of the shaft. The cam defines a bore for receiving the shaft. The bore has at least one radially inwardly directed projection. At least one portion of the area of the shaft has a diameter larger than the remaining areas of the shaft. The increased diameter portion of the shaft is a bead-like material displacement which extends circumferentially on the shaft and is manufactured by rolling. The cam is forced onto the increased diameter portion of the shaft with a projection in the bore of the cam forming in a chip-removing operation a groove in the increased diameter portion.

The projection is so finished as a cutting edge with an angular cross-section to form the groove in the outer surface of the shaft. It is also required for the fitting member to be harder than the shaft, since the fitting member must cut the groove off on the shaft with its projection. However, it is not easy to provide and finish the axially extending angular projection as a cutting edge within the bore of the fitting member. The cost of manufacturing the camshaft considerably rises when the fitting member is made from a harder material for coupling with the relatively hard shaft.

The present invention as claimed is intended to provide a remedy. It provides a machine element in which at least one fitting member is pressure-fitted onto the increased diameter portion of a shaft with

at least an inner wall portion of the fitting member shaving and/or deforming the outer surface of the shaft for a tight connection therebetween, while the fitting member is manufactured with ease at a relatively low cost.

In DE-A-2336241 a camshaft assembly is disclosed wherein a cam has a hexagonal bore for fitting with a hexagonal shaft. EP-A-190841 discloses a camshaft assembly wherein the cam is formed with a hexagonal bore to be fitted on a tubular shaft by a radial expansion of this hollow shaft.

In accordance with this invention a machine element as defined in claim 1 is provided. Preferred embodiments are defined in the dependent claims.

In accordance with the present invention, the shaft has protrusions on the outer surface thereof in the area of the shaft in which the fitting member is to be mounted. The protrusions have a diameter larger than the remaining areas of the shaft. The protrusions extend continuously or discretely and axially, peripherally or helically on the shaft and are formed by means of the known manner as padding, cutting, rolling and knurling. The fitting member has a bore, concentric or eccentric to the center of the fitting member, for receiving the shaft. The bore is formed with at least a chordal inner surface as an inner wall portion defining a space diametrically smaller than the protrusions. The chordal surface has such a perpendicular from the center of the bore that is adequately smaller than the radius of the protrusions. The bore in the fitting member consists of alternately connected arcuate and chordal surfaces in which the inner diameter of the arcuate surface is slightly larger than the outer diameter of the protrusions. It is also composed of a plurality of chordal surfaces in the form of a polygon. The fitting member is not always required to be harder than the shaft or the protrusions thereof. It can be similar in hardness to the shaft or the protrusions thereof.

The fitting member is forced onto the protrusions of the shaft with the inner chordal surface of the fitting member forming in a shaving and/or deforming operation an outer chordal surface on the the protrusions for a tight connection between the fitting member and the shaft. In the procedure of pressure-fitting the shaft into the bore of the fitting member, the chordal surface of the bore has the central portion thereof for shaving engagement with the protrusions of the shaft when the fitting member is harder than the shaft or for plastically deforming engagement with the protrusions of the shaft when the fitting member is similar in hardness to the shaft. The both side portions adjacent to central portion of the bore force the protrusions to deform partly plastically, partly elastically, so

that the inner chordal surface of the bore is secured to a corresponding outer surface formed in the protrusions by a shaving and/or deforming operation. This connection is substantially similar to an angular joint. It ensures that the machine element thus assembled has no relative motion arising between the shaft and the fitting member under practical working conditions.

It is easy to form and finish the flat chordal surface within the bore as the cutting edge for shaving and/or deforming the protrusions of the shaft as compared with the known projection in the form of an angular cutting edge for forming a groove in the outer surface of the shaft. Another advantage of the present invention is that the fitting member is not required to be harder than the shaft. Therefore, the machine element according to the present invention can be manufactured with ease at a lower cost than the prior art.

The Present invention will become more fully understood from the detailed description given hereinbelow and the accompanying drawings which are given by way of illustration only, and thus, are not limitative of the present invention.

FIG. 1 is a partial longitudinal sectional view of the camshaft according to the present invention;

FIG. 2 is a cross-sectional view taken along the line II-II of FIG. 1;

FIG. 3 is a partial longitudinal view of the shaft with helically, continuously extending protrusions;

FIG. 4 is a cross-sectional view of the shaft with peripherally or helically, discretely extending protrusions;

FIG. 5 is a partial longitudinal sectional view of the camshaft illustrating the cam piece being slid onto the protrusions of the shaft;

FIG. 6 is a view similar to FIG. 5 but showing the cam piece chamfered at the forward end of the bore;

FIG. 7 is a cross-sectional view of the shaft-supported rotor for use in a rotary compressor;

FIG. 8 is a cross-sectional view of the shaft-supported spur gear;

FIG. 9 is a graph illustrating the relation among the type of the protrusions, the pressure-fitting load, and the bonding strength between the fitting member and the shaft; and

FIG. 10 is a graph illustrating the relation between the angular number of the polygonal bores in the fitting members and the bonding strength between the fitting member and the shaft.

As seen in FIGS. 1 and 2, the shaft 10 has a fitting area A on which the cam piece 20 is fitted. The area is provided on the outer periphery thereof with a plurality of peripherally extending protrusions 12 in the form of an annular-groove knurling. The

protrusions are previously formed by rolling for fitting engagement with the chordal inner surface 22 which is formed in the bore 25 of the cam piece 20 to assemble the cam piece and the shaft into a camshaft. The peripheral or helical protrusions in the form of an annular or helical-groove knurling can be formed by means of pressure deformation, for example, by rolling. The protrusions extend continuously, peripherally in the form of an annular-groove knurling as seen in FIG. 1. The protrusions extend continuously, helically in the form of a helical-groove knurling as seen in FIG. 3. The protrusions extend discretely, peripherally or helically in the form of a criss-cross or diamond knurling as seen in FIG. 4. The protrusions in the form of a coarse criss-cross or diamond knurling are shaped by knurling. The knurled and rolled protrusions are preferable considering an efficiency in production.

As seen in FIG. 2, the protrusions 12 have an outer diameter D1 larger than the outer diameter D of the shaft 10 except the fitting area A in which the individual root between the two adjacent protrusions 12 has a diameter smaller than D. As seen in FIG. 2, the bore in the cam piece 20 consists of inner arcuate surfaces 21 and inner chordal surfaces 22 which are alternately, circumferentially connected. The arcuate surface 21 has a diameter D2 larger than the diameter D1 of the protrusions 12. The chordal surface 22 has such a perpendicular from the center of the bore 25 that is shorter than the radius of the protrusions 12 but longer than the radius of the root between the two adjacent protrusions. If the inner diameter D2 were smaller than or equal to the outer diameter D1, a highly tight fitting would be obtained. However, it is preferable for an efficient assembling of the cam piece and the shaft that the inner diameter D2 of the inner arcuate surface is larger than the outer diameter D1 of the protrusions. The bore 25 of FIG. 2 consists of four same arcuate surfaces 21 and four same chordal surfaces 22. It can consist of any number of arcuate or chordal surfaces. Both or either of arcuate and chordal surfaces may be in number more or less than 4. For example, an arcuate surface and a chordal surface can constitute the bore. Furthermore, the bore in the shape of polygon is formed only by the chordal surfaces. The polygonal bore makes a tight fitting with the shaft so that there occurs no relative motion between the fitting member and the shaft. The chordal surface is easy to be manufactured and finished since it is simple and flat. This results to remarkably reduce the cost of manufacturing the camshaft as compared with the conventional camshaft.

As seen by the arrow B in FIG. 5, the cam piece 20 is axially slid onto the fitting area A from an end of the shaft 10. Then, the chordal surface 22 within the bore 25 of the cam piece 20 has its

central portion shaving the protrusions 12 partly, the both side portions adjacent to the central portion deforming the same plastically, and the both further side portions deforming the same elastically, so that the cam piece 20 is tightly fitted on the protrusions.

As seen in FIG. 6, the cam piece 20 is chamfered at the forward end of the bore 25 and formed with a conical surface 23. When the cam piece 20 is slid onto the fitting area A of the shaft in the direction shown by the arrow B, the conical surface 23 facilitates for the inner chordal surface 22 to form the corresponding outer surface on the protrusions 12 of the shaft 10 in a shaving and/or deforming operation. The conical surface 23 also serves as a stopper to determine the axial position of the cam piece on the shaft.

There is shown a shaft-supported rotor for use in a rotary compressor in FIG. 7, in which the rotor body 20 in the form of a disk is the fitting member. The bore 25 is eccentric to the center of the rotor body 20. The shaft 10 has the protrusions 12 formed on the outer surface in the fitting area of the shaft by means of pressure deformation. The bore 25 is composed of four inner arcuate surfaces 21 and four inner chordal surfaces 22, alternately connected to each other. The diameter D1 of the protrusions 12 is smaller than the diameter D2 of the arcuate surface 21, while the radius of the protrusions 12 is larger than the perpendicular to the chordal surface 22 from the center of the bore 25. The shaft-supported rotor has the same longitudinal section as shown in FIG. 1.

A shaft-supported gear is shown in FIG. 8, in which the spur gear 20 is the fitting member. The bore 25 is concentric to the center of the gear 20. There is the same relation among the diameter D1 of the protrusions 12, the diameter D2 of the inner arcuate surfaces 21, and the perpendicular to the inner chordal surface 22 from the center of the bore 25 as shown in FIG. 7.

Three sorts of protrusions were formed on the outer surface of the shafts and tested by measuring the pressure-fitting load when inserted into the hexagonal bore of the fitting members and the bonding strength between the shaft and the fitting member after the protrusions being inserted into the bore. The fitting members were made from a Fe-8%Cr alloy and had an axial length of 11 mm. The shafts were made from a steel similar to SAE 1050. The first protrusions extended continuously, axially in the form of axial-groove knurling. The second protrusions extended discretely, peripherally or helically in the form of a criss-cross or diamond knurling. The third protrusions extended continuously, peripherally in the form of an annular-groove knurling. The hexagonal bore had an inscribed circle which was radially smaller by 0.8

mm than the protrusions, so that there was in maximum a radial interference of 0.8 mm between the fitting members and the shafts. The test results are shown in FIG. 9, which illustrates that the axial-groove knurling gives the relatively small bonding strength or applicable torque to the machine element, although it needs the relatively small pressure-fitting load, that the criss-cross and annular-groove knurlings advantageously give the relatively large bonding strength or applicable torque to the machine element, and that the criss-cross knurling needs the pressure-fitting load less than the annular-groove knurling.

Regular hexagonal, octagonal, decagonal and dodecagonal bores in the fitting members were tested by measuring the bonding strength between the fitting members and the shafts after each bore being forced onto the protrusions in the form of the criss-cross knurling on the shaft. The polygonal bores had the same circumcircle which was radially larger by 0.8 mm than the protrusions, so that there was in maximum a radial interference between the fitting member and the protrusions. The fitting members and the shafts were made from the same materials as those illustrated in FIG 9. The test results are shown in FIG. 10 in which the graph illustrates the relation between the angular number of the regular polygonal bores and the bonding strength. From FIG. 10 it is known that the polygonal bores with an angular number of 8 to 10 are superior in bonding strength or applicable torque to the hexagonal and dodecagonal bores.

Claims

1. A machine element comprising at least one fitting member (20) pressure-fitted on a shaft (10), the fitting member having a bore (25) for receiving the shaft, the shaft having at least an area (A) formed with protrusions (12) on which the fitting member is fitted, said protrusion of the shaft having an outer diameter (D1) larger than the outer diameter (D) of the shaft, the bore having an inner narrow portion (22) defining a space diametrically smaller than the protrusions, the protrusions (12) extending peripherally on the shaft (10), the bore (25) having at least one inner surface (22) having a perpendicular from the center of the bore shorter than the radius of said protrusions, wherein the fitting member (20) is configured to be forced onto the protrusions of the shaft with at least one inner surface of the bore forming a corresponding outer surface on the protrusions (12), characterized in that said at least one inner surface of the bore is a chordal inner surface.

2. The machine element according to claim 1, characterized in that the protrusions (12) extend continuously and axially on the outer surface of the shaft (10). 5
3. The machine element according to claim 1, wherein said protrusions (12) of the shaft (10) are in the form of one selected from the group consisting of criss-cross, annular-groove and helical-groove knurlings. 10
4. The machine element according to claim 1, wherein said bore (25) of the fitting member (20) is in the form of a regular polygon of which the angular number is in a range of 6 to 12. 15
5. The machine element according to claim 1, wherein said bore (25) of the fitting member (20) is composed of alternately connected inner arcuate (21) and chordal (22) surfaces. 20
6. The machine element according to claim 1, wherein said machine element is a camshaft with a plurality of cam pieces (20) fitted on the shaft (10). 25
7. The machine element according to claim 1, wherein the fitting member (20) is harder than the protrusions (12). 30
8. The machine element according to claim 1, wherein the fitting member (20) is similar in hardness to the protrusions (12). 35

Patentansprüche

1. Maschinenelement, das zumindest ein Montierglied (20) aufweist, das auf eine Welle (10) preßgepaßt ist, wobei das Montierglied eine Bohrung (25) zum Aufnehmen der Welle hat, die Welle zumindest einen Bereich (A) hat, der mit vorspringenden Teilen (12) gebildet ist, auf denen das Montierglied montiert ist, wobei die vorspringenden Teile der Welle einen äußeren Durchmesser (D1) haben, der größer als der äußere Durchmesser (D) der Welle ist, die Bohrung einen inneren engen Abschnitt (20) hat, der einen Raum definiert, der im Durchmesser kleiner als die vorspringenden Teile ist, die vorspringenden Teile (12) sich peripher auf der Welle (10) erstrecken, die Bohrung (25) zumindest eine innere Oberfläche (22) mit einer Senkrechten von dem Zentrum der Bohrung hat, die kürzer als der Radius der vorspringenden Teile ist, und wobei das Montierglied (20) so konfiguriert ist, das es auf die vorspringende Teile der Welle gezwungen 40

wird, wobei zumindest eine innere Oberfläche der Bohrung eine entsprechende äußere Oberfläche auf den vorspringenden Teilen (12) bildet, dadurch gekennzeichnet, daß zumindest eine innere Oberfläche der Bohrung eine sehnenförmige Oberfläche ist.

2. Maschinenelement gemäß Anspruch 1, dadurch gekennzeichnet, daß die vorspringenden Teile (12) sich kontinuierlich und axial auf der äußeren Oberfläche der Welle (10) erstrecken. 10
3. Maschinenelement gemäß Anspruch 1, wobei die vorspringenden Teile (12) der Welle (10) in der Form von kreuzförmigen, ringnutförmigen oder spiralnutförmigen Rändelungen sind. 15
4. Maschinenelement gemäß Anspruch 1, wobei die Bohrung (25) des Montiergliedes (20) in der Form eines regulären Polygons ist, dessen Winkelzahl im Bereich von 6 bis 12 liegt. 20
5. Maschinenelement gemäß Anspruch 1, wobei die Bohrung (25) des Montiergliedes (20) aus abwechselnd miteinander verbundenen inneren bogenförmigen (21) und sehnenförmigen (22) Oberflächen zusammengesetzt ist. 25
6. Maschinenelement gemäß Anspruch 1, wobei das Maschinenelement eine Nockenwelle mit einer Vielzahl von Nockenteilen (20) ist, die auf die Welle (10) montiert sind. 30
7. Maschinenelement gemäß Anspruch 1, wobei das Montierglied (20) härter als die vorspringenden Teile (12) ist. 35
8. Maschinenelement gemäß Anspruch 1, wobei das Montierelement (20) ähnlich in der Härte wie die vorspringenden Teile (12) ist. 40

Revendications

1. Un élément de machine comprenant au moins un organe adaptable (20) adapté à force sur un arbre (10), l'organe adaptable comprenant un alésage (25) recevant l'arbre, l'arbre comportant au moins une zone (A) formée avec des saillies (12) sur lesquelles est adapté l'organe adaptable, ladite saillie de l'arbre ayant un diamètre extérieur (D1) plus grand que le diamètre extérieur (D) de l'arbre, l'alésage ayant une partie intérieure étroite (22) définissant un intervalle diamétralement plus petit que les saillies, les saillies (12) s'étendant périphériquement sur l'arbre (10), l'alésage (25) présentant au moins une surface intérieure (22) pour 45

laquelle une perpendiculaire abaissée du centre de l'alésage est plus courte que le rayon des saillies, dans lequel l'organe adaptable (20) est configuré de manière à être forcé sur les saillies de l'arbre avec au moins une surface intérieure de l'alésage qui forme une surface extérieure correspondante sur les saillies (12) caractérisé en ce que ladite surface intérieure au moins de l'alésage est une surface intérieure suivant une corde.

5

10

2. L'élément de machine selon la revendication 1, caractérisé en ce que les saillies (12) s'étendent de façon continue et axialement sur la surface extérieure de l'arbre (10).
3. L'élément de machine selon la revendication 1, dans lequel les saillies (12) de l'arbre (10) ont la forme d'un moletage choisi dans le groupe formé des moletages croisés, des moletages à gorge annulaire et des moletages à gorge hélicoïdale.
4. L'élément de machine selon la revendication 1, dans lequel l'alésage (25) de l'organe adaptable (20) a la forme d'un polygone régulier dont le nombre de sommets est compris dans la plage allant de 6 à 12.
5. L'élément de machine selon la revendication 1, dans lequel l'alésage (25) de l'organe adaptable (20) est composé de surfaces intérieures suivant un arc (21) et suivant une corde (22) reliées de façon alternée.
6. L'élément de machine selon la revendication 1, dans lequel l'élément de machine est un arbre à cames avec une pluralité de pièces de came (20) adaptées sur l'arbre (10).
7. L'élément de machine selon la revendication 1, dans lequel l'organe adaptable (20) est plus dur que les saillies (12).
8. L'élément de machine selon la revendication 1, dans lequel l'organe adaptable (1) a une dureté semblable à celle des saillies (12).

15

20

25

30

35

40

45

50

55

FIG. 1

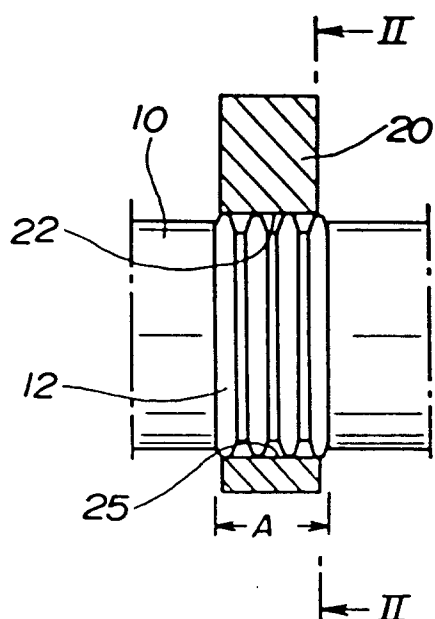


FIG. 3

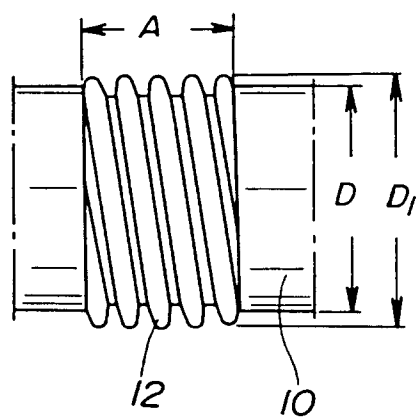


FIG. 2

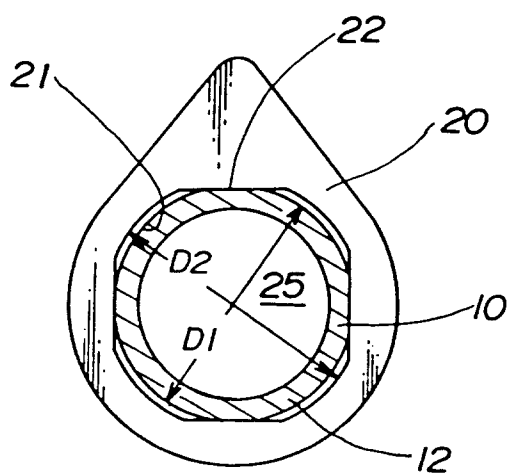


FIG. 4

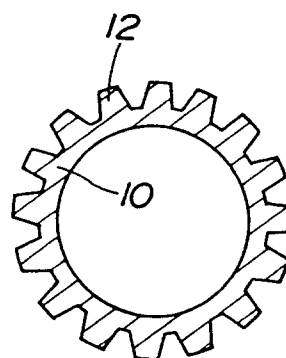


FIG. 5

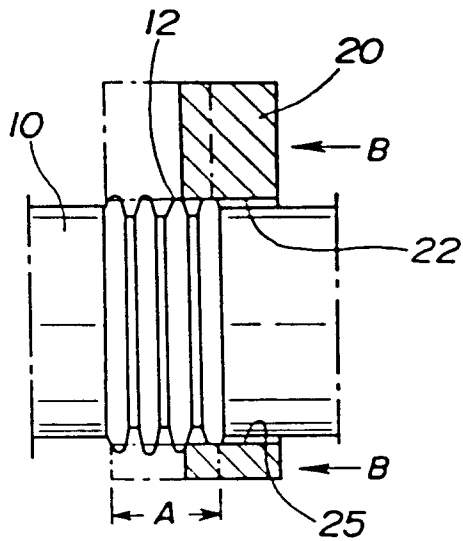


FIG. 7

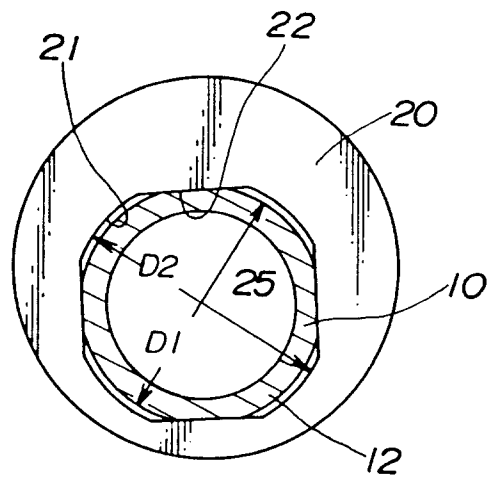


FIG. 6

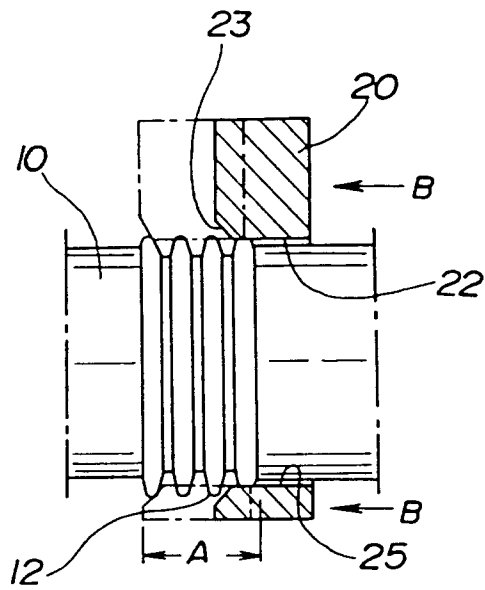


FIG. 8


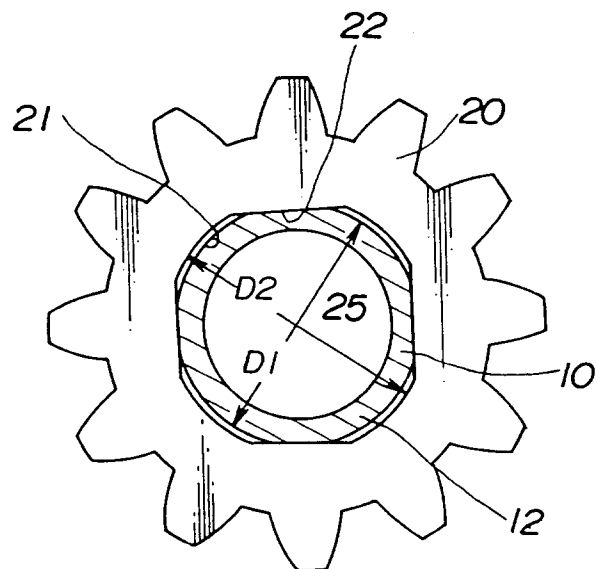



FIG. 9

RELATION AMONG KNURLING,
BONDING STRENGTH AND
PRESSURE-FITTING LOAD

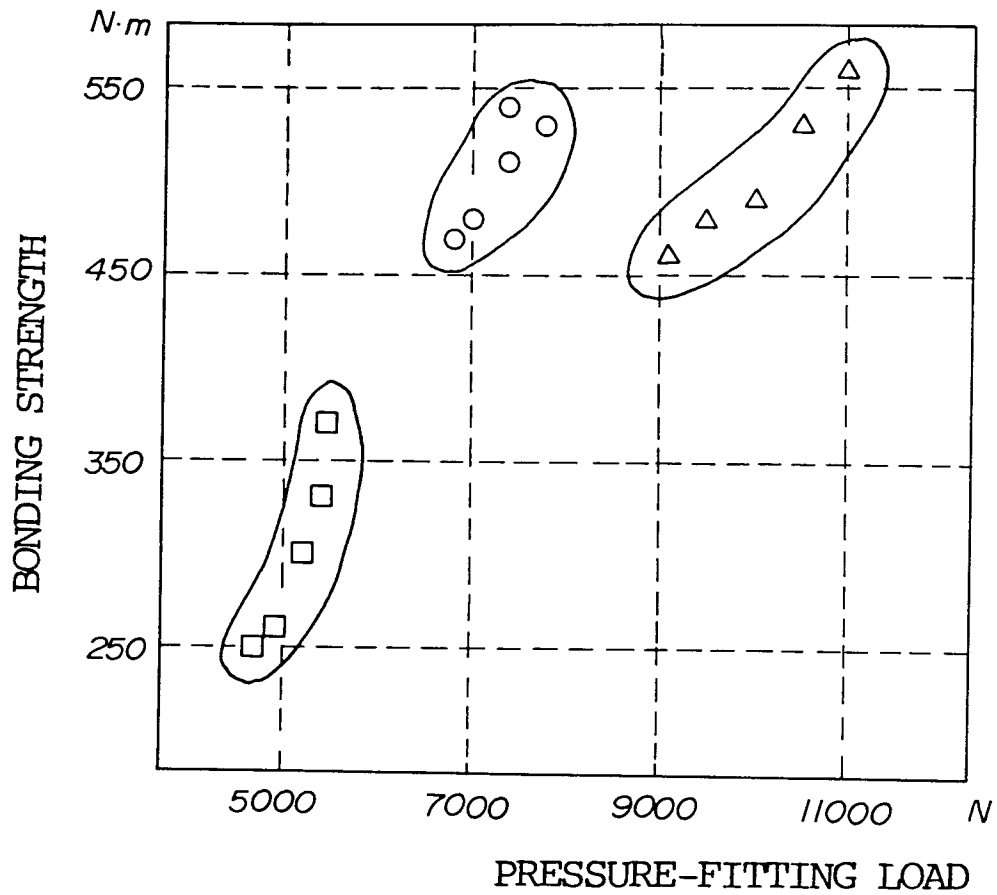


ANNULAR-GROOVE KNURLING

Δ



DIAMOND KNURLING

○



AXIAL-GROOVE KNURLING

□




FIG. 10

RELATION BETWEEN POLYGONAL
BORE AND BONDING STRENGTH

