

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 492 088 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **04.10.95** (51) Int. Cl.⁶: **B65B 1/16**

(21) Application number: **91118604.7**

(22) Date of filing: **31.10.91**

(54) **Filling apparatus.**

(30) Priority: **21.12.90 US 632458**

(43) Date of publication of application:
01.07.92 Bulletin 92/27

(45) Publication of the grant of the patent:
04.10.95 Bulletin 95/40

(64) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IT LI LU NL SE

(56) References cited:
EP-A- 0 059 394
DE-A- 1 561 952
US-A- 3 656 517
US-A- 4 133 281

(73) Proprietor: **AMERICAN CYANAMID COMPANY**
One Cyanamid Plaza
Wayne, NJ 07470-8426 (US)

(72) Inventor: **Zoltan, Bart Joseph**
152 DeWolf Road
Old Tappan,
New Jersey 07657 (US)
Inventor: **Bouley, William Francis**
142 Convent Road
Blauvelt,
New York 10993 (US)
Inventor: **Miller, Donald Robert**
12 Roosevelt Avenue
Westwood,
New Jersey 07675 (US)

(74) Representative: **Wächtershäuser, Günter, Prof.**
Dr.
Patentanwalt,
Tal 29
D-80331 München (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 492 088 B1

Description

BACKGROUND OF THE INVENTION

1. FIELD OF THE INVENTION

The invention relates to an apparatus for filling a cavity with a fine particulate material with a nozzle assembly in a nozzle housing being connected to a powder supply tube and an inlet for a moving gas stream and having a discharge port with an orifice pointed to the opening of a cavity to be filled according to the preamble of Claim 1. Such an apparatus is known from DE-A-15 61 952 on which the preamble of Claim 1 is based.

2. DESCRIPTION OF PRIOR ART

It is desirable to administer a pharmacologically active material in a finely powdered form to a patient. For example, anti-asthma and other drugs have been administered via oral inhalation type dispensing devices. One problem with administering finely powdered materials is that it is often necessary to accurately and repeatably fill long and narrow cavities or holes that comprise the dispensing apparatus with a measured unit dosage amount of the material.

In this regard, recently, an apparatus and method for dispensing a finely powdered solid antibiotic therapeutic agent into the periodontal pocket of a patient suffering from periodontal disease has been developed (US-A-5 236 355). The apparatus includes a narrow tip portion sufficiently small to fit into the periodontal pocket. The powdered therapeutic agent is disposed within a narrow bore located in the tip and dispensed from the tip into the periodontal pocket.

Filling the narrow bore of the periodontal dispensing apparatus with the proper amount of the powdered therapeutic agent has proved to be a difficult task due to the small opening through which the agent must enter and the relatively long and narrow hole which must be filled. In addition, due to the fact that a standard dosage of the therapeutic agent must be delivered to the periodontal pocket, the dispensing apparatus must be filled in a precise and repeatable manner.

One known way of filling a cylinder such as a cartridge with a powdered material such as gun powder involves placing the gun powder in a funnel and allowing gravity to feed it through the funnel stem into the cartridge. This method would not be useful to fill the periodontal dispensing apparatus described above because the hole to be filled is too narrow to allow particles to flow through by gravity feed. In addition, the therapeutic agent is hygroscopic and does not flow evenly.

Another way to fill a long and narrow hole such as the bore in the periodontal dispensing apparatus includes gathering a mound of the powder, and tamping the bore repeatedly into the mound, until the desired weight of medication has been added to the weight of the dispenser. This method, however, is extremely time consuming and inaccurate.

It is thus an object of the present invention to provide an apparatus capable of filling a long and narrow cavity or hole having a relatively small opening with a finely powdered material. It is another object of the invention to provide an apparatus capable of accurately filling a long and narrow hole or cavity of an apparatus for dispensing such material with a unit dosage amount of a pharmacologically active powdered material.

SUMMARY OF THE INVENTION

The invention provides a filling apparatus for dispensing and filling a finely powdered material into a long and narrow cavity or hole having a relatively small opening as defined in claim 1 and a method as defined in claim 10. Said apparatus includes a discharge port having an orifice positioned so as to point at the opening of the cavity to be filled, but spaced apart from the opening of the cavity or hole by a gap, means for suspending the finely powdered material into a moving gas stream and discharging the gas stream through the orifice of the discharge port, whereby as the gas stream containing the suspended powdered material is discharged through the orifice of the discharge port the powder bridges the gap and fills the hole or cavity while the gas escapes through the gap. The gap between the discharge port and the opening of the cavity or hole to be filled should be a distance not greater than twice the size of the orifice of the discharge port, preferably a distance of about .2 to 2 times the size of the orifice of the discharge port. Since the density of the powder is typically much greater than that of the gas, the gas can easily change direction and escape through the gap, however, the powder which is denser, continues because of its inertia into the long and narrow cavity or hole. For the cavity or hole to be filled, the far end of the hole must be blocked. In the event that devices such as a small pipe or tube are to be filled, the far end can be temporarily blocked until the filling is complete. When the hole is filled to capacity the excess powder automatically exits through the gap, and may be reclaimed for use, if desired. In the case of the present invention the powder is reclaimed because the powder is a pharmaceutical product which is valuable, and which must be accounted for.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 depicts the discharge port, gap and the cavity or hole to be filled.

Figure 2 is a block diagram of the control elements of the system.

Figure 3 depicts one embodiment of a filling apparatus according to the present invention.

Figure 4 is a detailed view of the manifold of the nozzle assembly.

Figure 5 is a detailed view of the nozzle housing.

Figure 6 depicts a dispenser which is filled with an apparatus according to the present invention.

Figure 7 shows a histogram of fill weights for a pharmaceutical powder, where the target fill weight was 4.5 milligrams.

Figure 8 depicts one embodiment of a multiple unit dose powder dispenser of the type useful for medications which can be delivered by way of oral inhalation.

Figure 9 depicts another embodiment of a filling apparatus according to the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The filling apparatus of the present invention is particularly suited for filling a long and narrow cavity or hole having a relatively small opening with a finely powdered material. For this invention narrow is considered to be about 1 millimeter in width or diameter or smaller, and long is considered greater than about seven millimeters in length. The cavity or hole to be filled may be of any cross sectional shape and may for example include square, rectangular, spherical, or an irregular shape. The hole need not have a uniform cross section. For this invention, a relatively small opening is considered to be about 1 millimeter in width or diameter or smaller. As with the cavity or hole the opening may be of various shapes.

The invention is particularly suited for filling various dispensing devices for dispensing unit dosage forms of pharmacologically active materials. In this regard, it is recognized that the material must be packed into the cavity of the dispensing device in such a way so that it can be dispensed therefrom. The apparatus of the present invention is uniquely suited for this type of filling in that the powdered materials are not packed too tightly due to the fact that they are transported via a moving gas stream. Further in this regard, it will be appreciated that cylindrical cavities are particularly suited to be filled by the present apparatus because cylindrical barrels and cylindrical plungers provide reproducible cross sections and volumes for dispens-

ing. Also, cylindrical plungers are well suited to dispense all of the material without leaving any behind in corners, etc. In the event that a cavity has more than one opening, all but one must be temporarily blocked during the filling operation or otherwise the particle laden gas stream will exit through the other openings and the cavity will not be filled. This temporary blocking can be easily removed and thus items such as small tubes or pipes are filled.

The filling apparatus of the present invention is particularly suited for filling all types of finely powdered solid materials such as pharmacologically active powdered materials. Among the pharmacologically active agents which can be finely powdered and thus are amenable for filling by the present apparatus are peptides and proteins. Specific examples of the latter are: aerial natriuretic factor, tumor necrosis factor, oxytocin, vasopressin, adrenocorticotrophic hormone (ACTH), epidemial growth factor, tryocidins, gramicidins, renin, bradykinin, angiotensins, encorphins, enkephalins, calcitonin, salmon calcitonin, secretin, calcitonin gene related factor, tissue plasminogen factor, kidney plasminogen factor, cholecystokinin, melanocyte inhibiting factor, melanocyte stimulating hormone, neuropeptide y, nerve growth factor, muramyl dipeptide, thymopoietin, human growth hormone, porcine growth hormone, sodium pentemedine, bovine growth hormone, insulin, thyrotropin releasing hormone (TRH), arogastrone, pentagastrin, tetragastrin, gastrin, interferons, glucagon, somatostatin, prolactin, superoxide dismutase, luteinizing hormone releasing hormone-(LHRH), H-5-Oxo-Pro-His-Trp-Ser-Tyr-DTrp-Leu-Arg-Pro-GlyNH₂, H-5-Oxo-Pro-His-Trp-Ser-Tyr-3-(2Naphthyl)-D-alanyl-Leu-Arg-Pro-Gly-NH₂, Luteinizing hormone-releasing factor (pig), 6-[0-(1,1-dimethylethyl)-D-serine]-10-deglycinamide-, 2-(aminocarbonyl)hydrazide (9CI), Luteinizing hormone-releasing factor (pig), 6-[0-(1,1-dimethylethyl)-D-serine]-9-[N-ethyl-L-prolinamide)-10-deglycinamide-(9CI), Luteinizing hormone-releasing factor (pig), 6-D-leucine-9-(N-ethyl-L-prolinamide)-10-deglycinamide-(9CI) and synthetic analogs and modifications and pharmacologically active fragments thereof and pharmaceutically acceptable salts thereof.

Other classes of compounds suitable for filling via the present apparatus includes: penicillins, betalactamase inhibitors, cephalosporins, quinolones, aminoglycoside antibiotics (gentamicin, tobramycin, kanamycin, amikacin), estradiol, norethisterone, norethindrone, progesterone, testosterone, aminonide, achromycin, tetracyclines (doxycycline, minocycline, oxytetracycline, tetracycline, chlor-tetracycline, demeclocycline, methacyline), clindamycin, Vitamin B-12, anesthetics (procaine,

tetracaine, lidocaine, mepivacaine, etidocaine), mitoxantrone, bisantrene, doxorubicin, mitomycin C, bleomycin, vinblastine, vincristine, cytosine arabinoside, ARA-AC, actinomycin D, daunomycin, daunomycin benzoylhydrazine, nitrogen mustards, 5-azacytidine, calcium leucovorin, cis-platinum compounds, 5-fluorouracil, methotrexate, aminopterin, maytansine, melphalan, mercaptopurines, methyl CCNU, hexamethylmelamine, etoposide, hydroxyurea, levamisole, mitoquanzone, mis-onidazole, pentostatin, teniposide, thioquanine, dichlorometho- trexate, chloprothixene, molindone, loxapine, haloperidol, chlorpromazine, triflupromazine, mesoridazine, thioridazine, fluphenazine, perphenazine, trifluoperazine, thiothixene, and pharmaceutically acceptable salts of the foregoing, hydromorphone, oxymorphone, levorphenol, hydrocodone, oxycodone, nalorphine, naloxone, naltrexone, buprenorphine, butorphenol, nalbuphine, meperidine, alphaprodine, anileridine, diphenoxylate, fentanyl and pharmaceutically acceptable salts of the foregoing. The foregoing may be utilized in finely powdered form, having sizes of from about .5 micron or larger. However, it will be appreciated that the materials may not be of such a large size to prevent suspension in a moving gas stream. In addition, useful materials include those microencapsulated pharmaceutical products of the type described in US-A-5 236 355. These microencapsulated materials typically have sizes of 20 to 120 micron diameter, which are suitable for filling with the present apparatus.

It will be appreciated that the type of gas which is used to suspend the particles of solid material must be compatible with the material and in the case of pharmaceutical products must meet sanitary requirements. In this regard, and bearing in mind the compatibility and sanitary requirements it is contemplated that a wide variety of gasses may be employed, including, air, nitrogen, dry air, carbon dioxide, argon and other inert gasses. Dry air or nitrogen will be preferred in connection with hygroscopic or hydrophilic particles.

Referring to Figure 1, discharge port 1 having orifice 4 with a width or diameter D is positioned so as to point at opening 5 of dispensing device 3 having cavity 2. Opening 5 has a width or diameter X. The discharge port 1 is spaced apart from the opening 5 of the cavity 2 by a gap G. The width or diameter D of orifice 4 of the discharge port must be equal to or smaller than the width or diameter X of opening 5 of cavity 2 to be filled. In some instances such as for discharge ports orifices or cavity openings with irregular or different shapes, it will be desirable for the discharge port to fit within the cavity opening. If the width or diameter of orifice 4 of the discharge port exceeds that of the width or diameter X of cavity 2, much of the

particulate material suspended in the gas stream will flow by the side of the device 3 and will thus not enter cavity 2. The orifice 4 of discharge port 1 and opening 5 of device 3 are spaced apart by a distance identified as gap G. It has been found that a gap of not greater than 2 times the width or diameter D of orifice 4 fits this criterion. It is preferred that gap G be a distance of .2 to 2 times the width or diameter D. The size of the gap G must be sufficiently large so that gas will be allowed to escape but not so large that the particulate material will not be carried along in the gas stream and bridge the gap.

In the embodiment of the apparatus described herein with reference to Figure 2 - 4, the discharge port orifice has a diameter of 0.09 cm (.038 inches) and the gap is 0.03 cm (.010 inches).

It will be appreciated that the powdered material may be suspended in a moving gas stream by any number of devices such as the venturi device described in greater detail herein or a fluidized bed or any other device which results in suspending particles of material in a moving stream of gas. The particular device must be capable however of suspending a sufficient amount of particles to fill the required cavities quickly and efficiently but not to allow too many particles to become suspended else they clog the discharge port or the gap. In this regard, for example, the flow rate of the gas through a device such as a venturi may be regulated to maintain a proper suspension of particles in the gas stream.

In one embodiment the filling apparatus includes a container for holding the powdered material to be filled, a source of gas (preferably dry air, or nitrogen), a regulator to provide the required volumetric flow rate, a venturi nozzle assembly for discharging the gas and drawing up the powder into the stream of discharged gas. Optionally it may also have an overflow collector for trapping powder which was in excess of the volume required to fill the narrow bore hole.

Referring to Figure 2, a supply of gas 10 is regulated by a regulator 15 prior to being connected to a solenoid controlled pneumatic valve 20. When the pneumatic valve 20 is energized by a standard 115 volt source 25, a solenoid controlled valve opens, permitting the gas to flow through pipe 30 to the filling system. Because for the operation of this invention only a brief burst of gas is required, an adjustable timer relay 35 is set to limit the time duration of the opening of the solenoid controlled pneumatic valve to under one second. It is not a requirement that the gas supply be pulsed, but it is preferred, to avoid packing of the finely powdered material. The closing of the timer relay 35 is initiated by the activation of a footswitch closure of switch 40.

The filling system is shown in greater detail in Figure 3. The gas supply to the system **30** is shown in both Figures 1 and 2. The gas supply is connected to the venturi nozzle assembly **45** using a standard pneumatic connector **50**. In the venturi nozzle assembly **45**, the gas enters a manifold **55** which is shown both in Figures 3 and 4. Referring to Figure 4, a powder supply tube **60** runs through the manifold, and acts as the backbone of the manifold assembly. Collar **65** permits gas to enter the manifold assembly through opening feature **70** and to pass through plenum **75**, and to exit through orifices **80** on orifice plate **85**. In this way, the gas is discharged through a plurality of orifices and will envelop the powder supply tube **60**.

The gas supply **30** in Figure 3 is divided at tee connector **90** to go to both the nozzle assembly **45**, and to the supply of powder **95**, and more specifically to the space above the powder, identified as **100**. In the pulsed mode of operation, by pressurizing the powder source, powder begins to dispense very quickly. Without this "bias pressure", it would take several seconds for the venturi effect to develop useful powder flow. The sipper tube **110** is immersed in the powder **105** and goes through the manifold assembly and into the nozzle assembly **45**.

Figure 5, shows the nozzle housing **115**. The supply of gas enters through cylindrical opening **120**, and the manifold is installed through opening **125**. The small bore cylinder to be filled will be placed into cylindrical holding feature **130**, and the overflow of powder, if any, will escape through overflow conduit **135**.

In use, the gas after exiting nozzle **80** is constrained to flow through a necked down venturi area **140** defined by the clearance between manifold **115** and powder supply tube **60**. Because the gas velocity is high through the venturi **140**, the pressure in this area is greatly reduced.

This area of low pressure draws powder **105** through sipper **110**, mixes the gas with the powder, and the gas/powder mixture is discharged through the discharge port **131** having the length G'. In use, as shown on Figure 3, the dispensing device having a cavity to be filled **145** is held in a holding feature **130** of nozzle housing **115**.

Critical to the operation of this device is the gap G. Overflow conduit **135** allows excess gas and powdered material to escape during the fill process. In operation, the powder is packed by the velocity of the gas/powder mixture into the cavity of the dispensing device **145**, but the much lower density gas is able to change direction and exit through the gap G and overflow conduit **135**.

Some quantity of powder will be mixed with the overflow gas, and will be carried into the overflow collector **150**. To prevent pressurizing the overflow

collector **150**, there is a vent to atmosphere provision **155**. If the vessel **150** collecting the overflow were not vented to atmosphere, pressure would build up in the vessel. As this pressure increased, it would reach the point where the pressure used to propel the gas would equal the pressure of the overflow vessel. At this point there would be no pressure differential, and therefore no motive force. To keep the ambient environment from being contaminated by the powder being filled, there is a filter **160** in the overflow collector to keep the powder from escaping, and also to recover the powder in those applications where the powdered material is valuable.

Referring to Figure 6, dispenser **200** is comprised of two parts, a barrel **210** and plunger **220**. In a preferred embodiment, exactly 4.5 milligrams of a pharmaceutically active material is metered into the dispenser **200**. Modified depth micrometer **230** is mounted into block **240** so that when the micrometer barrel is turned, attached pin **235** moves inward or outward depending on the direction of micrometer barrel rotation. Pin **235** is sized so as to fit easily into dispenser barrel **210**. In use, plunger **220** is depressed, and then the dispenser assembly is impaled upon pin **235** so as to set a fixed, and repeatable position of plunger **220** in barrel **210**. If the amount of material to be metered is always fixed, the micrometer adjustment need not be used, and can be replaced with a fixed length pin.

The embodiment depicted in Figures 1 to 6 has been evaluated to determine if it accurately and precisely filled the cavity **250** in dispenser **200**. Figure 6, shows a typical histogram of fill weights or approximately 5400 fills.

The x-axis of the histogram shows the fill weights of 5400 periodontal dispensers filled with the antibiotic minocycline. The resultant fill weights are divided, for the purpose of presentation, into 14 bins, from 3.9 milligrams to 5.2 milligrams in 0.1 milligram increments. The y-axis of the histogram shows the number of dispensers which had the indicated fill weight.

It is apparent that the fill weights are narrowly clustered. Specifically, the average fill weight is 4.5 milligrams (which was the target fill weight), with a standard deviation of 0.19 milligrams. This 4.22 percent standard deviation is acceptable for pharmaceutical applications.

The apparatus described in this application may also be used to fill other medication delivery devices which deliver powdered inhalants to the lung. Specifically, certain medications are most effective when delivered directly to the lungs of the patient. Examples include drugs against reversible airway obstruction such as asthma, drugs to control pulmonary illnesses or infections, any drugs to fight

off opportunistic infections of the lungs which tend to infect patients who have antibodies to the HIV virus (AIDS). Examples also include polypeptide products of biotechnology.

Freeze-dried polypeptides could be delivered by the pulmonary route of administration. These rDNA products are very potent, and the required dosages are likely to be small. The subject invention is capable of accurately metering small volumes of powdered drug into a dispenser for later use.

Figure 8 shows one apparatus for storing multiple-doses of powdered material and which is useful in medication delivery devices for delivery of medication to the lungs. It is comprised of a support plate **800**, preferably made of plastic or paper, having a mounting feature **810**, shown as a hole but which may be one of any practical holding means, and also having one or more long, thin tube-like devices **820a** through **820n**, for holding one or several dosages of the drug. The subject invention can be used to fill these tube like devices with drug. The devices must be made of a material which can readily be pierced or broken, so that the complete contents of one device is available for therapy. The number of such devices is a design choice, but can easily encompass from one (1) to thirty (30) dosages. The apparatus of the present invention can be used to fill one device at a time, with provision having been made to seal the filled device, and then stepping the support plate **800** to present the next position, such as **820b** to the filling apparatus.

In the alternative it is practical to build a filling apparatus according to the present invention with multiple venturis, and multiple sources and gaps, so that all of the devices on plate **800** are filled simultaneously.

Figure 9 is a modification of Figure 2 to the filling apparatus of Figure 2 adapted to fill the dispenser device **820a** instead of filling the small bore cylinder. Nozzle housing **115** is modified so that opening **130** shown in Figure 3 is replaced by slit **900**. Support plate **800** is capable of being rotated about axis **910**, so as to present devices **810a**, **810b**, **810c**, etc. to the discharge port.

Claims

1. Apparatus for filling a cavity with a fine particulate material, with a nozzle assembly (45) in a nozzle housing (115) being connected to a powder supply tube (60) and a source of gas (120) and having a discharge port (1) with an orifice (4) pointed to the opening (5) of a cavity (2) to be filled
characterized in that
the nozzle assembly (45) comprises a holding

feature (130, 900) for holding at least one long, narrow cavity (145) such that it is aligned with and at a distance from said discharge port 1, whereby a gap (G) is formed between said cavity and said discharge port 1, and in that it comprises a means (55, 60, 140) for suspending the particulate material in a moving gas stream and discharging the particulate laden gas stream so that said suspended material is propelled into said cavity until said cavity is filled to capacity with said material, while said gas is allowed to escape via said gap (G) provided between the opening (5) of the cavity and said orifice (4).

2. The apparatus of Claim 1, wherein said orifice (4) has a width or diameter (D) equal to or smaller than the opening (X) of the cavity to be filled.
3. The apparatus of Claim 1, wherein said gap (G) is not more than 2 times the width or diameter (D) of the orifice (4) of the discharge port (1).
4. The apparatus according to Claim 1, wherein said means for suspending said particulate material comprises a fluidized bed.
5. The apparatus in Claim 1, also having a particulate material recovery system comprising:
 - a) a housing (115) having a plenum in which said discharge port (1) and said opening (5) of said cavity (2) are located; and
 - b) a collection vessel (150) pneumatically connected to said plenum, said collection vessel being opened to atmospheric pressure only through a filter (160) impervious to said powder.
6. The apparatus according to Claim 1, wherein said gas comprises air, nitrogen or carbon dioxide.
7. The apparatus according to Claim 1, wherein said particulate material comprises a pharmaceutical composition.
8. The apparatus according to Claim 7, wherein said pharmaceutical composition comprises minocycline.
9. The apparatus according to Claim 4, wherein said source of gas is pulsed for a period of time sufficient to fill said cavity.
10. A method of filling a cavity having an opening with a finely powdered material which com-

prises:

- a) suspending said finely powdered material in a moving gas stream; and
- b) discharging the particulate laden gas stream through an orifice pointed at the opening of the cavity to be filled but spaced apart by a gap, whereby upon discharge of said gas stream said particulate material is propelled into said cavity until said cavity is filled and said gas is allowed to escape through said gap.

Patentansprüche

1. Vorrichtung zum Befüllen eines Hohlraums mit feinem, teilchenförmigem Material, mit einer Düsenanordnung (45) in einem Düsengehäuse (115), das mit einem Pulverzuführrohr (60) und einer Gasquelle (120) verbunden ist und einen Auslaßstutzen (1) mit einer Mündung (4) aufweist, die der Öffnung (5) eines zu befüllenden Hohlraums (2) zugewandt ist;
dadurch gekennzeichnet, daß
die Düsenanordnung (45) eine Halteeinrichtung (130, 900) zum Halten mindestens eines langen, engen Hohlraums (145) aufweist, in solcher Weise, daß dieser zum Auslaßstutzen (1) ausgerichtet ist, wobei zwischen dem Hohlraum und dem Auslaßstutzen (1) ein Spalt (G) ausgebildet ist, und daß sie eine Einrichtung (55, 60, 140) zum Suspendieren des teilchenförmigen Materials in einem Transportgasstrom und zum Ausstoßen des mit Teilchen beladenen Gasstroms aufweist, so daß das suspendierte Material in den Hohlraum getrieben wird, bis dieser bis zu seinem Fassungsvermögen mit dem Material aufgefüllt ist, während das Gas über den Spalt (G) entweichen kann, der zwischen der Öffnung (5) des Hohlraums und der Mündung (4) vorhanden ist.
2. Vorrichtung nach Anspruch 1, bei der die Mündung (4) über eine Weite oder einen Durchmesser (D) verfügt, der der Öffnung (X) des zu befüllenden Hohlraums entspricht oder kleiner ist.
3. Vorrichtung nach Anspruch 1, bei der der Spalt (G) nicht größer als das 2-fache der Weite oder des Durchmessers (D) der Mündung (4) des Auslaßstutzens (1) ist.
4. Vorrichtung nach Anspruch 1, bei der die Einrichtung zum Suspendieren des teilchenförmigen Materials ein Fließbett enthält.
5. Vorrichtung nach Anspruch 1, mit zusätzlich einem Rückgewinnungssystem für teilchenförmiges Material, mit:

miges Material, mit:

- a) einem Gehäuse (115) mit einer Verteileranordnung, in der der Auslaßstutzen (1) und die Öffnung (5) des Hohlraums (2) liegen; und
 - b) einem Sammelbehälter (150), der pneumatisch mit der Verteileranordnung verbunden ist und nur über ein für das Pulver undurchlässiges Filter (160) zum Atmosphärendruck geöffnet ist.
6. Vorrichtung nach Anspruch 1, bei der das Gas Luft, Stickstoff oder Kohlendioxid ist.
 7. Vorrichtung nach Anspruch 1, bei der das teilchenförmige Material eine pharmazeutische Zusammensetzung ist.
 8. Vorrichtung nach Anspruch 7, bei der die pharmazeutische Zusammensetzung Minocyclin enthält.
 9. Vorrichtung nach Anspruch 4, bei der die Gasquelle für eine Zeitspanne gepulst wird, die dazu ausreicht, den Hohlraum zu befüllen.
 10. Verfahren zum Befüllen eines Hohlraums mit einer Öffnung mit einem fein gepulverten Material, umfassend:
 - Suspendieren des fein gepulverten Materials in einem Transportgasstrom und
 - Ausgeben des mit Teilchen beladenen Gasstroms durch eine Mündung, die auf die Öffnung des zu befüllenden Hohlraums ausgerichtet ist, jedoch von dieser durch einen Spalt getrennt ist, wobei das teilchenförmige Material in den Hohlraum eingetrieben wird, bis dieser gefüllt ist, und das Gas durch den Spalt entweichen kann.

Revendications

1. Appareil de remplissage d'une cavité au moyen d'une substance particulaire fine, un ensemble tuyère (45) dans un logement de tuyère (115) étant relié à un tube d'alimentation en poudre (60) et à une source de gaz (120) et présentant une évacuation (1) dont l'orifice (4) est dirigé vers l'ouverture (5) d'une cavité à remplir, caractérisé en ce que l'ensemble tuyère (45) comprend un élément de retenue (130, 900) destiné à maintenir au moins une cavité longue, étroite (145) de façon qu'elle soit alignée avec ladite évacuation (1), à une certaine distance de celle-ci, un intervalle (G) étant formé entre ladite cavité et ladite évacuation (1) et en ce qu'il comprend un

- moyen (55, 60, 140) de mise en suspension de la matière particulaire dans un courant gazeux mobile et d'évacuation du courant de gaz chargé de particules de telle sorte que ladite matière en suspension est propulsée dans ladite cavité jusqu'à ce que ladite cavité soit emplie jusqu'à sa pleine capacité par ladite matière, cependant que ledit gaz peut s'échapper par ledit intervalle (G) prévu entre l'ouverture (5) de la cavité et ledit orifice (4). 5 10
2. Appareil selon la revendication 1, dans lequel ledit orifice (4) a une largeur ou un diamètre (D) égal ou inférieur à l'ouverture (X) de la cavité à remplir. 15
3. Appareil selon la revendication 1, dans lequel ledit intervalle (G) n'est pas plus de deux fois supérieur à la largeur ou au diamètre (D) de l'orifice (4) de l'évacuation (1). 20
4. Appareil selon la revendication 1, dans lequel ledit moyen de mise en suspension de ladite matière particulaire comprend un lit fluidisé. 25
5. Appareil selon la revendication 1, comportant également un système de récupération de la matière particulaire comprenant :
- a) un logement (115) ayant une chambre dans laquelle sont situées ladite évacuation (1) et ladite ouverture (5) de ladite cavité (2) et 30
 - b) un récipient collecteur (150) relié pneumatiquement à ladite chambre, ledit récipient collecteur n'étant ouvert à la pression atmosphérique que par l'intermédiaire d'un filtre (160) imperméable à ladite poudre. 35
6. Appareil selon la revendication 1, dans lequel ledit gaz comprend l'air, l'azote ou le dioxyde de carbone. 40
7. Appareil selon la revendication 1, dans lequel ladite matière particulaire comprend une composition pharmaceutique. 45
8. Appareil selon la revendication 7, dans lequel ladite composition pharmaceutique comprend la minocycline. 50
9. Appareil selon la revendication 4, dans lequel ladite source de gaz est pulsée pendant une durée suffisante pour emplir ladite cavité.
10. Procédé de remplissage d'une cavité comportant une ouverture au moyen d'une matière finement pulvérisée, lequel comprend :

- a) la mise en suspension de ladite matière finement pulvérisée dans un courant gazeux mobile et
- b) l'évacuation du courant gazeux chargé de particules par un orifice dirigé vers l'ouverture de la cavité à remplir mais séparé de celle-ci par un intervalle, étant entendu que lors de l'évacuation dudit courant gazeux, ladite matière particulaire est propulsée dans ladite cavité jusqu'à ce que ladite cavité soit remplie et que ledit gaz peut s'échapper par ledit intervalle.

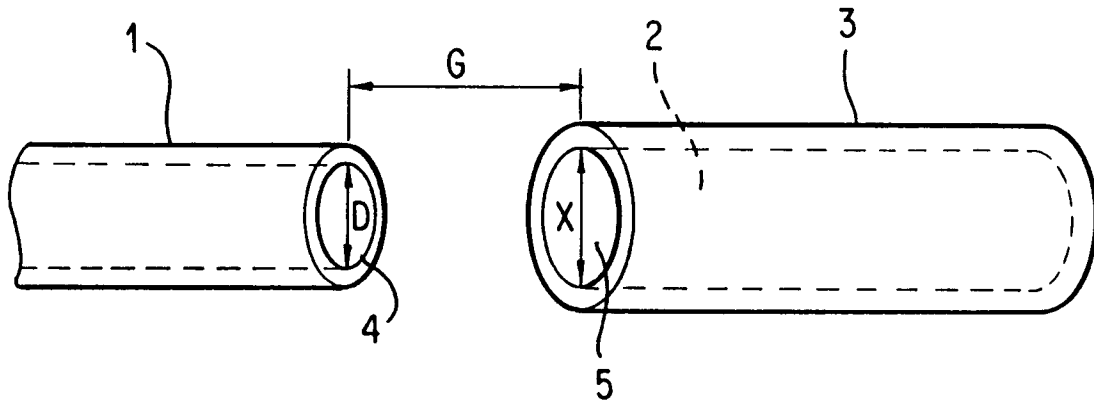


FIG. 1

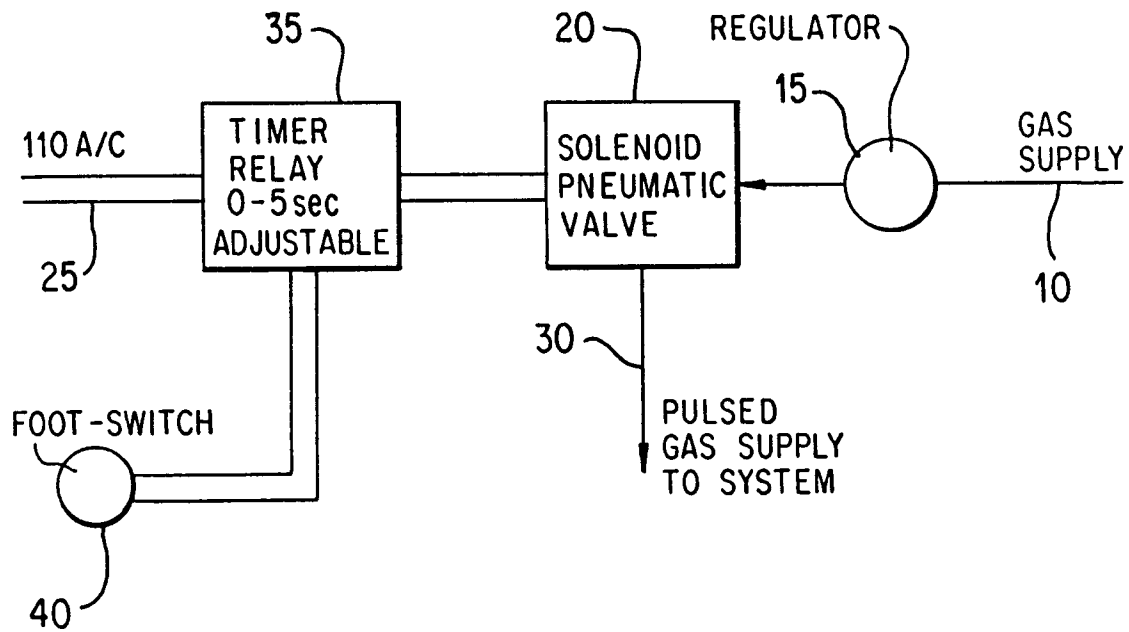


FIG. 2

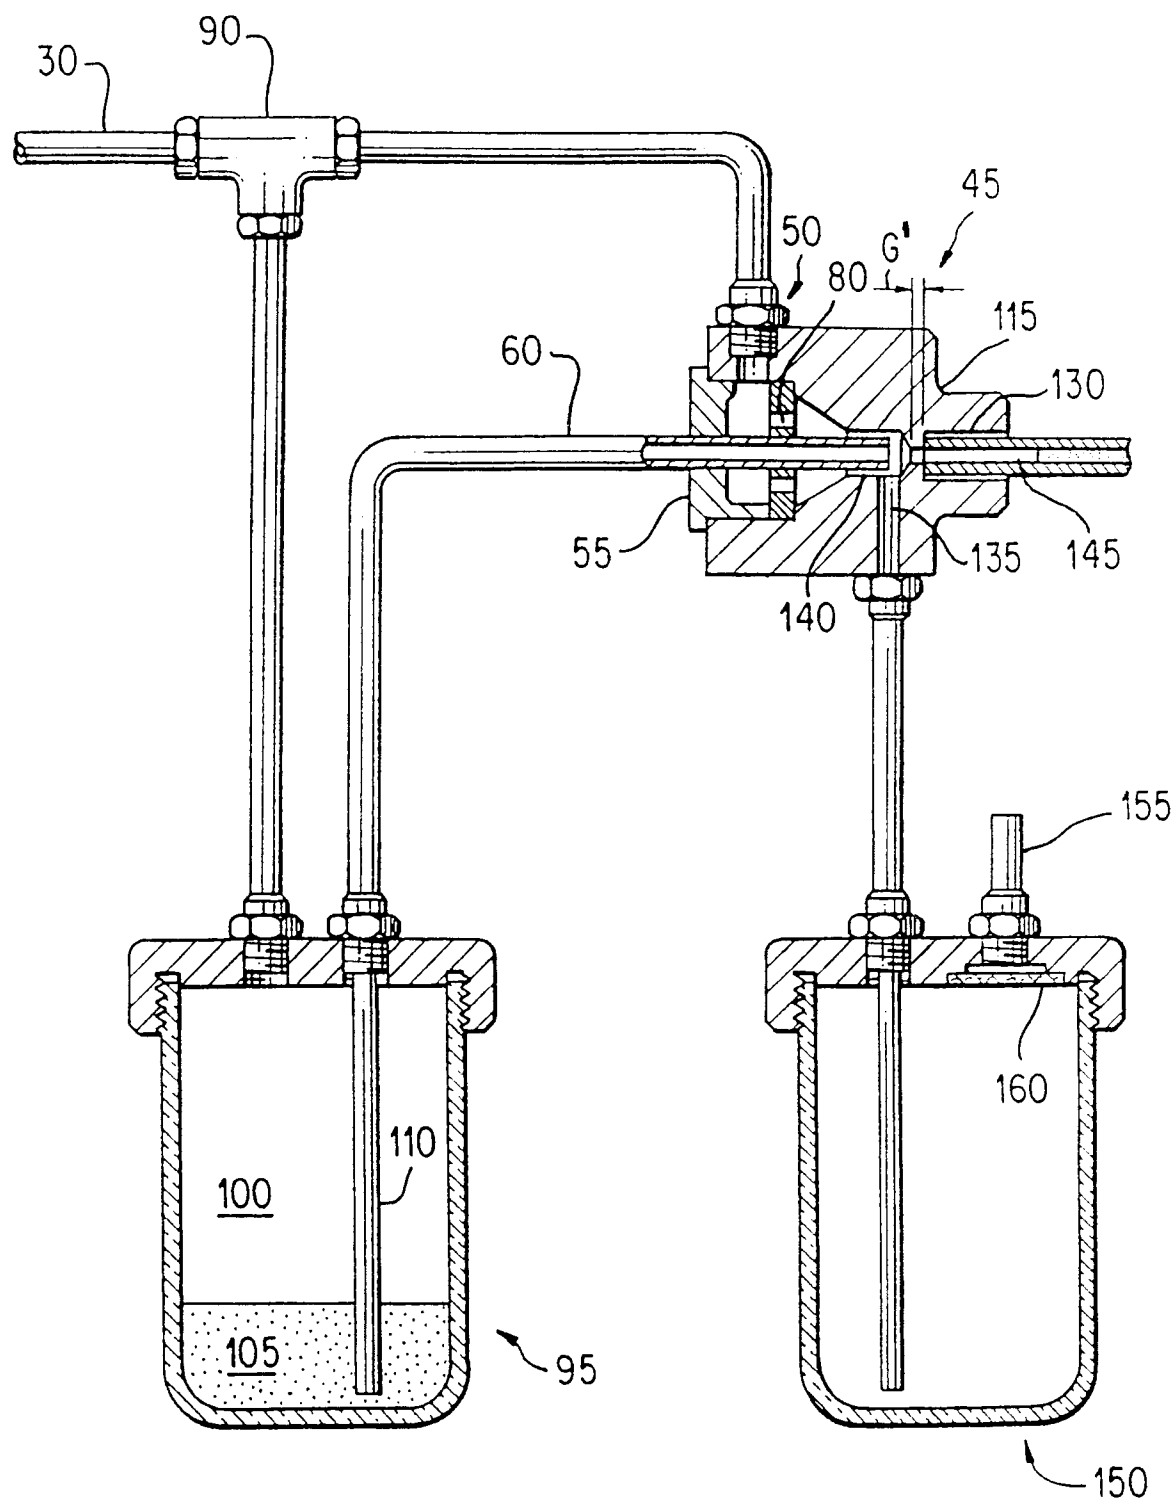


FIG. 3

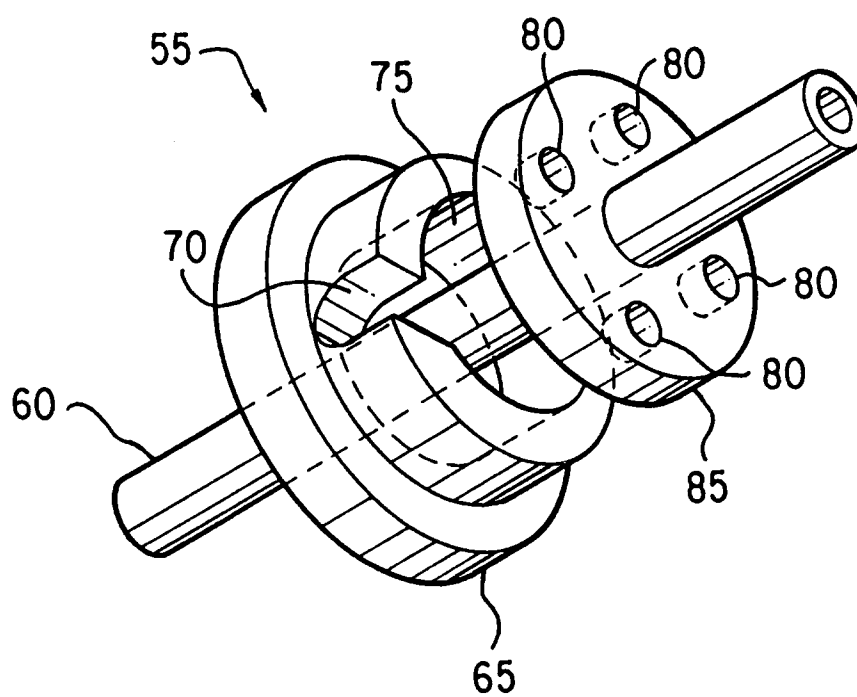


FIG. 4

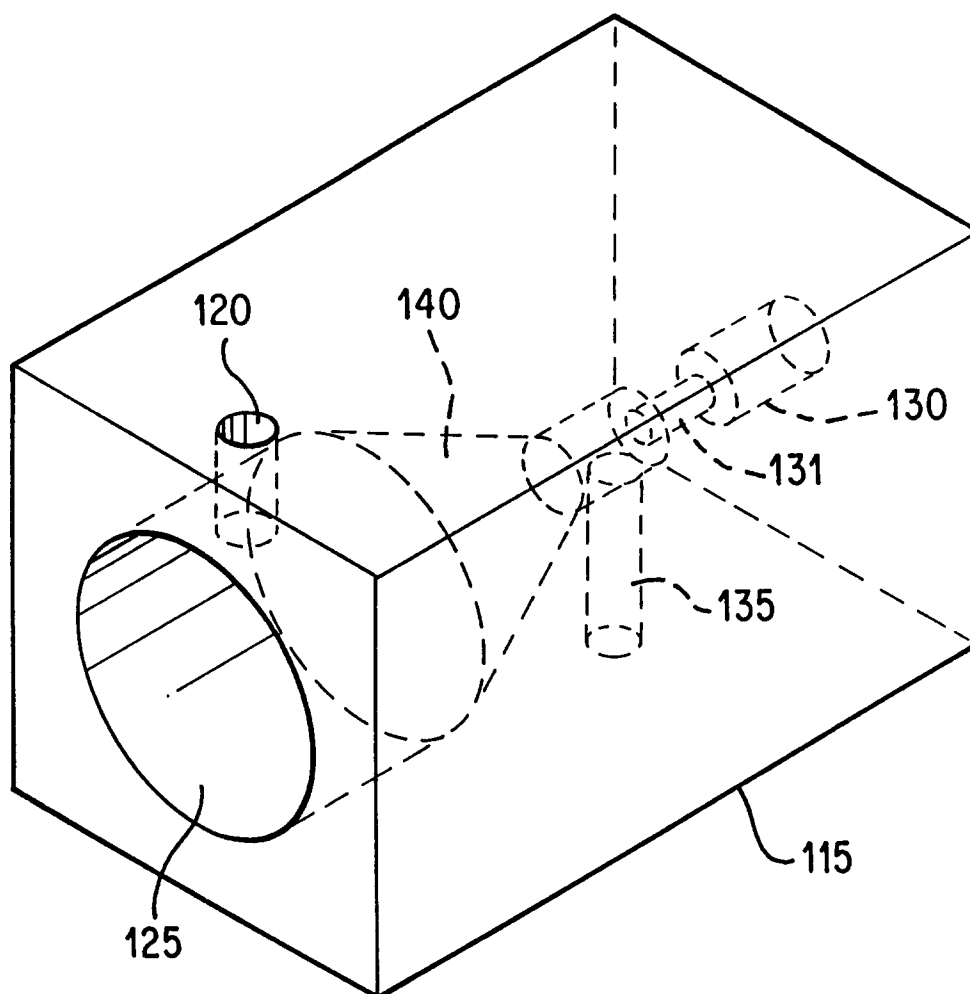


FIG. 5

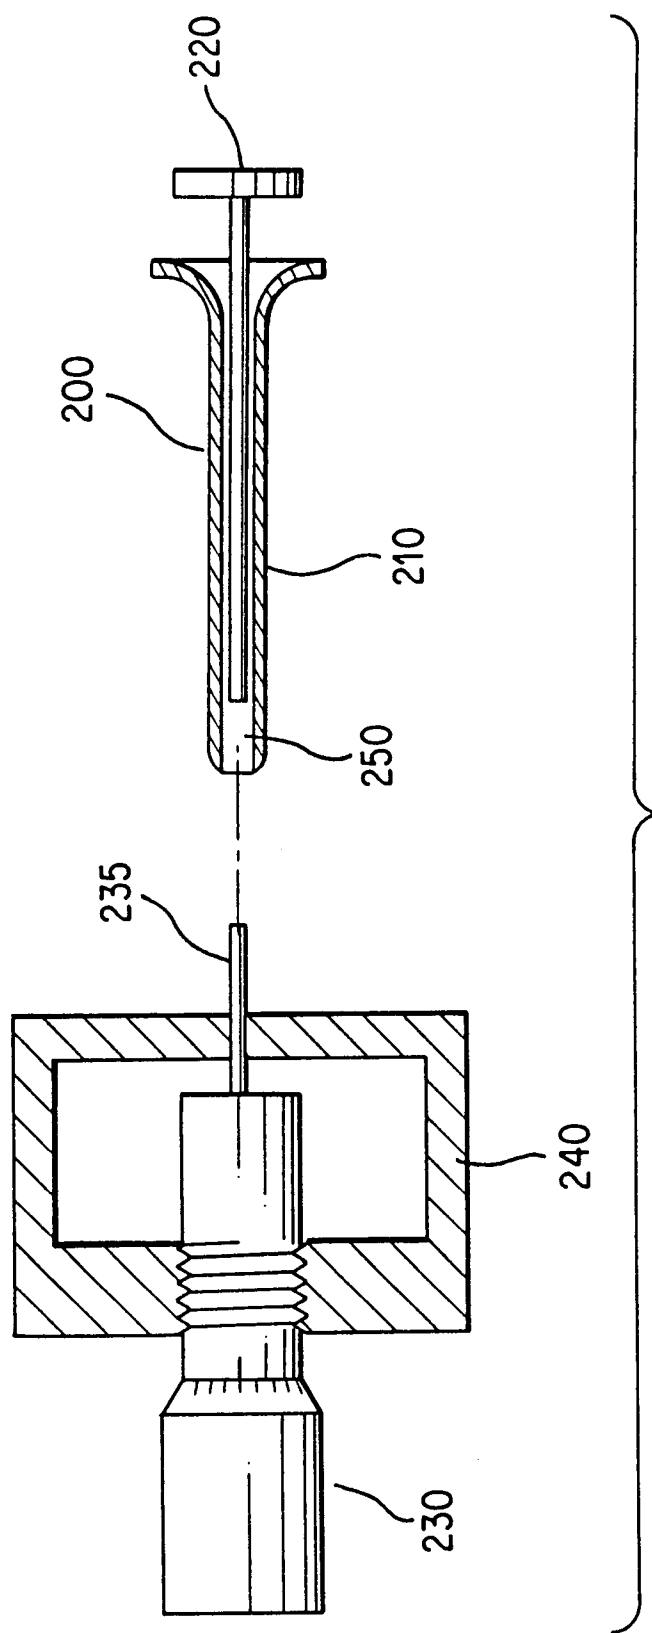


FIG. 6

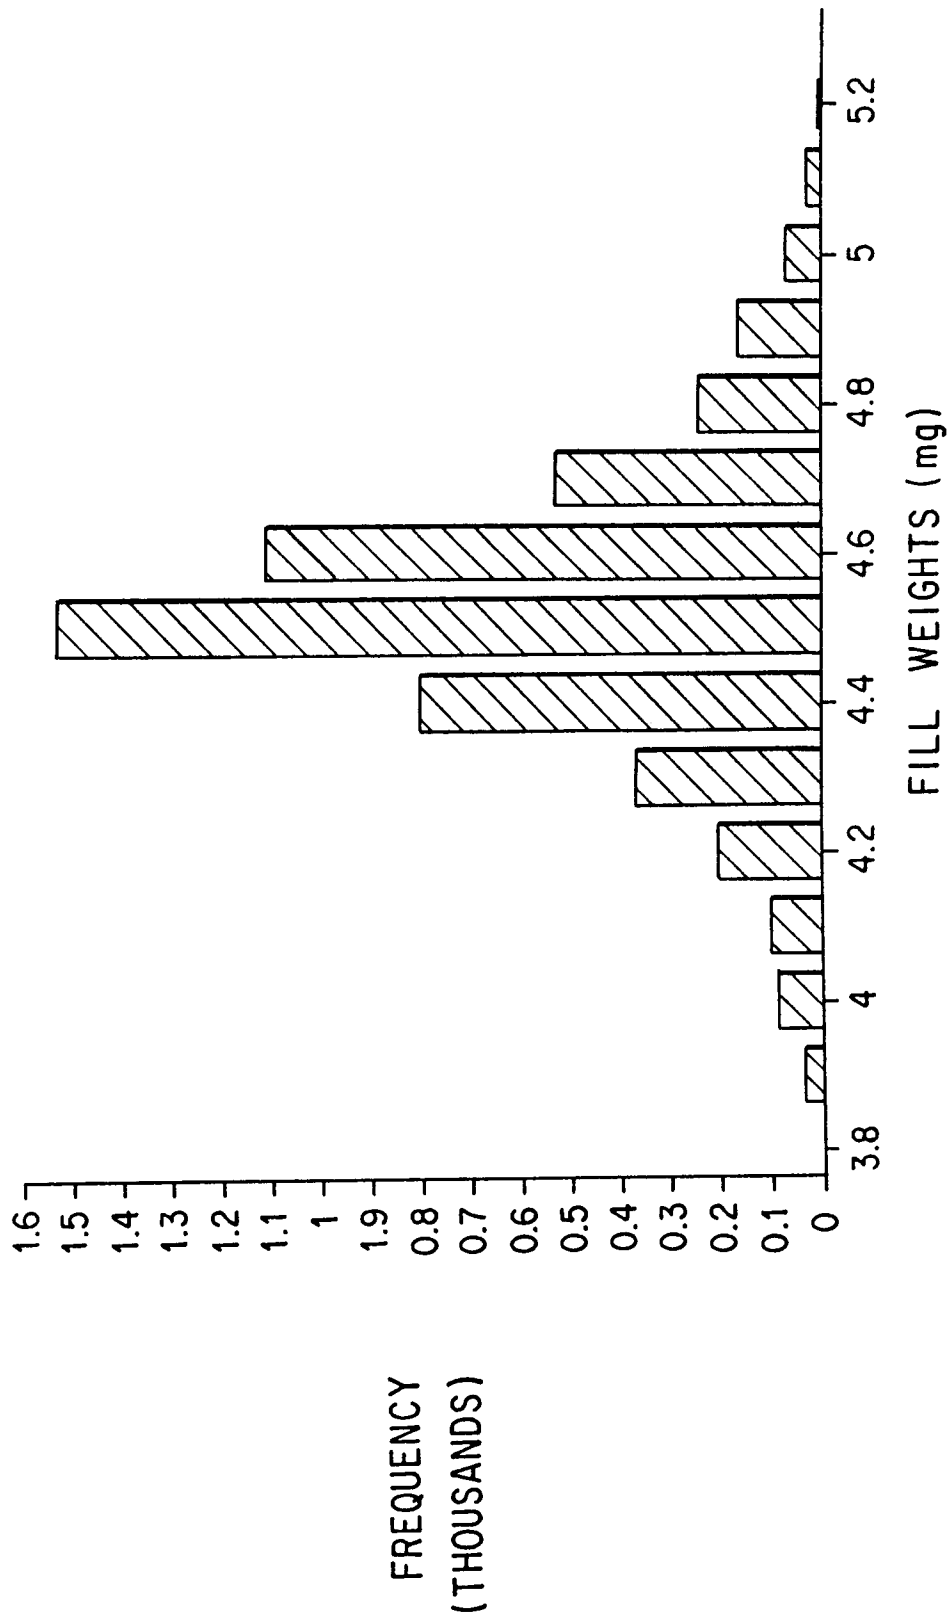


FIG. 7

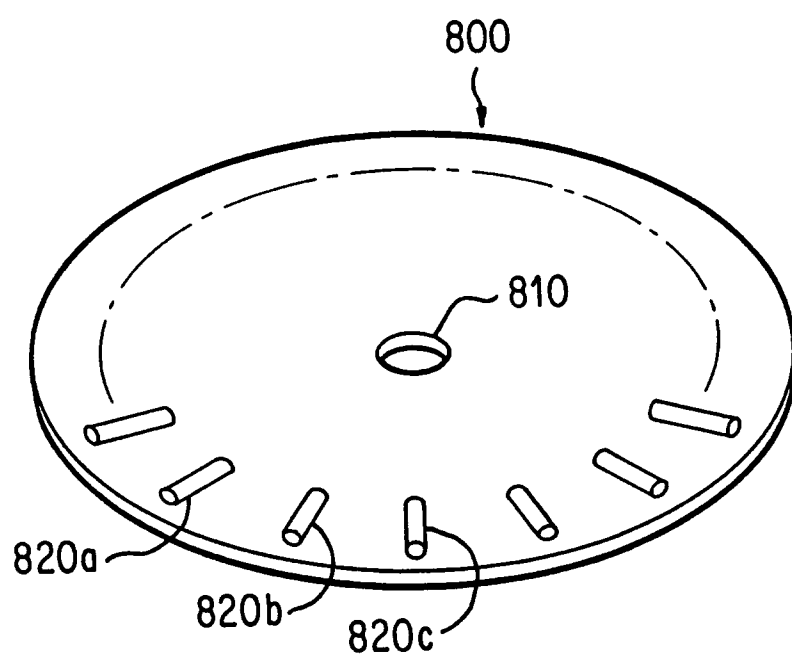


FIG. 8

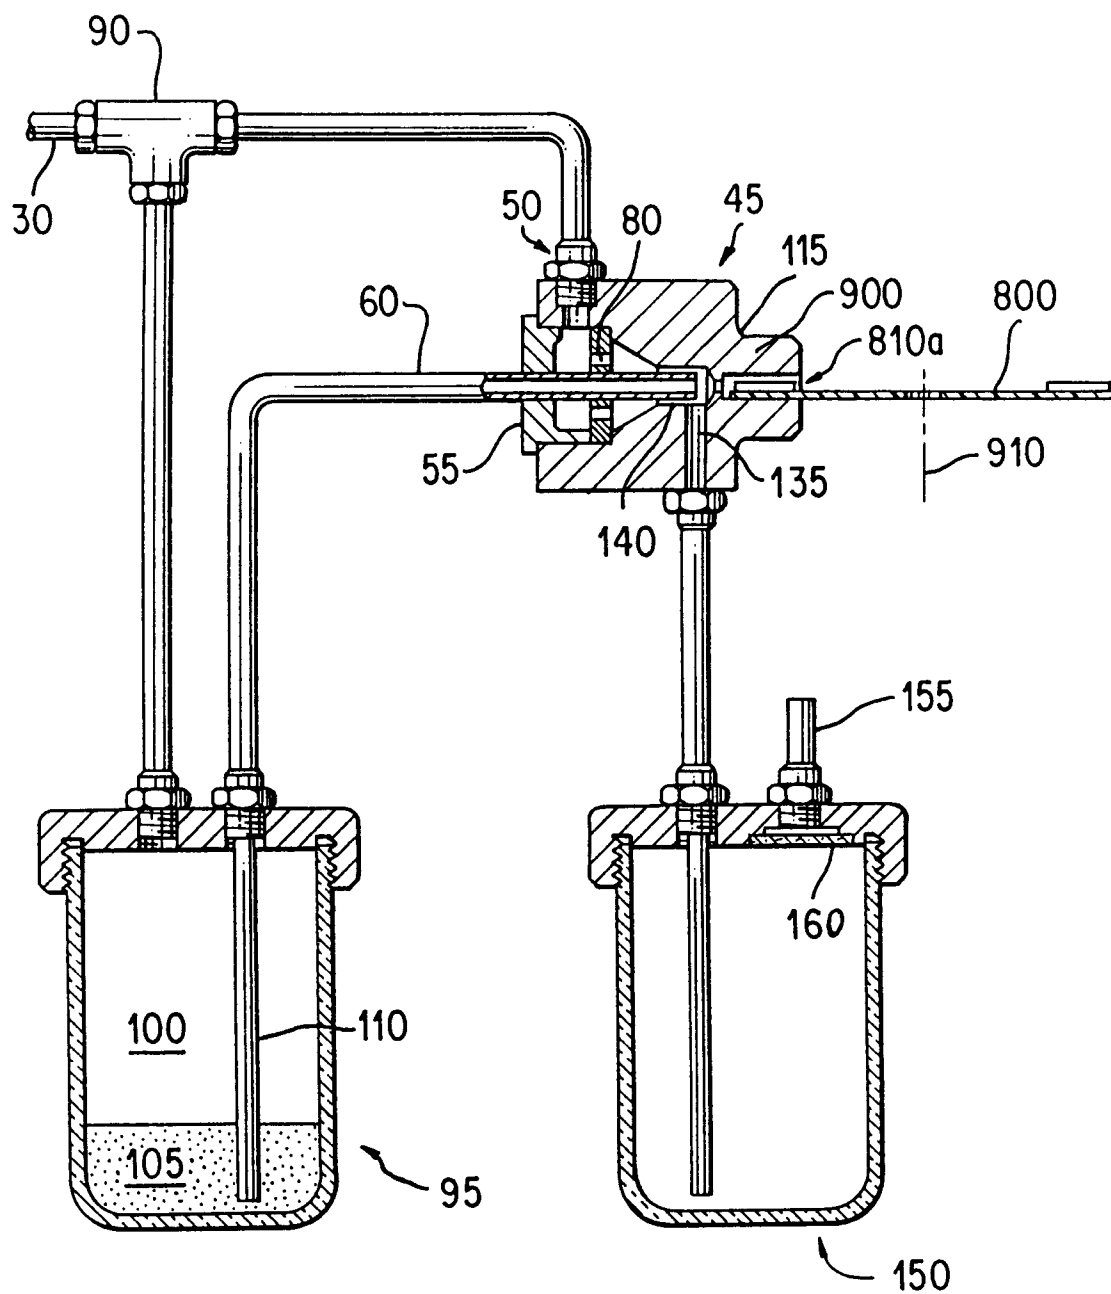


FIG. 9