



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: **0 492 733 B1**

12

EUROPEAN PATENT SPECIFICATION

49 Date of publication of patent specification: **20.09.95** 51 Int. Cl.⁸: **B28B 13/02**

21 Application number: **91203374.3**

22 Date of filing: **23.12.91**

54 **Device and method of manufacturing ceramic tiles.**

30 Priority: **28.12.90 NL 9002881**

43 Date of publication of application:
01.07.92 Bulletin 92/27

45 Publication of the grant of the patent:
20.09.95 Bulletin 95/38

84 Designated Contracting States:
AT BE CH DE DK ES FR GB GR IT LI LU NL SE

56 References cited:

EP-A- 0 024 237	EP-A- 0 300 532
EP-A- 0 312 938	DE-B- 1 170 850
DE-B- 1 281 915	FR-A- 355 255
FR-A- 2 196 603	LU-A- 34 512

73 Proprietor: **KONINKLIJKE MOSA B.V.**
Meerssenerweg 358
NL-6224 AL Maastricht (NL)

72 Inventor: **Kuppers, Andreas Jozef**
Bernhardlaan 59
NL-6269 CX Margraten (NL)

74 Representative: **Van kan, Johan Joseph**
Hubert, Ir. et al
Algemeen Octrooibureau
P.O. Box 645
NL-5600 AP Eindhoven (NL)

EP 0 492 733 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The invention relates to a device for manufacturing ceramic tiles, said device being provided with a mould having a lower die and an upper die, with a filling cart for introducing base material in said mould and with an endless conveyor belt, of which at least one upper part, which extends at least substantially horizontally, is movable in a direction towards and away from the mould, whilst at least two bunkers are disposed one behind the other, when seen in the direction of movement of said upper part, so as to deposit various materials on said upper part of the conveyor belt, via outlets located near the bottom side of said bunkers, whereby said materials can be deposited on base material present on the lower die by driving the conveyor belt during the movement of the conveyor belt over said lower die.

Such a device is known from EP-A-0,300,532. In this known device a brush means is arranged near the discharge end of the conveyor belt, so as to determine the layer thickness of the material which is supplied from the bunkers on the horizontally extending upper part of the conveyor belt. In practice this device is only suitable for processing comparatively fine materials, whereby additional materials all have at least substantially the same comparatively small grain size.

According to the invention a strickling means is disposed above the conveyor belt whose side receiving the material is provided with grooves and between the outlets of the two bunkers, so as to determine the layer thickness of the material deposited from the upstream bunker on the conveyor belt and conveyed under the outlet of the downstream bunker in the direction of the mould, whilst the downstream bunker is provided with a dosaging means for regularizing the amount of material which is discharged from the downstream bunker during each operation cycle.

When using the construction according to the invention it is possible to supply fine material, whose layer thickness on the conveyor belt is determined by the strickling means, from the upstream bunker, whilst a coarser granular material can be supplied from the downstream bunker, which eventually results in a tile wherein the surface which will be exposed to view will show relatively coarse grains besides the other fine material forming the upper surface.

It is noted that from DE-A-1,170,850 there is known a device for manufacturing artificial marble, said device being provided with two bunkers. During operation material flows from the bunkers on a conveyor belt for forming two layers of material on said belt, one lying upon the other. The thickness of each layer is thereby determined by a strickling

board associated with the corresponding bunker.

The use of such strickling boards is only possible in forming relatively thick layers of material. Contrary thereto the use of a dosaging means, makes it possible to make only a very thin upper layer, covering eventually the lowermost layer only in part.

Further in manufacturing tiles it is often required to be able to provide colour and/or pattern gradations in the upper surface of the tile in a simple manner.

In view thereof the storage bunker could be provided with a plurality of compartments arranged side by side in a row, said compartments being reciprocatingly movable at least substantially in the longitudinal direction of said row.

When using such a construction materials having different colours and/or grain sizes or the like may be introduced into the various compartments as required. By moving the interconnected compartments to and fro during operation, when material is gradually being discharged from the bunker, the material flowing from neighbouring compartments will be mixed, so that when the device according to the invention is used the upper surface of the tile that will be exposed to view can be given a patterned appearance.

The invention also relates to a method for providing striated patterns on the upper surface of tiles which are formed in a mould, whereby a layer of base material is provided on a lower die of the mould and whereby subsequently, additional material supplied from two successive bunkers is deposited on said layer of base material on a substantially horizontally extending upper part of a conveyor belt, whereby the conveyor belt is driven, in such a manner that said additional material falls from one end of the conveyor belt on the base material.

A similar method is likewise known from European patent no. 0,300,532.

The object of the invention is to create a possibility of forming wispy colour patterns in the upper surface of the tiles.

According to the invention this can be achieved in that use is made of a conveyor belt whose side receiving the material is provided with grooves disposed in a desired arrangement, into which additional material is introduced in order to be subsequently deposited from said grooves onto the base material, whereby there is used a strickling means between the outlets of said two bunkers and a dosaging means on the downstream bunker.

The grooves may or may not be provided in a random pattern on the side in question of the conveyor belt, so that the material initially received in said grooves and then deposited on the upper surface of the tile will land on the upper surface of

the tile in corresponding, whether or not random patterns.

Preferably also the cross-sectional dimensions of the grooves are varied, whether or not in a random manner.

A further influencing of the configuration may furthermore be effected by varying the velocity of displacement of the belt.

In using the above mentioned method it is possible to form striated patterns on the tiles by using only a relatively small quantity of the additional material.

For obtaining tiles having an appearance of artificial marble in the device according to the above cited DE-A-1,170,850 the layers of material lying upon each other are transported by the conveyor belt towards a device comprising a number of interengaging fingers upon which the materials are dumped for mixing the materials. So both said materials have to be supplied in relative big quantities for obtaining the desired varied marble pattern.

Further in EP-A-0 312 938 there is disclosed a device for manufacturing tiles having a striped pattern. In said known device there is dumped on a conveyor belt a layer of a base material and on said layer of base material there is dumped additional material in various spaced strips. Then all the material lying on the conveyor belt is dumped by the conveyor belt into a funnel. From said funnel the material is discharged into moulds. Also in said known device there has to be dumped a relatively great quantity of additional material on the base material for obtaining the stripe effect on the surface of the tile due to the fact that a mixing of base material and additional material will occur in the funnel.

The invention will be further explained hereafter with reference to the accompanying Figures.

Figure 1 is a diagrammatic side elevational view of a device according to the invention.

Figure 2 is a diagrammatic elevational view of a part of a conveyor belt to be used with the device of Figure 1.

Figure 3 is a diagrammatic, perspective view of a possible embodiment of a bunker to be used with the device of Figure 1.

The device illustrated in Figure 1 comprises a diagrammatically depicted frame 1, in which one or more lower dies 2 are reciprocatingly movable in vertical direction by means of (a) setting cylinder(s) (not shown), as is indicated by means of the arrow A. For each lower die 2 there is provided an upper die 3 co-operating therewith, said upper die likewise being reciprocatingly movable in vertical direction with the aid of setting means (not shown).

The device is furthermore provided with a bunker 4 for base material. A filling cart 5 is dis-

posed under said bunker, which is reciprocatingly movable over the frame in the direction according to the arrow B with the aid of drive means (not shown). The filling cart has an opening 6 provided therein, into which opening, in the position of the filling cart 5 illustrated in Figure 1, base material can flow from the bunker 4.

A further filling cart 7 is disposed more or less in the extension of the filling cart 5, said further filling cart likewise being reciprocatingly movable in horizontal direction. Near one of its ends the filling cart 7 has a passage 8, a sieve 9 being disposed in the lower end of said passage. A charging slide 10 is reciprocatingly movable in horizontal direction over said filling cart 7 with the aid of drive means (not shown). The charging slide 10 is thereby provided with a receiving room 11 for receiving additional material.

The filling cart 7 is mobile, together with a frame part (not shown), in which rollers 12 are rotatably journaled about a horizontal axis of rotation extending perpendicularly to the direction of movement of the filling cart 7. Further rollers 13 - 16 extending parallel to said roller 12 are journaled in a fixed frame part.

The rollers 12 - 16 function to guide an endless conveyor belt 17 in the manner illustrated in Figure 1, said conveyor belt being guided by the rollers in such a manner that the conveyor belt 17 has a horizontal part, which extends across the end of the filling cart 7 directed towards the dies 2 and 3. The conveyor belt 17 is furthermore passed over a roller 18, which is vertically movable.

Two bunkers 19 and 20 are arranged above the horizontally extending part of the conveyor belt 17. Near its bottom end the bunker 20 is provided with an outlet opening, whilst a roll feeder 21 is disposed near said outlet opening. In a similar manner the bunker 19 is near its bottom side provided with an outlet opening, whilst a roll feeder 22 is disposed near said outlet opening. A downwardly extending plate 23 functioning as a strickling means is disposed between the two roll feeders, said plate with its lower boundary edge at least substantially abutting against the upper side of the upper horizontal part of the conveyor belt 17.

The bunker 20 is intended for accommodating fine additional material, whereas the bunker 19 is intended for accommodating coarser additional material having a diameter of 2 - 7 mm. In order to enable a well-dosaged discharge of said coarser material from the bunker 19 the dosaging means 22 consists of a roller, whose circumferential surface is provided with fine recesses, said recesses being dimensioned such that the recesses are suitable for receiving grains of the granular material present in the bunker 19.

When the device is put into operation it will first be necessary to put the lower die 2 in a position in which the distance between the upper side of said lower die 2 and the upper surface of the frame 1, across which the filling cart 5 moves to and fro, will be at least substantially equal to the required thickness of the layer of base material to be formed on the lower die 2. After the die 2 has been adjusted the filling cart 5 will be moved towards the right, when seen in Figure 1, so that material present in the recess 6 can be provided on the die 2 and also be smoothed by means of the filling cart. Meanwhile the charging slide 10 has been placed in a position in which the receiving room 11 provided in said charging slide 10 is filled with additional material from a bunker (not shown). When the filling cart 5 moves towards the left, when seen in Figure 1, after the layer of base material has been provided on the lower die 2, said lower die is moved downwards over a distance corresponding with the thickness of an upper layer yet to be provided, and the filling cart 7 is moved towards the left, when seen in Figure 1, so that the sieve 9 will come to lie above the lower die 2. The frame part supporting the roller 12 will thereby move along with the filling cart 7, so that the various movable parts will reach the position illustrated in dotted lines in Figure 1. During this movement the roller 12 is prevented from rotating and the roller 18 will move upwards from the position illustrated in full lines in Figure 1 towards the position illustrated in dotted lines.

When the sieve 9 is positioned above the lower mould the charging slide 10 is moved to and fro above the sieve, so that material accommodated in the charging slide 10 can fall from the receiving room 11, through the openings in the sieve, on the layer of base material, whereby any undesirable coarse constituents will be retained by the sieve 9.

Then the filling cart 7, the charging slide 10 which is movable over said filling cart and the frame part supporting the roller 12 will be returned to the starting position illustrated in Figure 1, whilst at the same time the conveyor belt 17 will be driven in the direction indicated by the arrow C, so that the upper part of the horizontally extending part of the conveyor belt will move towards the left, when seen in Figure 1. During this return movement of said parts from the position illustrated in dotted lines to the position illustrated in full lines the material supplied from the bunkers 19 and 20 which is present on said upper part will then be spread over the material already present on the lower die 2.

When the filling cart 7 and the frame part supporting the roller 12 move towards the left, when seen in Figure 1, material is supplied from the bunkers 19 and 20, whilst a surplus of fine

material supplied from the bunker 20 is retained by the strickling means 23.

Since it is not necessary for the granular materials supplied from the bunker 19 during the latter movement of the various movable parts to move past the strickling means 23, said strickling means 23 can be arranged with its lower edge quite close to the upper surface of the conveyor belt. The quantity of granular material which can be supplied during each operating stroke of the device can be regulated by the number of revolutions the dosaging means 22 is caused to make, since the quantity per revolution of the dosaging means is at least substantially determined by the number of recesses provided in the circumferential surface of the dosaging means for receiving the granular material. Thus it is possible, with the aid of the dosaging means 22, to influence the quantity of material deposited on the belt 17 during each operating stroke.

After all the material has thus been deposited on the lower die 2 the material can be compressed between the lower die 2 and the upper die 3 in the required manner. After that the upper die 3 is moved upwards again and the lower die 2 is positioned such that when the filling cart moves to the right, when seen in Figure 1, the tile now formed will be moved to the right by said filling cart, so as to be discharged.

Preferably a second strickling means 25 is mounted at the end of the filling cart 7, so as to strickle material present on the upper surface of the frame 1. Said second strickling means 25 is thereby connected to the filling cart 7, by means of guide rods or the like, in such a manner that said second strickling means 25 can move, parallel to the direction of movement of the filling cart 7 during operation, along a very limited distance, with respect to the filling cart. As a result of this it is effected that when the filling cart 7 moves toward the left, when seen in Figure 1, the filling cart 7 will push the second strickling means 25 ahead as far as the position of the second strickling means illustrated in dotted lines in Figure 1, in which position the second strickling means is supported on the left-hand side of the recess in the frame 1 supporting the lower die 2. When subsequently the filling cart 7 and the roller 12 of the conveyor belt 17 connected thereto are moved towards the right, the second strickling means 25 will initially remain behind in the position illustrated in Figure 1, and not be carried along by the filling cart 7 before the roller 12 has also been moved along a certain distance. Consequently, when the various movable parts move towards the right, when seen in Figure 1, the second strickling means 25 will follow the roller 12 of the conveyor belt 17 and thus strike off any material which has fallen from the conveyor

belt 17 on the frame 1, near the end of the conveyor belt 17 located near the roller 12, so that no more material will be present on the upper surface of the frame 1, which material will prevent the effective closing of the die 3.

Use will be made of a conveyor belt 17, whose upper surface coming into contact with material supplied from the bunkers 19 and 20 is provided with grooves 26, as is diagrammatically depicted in Figure 2. Such grooves may be provided along the entire length of the conveyor belt, whether or not in a random and erratic pattern, whilst also the cross-sectional width of the grooves may extend in a varied, preferably erratic manner along the length of the grooves. The adjustment of the device will generally be such that the fine material from the bunker 20 fills the grooves, whilst at least very little of said material is present on the part of the relevant surface of the conveyor belt located between the grooves.

It will be apparent that the material accommodated in the grooves 26 will also be deposited on the upper surface of the tile in wisps corresponding with the arrangement of said grooves, so that wispy patterns will be provided in the tile that is eventually manufactured. The configuration of said wispy patterns can furthermore be influenced by varying the velocity of movement of the conveyor belt when the material is being deposited on the upper surface of the tile by means of the conveyor belt.

Figure 3 shows an embodiment of a bunker 27, which may e.g. be used instead of a bunker 19 or 20, or for the supply of material to the charging slide 10. Near its bottom end this bunker is again provided with an outlet or dosaging means 28. In the illustrated embodiment the bunker is built up of two parts 29 and 30 located one above the other. The upper part 30 of the bunker is divided, by means of a number of division plates 31, into a number of compartments arranged in a row. Materials having different colours and/or grain sizes and the like may be deposited in the various compartments arranged side by side. By moving said upper part 30 of the bunker to and fro (arrow D) with the aid of drive means (not shown) during operation, the materials present in the various compartments will be mixed in a random manner while flowing from the upper part 30 of the bunker into the lower part 29, which will eventually result in corresponding, random patterns of the additional material provided on the upper surface of the tile.

It will be apparent that it is also possible to construct the bunker 27 in one piece, whereby the bunker can be made to move reciprocatingly in its entirety during operation.

Claims

1. A device for manufacturing ceramic tiles, said device being provided with a mould having a lower die (2) and an upper die (3), with a filling cart (5) for introducing base material in said mould and with an endless conveyor belt (17), of which at least an upper part, which extends at least substantially horizontally, is movable in a direction towards and away from the mould, whilst at least two bunkers (19, 20) are disposed one behind the other, when seen in the direction of movement of said upper part, so as to deposit various materials on said upper part of the conveyor belt (17), via outlets located near the bottom side of said bunkers (19, 20), whereby said materials can be deposited on base material present on the lower die (2) by driving the conveyor belt (17) during the movement of the conveyor belt (17) over said lower die (2), characterized in that a strickling means (23) is disposed above the conveyor belt (17) whose side receiving the material is provided with grooves (26) and between the outlets of the two bunkers (19, 20), so as to determine the layer thickness of the material deposited from the upstream bunker (20) on the conveyor belt (17) and conveyed under the outlet of the downstream bunker (19) in the direction of the mould, whilst the downstream bunker (19) is provided with a dosaging means (22) for regulating the amount of material which is discharged from the downstream bunker (19) during each operating cycle.
2. A device according to claim 1, characterized in that said dosaging means (22) is a drum, in whose circumferential surface recesses are provided for receiving grains of said granular material.
3. A device according to claim 1 or 2, characterized in that a second strickling means (25) is provided on the movable part of the conveyor belt (17), said second strickling means (25) cooperating with the upper surface of a frame (1) accommodating the lower die (2), whereby the second strickling means (25) is connected to the movable part of the conveyor belt (17) via a mechanism allowing a lost movement, all this in such a manner that when the movable part moves over the lower die (2) in a first direction the second strickling means (25) is moved along with the movable end of the conveyor belt (17), and that when the movable part moves in an opposite direction the second strickling means (25) initially remains stationary and is not moved along before the dis-

charge end of the horizontally extending part of the conveyor belt (17) has been moved along a certain distance.

4. A device according to claim 2 or 3, characterized in that said second strickling means (25) is connected to a filling cart (7) disposed under the horizontal part of the conveyor belt (17), which is movable to and fro during operation. 5
5. A device according to any preceding claim, characterized in that said grooves (26) are provided on the surface in a random arrangement. 10
6. A device according to any preceding claim, characterized in that the cross-sectional dimensions of the grooves (26) are varied along the length of said grooves. 15
7. A device according any of the preceding claims, characterized in that a storage bunker (27) is provided with a plurality of compartments arranged side by side in a row, said compartments being reciprocatingly movable at least substantially in the longitudinal direction of said row. 20
8. A method of manufacturing ceramic tiles having striated patterns on their upper surface, the tiles being formed in a mould, whereby a layer of base material is provided on a lower die (2) of the mould and whereby subsequently, additional material supplied from two successive bunkers (19, 20) is deposited on said layer of base material by means of an at least substantially horizontally extending upper part of a conveyor belt (17), whereby the conveyor belt (17) is driven, in such a manner that said additional material falls from one end of the conveyor belt (17) on the base material, characterized in that use is made of a conveyor belt (17) whose side receiving the material is provided with grooves (26) disposed in a desired arrangement, into which additional material is introduced in order to be subsequently deposited from said grooves onto the base material, whereby there is used a strickling means (23) between the outlets of said two bunkers (19, 20) and a dosaging means (22) on the downstreams bunker (19). 25
9. A method according to claim 8, characterized in that the velocity of displacement of the belt is varied. 30

Patentansprüche

1. Vorrichtung zum Herstellen von Keramikfliesen, wobei die Vorrichtung mit einer Form, die ein unteres Gesenk (2) und ein oberes Gesenk (3) aufweist, mit einem Füllwagen (5) zur Einführung von Grundmaterial in die Form und mit einem endlosen Transportband (17) versehen ist, von dem zumindest ein oberer Teil, der zumindest im wesentlichen horizontal verläuft, in eine Richtung hin zur und weg von der Form bewegbar ist, während zumindest zwei Bunker (19, 20), in Bewegungsrichtung des oberen Teils gesehen, hintereinander angeordnet sind, um verschiedene Materialien auf den oberen Teil des Transportbandes (17) über in der Nähe der Unterseite der Bunker (19, 20) angeordnete Auslässe aufzubringen, wobei die Materialien auf dem unteren Gesenk (2) befindliches Grundmaterial aufgebracht werden können, indem das Transportband (17) während der Bewegung des Transportbandes (17) über das untere Gesenk (2) angetrieben wird, dadurch gekennzeichnet, daß ein Ziehbrett (23) über dem Transportband (17), dessen das Material aufnehmende Seite mit Rillen (26) versehen ist, und zwischen den Auslässen der beiden Bunker (19, 20) angeordnet ist, um die Schichtdicke des von dem Bunker (20) stromaufwärts auf das Transportband (17) aufgetragenen und unter dem Auslaß des Bunkers (19) stromabwärts in Richtung der Form geförderten Materials zu bestimmen, während der Bunker (19) stromabwärts mit einer Dosiereinrichtung (22) versehen ist, um die Materialmenge zu regeln, die von dem Bunker (19) stromabwärts während jedes Arbeitsganges ausgelassen wird. 35
2. Vorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Dosiereinrichtung (22) eine Trommel ist, in deren Mantelfläche Vertiefungen vorgesehen sind, um Körner des körnigen Materials aufzunehmen. 40
3. Vorrichtung nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß ein zweites Ziehbrett (25) auf dem beweglichen Teil des Transportbandes (17) vorgesehen ist, wobei das zweite Ziehbrett mit der Oberseite eines Rahmens (1) zusammenwirkt, der das untere Gesenk (2) aufnimmt, wobei das zweite Ziehbrett (25) mit dem beweglichen Teil des Transportbandes (17) über einen Mechanismus verbunden ist, der einen Leerlauf erlaubt, das alles derart, daß, wenn der bewegliche Teil sich in einer ersten Richtung über das untere Gesenk (2) bewegt, das zweite Ziehbrett (25) zusammen 45

- mit dem beweglichen Ende des Transportbandes (17) bewegt wird, und daß, wenn der bewegliche Teil sich in entgegengesetzter Richtung bewegt, das zweite Ziehbrett (25) anfänglich ortsfest bleibt und erst mitbewegt wird, wenn das Auslaufende des horizontal verlaufenden Teils des Transportbandes (17) eine bestimmte Strecke bewegt worden ist. 5
4. Vorrichtung nach Anspruch 2 oder 3, dadurch gekennzeichnet, daß das zweite Ziehbrett (25) mit einem Füllwagen (7) verbunden ist, der unter dem horizontalen Teil des Transportbandes (17) angeordnet und während des Betriebs hin- und herbewegbar ist. 10 15
5. Vorrichtung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die Rillen (26) auf der Oberfläche in einer beliebigen Anordnung vorgesehen sind. 20
6. Vorrichtung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die Querschnittsabmessungen der Rillen (26) über die Länge der Nuten verschieden sind. 25
7. Vorrichtung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß ein Lagerbunker (27) mit einer Vielzahl von nebeneinander in einer Reihe angeordneten Abteilungen vorgesehen ist, wobei die Abteilungen zumindest im wesentlichen in Längsrichtung der Reihe hin- und herbewegbar sind. 30
8. Verfahren zum Herstellen von Keramikfliesen mit geriffelten Mustern auf ihrer Oberseite, wobei die Fliesen in einer Form hergestellt werden, bei dem eine Schicht Grundmaterial auf einem unteren Gesenk (2) der Form angebracht wird und wobei anschließend zusätzliches, von zwei aufeinanderfolgenden Bunkern (19, 20) geliefertes Material auf der Schicht Grundmaterial mittels eines zumindest im wesentlichen horizontal verlaufenden oberen Teils eines Transportbandes (17), wobei das Transportband (17) angetrieben wird, so aufgebracht wird, daß das zusätzliche Material von einem Ende des Transportbandes (17) auf das Grundmaterial fällt, dadurch gekennzeichnet, daß ein Transportband (17) verwendet wird, dessen das Material aufnehmende Seite mit Rillen (26) in gewünschter Anordnung versehen ist, in die zusätzliches Material eingeführt wird, um anschließend aus den Rillen auf das Grundmaterial aufgebracht zu werden, wobei ein Ziehbrett (23) zwischen den Auslässen der beiden Bunker (19, 20) und eine Dosiereinrichtung (22) an dem Bunker (19) stromabwärts verwendet wer-

den.

9. Verfahren nach Anspruch 8, dadurch gekennzeichnet, daß die Verschiebegeschwindigkeit des Bandes veränderlich ist.

Revendications

1. Dispositif pour la fabrication de carreaux en céramique, ledit dispositif comportant un moule qui comprend une matrice inférieure (2) et une matrice supérieure (3), un chariot de remplissage (5) pour introduire une matière de base dans ledit moule et une bande transporteuse sans fin (17), dont au moins un brin supérieur qui s'étend au moins sensiblement horizontalement est déplaçable de manière à se rapprocher et s'éloigner du moule, tandis qu'au moins deux trémies (19,20) sont disposées l'une derrière l'autre, dans la direction de mouvement du dit brin supérieur, afin de déposer diverses matières sur ledit brin supérieur de la bande transporteuse (17) par des sorties situées près du côté inférieur desdites trémies (19,20), de sorte que lesdites matières peuvent être déposées sur la matière de base présente sur la matrice inférieure (2) par entraînement de la bande transporteuse (17) pendant le déplacement de la bande transporteuse (17) au-dessus de ladite matrice inférieure (2), caractérisé en ce qu'un moyen de raclage (23) est disposé au-dessus de la bande transporteuse (17), dont la face de réception de la matière comporte des rainures (26), et entre les sorties des deux trémies (19,20) de façon à déterminer l'épaisseur de couche de la matière déposée sur la bande transporteuse (17) à partir de la trémie amont (20) et transportée sous la sortie de la trémie aval (19) en direction du moule, tandis que la trémie aval (19) comporte un moyen de dosage (22) pour régler la quantité de matière qui est extraite de la trémie aval (19) pendant chaque cycle de fonctionnement.
2. Dispositif suivant la revendication 1, caractérisé en ce que ledit moyen de dosage (22) est un tambour dans la surface circonférentielle duquel sont prévus des évidements pour recevoir des grains de ladite matière granulée.
3. Dispositif suivant la revendication 1 ou 2, caractérisé en ce qu'un deuxième moyen de raclage (25) est prévu sur la partie mobile de la bande transporteuse (17), ledit deuxième moyen de raclage (25) coopérant avec la surface supérieure d'un châssis (1) qui reçoit la matrice inférieure (2), le deuxième moyen de raclage (25) étant relié à la partie mobile de la

- bande transporteuse (17) par un mécanisme permettant une course morte, tout ceci d'une manière telle que, lorsque la partie mobile passe au-dessus de la matrice inférieure (2) dans une première direction, le deuxième moyen de raclage (25) se déplace en même temps que l'extrémité mobile de la bande transporteuse (17), et que, lorsque la partie mobile se déplace en sens inverse, le deuxième moyen de raclage (25) reste initialement immobile et ne se déplace pas avant que l'extrémité de décharge de la partie horizontale de la bande transporteuse (17) se soit déplacée d'une certaine distance.
4. Dispositif suivant la revendication 2 ou 3, caractérisé en ce que ledit deuxième moyen de raclage (25) est relié à un chariot de remplissage (7) disposé sous la partie horizontale de la bande transporteuse (17), qui est déplaçable en va-et-vient pendant le fonctionnement.
5. Dispositif suivant une quelconque des revendications précédentes, caractérisé en ce que lesdites rainures (26) sont prévues sur la surface en un agencement aléatoire.
6. Dispositif suivant une quelconque des revendications précédentes, caractérisé en ce que les dimensions de section transversale des rainures (26) varient sur la longueur desdites rainures.
7. Dispositif suivant une quelconque des revendications précédentes, caractérisé en ce qu'une trémie de stockage (27) est prévue avec une pluralité de compartiments agencés côte à côte en une rangée, lesdits compartiments étant déplaçables en va-et-vient au moins sensiblement dans la direction longitudinale de ladite rangée.
8. Méthode de fabrication de carreaux en céramique présentant des configurations striées sur leur surface supérieure, les carreaux étant formés dans un moule, de sorte qu'une couche de matière de base est placée sur une matrice inférieure (2) du moule et, ensuite, une matière additionnelle provenant de deux trémies successives (19,20) est déposée sur ladite couche de matière de base au moyen d'un brin supérieur d'une bande transporteuse (17) s'étendant au moins sensiblement horizontalement, et la bande transporteuse (17) est entraînée d'une manière telle que ladite matière additionnelle tombe d'une extrémité de la bande transporteuse (17) sur la matière de base, caractérisée en ce qu'on utilise une bande transporteu-

se (17) dont la face de réception de la matière comporte des rainures (26), disposées en un agencement désiré, dans lesquelles la matière additionnelle est introduite afin d'être ensuite déposée sur la matière de base à partir des dites rainures, et on utilise un moyen de raclage d'épaisseur de couche (23) entre les sorties desdites deux trémies (19,20) et un moyen de dosage (22) sur la trémie aval (19).

9. Méthode suivant la revendication 8, caractérisée en ce qu'on peut faire varier la vitesse de déplacement de la bande.

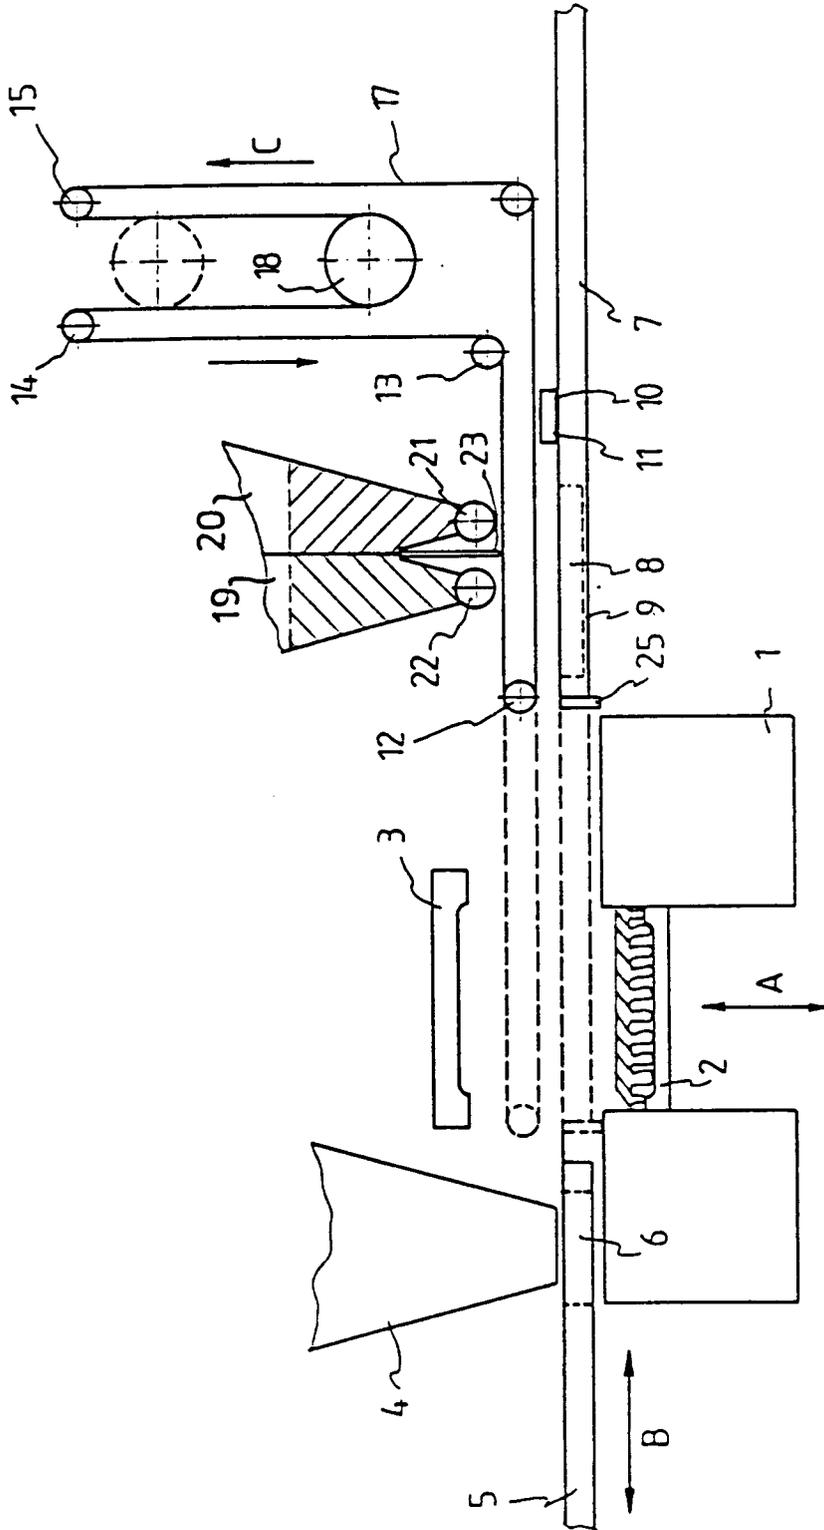


Fig 1

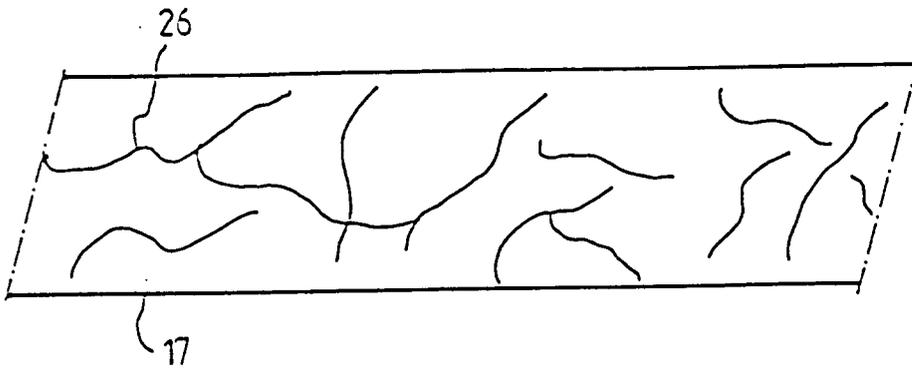


Fig 2

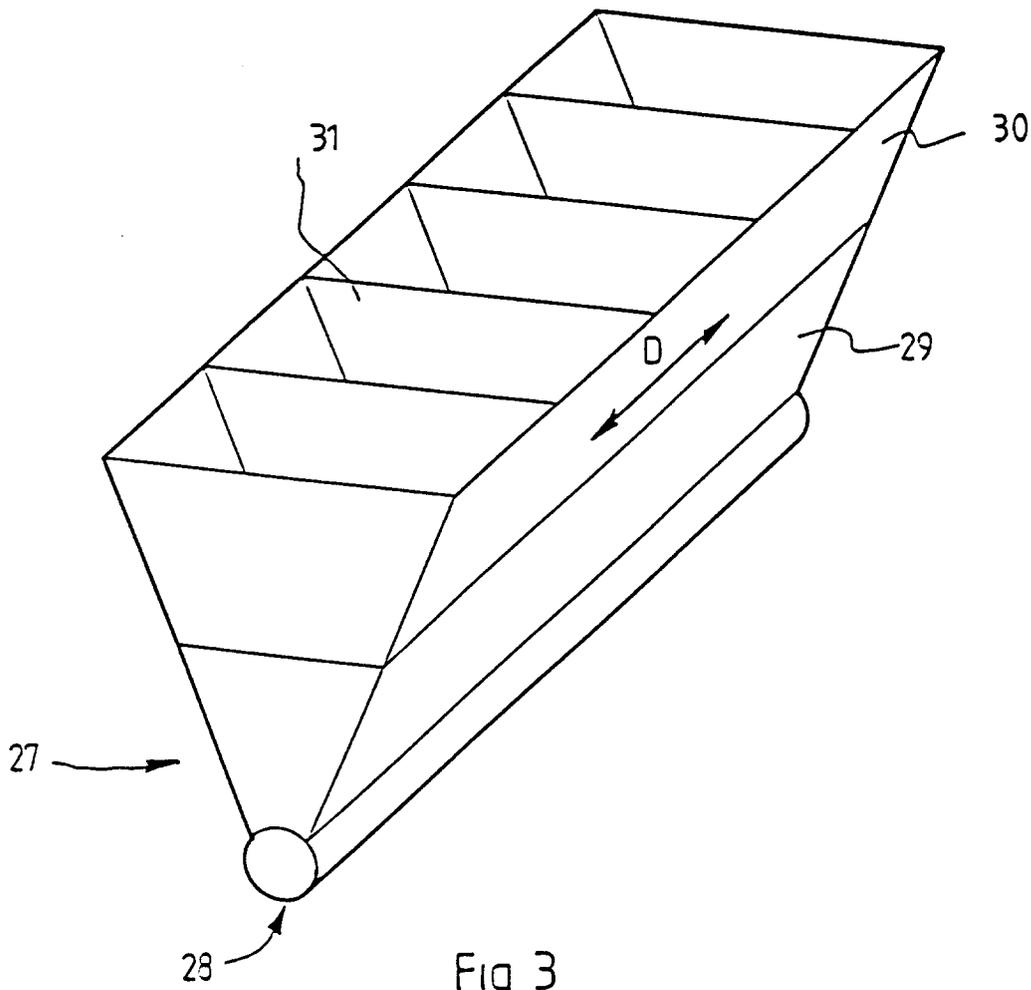


Fig 3