



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 492 734 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(49) Date of publication of patent specification: **08.03.95** (51) Int. Cl.<sup>6</sup>: **B65B 43/18**, B65B 43/30

(21) Application number: **91203375.0**

(22) Date of filing: **23.12.91**

(54) **Blank feeder.**

(30) Priority: **25.12.90 JP 401575/90**

(43) Date of publication of application:  
**01.07.92 Bulletin 92/27**

(45) Publication of the grant of the patent:  
**08.03.95 Bulletin 95/10**

(84) Designated Contracting States:  
**CH DE DK FR GB LI NL SE**

(56) References cited:  
**US-A- 3 176 978**  
**US-A- 4 921 237**

(73) Proprietor: **Shikoku Kakoki Co., Ltd.**  
**10-1, Aza-Nishinokawa**  
**Tarohachizu**  
**Kitajima-cho**  
**Itano-gun**  
**Tokushima (JP)**

(72) Inventor: **Wakabayashi, Shigeru, c/o Shikoku**  
**Kakoki Co., Ltd.**  
**10-1, Aza-Nishinokawa,**  
**Tarohachizu,**  
**Kitajima-cho**  
**Itano-gun,**  
**Tokushima (JP)**

Inventor: **Hirose, Shoji, c/o Shikoku Kakoki**  
**Co., Ltd.**

**10-1, Aza-Nishinokawa,**  
**Tarohachizu,**  
**Kitajima-cho**  
**Itano-gun,**  
**Tokushima (JP)**

Inventor: **Nishioka, Shoji, c/o Shikoku Kakoki**  
**Co., Ltd.**

**10-1, Aza-Nishinokawa,**  
**Tarohachizu,**  
**Kitajima-cho**  
**Itano-gun,**  
**Tokushima (JP)**

Inventor: **Fujikawa, Yasuji, c/o Shikoku Kakoki**  
**Co., Ltd.**

**10-1, Aza-Nishinokawa,**  
**Tarohachizu,**  
**Kitajima-cho**  
**Itano-gun,**  
**Tokushima (JP)**

(74) Representative: **Vollebregt, Cornelis Jacobus**  
**et al**  
**Algemeen Octrooibureau**  
**P.O. Box 645**  
**NL-5600 AP Eindhoven (NL)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

**EP 0 492 734 B1**

## Description

### BACKGROUND OF THE INVENTION

The present invention relates to an apparatus for use with blanks which are folded flat so as to be unfoldable to a tubular form of square cross section for feeding each of the blanks to a bottom forming mandrel by unfolding the blank to the tubular form and fitting the unfolded blank around the mandrel.

FIG. 8 shows a conventional apparatus of the type mentioned which comprises a magazine 62 having a delivery opening 61 at one end for accommodating flat blanks B as arranged side by side from the one end toward the other end thereof, transport means having a path of transport extending from the delivery opening 61 as a starting end and a transport rod 64, the transport rod 64 having a suction member 63 attached to the forward end thereof and reciprocatingly movable on a straight line orthogonal to the blank B in the delivery opening 61, and means for unfolding each flat blank B to a tubular form of square cross section while the blank is being transported by the transport means, the unfolding means having first and second unfolding claws 65, 66 provided at edge portions of the delivery opening 61 so as to be individually engageable with opposite ends of the blank B in the delivery opening 61.

With the conventional apparatus, the blank B which is to be unfolded to the tubular form is likely to be bent in two in cross section instead. The cause appears to be as follows. Since the blank B moves on the straight line while being transported by the transport means, opposite ends of the blank move at the same velocity. When the blank B is delivered from the delivery opening 61, the opposite ends of the blank B move at the same speed to come into engagement with the respective unfolding claws 65, 66 at the same time, whereby the blank is unfolded to the same extent by the two claws. After the blank has been unfolded to some extent, the blank ends move out of engagement with the two claws 65, 66 at the same time, with the result that the unfolded blank B restores itself to the original flat state owing to its own repulsive force and further becomes bent to <- shape in cross section.

### SUMMARY OF THE INVENTION

The main object of the present invention is to provide a blank feeder which is capable of reliably unfolding flat blanks to a tubular form of square cross section without bending the blank to the above shape.

The present invention provides a blank feeder which comprises a magazine having a delivery

opening at one end and accommodating flat blanks as arranged side by side from the end toward the other end thereof, transport means having a path of transport extending from the delivery opening at a starting end to a terminal end along a circular arc having a central axis parallel to the widthwise direction of the blank in the delivery opening whereby the terminal end of the transport path of the transport means is in match with a phantom outward extension of the mandrel, and means for unfolding each blank from a flat form to a tubular form of square cross section while the blank is being transported by the transport means, the unfolding means having first and second blank unfolding claws provided at edge portions of the delivery opening so as to be individually engageable with opposite ends of the blank in the delivery opening.

With the blank feeder of the present invention, the blank moves with its opposite ends directed radially inwardly and outwardly of the circular arc while being transported on the circular arc by the transport means, so that the blank ends move at different speeds. Thus, the end remote from the central axis moves at a high velocity, and the other end close to the axis moves at a low velocity. Consequently, when the blank is withdrawn from the delivery opening, the blank ends are unfolded to different extents corresponding to the respective speeds. After the blank has been unfolded to some extent, the blank ends are disengaged from the respective claws at different times. Accordingly, the blank does not act to return to the original flat state, nor is it likely for the blank to become folded in two in cross section. The blank can therefore be unfolded to the tubular form reliably.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a blank feeder embodying the invention;  
FIG. 2 is a side elevation of the feeder;  
FIG. 3 is a view in vertical section of the feeder;  
FIG. 4 is a view in cross section of the feeder;  
FIG. 5 is a side elevation of the feeder and mandrels;  
FIG. 6 is a diagram for illustrating how a blank is unfolded;  
FIG. 7 is a perspective view of the blank; and  
FIG. 8 is a diagram corresponding to FIG. 6 and illustrating the operation of a conventional apparatus.

### DESCRIPTION OF THE PREFERRED EMBODIMENT

An embodiment of the invention will be described below with reference to the drawings.

In the following description, the terms "inward" and "outward" are used based on FIG. 2. The left-hand side of the drawing will be referred to as "inward," and the right-hand side thereof as "outward." Further the terms "right" and "left" are used as the feeder is seen outward.

FIG. 7 shows a blank B having first to fourth side panels 11 to 14 which are joined to one another endlessly. The blank B is folded flat so as to be unfoldable to a tubular form of square cross section, by being bent along a first score 15 defining the first side panel 11 and the second side panel 12, and along a second score 16 defining the third side panel 13 and the fourth side panel 14. The first side panel 11 is provided at its opposite ends with engageable portions 11a for engagement with the blank unfolding claws to be described later. The engageable portions 11a project outward beyond the respective ends of the second side panel 12.

FIG. 5 shows a blank feeder which comprises a flat box-shaped frame 22 disposed on a phantom outward extension of a blank bottom forming mandrel 21 obliquely extending outwardly downward as stopped at a feed station S, a magazine 24 disposed obliquely above the frame 22 outwardly thereof and having an inward delivery opening 23 at an inner end thereof for accommodating a multiplicity of flat blanks B as arranged closely side by side from the inner end to the outer end thereof, transport means 25 for withdrawing the blanks B from the magazine 24 one by one and transporting the blank onto the outward extension, unfolding means 26 for unfolding the flat blank B to the tubular form of square cross section while the blank is being transported by the means 25, a holder 27 for movably holding the unfolded blank B on the outward extension, and a loader 28 for fitting the blank B held by the holder 27 around the mandrels 21.

With reference to FIG. 4, magazines 24, transport means 25, unfolding means 26 and holders 27 other than the loader 28 are provided in pairs each comprising two units of the same construction which are oriented in opposite directions transversely of the feeder. The units on the right side only will be described below.

When seen from the right side, the frame 22 has its top side inclined outwardly downward in parallel to the outward extension of the mandrel 21.

The magazine 24 comprises a vertical rectangular frame 31 defining the delivery opening 23, and a multiplicity of horizontal guide rails 32 extending outward from the frame 31. Within the magazine 24, each blank B is so positioned that the second side panel 12 and the third side panel 13 face toward the delivery opening 23, with the second side panel 12 at the left side of the third

side panel 13. The left and right frame members of the frame 31 are provided with blank supports 33 for the first and second score (15, 16) portions of the blank B, i.e., the left and right edge portions thereof, to bear on. Blank unfolding claws 34, 35 for engaging the opposite ends of the blank B are attached to the respective upper and lower frame members of the frame 31.

The transport means 25 comprises a suction member 36 for attracting the second side panel 12 of the blank B within the magazine 24, a transport arm 37 having the suction member 36 attached to its forward end, and a horizontal rotatable shaft 38 having the base end of the transport arm 37 fixed thereto. The suction member 36 comprises an elongated member having a length approximately equal to the length of the blank B, and a plurality of vacuum cups arranged in a row and attached to the elongated member. The rotatable shaft 38 extends in parallel to the widthwise direction of the blank B within the delivery opening 23, is disposed below the phantom outward extension of the mandrel 21 and is supported by bearings 39 on the lower end of the frame 22 which extends transversely of the feeder, i.e., perpendicular to the extension. The right end of the shaft 38 is connected to a drive mechanism which will not be described in detail.

The unfolding means 26 comprises, besides the unfolding claws 34, 35, a plurality of bent guides 41 for guiding to the holder 27 the blank B being transported by the means 25 while pushing the second score portion 16 of the blank leftward. When seen from the right side as seen in FIG. 2, the bent guides 41 extend from locations of different levels in the vicinity of the right frame member of the magazine 24, obliquely rearwardly downward toward the holder 27. When viewed from outside as seen in FIG. 4, the guides 41 extend from the above locations downward in a bent form and terminate at a position of the same level close to the holder 27.

The holder 27 comprises upper and lower guide rails 42, 43 extending on opposite sides of the phantom outward extension of the mandrel 21 in parallel thereto. The guide rails 42, 43 are formed with opposed recesses 44, 45 V-shaped in cross section in conformity with the respective corners of the unfolded tubular blank B along the first and second scores 15, 16 thereof. With reference to FIGS. 1 and 4, the outer half of the upper guide rail 42 comprises a fixed member 46 and a movable member 47. The movable member 47 is pivotally supported by a rod 48 of small width and by a rod 49 of large width. The rod 49 of large width has connected thereto the piston rod of a hydraulic cylinder 51 for operating the rod 49.

When pivotally moved by the operation of the cylinder 51, the movable member 47 advances into

or retracts from the path of movement of the blank B. The movable member 47 is retracted from the path immediately before the blank B is held by the holder 27 to avoid the interference of the movable member 47 with the blank B to be transported.

The loader 28 comprises a guide rod 52 extending in parallel to the outward extension of the mandrel 21 and positioned between right and left holders 27, a reciprocatingly movable member 53 slidably supported on the guide rod 52, and a blank pusher arm 54 projecting from the member 53 laterally.

When reciprocatingly moved along with the movable member 53, the pusher arm 54 pushes the blank B held by the holder 27 to a position where the blank is fitted around the mandrel 21 stopped at the blank feed station S.

With reference to FIG. 6, a blank unfolding operation will be described next. The blank B being transported as attracted to the suction member 36 moves on a circular arc C centered about the horizontal rotatable shaft 38. Accordingly, the opposite ends of the blank B are transported at different speeds. More specifically, the speed of transport of the blank upper end is considerably greater than that of the blank lower end. When the blank B is withdrawn from the delivery opening 23 of the magazine 24, the upper and lower blank unfolding claws 35, 36 engage with the respective engageable portions 11a at the upper and lower ends of the blank B. The blank B is transported in this state, whereby the blank B is gradually unfolded at its opposite ends. In this case, the speed of transport of the blank B is higher at its upper end than at its lower end as stated above, so that the upper end of the blank B is opened to a greater extent than the lower end thereof. The engageable portion 11a at the upper end of the blank B then moves out of engagement with the upper unfolding claw 35. At this time, the blank B acts to bend to a <-shape in cross section owing to its repulsive force, whereas the engageable portion 11a at the lower end of the blank B remains engaged by the lower unfolding claw 36, whereby the blank B is prevented from bending. The lower-end engageable portion 11a of the blank B is thereafter released from the lower claw 36, permitting the blank B to be unfolded to a tubular form of square cross section.

## Claims

1. A blank feeder for feeding to a bottom forming mandrel (21) blanks (B) each folded flat so as to be unfoldable to a tubular form of square cross section by unfolding each of the blanks (B) to the tubular form and fitting the unfolded blank (B) around the mandrel (21), the feeder

comprising:

a magazine (24) having a delivery opening (23) at one end and accommodating flat blanks (B) as arranged closely side by side from said one end toward the other end thereof,

transport means (25) having a path of transport extending from the delivery opening (23) as a starting end to a terminal end along a circular arc (C) having a central axis (38) parallel to the widthwise direction of the blank (B) in the delivery opening (23), the terminal end of the transport path of the transport means (25) being in match with a phantom outward extension of the mandrel (21), and

means (26) for unfolding each blank (B) from the flat form to the tubular form while the blank (B) is being transported by the transport means (25), the unfolding means (26) having first and second blank unfolding claws (34, 35) provided at edge portions of the delivery opening (23) so as to be individually engageable with opposite ends of the blank (B) in the delivery opening.

2. A blank feeder as defined in claim 1 wherein the transport means (25) comprises a suction member (36), a transport arm (37) having the suction member (36) attached to a forward end thereof, and a rotatable shaft (38) having a base end of the transport arm (37) fixed thereto and positioned in alignment with the central axis of the circular arc (C).
3. A blank feeder as defined in claim 1 or 2 wherein guide rails (42, 43) for guiding the unfolded blank (B) to the mandrel (21) are arranged on the phantom outward extension of the mandrel (21), the unfolding means (26) being provided with bent guides (41) for guiding from the delivery opening (23) to the guide rails (42, 43) one of folded edge portions (16) of the blank (B) to be unfolded from the flat form to the tubular form.
4. A blank feeder as defined in claim 2 of 3, wherein the magazine (24) is so disposed as to direct the delivery opening (23) inward and accommodate the blanks (B) in a vertical position with the opposite ends thereof oriented upward and downward, and the rotatable shaft (38) is orthogonal to the phantom outward extension of the mandrel (21) at a position outward from the guide rails (42, 43).

## Patentansprüche

1. Eine Zuschnittfördervorrichtung für die Zuführung von Zuschnitten (B) zu einem Bodenfor-

mungsdorn (21), wobei jeder Zuschnitt (B) flach gefaltet ist, um zu einer Rohrform quadratischen Querschnitts durch Auffaltung jedes Zuschnitts zu der Rohrform faltbar zu sein, und zum Aufsetzen des aufgefalteten Zuschnitts (B) auf den Dorn (21), wobei die Fördervorrichtung aufweist:

ein Magazin (24), das eine Zuführöffnung (23) an einem Ende hat und in dem flache Zuschnitte (B) Seite an Seite eng beieinander von besagtem einen Ende zu dessen anderem Ende angeordnet aufgenommen sind,

Transportmittel (25) mit einem Transportweg, der sich von der Zuführöffnung (23) als Ausgangspunkt zu einem Endpunkt entlang eines Kreisbogens (C) erstreckt, welche eine Mittelachse (38) parallel zu der Breitenrichtung des Zuschnitts (B) in der Zuführöffnung (23) hat, wobei der Endpunkt des Transportwegs der Transportmittel (25) mit einer fiktiven Auswärtserstreckung des Dorns (21) zusammenfällt, und

Mittel (26) zum Auffalten jeder der flachen Zuschnitte (B) in die Rohrform, während der Zuschnitt (B) mit Hilfe der Transportmittel (25) befördert wird, wobei die Auffaltmittel (26) erste und zweite Zuschnittauffaltklauen (34, 35) aufweisen, die an Kantenabschnitten der Zuführöffnung (23) derart vorgesehen sind, um individuell mit den gegenüberliegenden Enden des Zuschnitts (B) in der Zuführöffnung in Eingriff bringbar zu sein.

2. Eine Zuschnittfördervorrichtung nach Anspruch 1, bei der die Transportmittel (25) ein Saugmittel (36), einen Transportarm (37), an dessen vorderem Ende das Saugmittel (36) angebracht ist, und eine drehbare Welle (38) aufweist, an der das Basisende des Transportarms (37) befestigt ist und die in Ausrichtung mit der Mittelachse des Kreisbogens (C) positioniert ist.
3. Eine Zuschnittfördervorrichtung nach Anspruch 1 oder 2, bei der Führungsschienen (42, 43) zur Führung des aufgefalteten Zuschnitts (B) zu dem Dorn (21) auf einer fiktiven Auswärtserstreckung des Dorns (21) angeordnet sind, wobei die Auffaltmittel (26) versehen sind mit gebogenen Führungen (41) um eine der gefalteten Kantenabschnitte (16) des Zuschnitts (B) der von der flachen Form in die Rohrform zu biegen ist zu Führen von der Zuführöffnung (23) zu den Führungsschienen (42, 43).
4. Eine Zuschnittfördervorrichtung nach Anspruch 2 oder 3, bei der das Magazin (24) derart angeordnet ist, daß die Zuführöffnung (23) ein-

wärts gerichtet ist und die Zuschnitte (B) in vertikaler Position mit ihren gegenüberliegenden Enden oben und unten orientiert aufnimmt, und bei der die drehbare Welle (38) rechtwinklig zu der fiktiven Auswärtserstreckung des Dorns (21) in einer Position auswärts der Führungsschienen (42, 43) verläuft.

## Revendications

1. Dispositif d'amenée d'ébauches destiné à amener jusqu'à un mandrin de formage de fonds (21), des ébauches (B) pliées chacune à plat de manière à pouvoir être dépliées pour adopter une forme tubulaire de section transversale carrée, en dépliant chacune des ébauches (B) pour lui donner la forme tubulaire et en adaptant l'ébauche dépliée (B) autour du mandrin (21), le dispositif d'amenée comprenant :

un magasin (24) présentant une ouverture de distribution (23) à une extrémité et recevant les ébauches plates disposées côte à côte d'une manière rapprochée depuis ladite extrémité vers l'autre extrémité du magasin,

des moyens de transport (25) ayant une trajectoire de transport s'étendant depuis l'ouverture de distribution (23) en tant qu'extrémité de départ jusqu'à une extrémité d'arrivée suivant un arc circulaire (c) présentant un axe central (38) parallèle à la direction de la largeur de l'ébauche (B) située dans l'ouverture de distribution (23), l'extrémité d'arrivée de la trajectoire de transport des moyens de transport (25) coïncidant avec un prolongement extérieur imaginaire du mandrin (21), et

des moyens (26) destinés à déplier chaque ébauche (B) de la forme plate (B) à la forme tubulaire, l'ébauche (B) étant transportée par les moyens de transport (25), les moyens de dépliage (26) présentant une première et une deuxième griffes de dépliage (34, 35) prévues au niveau de parties marginales de l'ouverture de distribution (23) de manière à pouvoir venir individuellement en prise avec des extrémités opposées de l'ébauche (B) située dans l'ouverture de distribution.

2. Dispositif d'amenée d'ébauches défini dans la revendication 1, dans lequel les moyens de transport (25) comprennent un élément d'aspiration (36), un bras de transport (37) à l'extrémité avant duquel est fixé l'élément d'aspiration (36), et un arbre rotatif (38) auquel est fixée une extrémité de base du bras de transport (37) et qui est placé en alignement avec l'axe central de l'arc circulaire (C).

3. Dispositif d'amenée d'ébauches défini dans la revendication 1 ou 2, dans lequel des rails de guidage (42, 43) destinés à guider l'ébauche dépliée (B) vers le mandrin (21) sont disposés sur le prolongement extérieur imaginaire du mandrin (21), les moyens de dépliage (26) étant pourvus de guides coudés (41) destinés à guider de l'ouverture de distribution (23) jusqu'aux rails de guidage (42, 43) l'une des parties marginales pliées (16) de l'ébauche (B) devant être dépliée de la forme plate à la forme tubulaire.

5

10

4. Dispositif d'amenée d'ébauches défini dans la revendication 2 ou 3, dans lequel le magasin (24) est disposé de manière à diriger l'ouverture de distribution (23) vers l'intérieur et à recevoir les ébauches (B) dans une position verticale dans laquelle leurs extrémités opposées sont orientées vers le haut et vers le bas, et l'arbre rotatif (38) est perpendiculaire au prolongement extérieur imaginaire du mandrin (21) dans une position extérieure par rapport aux rails de guidage (42, 43).

15

20

25

30


35

40

45

50

55

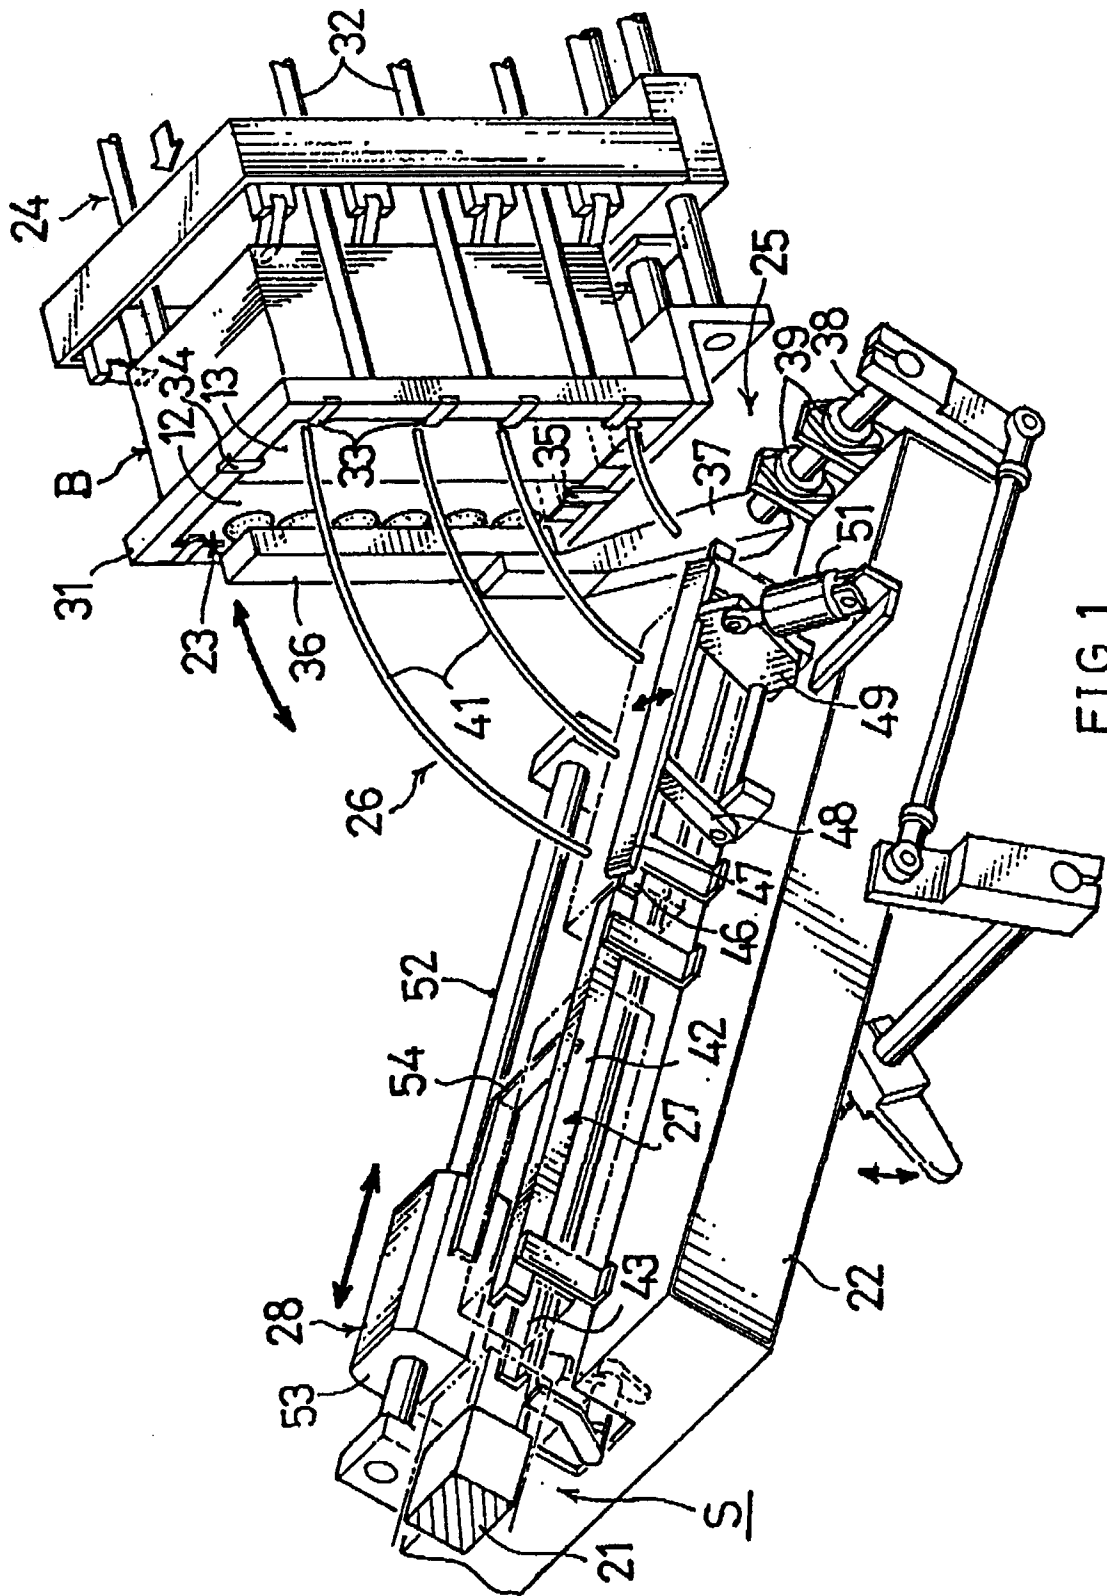

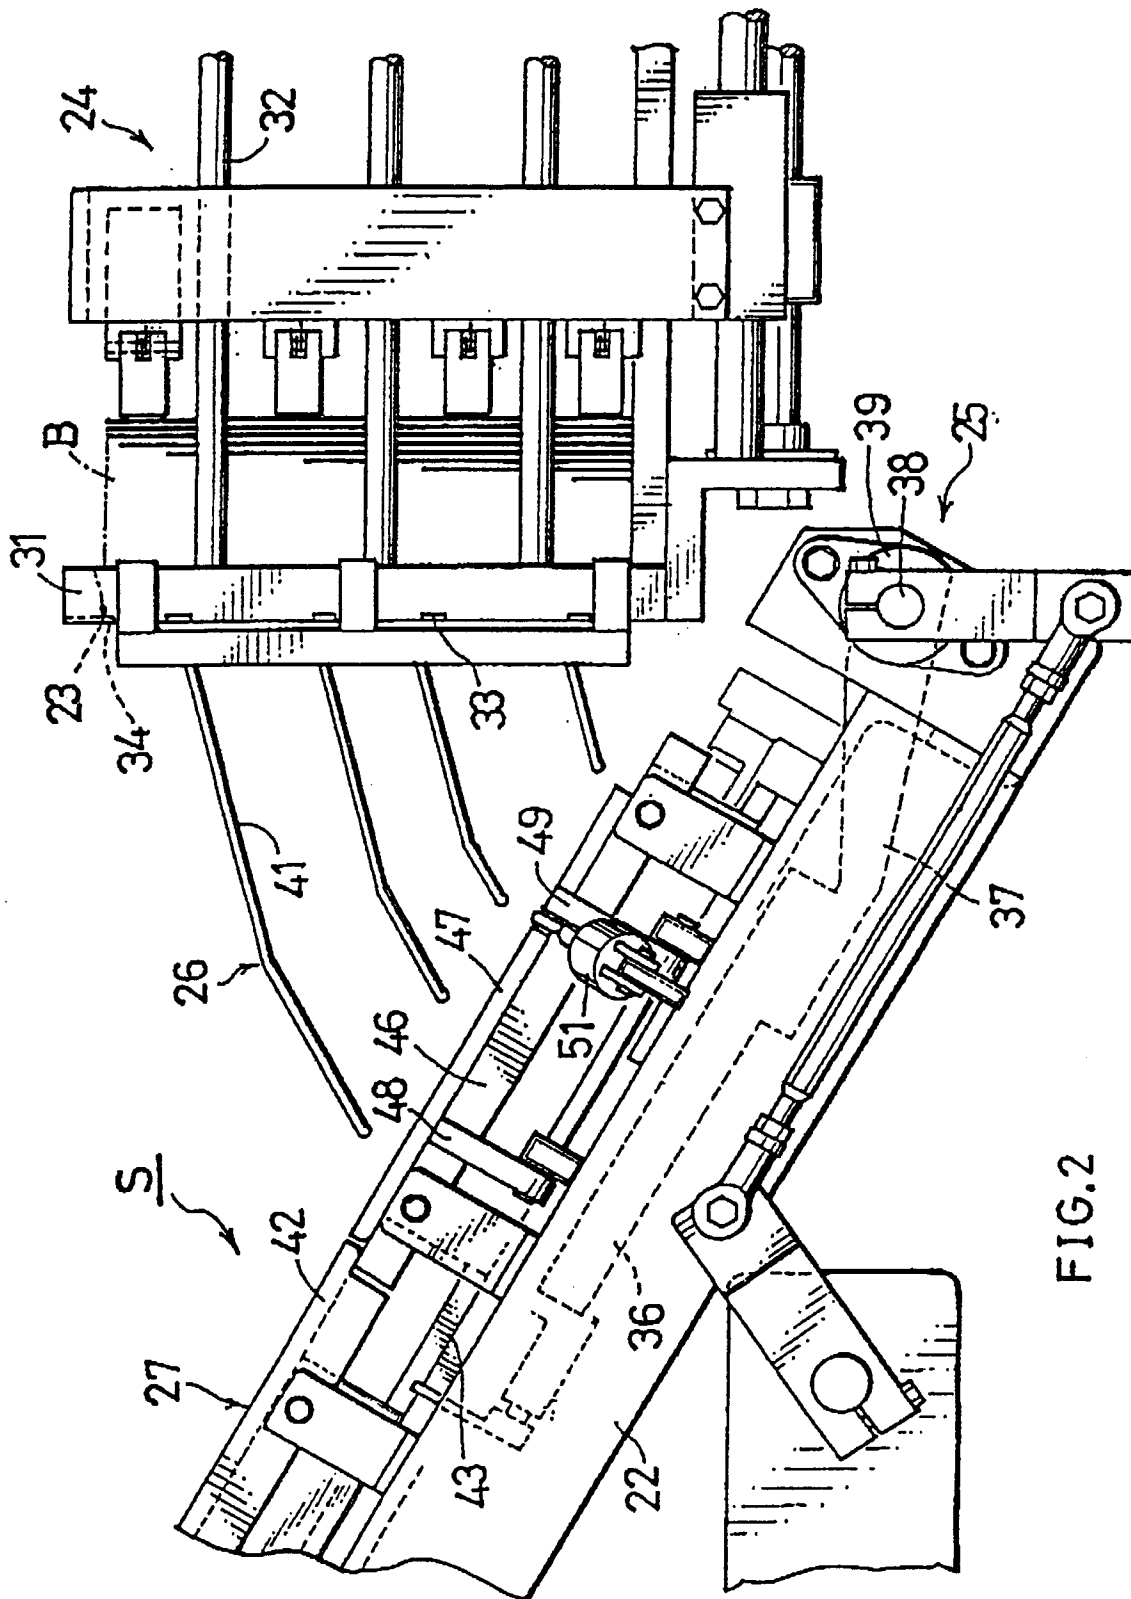


FIG. 2



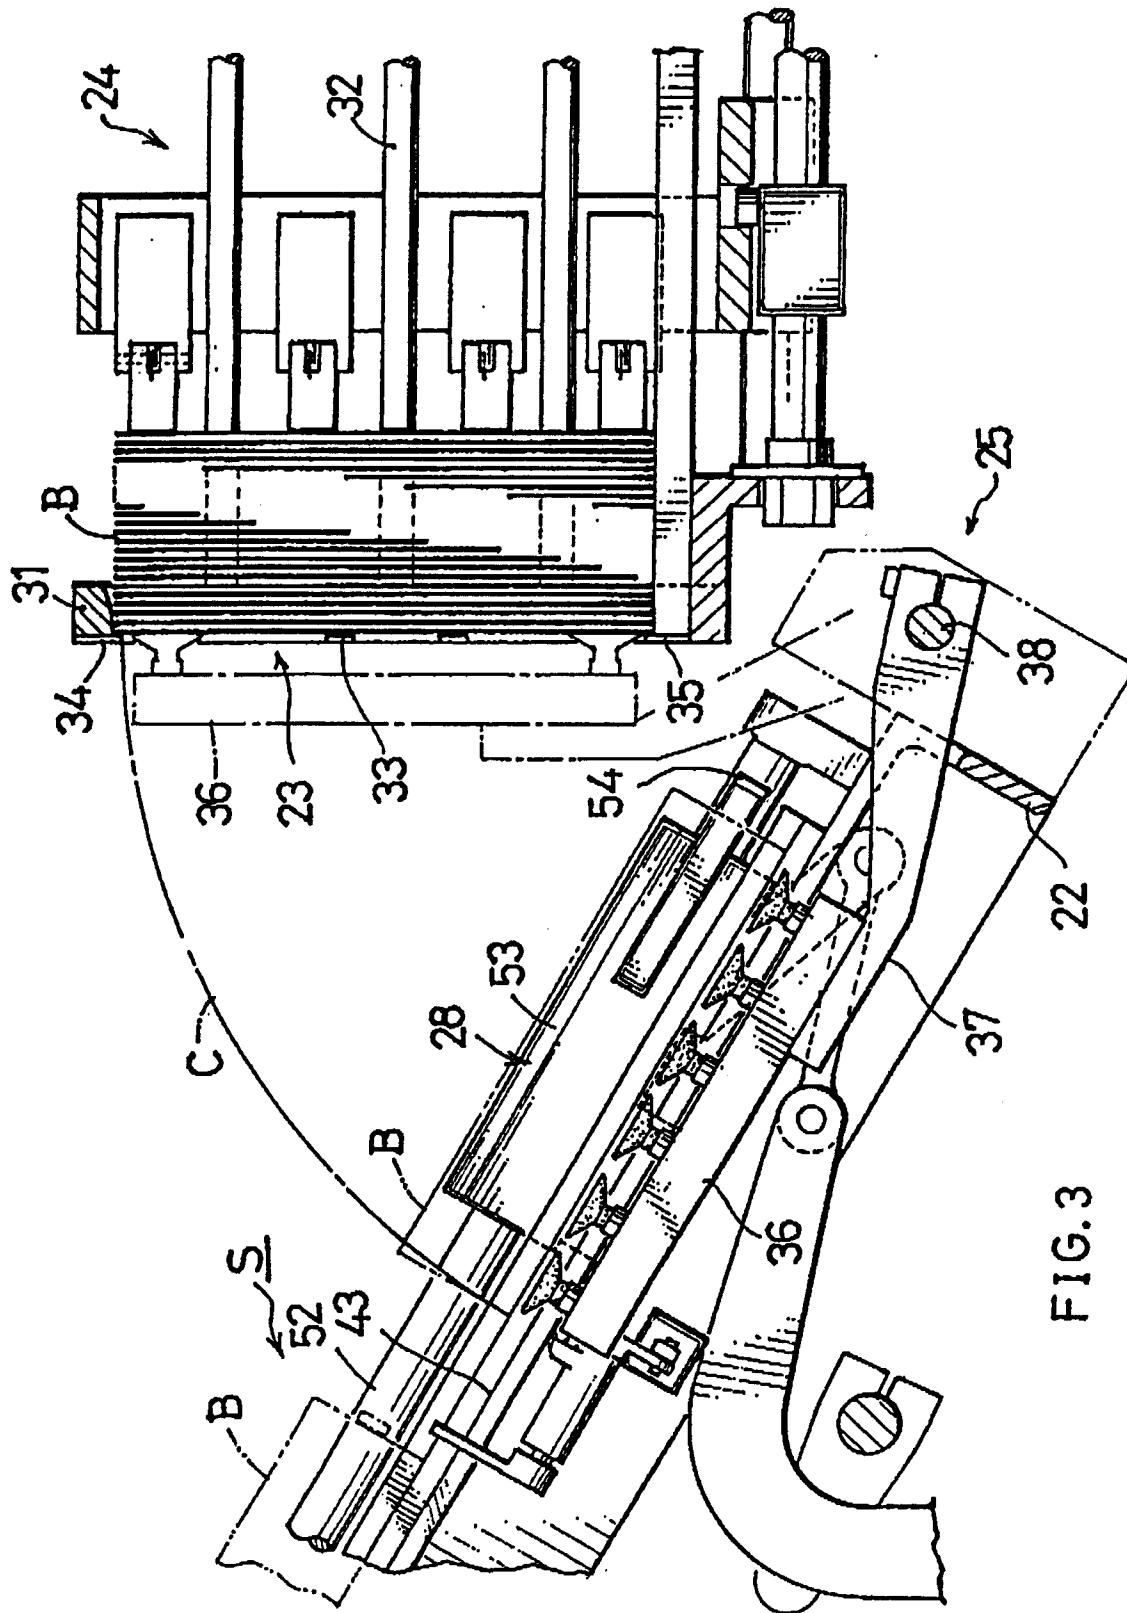
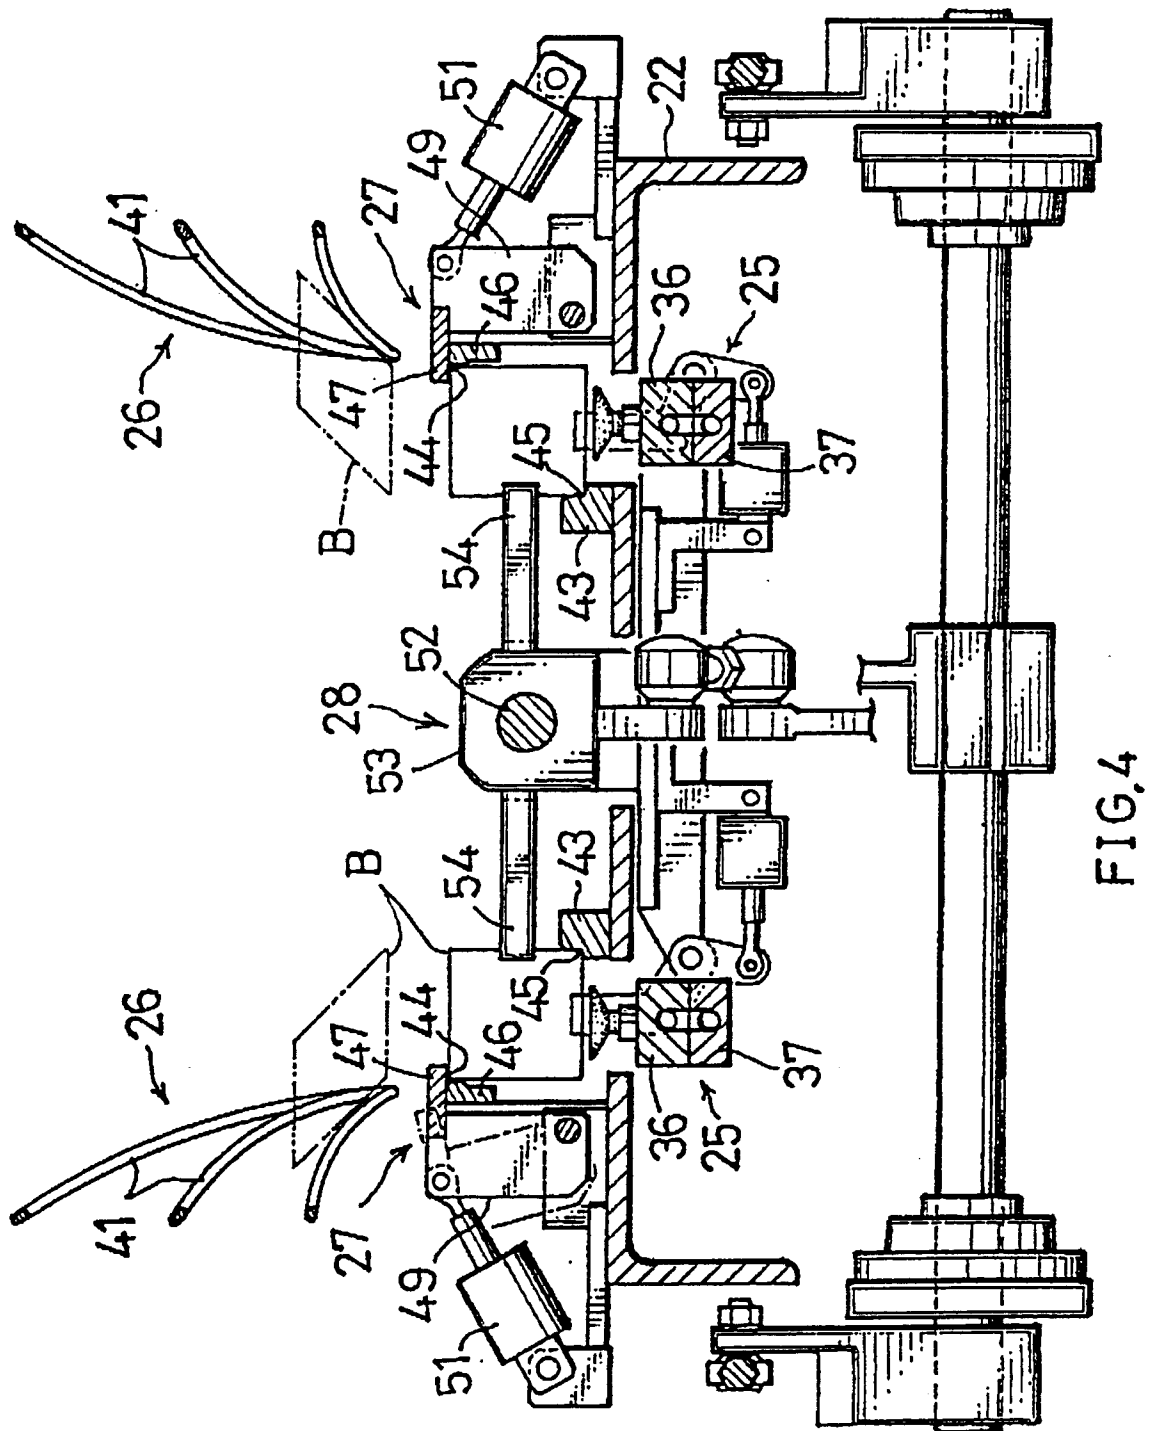
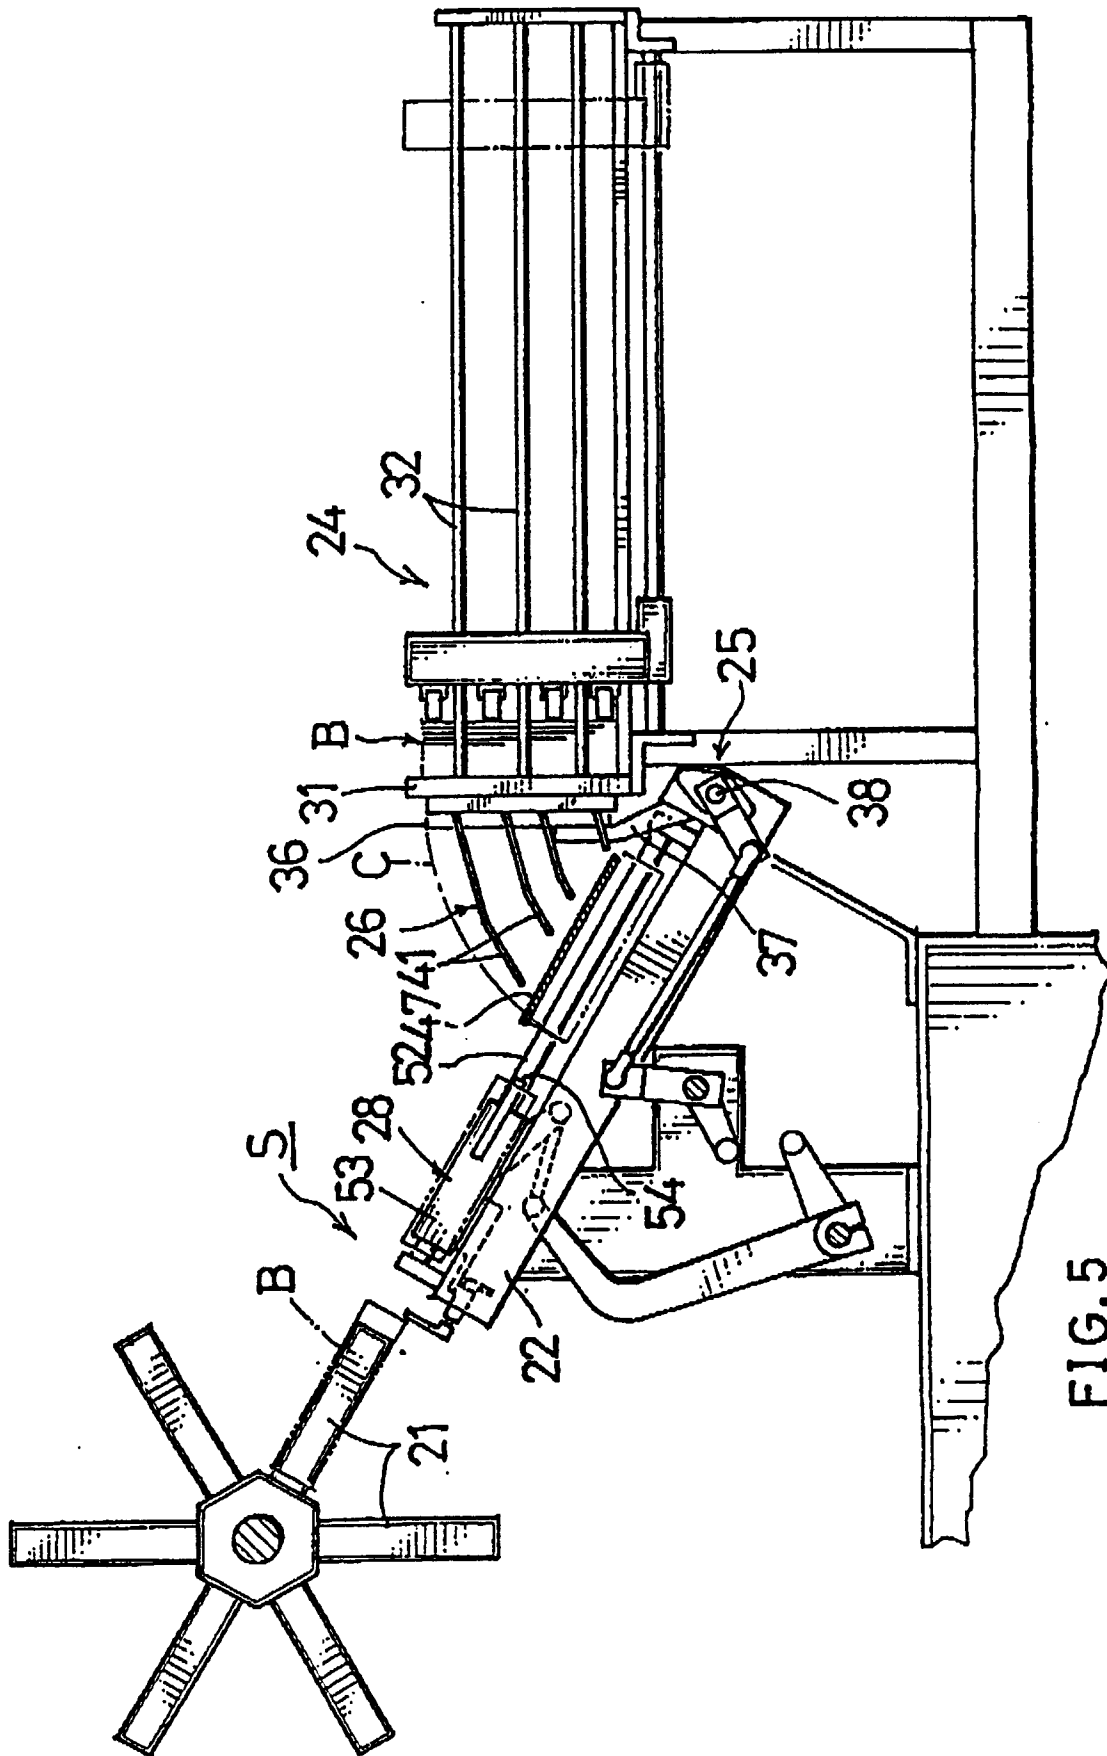


FIG. 3





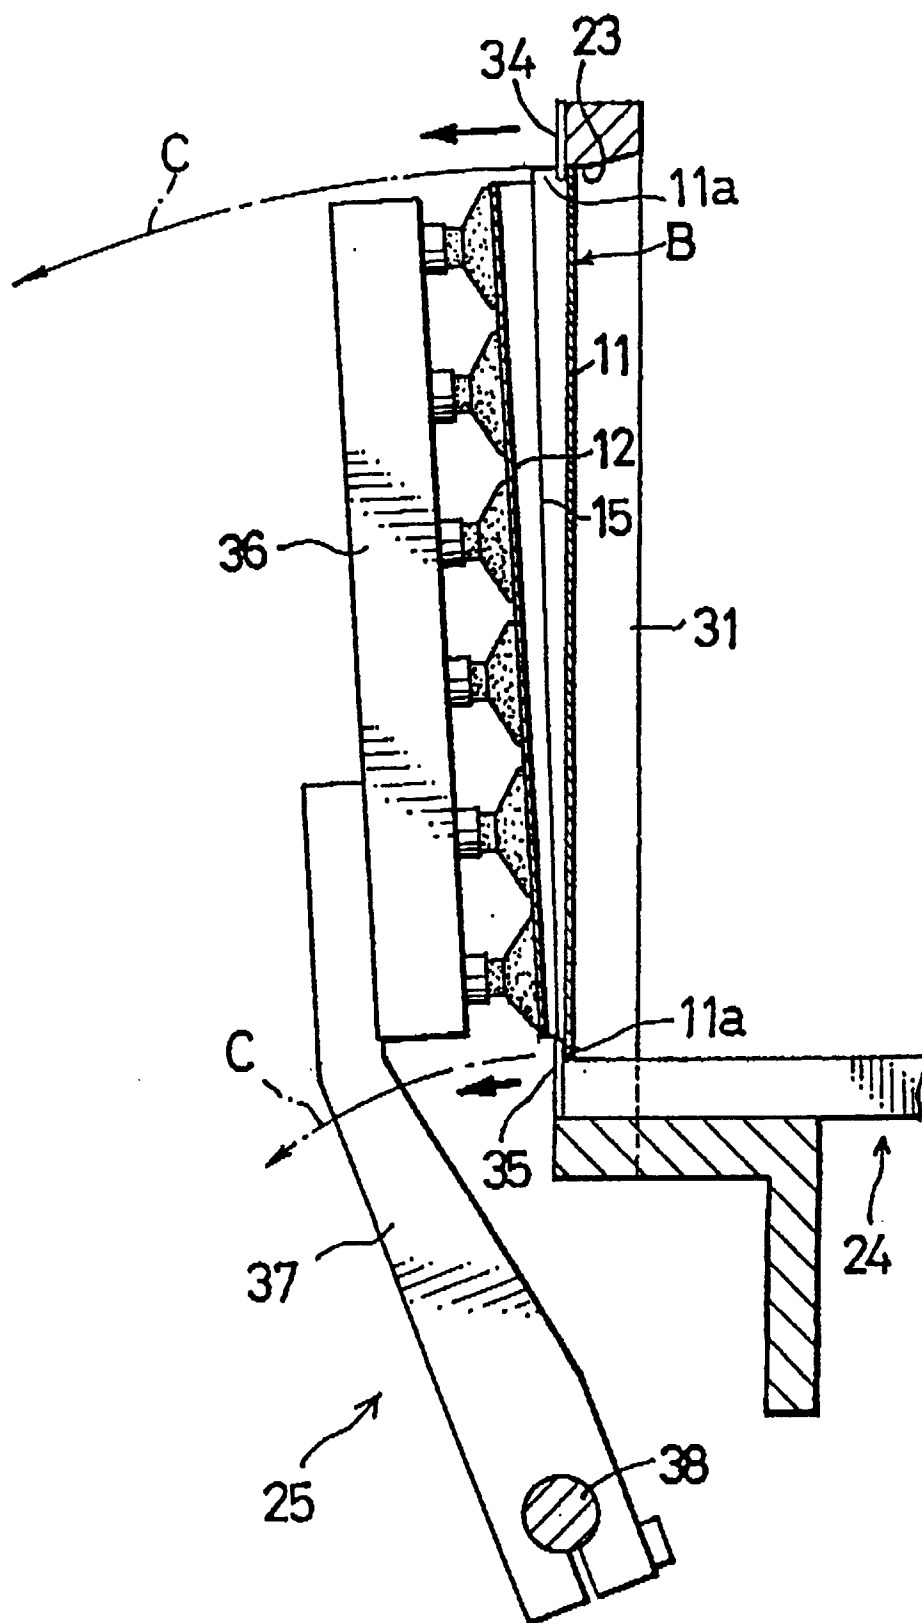


FIG. 6

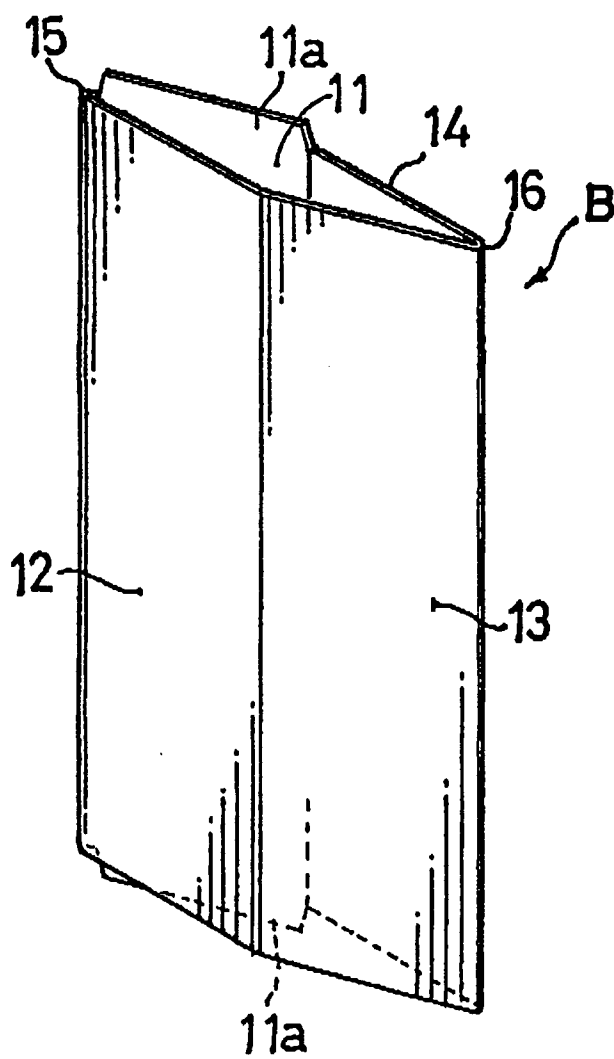


FIG.7

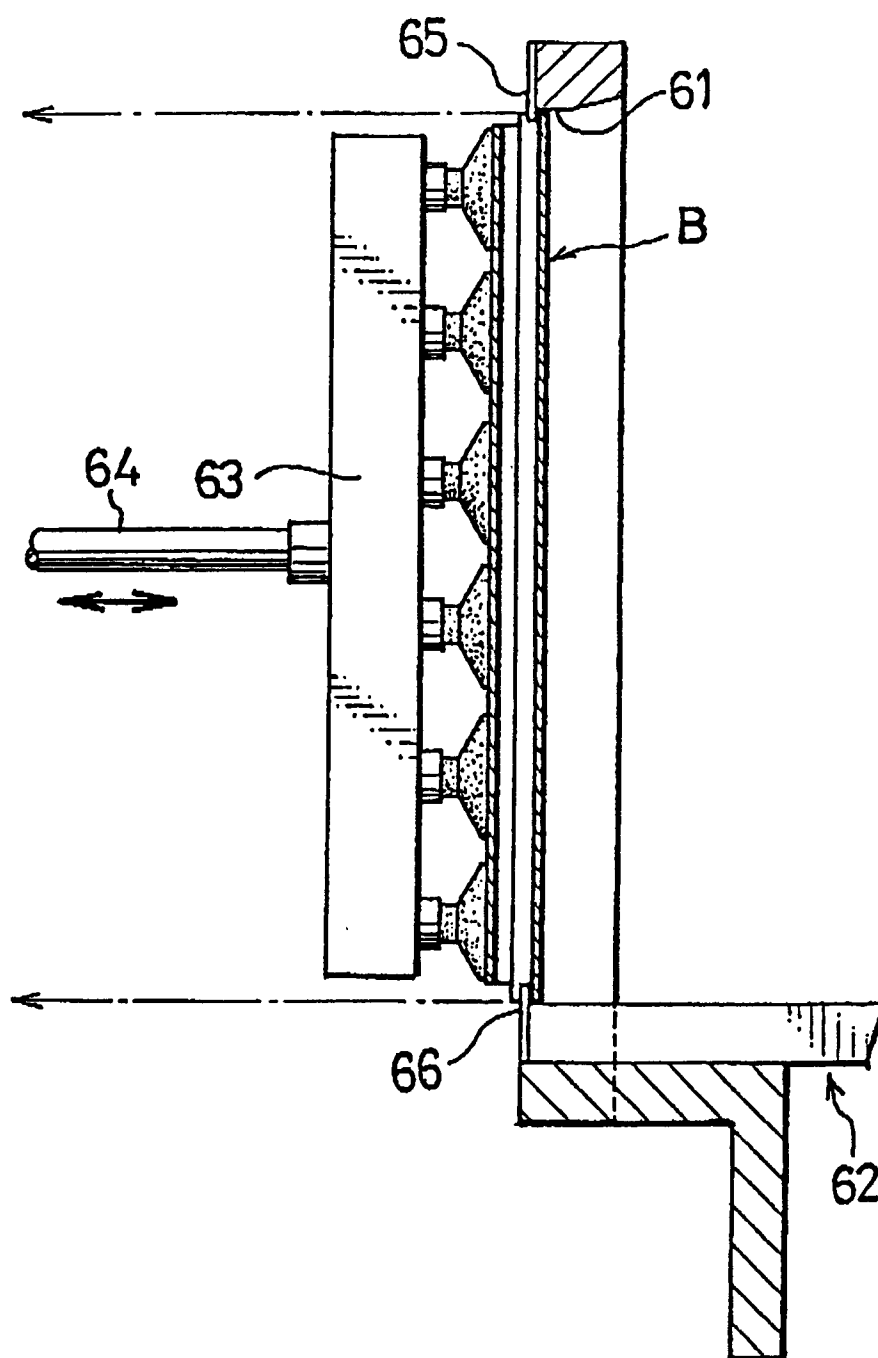


FIG. 8  
PRIOR ART