

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 496 017 A1

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **91100824.1**

(51) Int. Cl.⁵: **B41M 5/40**

(22) Date of filing: **23.01.91**

(43) Date of publication of application:
29.07.92 Bulletin 92/31

(84) Designated Contracting States:
DE FR GB

(71) Applicant: **HONSHU PAPER CO., LTD.**
12-8, Ginza 5-chome
Chuo-ku Tokyo(JP)

(72) Inventor: **Yoshikawa, Motonao**
3886-1, Nakanogo, Fujikawa-cho
Ihara-gun, Shizuoka-ken(JP)
Inventor: **Moronuki, Katsumi**
4-10-24, Naka-machi
Koganei-shi, Tokyo(JP)

(74) Representative: **Vossius & Partner**
Siebertstrasse 4 P.O. Box 86 07 67
W-8000 München 86(DE)

(54) **Heat-sensitive recording medium.**

(57) The present invention relates to a heat-sensitive recording medium which is excellent in dot-reproducibility and in adhesion between a support and a heat-sensitive recording layer provided thereon. The present recording medium comprises a synthetic-resin support, an ionomer-resin layer on the support, and a heat-sensitive recording layer provided on the ionomer-resin layer.

EP 0 496 017 A1

The present invention relates to a heat-sensitive recording medium, in particular, to a heat-sensitive recording medium which is excellent in dot reproducibility and in adhesion between a support and a heat-sensitive recording layer.

A heat-sensitive recording system is advantageous in that no development/fixing step is necessary, and maintenance for hardware is easy. Accordingly, this system has been recently and widely used in recording television images and in recording media for various printers, facsimile machines, and laboratory instruments. The properties necessary for these recording media are dependent on their applications. For example, in order for a halftone recording to be adequately done, a heat-sensitive recording medium must have good dot-reproducibility.

As support for heat-sensitive recording media, various sheet supports (e.g., paper) and various film supports (e.g., synthetic resin films) have been used.

The dot-reproducibility and color-developability of paper are generally not good, although it is inexpensive. Film supports do not have this deficiency, but their adhesion to aqueous coating solution which forms a heat-sensitive recording layer is poor, in that the heat-sensitive recording layer is easily peeled from the support.

Methods have been proposed to improve the adhesion of the recording layer to the synthetic-resin film support. One is to apply corona discharge to the film; the other is to coarsen the film surface. The former method does not adequately improve adhesion; the latter reduces the smoothness of the film and thereby renders dot-reproducibility insufficient.

The objective of the present invention is to provide a heat-sensitive recording medium that is excellent both in dot-reproducibility and in adhesion of a heat-sensitive recording layer to a support.

This objective has been accomplished by the present invention, i.e. by the finding that a heat-sensitive recording medium exhibiting the desired properties can be attained by making a support from a synthetic resin and providing an ionomer resin between the support and the heat-sensitive recording layer. The present invention has been completed on the basis of this finding.

As a synthetic resin to be used as a support, any known resin (polyethylene, polypropylene, polyethylene terephthalate, polycarbonate, polystyrene, nylon, cellulose diacetate, cellulose triacetate, etc.) can be used.

If necessary, the support used according to the present invention can be subjected to corona discharge, in order to improve its adhesion to an ionomer resin layer to be provided thereon. The support also may be laminated with a sheet of paper or other sheet materials on the side opposite to that where the ionomer resin layer is to be formed.

Any kinds of ionomer resins can be used in the present invention. Preferable ionomer resins are copolymers of an α -olefin and an α , β -unsaturated carboxylic acid, wherein ionic crosslinking is formed with one or more kinds of metal ions.

The α -olefins usable for forming the copolymers of the ionomer resins have a general formula: $RCH=CH_2$. The group R means a hydrogen atom or an alkyl group. The alkyl group preferably has a carbon number of 1 to 8. Preferable olefins include ethylene, propylene, butene-1, pentene-1, hexene-1, heptene-1, 3-methylbutene-1 and 4-methylpentene-1.

Preferable α , β -unsaturated carboxylic acids are those of C3 to C8 and include acrylic acid, methacrylic acid, ethacrylic acid, itaconic acid, maleic acid and fumaric acid, and their esters (e.g., methyl acrylate, ethyl acrylate, methyl methacrylate, n-butyl methacrylate, dimethyl fumarate, diethyl itaconate and dimethyl maleate).

The α -olefins and α , β -unsaturated carboxylic acids may be used as a combination of more than one compound.

Metal ions suitable for producing the ionomer resins include those having a valence of one to three. Suitable mono valent metal ions include Na^+ , K^+ , Li^+ , Cs^+ , Ag^+ , and Hg^+ . Divalent metal ions include Be^{++} , Mg^{++} , Ca^{++} , Sr^{++} , Ba^{++} , Cu^{++} , Cd^{++} , Hg^{++} , Sn^{++} , Pb^{++} , Fe^{++} , Co^{++} , Ni^{++} , and Zn^{++} . Trivalent metal ions include Al^{+++} , Sc^{+++} , Fe^{+++} , and Y^{+++} . It is preferable that the metal ion be Na^+ , Mg^{++} or Zn^{++} in the present invention.

If necessary, the ionomer resin layer may be subjected to corona discharge to improve its adhesion to a heat-sensitive recording layer to be formed thereon.

The ionomer resin layer is usually laminated onto the support as follows:

(1) Anchor treatment is made on the support film (e.g., biaxially oriented polypropylene) and an ionomer-resin layer is laminated onto the film either by extrusion or by coating,

in a known manner, either the ionomer resin solution or the emulsion.

(2) In the production of a support film (e.g., biaxially oriented polypropylene), an ionomer resin and a polypropylene resin are extruded together to form an integrated film, an ionomer resin is extruded to

laminate a resin (e.g., polypropylene resin) before orientation of the film, or either an ionomer resin solution or an emulsion is coated onto the film before orientation is made.

Additives usually used for resins (e.g., polypropylene resin, ionomer resin) including antioxidants, antistatic agents, slip agents, etc., may be used.

5 Heat-sensitive recording layers usable in the present invention may be of any type, e.g. of a leuco-type, chelate-type, and diazo-type. The recording layer contains a coloring compound and a binder wherein the coloring compound is dispersed and feed throughout.

A leuco-type recording medium contains, as a coloring compound, a colorless-to-pale leuco compound and an organic acid. The leuco compound develops color when it reacts with the organic acid.

10 The leuco compounds include triphenylmethane, triphenylmethane phthalide, fluoran, leuco-auramine, diphenylmethane, phenothiazine, spiropyran, indoline, indigo and their derivatives. Preferable leuco compounds

include crystal violet lactone, 3-diethylamino-6-methyl-7-anilino-fluoran, 3-(N-ethyl-p-toluidino)-6-methyl-7-anilino-fluoran, 3-diethyl-amino-6-methyl-7-(o- or p-dimethylanilino) fluoran, 3-pyperidino-6-methyl-7-anilino-fluoran, 3-(N-cyclohexyl-N-methylamino)-6-methyl-7-anilino-fluoran, 3-diethylamino-7-(o-chloroanilino) fluoran, 3-diethylamino-7-(m-trifluoromethylanilino) fluoran, 3-diethylamino-6-methyl-chloro-fluoran, 3-diethylamino-6-methyl-fluoran, 3-(N-isoamyl-N-ethylamino)-6-methyl-7-anilino-fluoran or 3-dibutylamino-6-methyl-7-anilino-fluoran.

Organic acids usable with the leuco compounds are these which are meltable by heat and develop 20 color upon contact with the leuco compounds. The organic acids include various phenolic compounds, aliphatic acids or aromatic carboxylic acids. They include gallic acid, salicylic acid, 1-hydroxy-2-naphthoic acid, p-hydroxybenzoic acid, m-hydroxybenzoic acid, 2-hydroxy-p-toluic acid, 3,5-xyleneol, thymol, p-tert-butylphenol, 4-hydroxyphenoxide, methyl-4-hydroxybenzoate, 4-hydroxy-acetophenone, α -naphthol, β -naphthol, catechol, resorcinol, hydroquinone, 4-tert-octyl-catechol, 4,4'-sec-butylidenephthalenol, 2,2'-dihydroxydiphenyl, 2,2'-methylene-bis (4-methyl-6-tert-butylphenol), 2,2'-bis (4-hydroxyphenyl) propane (namely, bisphenol A), 4,4'-isopropylidenebis (2-tert-butylphenol), pyrogallol, phloroglucin, phloroglucin carboxylic acid, p-methylphenol, p-phenylphenol, 4,4'-cyclohexylidenediphenol, 4,4'-isopropylidene-diccatechol, 4,4'-benzylidenediphenol, 4,4'-isopropylidene bis (2-chlorophenol), 3-phenylsalicylic acid, 3,5-di-tert-butylsalicylic acid, 1-hydroxy-2-naphthoic acid, a gallic ester, a salicylate, a p-hydroxybenzoate, a 4-hydroxyphthalate, 2-(4-hydroxyphenyl)-2-(3'-hydroxyphenyl) propane or 4,4'-dihydroxy-3,3'-diisopropylidiphenyl-2,2'-propane.

The chelate-type heat-sensitive recording layer contains, as a coloring compound, (a) a heavy- or noble-metal salt of an organic acid and (b) an organic reducing agent, a sulfur compound, or an amino compound. Either of the compounds (a) and (b), or both, are melted by heat and the two react with each other to form a 35 chelate compound and develop color. Possible combinations of (a) and (b) include:

An iron salt of a long-chain aliphatic acid (e.g., ferric stearate or ferric myristate) and phenols (e.g., tannic acid, gallic acid or ammonium salicylate); a heavy-metal salt of an organic acid (e.g., Ni, Co, Pb, Cu, Fe, Mg, or Ag salt of acetic acid; stearic acid or palmitic acid), and an alkaline earth-metal sulfide (e.g., CaS, SrS or BaS) or an organic chelating agent (e.g., S-diphenylcarbazine or diphenylcarbazone); a heavy-metal 40 oxalate (e.g., Ag, Pb, Hg, Th salt of oxalic acid) and a sulfur compound (e.g., Na tetrathionate, thiosulfate soda or thiourea); a noble-metal salt of an organic acid (e.g., silver oxalate or mercury oxalate) and an organic polyhydroxy compound (e.g., polyhydroxy alcohol, glycerine or glycol); a noble-metal salt of an organic acid (e.g., silver behenate or silver stearate) and an aryl organic reducing agent (e.g., protocatechuic acid, spiroindane or hydroquinone); a ferric salt of an aliphatic acid (e.g., ferric stearate) and an aryl polyhydroxy compound (e.g., 3,4-dihydroxytetraphenylmethane); a metal salt of an organic acid (e.g., silver behenate or silver acid phthalate) and a cyclic organic reducing agent (e.g., protocatechuic acid, 2,3-dihydroxybenzoic acid, 4-methoxy-1-hydroxynaphthalene, hydroquinone or catechol); a ferric salt of an aliphatic acid (e.g., ferric palargonate or ferric laurate) and thiosemicarbazide or isothiosemicarbazide derivative); a lead salt of an organic acid' (e.g., lead caproate, lead pelargonate or lead behenate) and a 50 thiourea derivative (e.g., ethylene thiourea or N-dodecylthiourea); a heavy-metal salt of a higher aliphatic acid (e.g., ferric stearate or copper stearate) and a zinc salt of a disubstituted dithiocarbamic acid derivative (e.g., zinc dibutylthiocarbamate); a metal salt (e.g. nickel acetate) and a sulfur-releasing compound (e.g., thiooxalic acid or thioacetamide); a metal salt (e.g., nickel stearate, cobalt behenate or gold chloride) and N,N'-substituted rubeanic acid; a bismuth salt (e.g., borate, oxychloride, salicylate or benzoate) and a tin 55 compound, as a releasing agent (e.g., tin sulfide or tin hydroxide); a Grignard-type organic-metal compound and a sulfur compound (e.g., thiuram, thiouran or thioamide).

The diazo-type heat-sensitive recording layer contains, as a coloring compound, the following two systems:

(1) a diazosulfonate, which is stable at room temperature, and a coupler. The diazosulfonate is made to react with the coupler by light or heat to cause color-development reaction and form a diazo dye.


(2) a hydrophobic diazonium compound, a coupler, and a heat-meltable basic compound. The diazonium compound (e.g., diazonium salt) is heated in the presence of the coupler and the heat-meltable basic compound to cause reaction between the diazonium compound and the coupler, because the system becomes alkaline due to heat, so that a diazo dye is formed.

In this case, it is advantageous to incapsulate the hydrophobic diazo compound in a microcapsule having a polyurethane wall, by means of interfacial polymerization, to separate it from the other materials, so as to improve a pot life.

The diazonium salt may be soluble in water, insoluble in water, or hardly soluble in water.

Water-soluble diazonium salts include p-diazo-N-ethyl-N-hydroxyaniline chloride • zinc chloride, p-diazo-N,N-dimethylaniline chloride • zinc chloride, p-diazo-N,N-diethylaniline chloride • zinc chloride, 4-benzamide-2,3-diethoxybenzenediazonium chloride • zinc chloride, 2-methoxy-4-morpholino-benzenediazonium chloride • zinc chloride or 4-morpholino-2,5-dibutoxybenzene-diazonium chloride • zinc chloride.


Diazonium salts insoluble or hardly soluble in water include those which have, as a counter anion, tetrafluoroborate (BF_4^-), hexafluorophosphate (PF_6^-), or anions having the following formula:

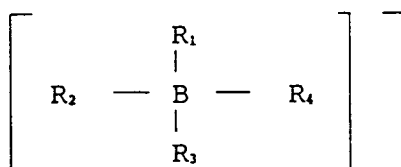

wherein R_1 to R_4 may be independently an alkyl group, an alkenyl group, a cycloalkyl group, an allyl group, an aryl group, a heterocyclic group or a cyano group.

The diazonium salt may be a mixture of two or more of the above-mentioned diazonium salts.

Couplers usable in the present invention include resorcinol, α -naphthol-2,7-dihydroxynaphthalene, sodium-2-hydroxynaphthalene-3,6-disulfonate, sodium-2,3-dihydroxynaphthalene-6-sulfonate, acetoacetylanilide, 2-hydroxy-3-naphthoic acid-ethanol amide, 2-hydroxy-3-naphthoic acid-o-toluidinoamide. As a coupler having a basic residual group, there may be mentioned the one having the following formula:

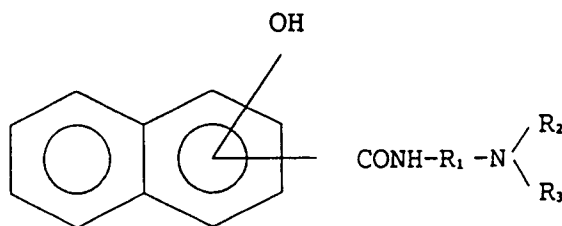

wherein R_1 is an alkyl group of C_1 - C_{18} , and R_2 and R_3 are alkyl groups or functional groups which form a heterocyclic ring with the N atom to which they bind.

The heat-meltable basic compound has the ability to make the system basic when it is heated to melt, dissolve, or decompose. Basic compounds include inorganic and organic ammonium salts, organic amines, urea, guanidine, piperadine, imidazole and their derivatives, nitrogen-atom-containing heterocyclic compounds (e.g., morpholine), and salts (e.g., sodium acetate, potassium malonate).

The coloring compound may contain an acid stabilizer (e.g., tartaric acid, citric acid, boric acid) to prevent precoupling.

The coloring agent also contains an antioxidant (e.g., thiourea or ascorbic acid) and a stabilizer for diazonium salts (e.g., zinc chloride).

The coloring compound may further contain various pigments and wax (e.g., paraffin wax, montan wax or amide wax) to improve coloring sensitivity and color density.

Most binders usable in the present invention are water-soluble; all separately fix the coloring compound dispersed in a fine-grain form.

Binders include polyvinyl-alcohol, epoxy-modified polyvinyl alcohol, methyl cellulose, carboxymethyl

cellulose, hydroxyethyl cellulose, polyacrylic acid, casein, gelatin, and starch, and their derivatives.

The heat-sensitive recording layer may contain inorganic and organic pigments (e.g., clay, calcium carbonate, synthetic silica, aluminum hydroxide, talc, titanium oxide or zinc oxide), antioxidants for storage stability, absorbers for ultraviolet rays, waterproofers for improving water resistance, phenolic resin, surfactants, conventional wax, and/or metal salts of higher aliphatic acids.

The recording layer may also contain heat-meltable materials for improving coloring e.g. at least one sensitizer, if necessary. The coating material for the heat-sensitive recording layer generally is prepared by pulverizing and dispersing the coloring compound and, if necessary, various additives (e.g. pigment, stabilizer, and/or sensitizer) in an aqueous medium containing a binder (e.g., polyvinyl alcohol) at a suitable concentration and by a suitable pulverizer/disperser such as a ball mill or sand grinder.

To enhance coloring efficiency, each component of the coating material should be as fine as possible, preferably no greater than $3\mu\text{ m}$ in particle diameter.

The resultant coating material is coated on the ionomer resin provided on the support and is then dried, to form the heat-sensitive recording medium of the present invention.

The coating usually may be made by a suitable coating machine such as a blade coater, an air-knife coater, a bar coater, or a reverse-roll coater.

EXAMPLES

The present invention will be further explained in detail by reference to the following nonlimitative examples.

Example 1

A. Production of a Support Having an Ionomer Resin Layer

A polypropylene sheet extruded from a T-die was oriented in one direction to five times its original size. One side of the resultant oriented sheet having a thickness of $200\mu\text{ m}$ was subjected to corona discharge. Ionomer emulsion (Chemipearl S, produced by Mitsui petrochemical Industries, Ltd.) was coated on the corona-discharge-treated side of the oriented sheet, so that the solid content after drying was 2 g/m^2 , and was immediately laterally oriented to nine times (root-mean-square) its original size by continuously passing the sheet through a tentering machine.

The sheet then was subjected to corona discharge, at the side where the ionomer layer was coated, to yield an ionomer layer having a surface tension of 50 dyne/cm and a thickness of $20\mu\text{ m}$.

B. Production of a Heat-Sensitive Recording Medium

Each of the solutions described below was prepared by ten hours of mixing by a paint-shaker (produced by Toyo Seiki, K.K.).

Solution A	
Leuco dye: 3-dibutylamino-6-methyl-7-anilino-fluoran	5 g
Zinc stearate	5 g
Polyvinylalcohol (12%)	40 g
Water	50 g

Solution B	
Bisphenol A	10 g
Zinc stearate	3 g
Polyvinylalcohol (12%)	40 g
Water	47 g

100 g of Solution A, 100 g of Solution B, 50 g of a 12% polyvinylalcohol solution, 15 g of synthetic silica (P-832, produced by Mizusawa Chemical, K.K.), and 60 g of water were stirred together to form a

coating solution. The coating solution was coated onto the ionomer layer of the support by means of a Wire bar so that the coating weight (after drying) was 8 g/m², and then was dried, to produce Heat-Sensitive Recording Medium A.

5 Example 2

The procedure of Example 1 was performed, with 10 g of ferric stearate in place of the leuco dye in Solution A, and 20 g of stearyl gallate in place of the bisphenol A in Solution B, yielding Heat-Sensitive Recording Medium B.

10

Example 3

The procedure of Example 1 was performed, with epoxy-modified polyvinyl alcohol (DR587, produced by Denki Kagaku, K.K.) in place of the 12% polyvinylalcohol solution added when Solution A was mixed with

15

Example 4


The following solutions were prepared:

20

Solution A

Diazonium compound:

25

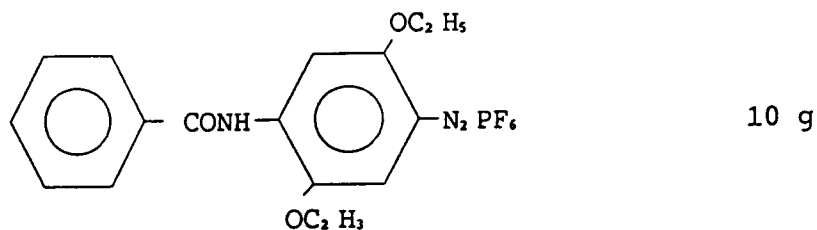

35

Zinc stearate 5 g

40

Polyvinylalcohol (12%) 40 g

Water 50 g


45

50

55

Solution B

Coupler:

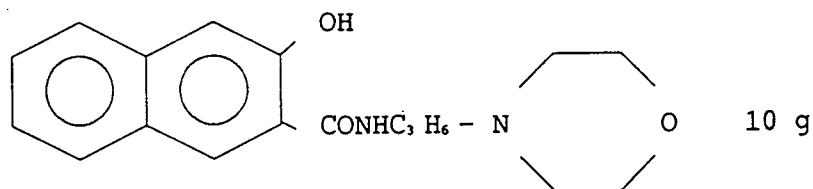

15 Polyvinylalcohol (12%) 30 g

Water 37 g

Solution C

Basic compound:

25 1,3-di-o-tolylguanidine 3 g

Heat sensitizer:

30 2-Naphthyl benzoic acid 5 g

Polyvinylalcohol (12%) 20 g

35 Water 20 g

Then, 105 g of Solution A, 77 g of Solution B, 48 g of Solution C, 50 g of a 12% polyvinylalcohol solution, 15 g of synthetic silica (P-832 produced by Mizusawa Chemical, K.K.), and 60 g of water are stirred together, yielding a coating solution which then was coated onto the ionomer layer on the support as in Example 1, yielding Heat-Sensitive Recording Medium D.

Comparative Example 1

The procedure of Example 1 was performed without the ionomer layer, yielding Heat-Sensitive Recording Medium E.

Comparative Example 2

The procedure of Example 1 was performed without the ionomer layer and the support coarsened by sandblast method instead of subjected to corona discharge, yielding Heat-sensitive Recording Medium F.

Heat-Sensitive Recording Media A-F were subjected to the following tests:

Test 1

(to determine the adhesion of the heat-sensitive recording layer to the support)

Commercially available mending tape was placed onto the recording layer, the tape was peeled from the recording layer, and the surface of the recording layer was visually observed.

Test 2

(to determine image density and dot-reproducibility)

5 Solid printing was performed by means of a commercially available thermal head (KFT-216-8 MPD I
(Kyocera K.K.J) having a printing power of 0.7 W/dot, a pulse cycle of 5.0 msec, and a pulse width of 0.3
msec. The density of the resultant image and the background density were determined by means of a
densitometer (Macbeth RD-914). Dot-reproducibility was determined by visual observation.

Test 3

10 (to determine moisture-vapor resistance and heat resistance)

After Test 2 had been performed, Heat-Sensitive Recording Media A, B, C, E, and F were stored for 24
hours at 40° C in 90% RH and at 60° C in 30% RH. Background density and image density were then
determined as in Test 2.

15 The moisture-vapor resistance and heat resistance of Heat-Sensitive Recording Medium D were
determined after the medium had been exposed to the light of two 85 W ultraviolet-ray lamps for 10 sec at
a distance of 2 cm and had been fixed after the completion of the printing.

The results of these tests are shown in Table I.

20

25

30

35

40

45

50

55

TABLE 1

Heat Sensitive Recording Medium	Adhesion (Peeling Off)	Dot Reproducibility	Background Density	Image Density	Moisture Vapor Resistance		Heat Resistance	
					Background Density	Image Density	Background Density	Image Density
A	⊙	○	0.03	1.28	0.08	1.25	0.09	1.24
B	⊙	○	0.08	1.03	0.12	0.98	0.15	1.02
C	⊙	○	0.03	1.28	0.08	1.25	0.09	1.24
D	⊙	○	0.05	1.12	0.05	1.13	0.05	1.12
E	×	○	0.03	1.27	0.09	1.26	0.08	1.24
F	○	×	0.03	1.14	0.09	1.09	0.09	1.06

(Footnote: ⊙ means: "very good"; ○ means: "good"; × means: "bad")

Table I shows that, by providing an ionomer-resin layer between the support and the heat-sensitive recording layer, an excellent heat-sensitive recording medium can be obtained, wherein dot-reproducibility and adhesion between the support and the heat-sensitive recording layer are superior to those of the prior art recording medium.

Claims

1. A heat-sensitive recording medium, comprising:

(a) a synthetic-resin support;

(b) an ionomer-resin layer on said support; and

(c) a heat-sensitive recording layer on said ionomer resin layer.

2. The heat-sensitive recording medium of claim 1, wherein said ionomer resin layer comprises a polymer containing an ionic crosslinking.

3. The heat-sensitive recording medium of claim 2, wherein said polymer is a copolymer produced by polymerizing an olefin with an α , β -unsaturated carboxylic acid or its ester, and wherein all or a part of the hydrogen atoms or ester groups of the carboxyl groups are replaced by metal.

4. The heat-sensitive recording medium of claim 1, wherein said recording layer is of the leuco-type, chelate-type or diazo-type.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 91 10 0824

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X,Y	PATENT ABSTRACTS OF JAPAN vol. 6, no. 150 (M-148)(1028) 10 August 1982, & JP-A-57 69095 (KONISHIROKU PHOTO INDUSTRY COMPANY LIMITED) 27 April 1982, * the whole document * ----	1-4	B41M5/40
Y	EP-A-304936 (KAO CORPORATION) * page 3, lines 2 - 50 * ----	1-4	
Y	GB-A-2114767 (RICOH COMPANY LIMITED) * page 3, lines 17 - 22 * ----	1-4	
A	EP-A-361500 (MITSUBISHI PAPER MILLS LIMITED) * page 5, lines 10 - 20 * ----	1-4	
A	PATENT ABSTRACTS OF JAPAN vol. 8, no. 61 (M-284)(1498) 23 March 1984, & JP-A-58 211497 (RICOH K.K.) 08 December 1983, * the whole document * -----	1-4	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			B41M
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 02 SEPTEMBER 1991	Examiner BACON A. J.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			