

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 503 080 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art.
158(3) EPC

(21) Application number: **91916786.6**(51) Int. Cl.⁵: **F28F 3/08, F28D 9/02**(22) Date of filing: **27.09.91**(86) International application number:
PCT/JP91/01292(87) International publication number:
WO 92/06343 (16.04.92 92/09)(30) Priority: **28.09.90 JP 260992/90**
26.10.90 JP 288725/90
05.04.91 JP 72871/91(43) Date of publication of application:
16.09.92 Bulletin 92/38(84) Designated Contracting States:
DE FR GB IT SE(71) Applicant: **MATSUSHITA REFRIGERATION**
COMPANY
22, Takaidahondori 3-chome
Higashiosaka-shi, Osaka-fu 577(JP)(72) Inventor: **MATSUNAGA, Tsuyoshi**

780-5, Nagahara, Yasucho
Yasugun, Shiga 520-23(JP)
Inventor: **FUJINO, Kenji**
31-38, Rokujo 1-chome
Nara-shi, Nara 630(JP)
Inventor: **SUGAHARA, Takashi**
847-4, Tanakamiedacho
Otsu-shi, Shiga 520-21(JP)
Inventor: **SUGA, Hiroaki**
881-178, Tanakamisatocho
Otsu-shi, Shiga 520-22(JP)


(74) Representative: **Eisenführ, Speiser & Partner**
Martinistrasse 24
W-2800 Bremen 1(DE)(54) **LAMINATED HEAT EXCHANGER.**

(57) In a laminated heat exchanger wherein partitions are provided in a plate (32) on a primary side and a plate (33) on a secondary side to form channels therein, and a plurality of the plates (32) on the primary side and the plates (33) on the secondary side are laminated one upon another with respective seal plates (3) therebetween, each of the partitions (35) of the plates (33) on the secondary side are located at positions opposed to each of the channels (11) of the plates (32) on the primary side and each of the partitions (34) of the plates (32) of the primary

side are located at positions opposed to each of the channels (17) of the plates (33) on the secondary side, thereby preventing the seal plates (3) from being deformed even if pressure of the coolant flowing through the channels becomes nonuniform. Furthermore, sides of the plates (32) on the primary side, the plates (33) on the secondary side and the seal plates (3) are formed into shapes different from one another, thereby making it easy to identify falling-off of a plate.

EP 0 503 080 A1

FIG. 6

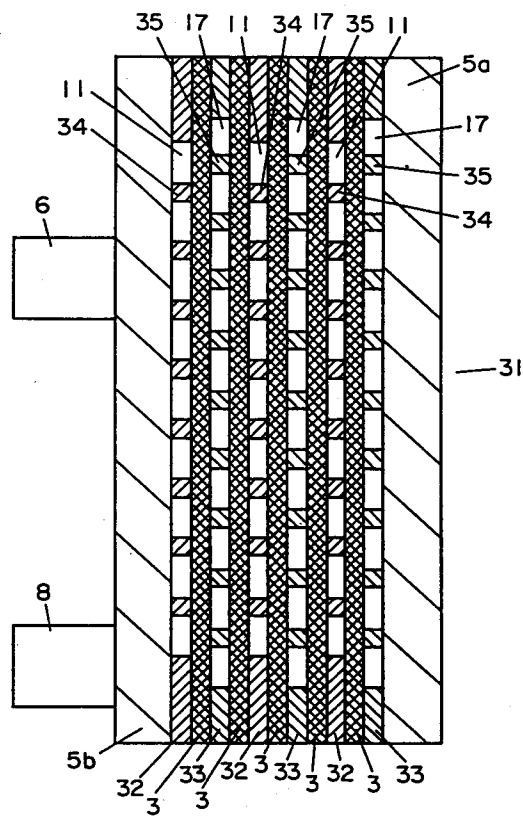

Field of the invention

The present invention relates to a layer-built heat exchanger for exchanging heat between a first coolant and a second coolant, and is used in a radiator for coolant oil in machine tools or in an air conditioner.

Background of the invention

Demand has risen for layer-built heat exchangers capable of using chlorofluorocarbons (CFC) and water and oil coolants in combination as first and second coolants for exchanging heat between CFC and CFC, CFC and water, water and water, or oil and water. A conventional layer-built heat exchanger is described below with reference to Figs. 1 - 5 (Japanese Patent Laid-Open No. S61-243297).

As shown in the figures, the conventional layer-built heat exchanger 1 combines plural first-side plates 2, seal plates 3, and second-side plates 4 between end plates 5a and 5b. The inlet and outlet pipes 6-7 and 8-9 for the first and second coolants, respectively, are connected to the one end plate 5b.

The first-side plate 2 has a rectangular shape with a pair of round holes 10, provided offset from the center at each end of the plate, for the first coolant flow. A series of parallel and winding channels 11 are formed by dividers 12 for conducting the coolant from a position near the round hole 10 at one end of the first-side plate 2 to a position near the round hole 10 at the other end.

Holes 13 for the flow of the second coolant are also formed on a diagonal line on the first-side plate 2 on the sides different from those on which the round holes 10 are formed. Each hole 13 has a rectangular shaped area 14 and a semi-circular shaped area 15 at the middle of the long side of the rectangular shaped area 14.

The second-side plate 4 has a similar rectangular shape with a series of parallel and winding channels 16 formed by dividers 17 to conduct the coolant between the two round holes 18. These round holes 18 are formed correspondingly to the holes 13 in the first-side plate 2 with part of each hole 18 tracing the same arc as the semi-circular shaped area 15 of the corresponding hole 13 in the first-side plate 2. Holes 19 are also provided correspondingly to the round holes 10 in the first-side plate 2. Each hole 19 also consists of a rectangular shaped area 20 and a semi-circular shaped area 21 at the middle of the long side of the rectangular shaped area 20 such that part of each semi-circular shaped area 21 traces the same arc as the corresponding round hole 10 in the first-side plate 2.

The seal plate 3 has holes 22 and 23 similarly shaped to the corresponding holes 13 and 19 in

the first- and second-side plates 2 and 4, respectively. The length of the rectangular shaped area 6 and 13 of the holes 13 and 19 is made long enough to cover the ends of each of the channels 11 and 16, respectively.

The plates are then assembled in successive layers in the order of first-side plate 2, seal plate 3, second-side plate 4, seal plate 13, first-side plate 2, seal plate 3, ●●●●● as shown in the figure, and are sealed between the seal end plate 5a on one end and the end plate 5b provided with the first and second coolant inlet/outlet pipes 6-7 and 8-9.

With this construction the first coolant flows in through the inlet pipe 6, is diffused to the channels 11 of the first-side plate 2 in the rectangular shaped area of the hole 22 in the seal plate 3, and flows through the channels 11 to the hole 22 on the opposite side to flow out from the outlet pipe 7. Similarly, the second coolant flows in through the inlet pipe 8, is diffused to the channels 16 of the second-side plate 4 in the rectangular shaped area of the hole 19 in the seal plate 3, and flows out through the hole 19 on the opposite side to the outlet pipe 8.

Heat is exchanged between the first and second coolants through the seal plate 3, which is made from a material with good thermal conductivity for greater heat exchange efficiency.

With this construction, however, the distance from the ends of the channels 11 or 16 to the center of the hole 10 or 18 is long because the channels 11 or 16 of the first-side plate 2 or second-side plate 4 are the same length and the ends of the channels form a line with respect to the hole 10 or 18. The first or second coolant must therefore travel a greater distance before it enters the channels, and coolant flow is impeded by this increased distance.

Also, when there is a pressure difference between the first and second coolants, the seal plate 3 tends to become deformed where the channels 11 of the first-side plate 2 and the channels 16 of second-side plate 4 are positioned one over the other through the seal plate 3 because the seal plate 3 is the only member separating the channels 11 and 16 of the first- and second-side plates 2 and 4. This deformation also interferes with the coolant flow. It is therefore necessary to increase the thickness H of the seal plate 3 to prevent this deformation. The overall size and cost of the heat exchanger therefore increase.

In addition, if the order of the plates is mistaken during assembly and the seal plate 3 is omitted, leakage of the first and second coolants may occur, the offset in plate position makes assembly more difficult, and both productivity and quality decline.

In addition, to assemble the inlet/outlet pipes 6,

7, 8, and 9 to the end plate 5b, the holes in the end plate 5b must be countersunk so that the inlet/outlet pipes 6, 7, 8 and 9 can be positioned.

Therefore, an object of the present invention is to provide a layer-built heat exchanger for shortening the distance between the inlet/outlet holes and channel ends in the first-side plate and the second-side plate, and thus reducing the flow resistance.

A further object is to provide a layer-built heat exchanger wherein there is minimal parallel overlap between the channels of the first-side plate and the second-side plate through the seal plate.

A further object is to provide a layer-built heat exchanger wherein there is no error in the assembly order of the first-side plate, seal plate, and the second-side plate.

A further object is to provide a layer-built heat exchanger whereby positioning of the inlet/outlet pipes to the end plate is simplified.

Summary of the invention

A layer-built heat exchanger according to the present invention comprises channels in the first- and second-side plates of different lengths such that the ends of the channels form a V-shape with an approximately equal distance between the end of each channel and the hole. Furthermore, the channels of the second-side plate are positioned over the dividers forming the channels of the first-side plate, and the channels of the first-side plate are positioned over the dividers forming the channels of the second-side plate. This prevents deformation of the seal plate between the first-side plate and the second-side plate.

Furthermore, a convex member that has a height less than the plate thickness is formed on two different sides of the first-side plate and the second-side plate, and concave portions are formed in the seal plate at a position to mate with the convex members of the first- and second-side plates. Omission of the seal plate during assembly is thus less likely to be forgotten.

Furthermore, by shaping the corners of the first-side plate, second-side plate, and seal plate differently, a simple visual inspection can confirm whether or not the plates are assembled in the correct order.

In addition, the diameter of the holes in the first-side plate or the second-side plate is smaller than the diameter of the holes to which the inlet/outlet pipes are inserted in the end plates, thus controlling the depth to which the inlet/outlet pipes can be inserted.

Furthermore, the inlet/outlet pipes are inserted from one end plate to the other, and a hole is provided at the position of the round holes in the

first-side plate, second-side plate, and seal plate to control the depth of inlet/outlet pipe insertion.

Brief description of the drawings

Fig. 1 is an oblique view of a conventional layer-built heat exchanger,

Fig. 2 is a plan view of the first-side plate in Fig. 1,

Fig. 3 is a plan view of the seal plate in Fig. 1,

Fig. 4 is a plan view of the second-side plate in Fig. 1,

Fig. 5 is a cross sectional view of line V-V in Fig. 1,

Fig. 6 is a cross sectional view corresponding to Fig. 5 for a layer-built heat exchanger according to one embodiment of the present invention,

Fig. 7 is a plan view of the first-side plate in Fig. 6,

Fig. 8 is a plan view of the seal plate in Fig. 6,

Fig. 9 is a plan view of the second-side plate in Fig. 6,

Fig. 10 is an oblique exploded view of a layer-built heat exchanger according to another embodiment of the present invention,

Fig. 11 is a side view of Fig. 10,

Fig. 12 is a plan view of the first-side plate in Fig. 10,

Fig. 13 is a plan view of the seal plate in Fig. 10,

Fig. 14 is a plan view of the second-side plate in Fig. 10,

Fig. 15 is a side view of Fig. 12,

Fig. 16 is a side view of Fig. 13,

Fig. 17 is a side view of Fig. 14,

Fig. 18 is a partial cross sectional view of the major components of a layer-built heat exchanger according to yet another embodiment of the present invention,

Fig. 19 is a plan view of the first-side plate in Fig. 18,

Fig. 20 is a plan view of the seal plate in Fig. 18,

Fig. 21 is a plan view of the second-side plate in Fig. 18,

Fig. 22 is a cross sectional view of a layer-built heat exchanger according to a further embodiment of the present invention.

DESCRIPTION OF PREFERRED EMBODIMENTS

The preferred embodiments of the present invention are described below with reference to the accompanying Figs. 6 - 9. It is to be noted that like parts in the preferred embodiments and the prior art described above are referred to by like reference numbers, and further description of said like parts is omitted hereinbelow.

As shown in the figures, the layer-built heat exchanger 31 according to the present invention is

an assembly of plural first-side plates 32, seal plates 3, and second-side plates 33 assembled in alternating layers and sealed between a first end plate 5a and a second end plate 5b, which comprises inlet/outlet pipes 6 and 8, so that the fluid can flow through the first-side plate 32 and the second-side plate 33 without leaking.

The first coolant flowing in from the inlet pipe 6 flows into the plural channels 11, divided by the dividers 34, in the first-side plate 32, and flows out from the outlet pipe 7. Similarly, the second coolant flowing in from the inlet pipe (not shown) flows into the plural channels 17, divided by the dividers 35, in the second-side plate 33, and flows out from the outlet pipe (not shown). Heat is exchanged through the seal plate 3 between the two different fluids flowing through the upper and lower plates.

Because the channels 17 of the second-side plate 33 are formed over the dividers 34 of the first-side plate 32, and the channels 11 of the first-side plate 32 are formed over the dividers 35 of the second-side plate 33, two seal plates 3 and the divider 34 of one second-side plate 33 or the divider 35 of one first-side plate 32 are positioned between any two channels 11 or channels 17. The thickness of the solid material located between the channels 11 or 17 becomes great, so as to prevent deformation of the seal plate 3 even when there is a high differential pressure between the first and second coolants. Thus, the coolant flow can be maintained.

An alternative embodiment of the invention is described below with reference to Figs. 10 - 17. In this embodiment, 41 is the end plate comprising plural inlet/outlet members 42, 41a is another end plate to seal the coolant, 43 is the first-side plate comprising channels 43a formed with dividers 43b, 44 is the second-side plate comprising channels 44a formed with dividers 44b, and 45 is a seal plate 45. Plural convex members 46 that are shallower than the plate thickness h are formed on two different sides of the first-side plate 43 and the second-side plate 44, and concave portions 47 are formed in the seal plate 45 at a position to mate with the convex members 46 of the first- and second-side plates. Thus, the first-side plate 43 and the second-side plate 44 mate with the seal plate 45 during assembly, and if the seal plate 45 is forgotten and not inserted during manufacture, a gap is formed between the first-side plate 43 and the second-side plate 44 by the convex members 46, having a height less than the plate thickness h , formed on two different sides of the first- and second-side plates 43 and 44. Thus, the mistake can be easily discovered by visual inspection.

Furthermore, by providing the holes 48 with a raised rib edge, the holes 48 overlap one another when assembled and positioning during assembly

is made easier. In addition, the ribbed edges prevent the plates from slipping out of position.

A yet another embodiment of the invention is described below with reference to Figs. 18 - 21. Like parts in the preferred embodiments and the prior art described above are referred to by like reference numbers, and further description of said like parts is omitted hereinbelow.

The layer-built heat exchanger 51 according to this embodiment is an assembly of plural first-side plates 2, seal plates 3, and second-side plates 4 alternately placed one over the other in said order, and the assembled layers are sealed between a first end plate (not shown) and a second end plate 5b, which end plate 5b comprises an inlet pipe 6 and an outlet pipe (not shown). The layers are bonded together by adhesive material or wax so that the fluid can flow through the first-side plate 2 and the second-side plate 4 without leaking.

With this construction the first coolant flows in through the inlet pipe 6, guided along the holes 10, 22, and 19 and flows through the channels 11 of the first-side plate 2 to the holes 10, 22, and 19 on the opposite side to flow out from the outlet pipe (not shown). Similarly, the second coolant flows in through the inlet pipe (not shown), guided along the holes 13, 23, and 18 and flows through the channels 16 of the second-side plate 4, and flows out through the holes 13, 23, and 18 on the opposite side to the outlet pipe (not shown). Heat is exchanged between the first and second coolants through the seal plate 3 as the coolants flow through the respective plates.

In this embodiment the diameter D of the holes 10 in the plates following the end plate 5b in the assembly, i.e., the first-side plate 2 or the second-side plate 4, is made smaller than the outside diameter E of the inlet/outlet pipes 6 and 7, and at the same time, the diameter of the semi-circular member 15 of the first-side plate 2 opposite the inlet/outlet pipes 8 and 9 is made smaller than the diameter of the of the inlet/outlet pipes 8 and 9. By this arrangement, the inlet pipe 6 and the outlet pipe (not shown) stop where they contact the first-side plate 2, and are correctly positioned without countersinking the end plate 8.

Furthermore, because the corners of the first-side plate 2 are rounded in an arc 52 and the corners of the second-side plate 4 are bevelled on an angle 53, the type of plate can be determined by visual inspection after plate assembly to easily determine whether or not the plates are assembled in the correct order.

A further embodiment of the invention is described below with reference to Fig. 22. Like parts in the preferred embodiments and the prior art described above are referred to by like reference numbers, and further description of said like parts

is omitted hereinbelow.

In this embodiment the inlet pipe 61 for the first coolant passes through the end plate 5b, the round holes 10 in the first-side plates 2, the holes 22 in the seal plates 3, and the holes 19 in the second-side plates 4 to the other end plate 5a. A slit hole 62 is formed in the inlet pipe 61 at the position corresponding to the holes 10, 22, and 19. The outlet pipe for the first coolant and the inlet/outlet pipes for the second coolant are similarly formed through each of the plates to the end plate 5a.

It is thus possible during assembly to simply insert the inlet/outlet pipes through the holes to the opposite end plate to simply and correctly position the inlet/outlet pipes in the layer-built heat exchanger.

In these embodiments plural parallel channels 36 extending in a winding manner from a position adjacent one round hole 10 in the first-side plate 32 to a position adjacent the other round hole 10 are formed by plural dividers 36. The length of each channel 36 increases as the distance of the channel 36 from the center of the hole 10 increases, so that the ends of the channels 36 form an approximate V-shape around the center of the round hole 10 with the end of each channel 36 as close as possible to the center of the round hole 10. In addition, plural parallel channels 37 winding from a position adjacent one round hole 18 in the second-side plate 33 to a position adjacent the other round hole 18 are formed by plural dividers 35. The length of each channel 37 increases as the distance of the channel 37 from the center of the hole 18 increases, so that the ends of the channels 37 form an approximate V-shape around the center of the round hole 18 with the end of each channel 37 as close as possible to the center of the round hole 18. The average distance between the end of the channels 36 and 37 and the holes 10 and 18 is therefore shortened, improving the flow and distribution of coolant into the channels 36 and 37.

Because the channels 37 of the second-side plate 33 are formed over the dividers 34 of the first-side plate 32, and the channels 36 of the first-side plate 32 are formed over the dividers 35 of the second-side plate 33, two seal plates 3 and one second-side plate 33 divider 34 or first-side plate 32 divider 35 are positioned between any two channels 37 or channels 36. The greater total seal plate 3 thickness between the channels 37 or 36 therefore prevents deformation of the seal plate 3 even when there is a high differential pressure between the first and second coolants, and the coolant flow can thus be maintained.

Industrial applicability

A layer-built heat exchanger according to the present invention is suited to exchanging heat between the first and second coolants of an air conditioner. It is also suited for exchanging heat from a working oil in machine tools and other machinery by circulation with another coolant such as water.

List of the reference numbers used in the drawings

3	seal plate
32	first-side plate
33	second-side plate
43	first-side plate
44	second-side plate

Claims

1. A layer-built heat exchanger comprising: a first-side plate having plural channels for coolant flow formed by dividers on a flat rectangular panel, a hole at one end of the channels, and a hole on a diagonal line to the first hole on a different side of the plate; a second-side plate having plural channels for coolant flow formed by dividers on a flat rectangular panel, a hole formed separately at one end of the channels continuously to the corresponding hole in the first-side plate, and a hole on a diagonal line to the first hole on a different side of the plate continuously to the corresponding hole in the first-side plate; and a seal plate between the first-side plate and the second-side plate, and characterized by the ends of the channels in the first-side plate and the second-side plate forming a rough V-shape centering on the hole in the respective plate such that the length of each channel increases with the increase in the distance of the channel from the center of the hole.
2. A layer-built heat exchanger comprising: a first-side plate having plural channels for coolant flow formed by dividers on a flat rectangular panel, a hole at one end of the channels, and a hole on a diagonal line to the first hole on a different side of the plate; a second-side plate having plural channels for coolant flow formed by dividers on a flat rectangular panel, a hole formed separately at one end of the channels continuously to the corresponding hole in the first-side plate, and a hole on a diagonal line to the first hole on a different side of the plate continuously to the corresponding hole in the first-side plate; and a seal plate between the first-side plate and the second-side plate, and characterized by the dividers of the channels in the second-side plate being positioned opposite the channels in the first-

side plate, and the dividers of the first-side plate being positioned opposite the channels in the second-side plate, with the seal plate in between.

3. A layer-built heat exchanger comprising: a first-side plate having plural channels for coolant flow formed by dividers on a flat rectangular panel, a hole at one end of the channels, and a hole on a diagonal line to the first hole on a different side of the plate; a second-side plate having plural channels for coolant flow formed by dividers on a flat rectangular panel, a hole formed separately at one end of the channels continuously to the corresponding hole in the first-side plate, and a hole on a diagonal line to the first hole on a different side of the plate continuously to the corresponding hole in the first-side plate; and a seal plate between the first-side plate and the second-side plate, and characterized by the first-side plate, the second-side plate, and the seal plate each having a different and identifying shape at the outside edge thereof.

5

10

15

20

25
4. A layer-built heat exchanger according to Claim 2 wherein each of said first-side plates and the second-side plates is formed with convex members on different sides, and wherein each of said seal plates is formed with concave portions into which said convex members are inserted.

30
5. A layer-built heat exchanger according to Claim 2 wherein each of the first-side plates has rounded corners and wherein each of the second-side plates has beveled corners, and wherein each of the seal plates has corners formed in a shape different from that of the corners of the first-side plate and the second-side plate.

35

40
6. A layer-built heat exchanger comprising: a first-side plate having plural channels for coolant flow formed by dividers on a flat rectangular panel, a hole at one end of the channels, and a hole on a diagonal line to the first hole on a different side of the plate; a second-side plate having plural channels for coolant flow formed by dividers on a flat rectangular panel, a hole formed separately at one end of the channels continuously to the corresponding hole in the first-side plate; and a hole on a diagonal line to the first hole on a different side of the plate continuously to the corresponding hole in the first-side plate; a seal plate between the first-side plate and the second-side plate; an end plate provided on both ends; and

45

50

55

inlet/outlet pipes for the first and second coolants provided on one of the end plates continuous to said holes such that the diameter of the holes in the first-side plate is smaller than the diameter of the inlet/outlet pipes.

7. A layer-built heat exchanger comprising: a first-side plate having plural channels for coolant flow formed by dividers on a flat rectangular panel, a hole at one end of the channels, and a hole on a diagonal line to the first hole on a different side of the plate; a second-side plate having plural channels for coolant flow formed by dividers on a flat rectangular panel, a hole formed separately at one end of the channels continuously to the corresponding hole in the first-side plate, and a hole on a diagonal line to the first hole on a different side of the plate continuously to the corresponding hole in the first-side plate; a seal plate between the first-side plate and the second-side plate; an end plate provided on both ends; and inlet/outlet pipes for the first and second coolants provided on one of the end plates continuous to said holes such that the inlet/outlet pipes are inserted to the end plate on the other side and a long hole is provided in the inlet/outlet pipes through the length of the first-side plate, second-side plate, and seal plate layers.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

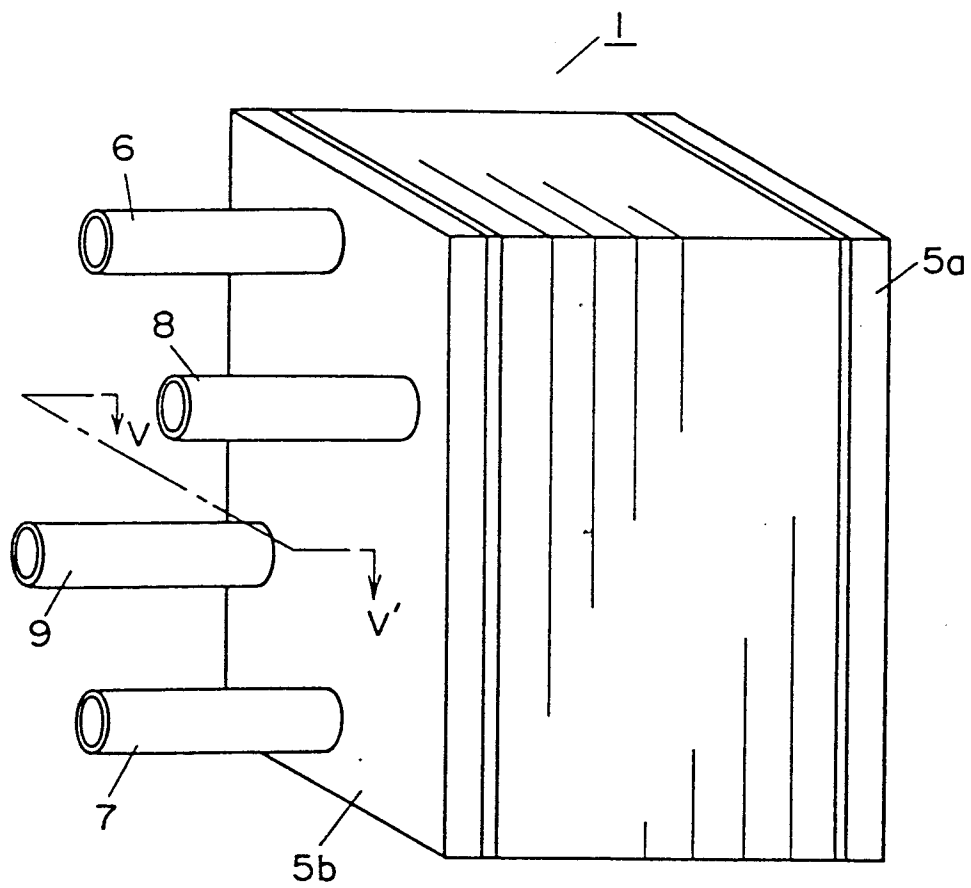


FIG. 4

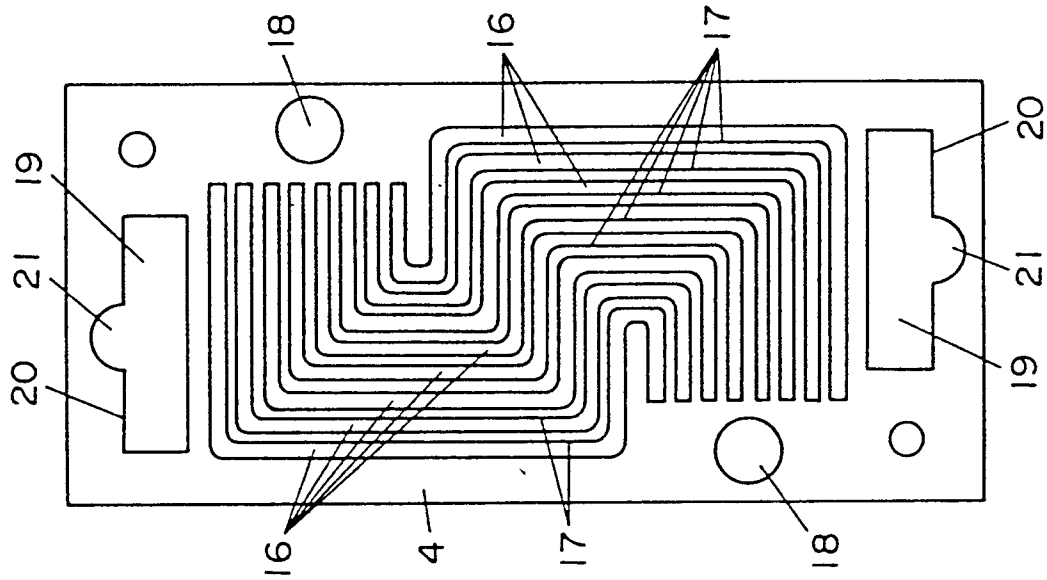


FIG. 3

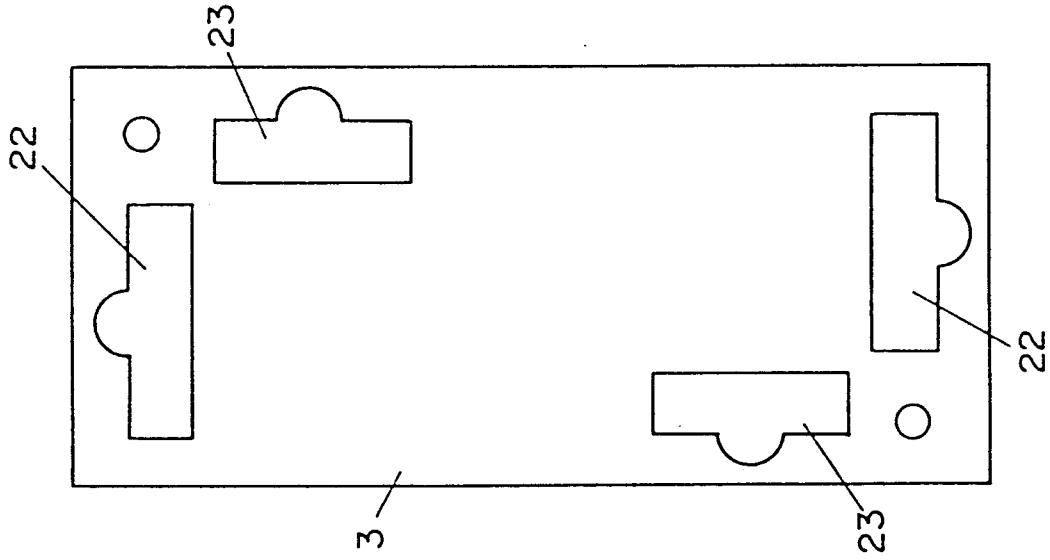


FIG. 2

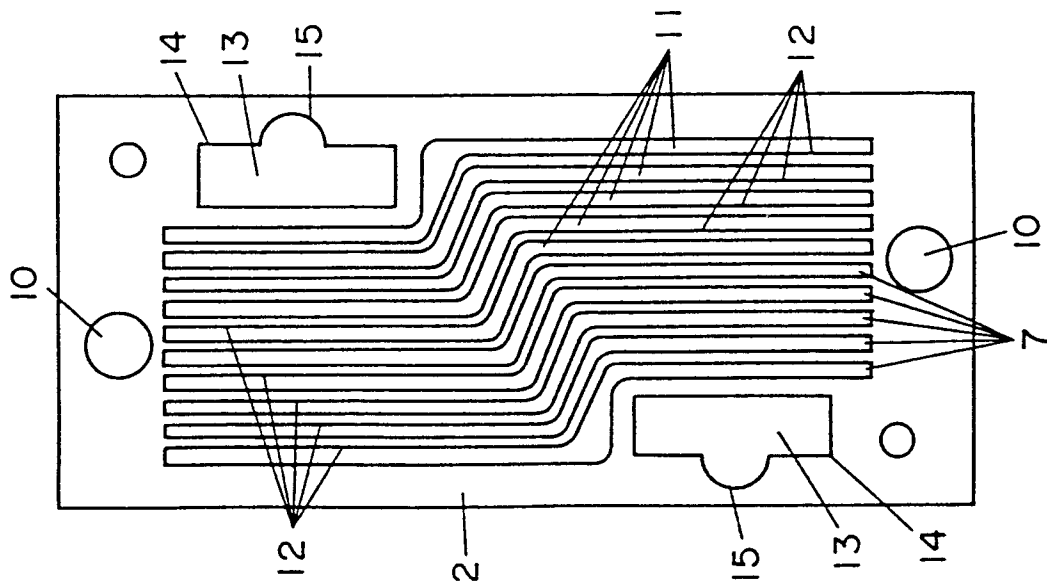


FIG. 5

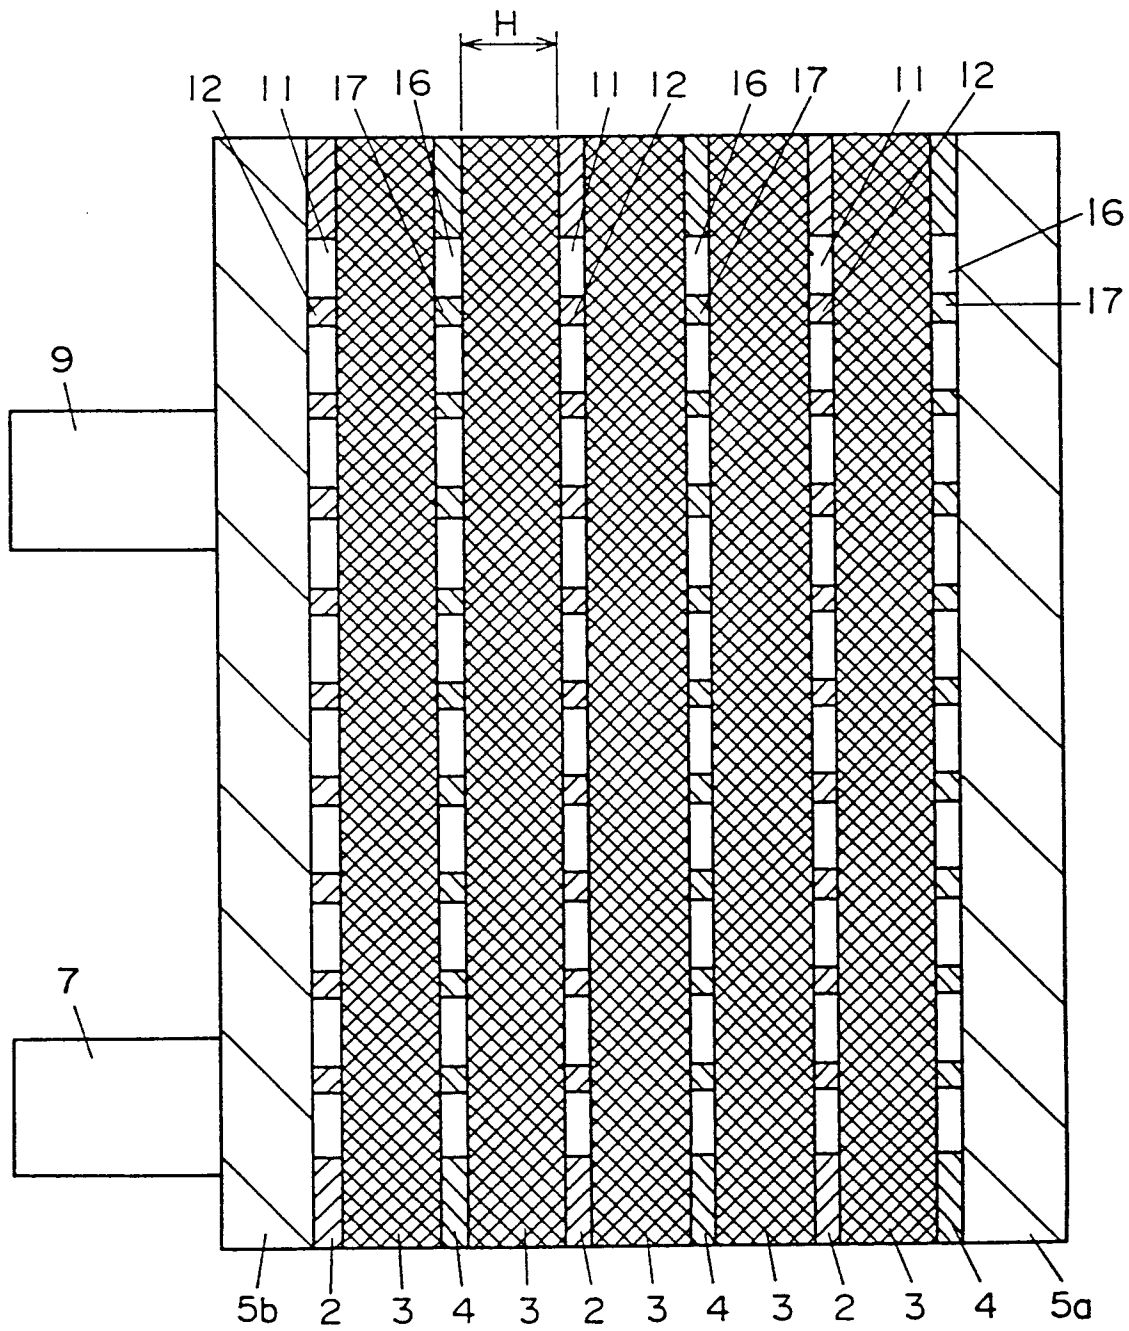


FIG. 6

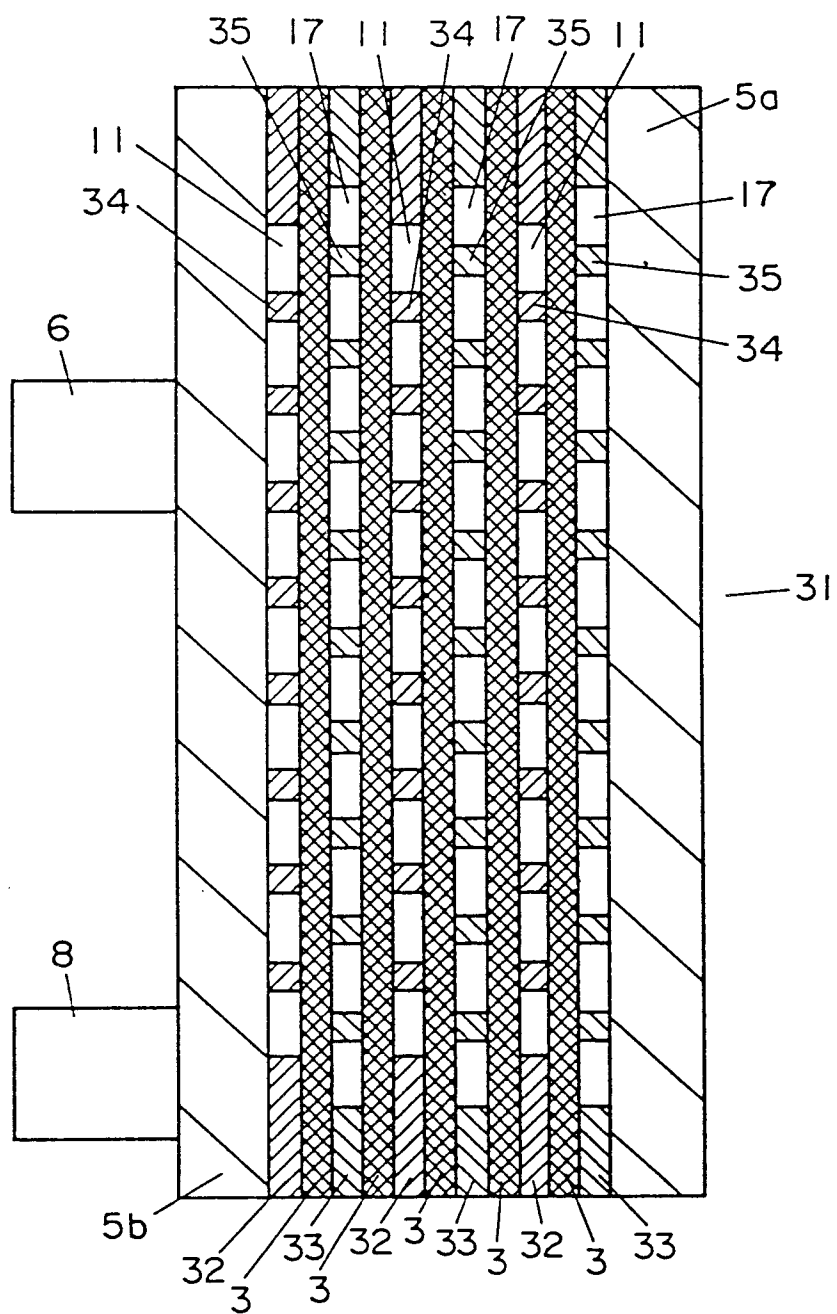


FIG. 7

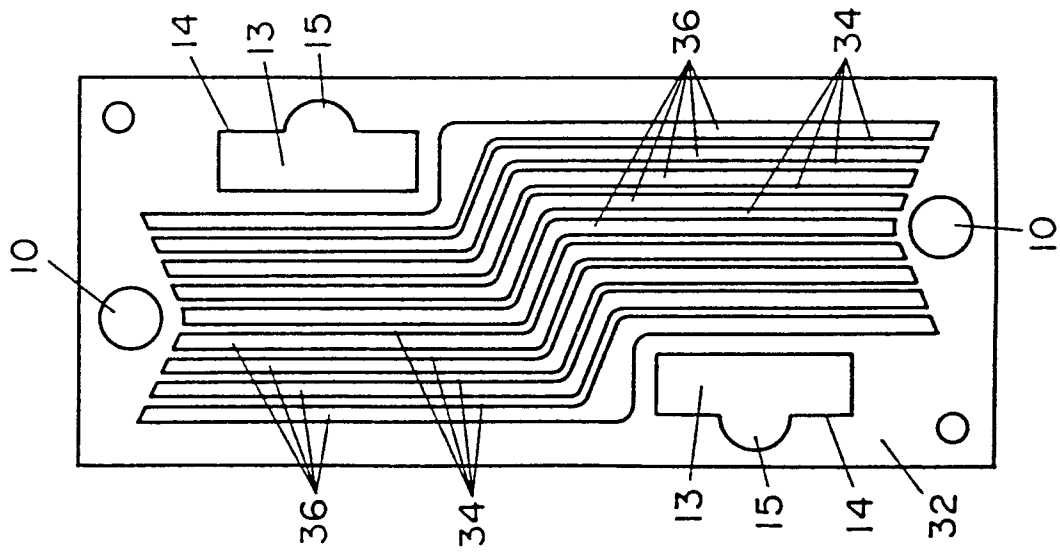


FIG. 8

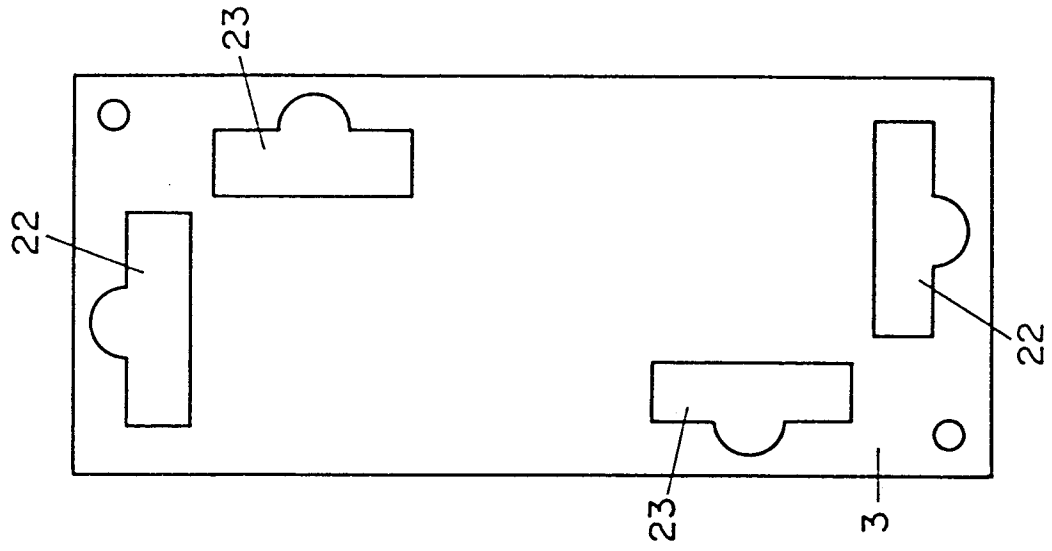


FIG. 9

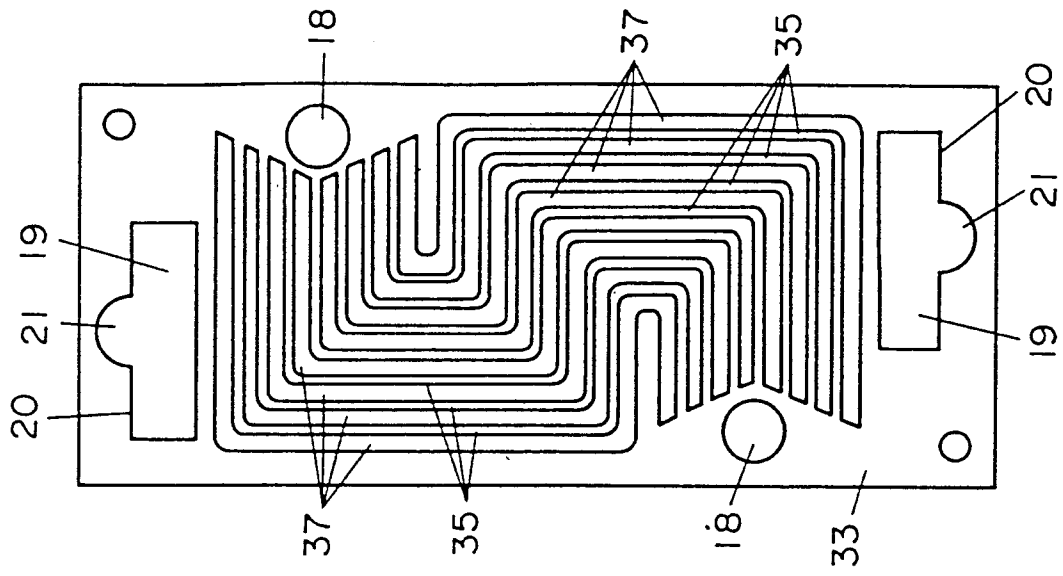


FIG. 10

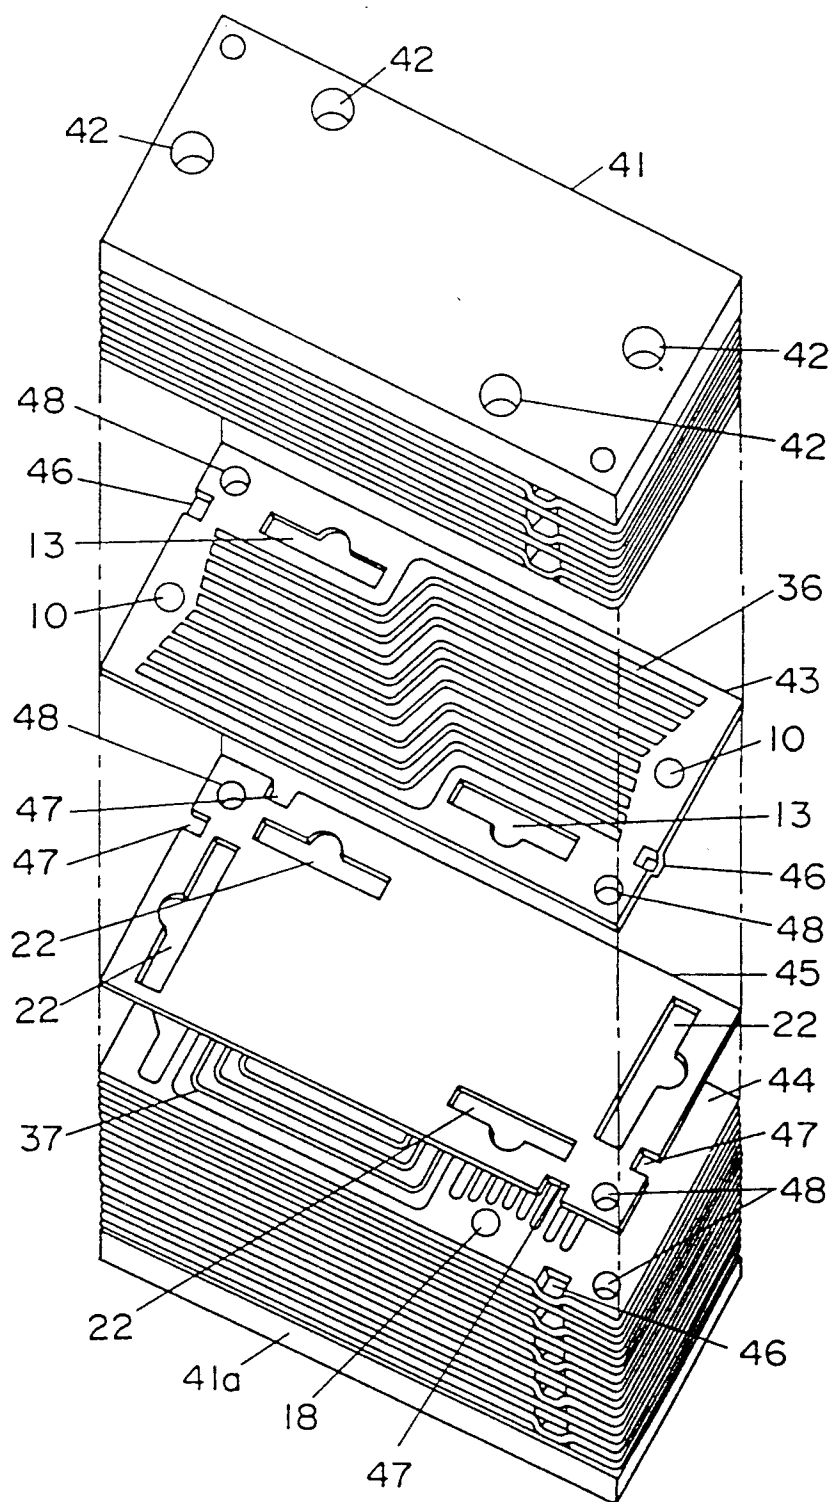


FIG. 11

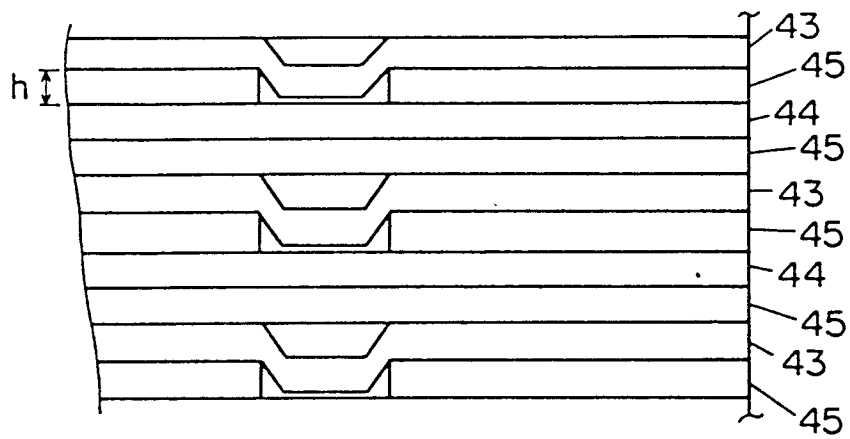


FIG. 12

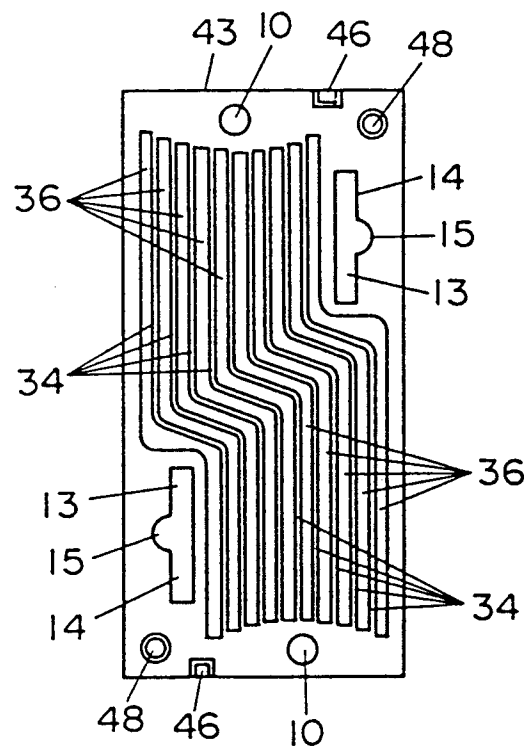


FIG. 13

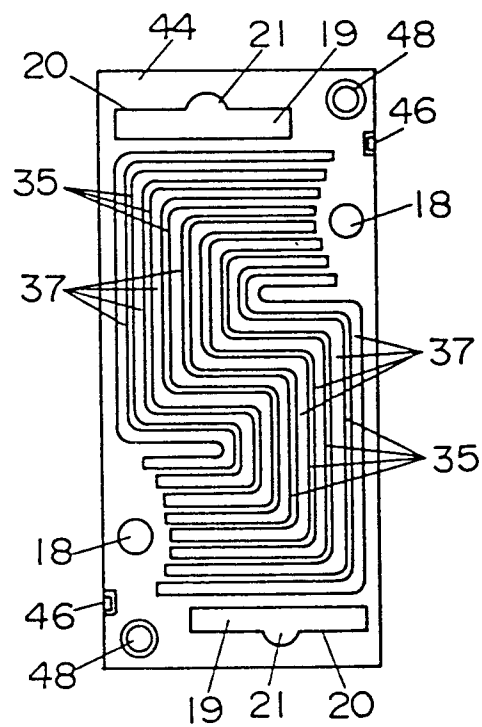


FIG. 14

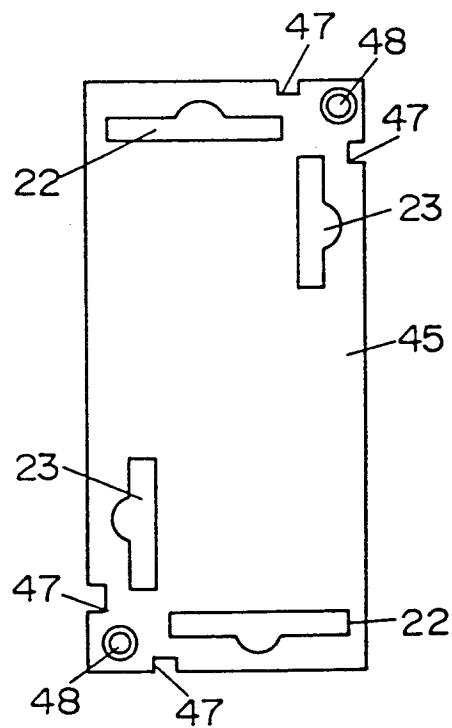


FIG. 15

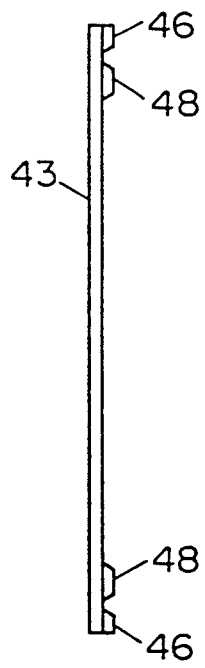


FIG. 16

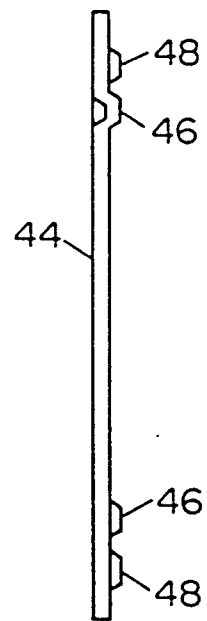


FIG. 17

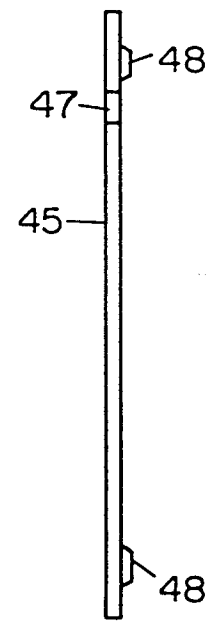


FIG. 18

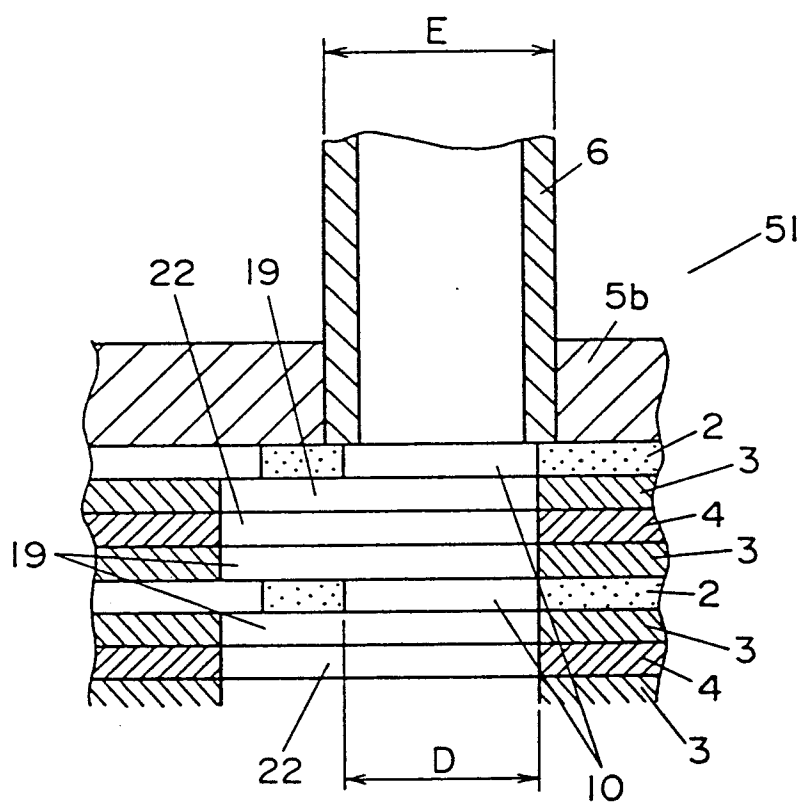


FIG. 19

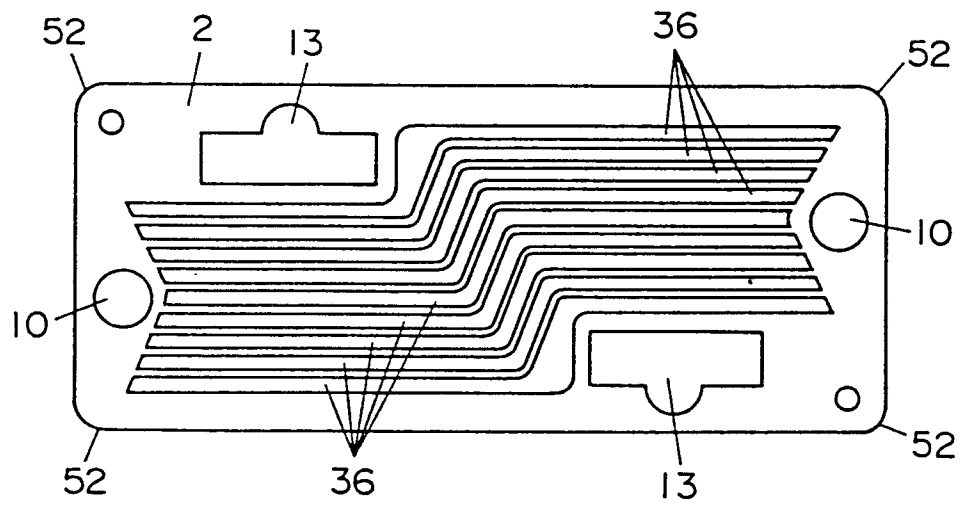


FIG. 20

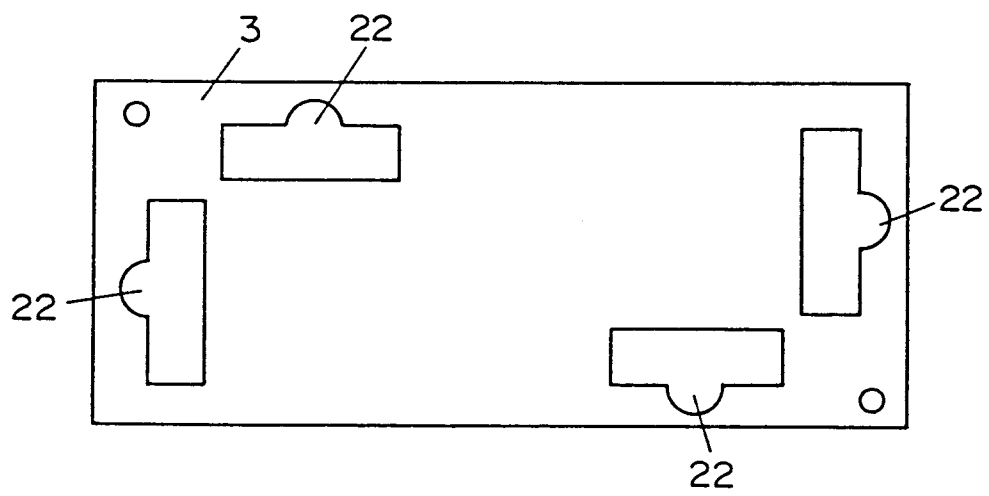


FIG. 21


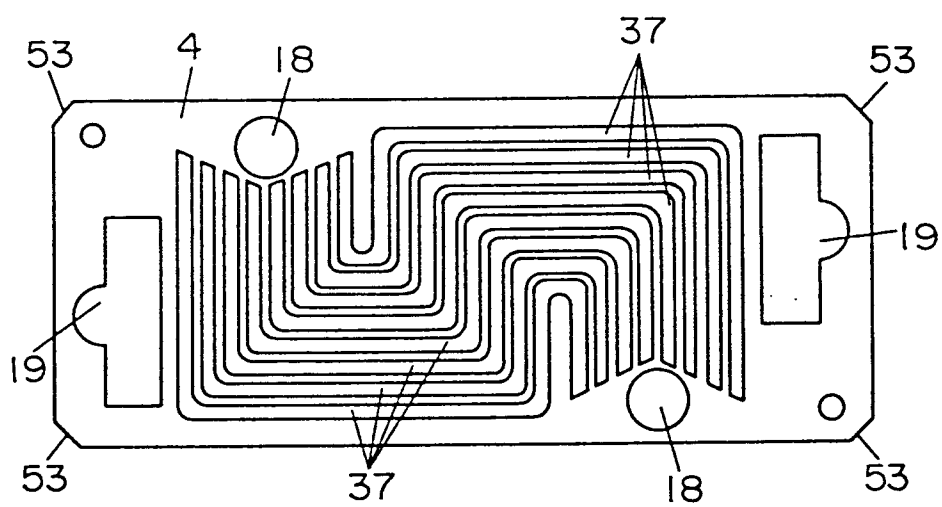


FIG. 22

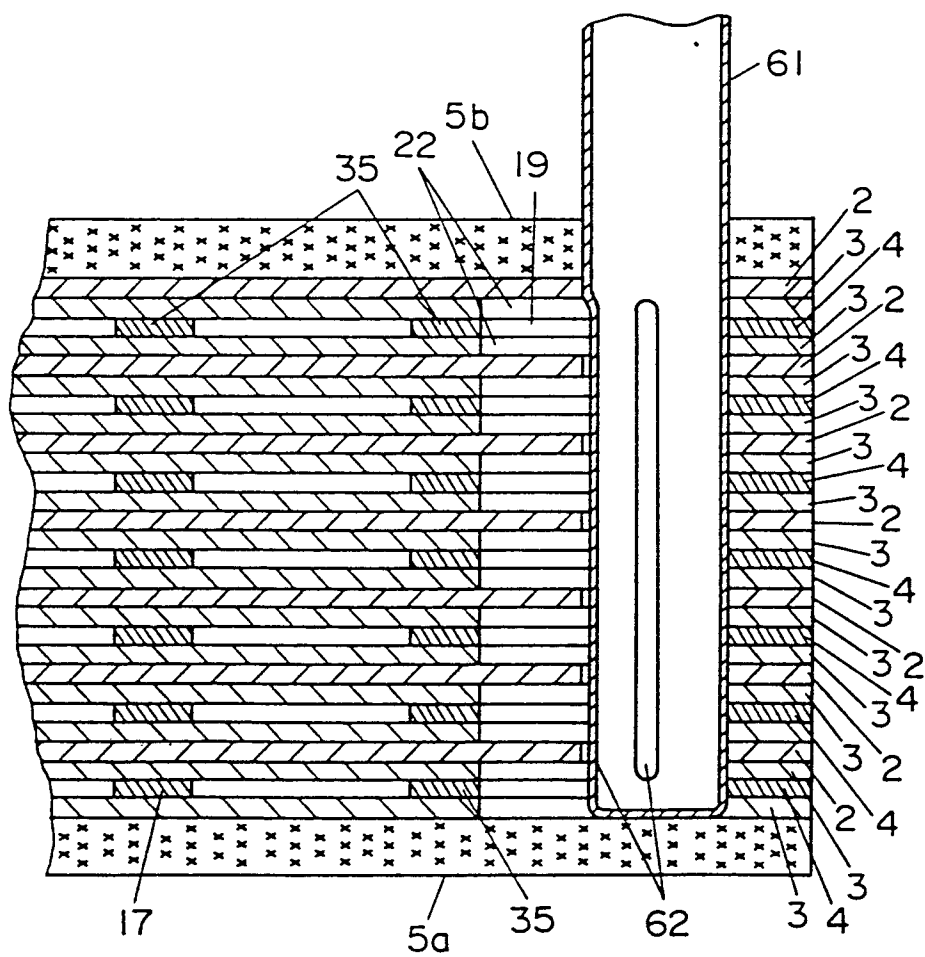

INTERNATIONAL SEARCH REPORT

International Application No PCT/JP91/01292

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int. Cl. ⁵ F28F3/08, F28D9/02		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC	F28F3/00-3/08, F28D9/00-9/02	
Documentation Searched other than Minimum Documentation to the extent that such Documents are Included in the Fields Searched ⁸		
Jitsuyo Shinan Koho	1926 - 1990	
Kokai Jitsuyo Shinan Koho	1971 - 1990	
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹		
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	JP, A, 61-55584 (Matsushita Electric Ind. Co., Ltd.), March 20, 1986 (20. 03. 86), (Family: none)	1-7
A	JP, U, 63-30776 (Ishikawajima-Harima Heavy Industries Co., Ltd.), February 29, 1988 (29. 02. 88), (Family: none)	1
A	JP, U, 60-66978 (Hitachi, Ltd.), May 13, 1985 (13. 05. 85), (Family: none)	2
A	JP, U, 55-3172 (Iwai Kikai Kogyo K.K.), January 10, 1980 (10. 01. 80), (Family: none)	3
A	JP, A, 57-196091 (Toshiba Corp.), December 1, 1982 (01. 12. 82), (Family: none)	4
A	JP, A, 61-122493 (Hisaka Seisakusho, K.K.),	6
* Special categories of cited documents: ¹⁰ "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
December 5, 1991 (05. 12. 91)	December 24, 1991 (24. 12. 91)	
International Searching Authority	Signature of Authorized Officer	
Japanese Patent Office		

FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

June 10, 1986 (10. 06. 86),
Figs. 8, 9 (Family: none)

A JP, Y1, 47-34948 (Hisaka Seisakusho, K.K.),
October 23, 1972 (23. 10. 72),
(Family: none)

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE ¹

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers , because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claim numbers , because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claim numbers , because they are dependent claims and are not drafted in accordance with the second and third sentences of PCT Rule 6.4(a).

VI. ☐ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING ²

This International Searching Authority found multiple inventions in this international application as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.
2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:

3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:

4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

Remark on Protest

- ☐ The additional search fees were accompanied by applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.