

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 503 976 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **08.11.95** (51) Int. Cl.⁶: **F21V 9/06**

(21) Application number: **92302221.4**

(22) Date of filing: **13.03.92**

(54) **Automotive arc headlamp with reduced UV emission.**

(30) Priority: **15.03.91 US 669820**

(43) Date of publication of application:
16.09.92 Bulletin 92/38

(45) Publication of the grant of the patent:
08.11.95 Bulletin 95/45

(84) Designated Contracting States:
DE FR GB IT NL

(56) References cited:
EP-A- 0 043 114
DE-A- 4 128 906
US-A- 4 524 299
US-A- 4 604 680

(73) Proprietor: **GENERAL ELECTRIC COMPANY**
1 River Road
Schenectady, NY 12345 (US)

(72) Inventor: **Strok, Jack Mack**
10198 Nichols Road
Garrettsville,
Ohio 44231 (US)
Inventor: **Kosmatka, Walter John**
390 Sandhurst Drive
Highland Heights,
Ohio 44143 (US)

(74) Representative: **Pratt, Richard Wilson et al**
London Patent Operation
G.E. Technical Services Co. Inc.
Essex House
12/13 Essex Street
London WC2R 3AA (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 503 976 B1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to an automotive arc discharge headlamp having reduced ultraviolet (UV) emission. More particularly, this invention relates to an automotive headlamp comprising a forward projecting reflector with a light transmissive lens mounted on the forward end and enclosing an electric arc discharge lamp within as a light source, wherein the reflecting surface of the reflector is coated with a UV absorbing coating.

Background Of The Disclosure

There is much interest in the automobile industry in using arc lamps also known as arc discharge lamps as the light source for automotive headlamps. Tungsten-halogen lamps are presently used, but arc lamps have potentially longer life, higher light output and much higher source brightness. The small size of the arc lamps and concomitant reflector and lens assembly provide automotive manufacturers a greater leeway in innovative front end automotive design. Arc discharge lamps useful for automotive applications are basically miniature metal halide arc discharge lamps. One such lamp is known from EP-A-0043114. One of the disadvantages associated with such lamps for automotive use is that they emit a significant amount of UV radiation. Emission of UV radiation by automotive headlamps is undesirable because of its adverse effect on human eyes and skin. Further, miniature automotive headlamps employing arc discharge lamps are often plastic and have plastic lenses. Plastic lenses are easier to fabricate than glass into more complex shapes for automotive styling. Plastic is more flexible than glass and can possess greater impact resistance. Polycarbonate is the plastic of choice for such lenses because of its clear, visible light transmissive properties along with excellent impact and abrasion resistance. Unfortunately, polycarbonate and other plastics turn yellow or brown and/or become hazy when exposed to UV radiation.

US-A-4604680 shows in infra-red floodlight using two mirrors with dichroic coatings designed to prevent visible light from being emitted by the floodlight. However, no action is taken with regard to UV light.

Accordingly, a need exists for automotive arc headlamps having reduced UV emission, particularly when the headlamps employ plastic reflectors and plastic lenses.

SUMMARY OF THE INVENTION

According to the invention, there is provided a lamp and reflector assembly, wherein said lamp emits both UV and visible radiation and is mounted within said reflector, characterized by said reflector having an internal reflecting surface for reflecting said visible radiation forward of said reflector and a UV absorbing silicone coating disposed on said reflecting surface between said reflective surface and said lamp for absorbing UV radiation emitted by said lamp to thereby reduce the amount of UV radiation projected forward of said reflector.

The present invention relates to a reflector and lamp assembly employing an arc discharge lamp which emits UV radiation as the light source and which has a UV absorbing coating on the reflecting surface of the reflector to reduce the amount of UV radiation projected forward of the reflector.

Such lamp and reflector combinations have been made by the Applicants without the presence of a lens on the open, visible light projecting end of the reflector, wherein it was found that less than 10% of the UV radiation emitted by the lamp is projected forward of the reflector due to absorption of the UV by the coating on the reflecting surface.

In one embodiment of the invention, the lamp will employ a light transmissive lens made of a material which is degraded by UV radiation. In such an embodiment, it is preferred that the interior surface of the lens also has disposed on it a coating which absorbs UV radiation.

By UV radiation is meant radiation having a wavelength generally below about 400 nm. UV radiation having a wavelength of about 320 nm or less is known to have a detrimental effect on human eyes while that having a wavelength of about 340 nm or less will degrade polycarbonate plastic causing it to turn yellow and/or become hazy, depending on the wavelength. Accordingly, the UV absorbing coating should be selected so as to absorb UV radiation having a wavelength equal to or below about 340 nm and at the same time be substantially nonabsorbent and transparent to visible light radiation. The coating must also be somewhat heat resistant due to its presence inside the interior cavity of a sealed automotive headlamp reflector wherein operation of the arc discharge lamp can heat the inside of the reflector to a temperature of 150 °C and more. Proprietary coatings commercially available on the market comprising one or more silicone resins in which is dissolved or dispersed a UV absorbing material have been found satisfactory for use with the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

Figure 1 schematically illustrates a plastic lens, reflector, and lamp assembly useful in the practice of the present invention with the reflecting surface coated with a UV absorbing coating.

Figure 2 is a graph illustrating the UV attenuation factor as a function of wavelength using a reflector similar to that in Figure 1 containing a UV absorbing coating on the interior reflecting surface, but without a lens.

Figure 3 is a graph illustrating the UV spectral output of a miniature arc discharge lamp of the type illustrated in Figure 1.

DETAILED DESCRIPTION

Turning to Figure 1 there is shown automotive headlamp reflector assembly 10 comprising all plastic molded reflector 12 consisting of a parabolic or elliptical reflecting portion 14, open at its forward projecting end 18 and terminating at its rear end in an integrally molded base portion 16. The interior surface of reflector 12 is coated with a thin, light reflecting, shiny coating of aluminum 22 over which is disposed UV absorbing coating 24. Coating 24 is clear and is substantially transparent and non-absorbing to radiation in the visible light region, but absorbs radiation in the UV region (i.e., < 400 nm). The forward end 18 of reflector 12 is hermetically sealed with plastic lens 26 which is transparent to visible light radiation. In an embodiment where lens 26 is made of a plastic which is degraded by UV radiation, such as a polycarbonate which has excellent light transmission, strength, impact and abrasion resistance and which is often the plastic of choice for such applications, the interior surface 42 of the lens is also coated with UV absorbing coating 24 to insure that little or none of the UV radiation emitted by lamp 28 reaches the plastic lens. It should be noted that if lens 26 is glass, then no coating would be necessary since glass is a natural absorber of UV radiation and its transparency to visible light radiation is unaffected by exposure to UV radiation. Miniature arc discharge lamp 28 is enclosed within assembly 10 with its optical center approximately coinciding with the focal point of reflector 12. Lamp 28 comprises a synthetic quartz envelope 30 enclosing within electrodes 32 hermetically sealed within arc chamber 34 as is well known to those skilled in the art. Arc chamber 34 also contains, as is known to those skilled in the art, a small amount of mercury along with one more more metal halides and an inert starting gas, such as xenon. Lamp 28 is connected by means of mount wires 38 and 39 to base portion 16 (by means not shown) and thence to terminal pins 40 for connection to a source of electric current. In

automotive applications, a metal shield (not shown) will be employed in front of the forward end of the lamp to insure that all of the light projected forward of the reflector is reflected from reflecting surface 22. Such metal light shields and their uses in association with such lamps are known to those skilled in the art and examples may be found, for example, in U.S. Patents 4,795,939 and 4,754,373.

UV absorbing coatings for protecting UV degradable plastics from UV radiation are commercially available and may be obtained from coating manufacturers and suppliers such as the Silicone Division (GE Silicones) of GE Plastics in Waterford, N.Y., Dow Corning, DuPont, Sherwin Williams, Bee Chemical Company and the like. Such coatings are clear and absorb little or no light in the visible region of the spectrum (i.e., 400-750 nm). These coating materials contain a UV absorber for absorbing radiation in the UV portion of the spectrum (i.e., < 400 nm). Heat-resistant coatings are preferred for use in the present invention. Heat resistant coatings and also heat resistant UV absorbers are generally based on silicone containing compounds or at least contain such compounds. Illustrative, but non-limiting examples of both coatings and UV absorbers containing silicone compounds and suitable for use in the present invention are disclosed and claimed, for example, in U.S. Patent Nos. 4,374,674; 4,278,804; 3,986,997; 4,177,315 and 4,644,077, the disclosures of which are incorporated herein by reference.

Although the examples and disclosure of this invention have been directed mostly to automotive types of applications, the invention is not meant to be so restricted. Thus, the invention may also be used for spotlight and general illumination types of lighting applications, with elliptical or parabolic shaped reflectors, with or without a plastic lens, etc.

EXAMPLES

In one experiment, reflector and lamp assemblies similar to those illustrated in Figure 1 and described above, (with the exception that the forward, light projecting end of the reflector was open and not covered with a lens) were assembled. The reflector was parabolic having a 7/8 inch focal length and arc lamp 28 was a miniature, 30 watt lamp intended for automotive applications. The aluminum reflecting surface 22 was coated by the manufacturer with an 8 micron thick coating of a clear, essentially non-UV absorbent coating material designed to prevent corrosion and dulling of the highly light reflective aluminum coating. This coating material is a proprietary acrylic composition, ET4, obtained from the Red Spot Paint & Varnish Company. Some of the reflectors were

then top-coated with two different commercially available coating materials used to protect plastics, particularly polycarbonate plastics, from UV degradation. These two coating materials, LTC5000 and LS123, were obtained from Bee Chemical Company and are believed to be organic resins containing a UV absorber. One of these is based on a urethane/melamine organic resin, and the other is of unknown composition. The recommended thickness for these coatings are 1.6 mils and 0.20 mils, respectively. The 30 watt miniature metal halide arc lamps were assembled into the reflectors with the arc center at the focal point, and the arc lamp was then energized. An ultraviolet spectral energy distribution was measured in the projected beam, 50 cm from the front of the reflector, with an Optronics Laboratories, Inc., Model 742, Spectroradiometer. The results of the measurements are illustrated in Figure 2 as plots of attenuation factor as a function of wavelength. Figure 3 illustrates the UV spectrum of the lamp projected forward of the reflector with no UV absorbing coating.

Turning to Figure 2, the attenuation factor at each wavelength was computed by taking the ratio of the measurements for reflectors with organic UV absorbent coatings to those without UV absorbent coatings. In another experiment, UV transparent flat quartz plates were coated with either ET4, or a clear coating material, AS4000, obtained from GE in Waterford, New York, based on silicones, which contained a UV absorber. The thickness of this coating was about 0.22 mils. Transmission versus wavelength for the sample plates was measured. Also plotted in Figure 2 is the square of the measurements at each wavelength to simulate the attenuation characteristics of these two materials on a reflector surface, where radiation from the arc source makes two passes through the coating.

The top curve, curve A, represents a reflector having only the aluminum protective coating ET4, which exhibited little attenuation or absorption of UV radiation above 300 nm. Curves B, C and D represent reflectors having the GE AS4000, Bee Chemical LS123 and Bee Chemical LTC5000 UV absorbing coatings respectively, over an ET4 coated reflector. It is immediately obvious from curve B that the GE coating AS4000 absorbed essentially all of the UV radiation below about 350 nm, whereas one of the Bee Chemical coatings LS123 represented by curve C, absorbed almost all of the UV radiation below about 360 nm, and the other Bee Chemical coating LTC5000 represented by curve D, absorbed almost all of the UV radiation below about 380 nm. This indicates that a UV absorbing coating system, completely satisfactory for initial performance, can be achieved using any of these three coatings on the reflecting surface and/or on a polycarbonate lens to avoid degradation of the

lens. However, life tests revealed that the LTC5000 coating turned yellow and started to peel off the reflector after 1000 hours of lamp operation. No objectionable degradation of the other two materials was observed in over 2000 hours of life testing.

Claims

1. A lamp (28) and reflector (12) assembly, wherein said lamp (28) emits both UV and visible radiation and is mounted within said reflector (12), characterized by said reflector having an internal reflecting surface (22) for reflecting said visible radiation forward of said reflector (12) and a UV absorbing silicone coating (24) disposed on said reflecting surface (22) between said reflective surface (22) and said lamp (28) for absorbing UV radiation emitted by said lamp (28) to thereby reduce the amount of UV radiation projected forward of said reflector.
2. The lamp and reflector of claim 1, wherein said UV absorbing coating (24) is substantially non-absorbent and transparent to visible light radiation.
3. The lamp and reflector assembly of claim 1 or 2, wherein the optical center of said lamp (28) is located at about the focal point of said reflector (12).
4. The lamp and reflector assembly of claim 1, 2 or 3, wherein said lamp (28) is an arc discharge lamp, a miniature arc discharge lamp, or a miniature metal halide arc discharge lamp.
5. The lamp and reflector assembly according to any one of claims 1 to 4, said reflector (12) having a lens (26) mounted at its forward end, said lens (26) being of a light-transmissive plastic which is degraded by UV radiation.
6. The lamp and reflector assembly of claim 5, wherein a UV absorbing coating (24) is disposed on that surface (42) of said lens (26) which is interior of said assembly.
7. The lamp and reflector assembly of claim 6 for an automobile, wherein a light shield is disposed between said lamp (28) and said lens (26) to insure that substantially all of said forward projected visible light is projected from said reflecting surface (22).
8. The lamp and reflector assembly of any one of claims 1 to 7, wherein said reflector (12) is made of plastic.

Patentansprüche

1. Baueinheit aus Lampe (28) und Reflektor (12),
worin die Lampe (28) sowohl UV-als auch
sichtbare Strahlung emittiert und innerhalb des
Reflektors (12) montiert ist, dadurch gekenn-
zeichnet, daß der Reflektor eine innere, reflektierende
Oberfläche (22) zum Reflektieren der sichtbaren
Strahlung in Vorwärtsrichtung des Reflektors (12) und einen UV-absorbierenden
Silicon-Überzug (24) aufweist, der auf der reflektierenden
Oberfläche (22) zwischen der reflektierenden
Oberfläche (22) und der Lampe (28) zum Absorbieren von durch die Lampe
(28) emittierter UV-Strahlung angeordnet ist, um dadurch die Menge von UV-Strahlung zu
verringern, die in Vorwärtsrichtung des Reflektors reflektiert ist. 5 10 15
2. Baueinheit aus Lampe und Reflektor nach Anspruch 1, worin der UV-absorbierende Überzug
(24) für sichtbare Lichtstrahlung im wesentlichen nicht-absorbierend und transparent ist. 20
3. Baueinheit aus Lampe und Reflektor nach Anspruch 1 oder 2, worin das optische Zentrum
der Lampe (25) bei etwa dem Brennpunkt des Reflektors (12) angeordnet ist. 25
4. Baueinheit aus Lampe und Reflektor nach Anspruch 1, 2 oder 3, worin die Lampe (28) eine
Bogenentladungslampe, eine Miniatur-Bogenentladungslampe oder eine Miniatur-Metallhalogenid-Bogenentladungslampe ist. 30 35
5. Baueinheit aus Lampe und Reflektor nach einem der Ansprüche 1 bis 4, worin der Reflektor
(12) eine Linse (26) aufweist, die an seinem vorderen Ende montiert ist und aus einem
lichtdurchlässigen Kunststoff besteht, der durch UV-Strahlung abgebaut wird. 40
6. Baueinheit aus Lampe und Reflektor nach Anspruch 5, worin der UV-absorbierende Überzug
(24) auf der Oberfläche (42) der Linse (26) angeordnet ist, die sich im Inneren der Baueinheit befindet. 45
7. Baueinheit aus Lampe und Reflektor nach Anspruch 6 für ein Automobil, worin eine Lichtabschirmung
zwischen der Lampe (28) und der Linse (26) angeordnet ist, um sicherzustellen, daß im wesentlichen das gesamte, in Vorwärtsrichtung projizierte, sichtbare Licht von der reflektierenden
Oberfläche (22) projiziert wird. 50 55
8. Baueinheit aus Lampe und Reflektor nach einem der Ansprüche 1 bis 7, worin der Reflektor

tor (12) aus Kunststoff hergestellt ist.

Revendications

1. Ensemble de lampe (28) et de réflecteur (12),
dans lequel ladite lampe (28) émet à la fois des UV et des radiations visibles et est monté dans ledit réflecteur (12), caractérisé en ce que ledit réflecteur comporte une surface interne réfléchissante (22) pour réfléchir lesdites radiations visibles vers l'avant dudit réflecteur (12) et un revêtement (24) de silicone absorbant les UV et disposé sur ladite surface réfléchissante (22) entre ladite surface réfléchissante (22) et ladite lampe (28) pour absorber les radiations UV émises par ladite lampe (28) de manière à réduire ainsi la quantité de radiations UV projetée vers l'avant dudit réflecteur.
2. Ensemble de lampe et de réflecteur selon la revendication 1, dans lequel ledit revêtement absorbant les UV (24) est sensiblement non-absorbant et transparent vis-à-vis des radiation de lumière visibles.
3. Ensemble de lampe et de réflecteur selon la revendication 1 ou 2, dans lequel le centre optique de ladite lampe (28) se trouve à peu près au point focal dudit réflecteur (12).
4. Ensemble de lampe et de réflecteur selon la revendication 1, 2 ou 3, dans lequel ladite lampe (28) est une lampe à décharge d'arc, une lampe à décharge d'arc miniature, ou une lampe à décharge d'arc miniature à halogénure métallique.
5. Ensemble de lampe et de réflecteur selon l'une quelconque des revendications 1 à 4, ledit réflecteur (12) comportant une lentille (26) montée à son extrémité avant, ladite lentille (26) étant en matière plastique qui transmet la lumière et qui est détériorée par es radiations UV.
6. Ensemble de lampe et de réflecteur selon la revendication 5, dans lequel un revêtement (24) absorbant les UV est disposé sur la surface (42) de ladite lentille qui se trouve à l'intérieur dudit ensemble.
7. Ensemble de lampe et de réflecteur selon la revendication 6 pour une automobile, dans lequel un écran d'occultation de lumière est disposé entre ladite lampe (28) et ladite lentille (26) pour que pratiquement toute la lumière visible projetée vers l'avant soit réfléchiée à coup sûr par ladite surface réfléchissante (22).

8. Ensemble de lampe et de réflecteur selon l'une quelconque des revendications 1 à 7, dans lequel ledit réflecteur (12) est en matière plastique.

5

10

15

20

25

30

35

40

45

50

55

6

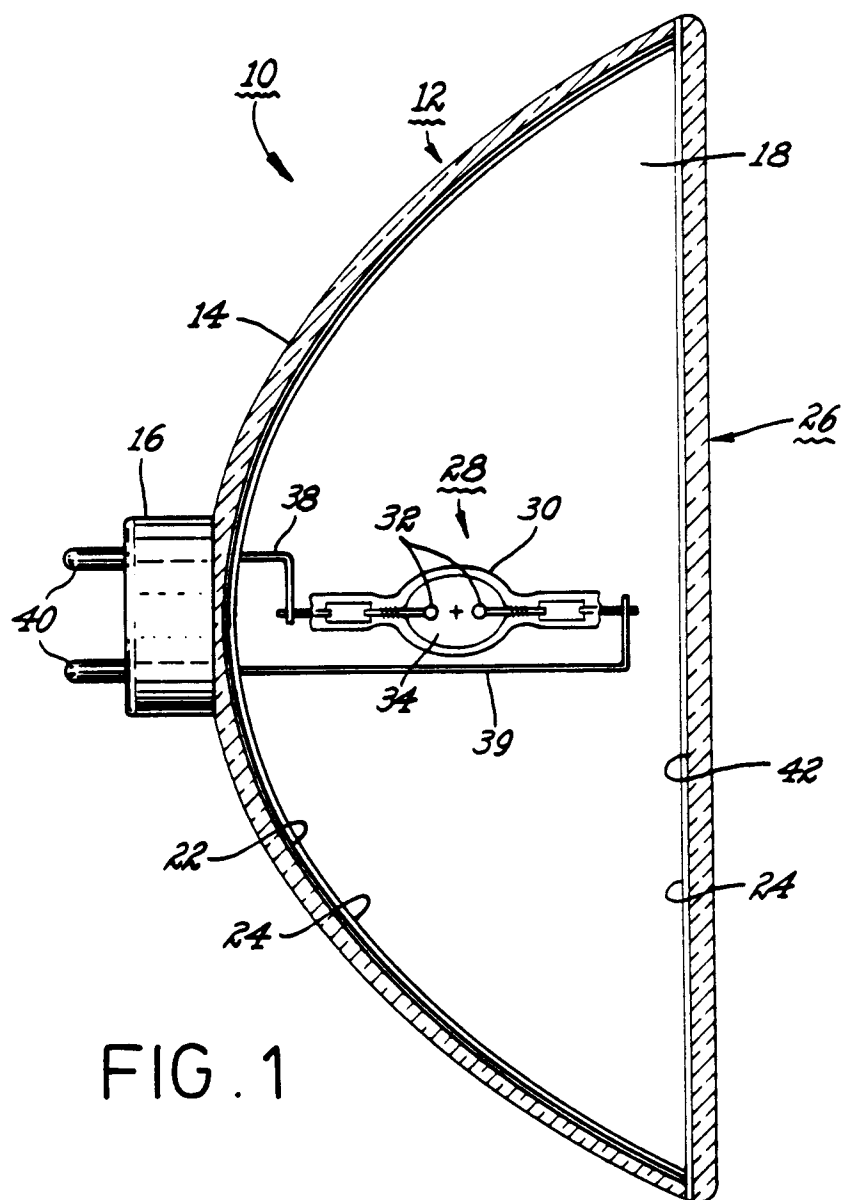


FIG. 2

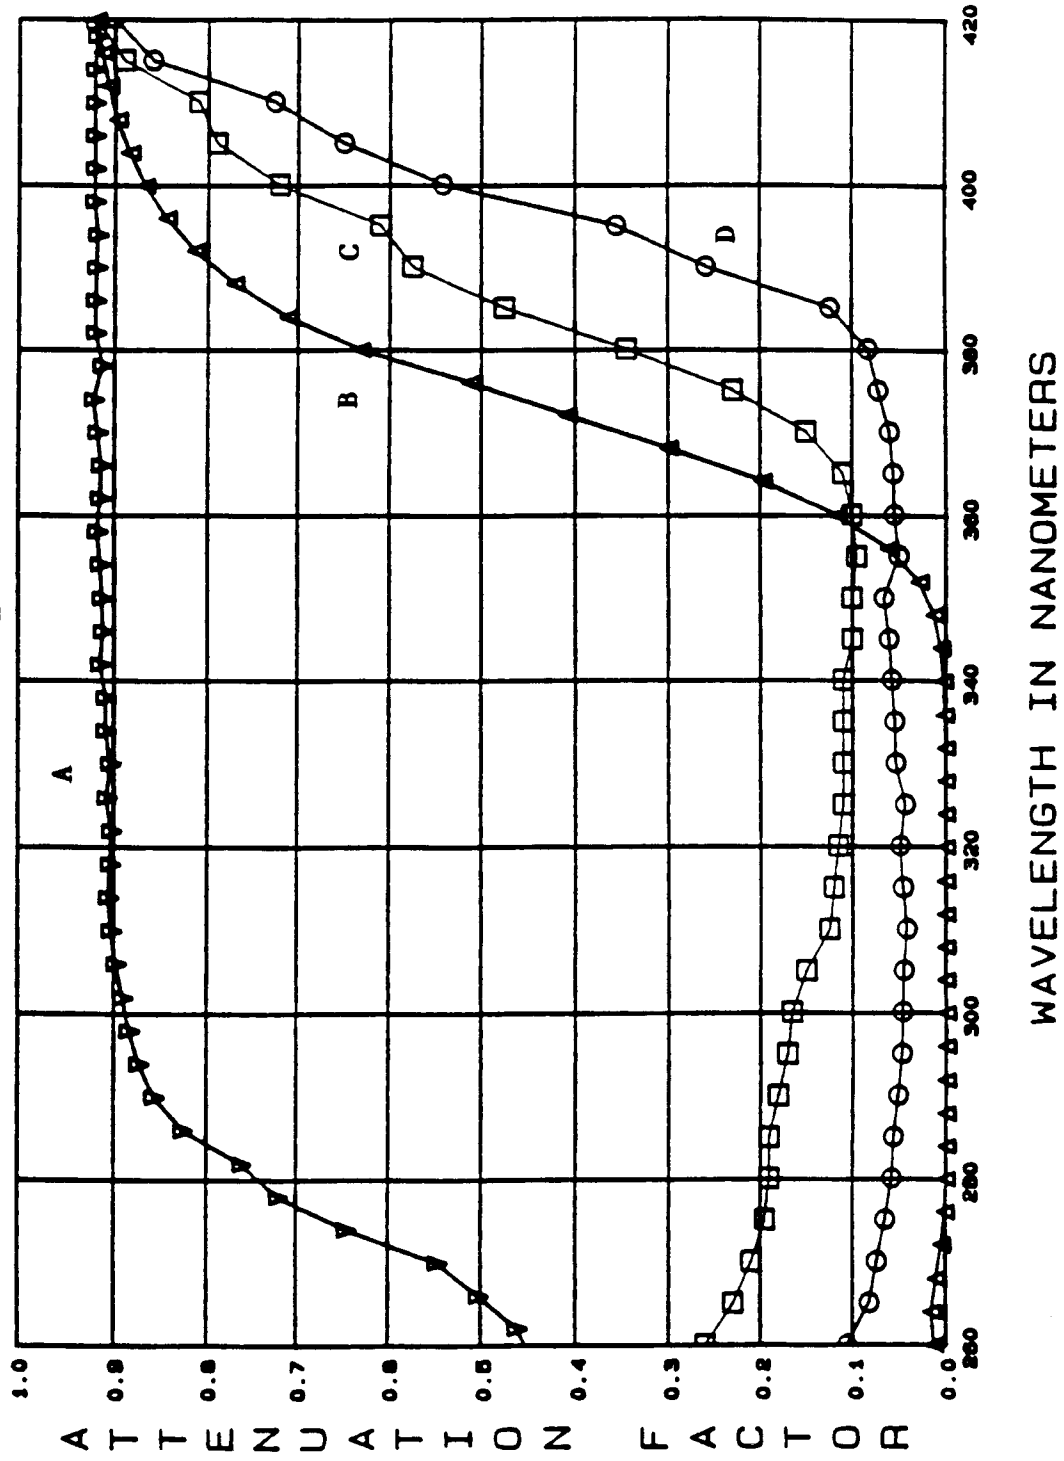


FIG. 3

