



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 540 223 B1

(12)

EUROPEAN PATENT SPECIFICATION

(49) Date of publication of patent specification: **13.12.95** (51) Int. Cl.⁶: **A44B 17/00, A44B 1/04**

(21) Application number: **92309538.4**

(22) Date of filing: **19.10.92**

(54) **Ornamental button body with clasp and method for manufacturing the same**

(30) Priority: **31.10.91 JP 314119/91**

(43) Date of publication of application:
05.05.93 Bulletin 93/18

(45) Publication of the grant of the patent:
13.12.95 Bulletin 95/50

(84) Designated Contracting States:
DE ES FR GB IT

(56) References cited:
EP-A- 0 090 131
DE-A- 1 936 163
JP-A- 5 836 503
JP-U- 2 130 214
US-A- 1 831 291

(73) Proprietor: **YKK CORPORATION**
No. 1, Kanda Izumi-cho
Chiyoda-ku,
Tokyo (JP)

(72) Inventor: **Watanabe, Hirokazu**
700, Yoshida,
Kurobe-shi
Toyama-ken (JP)

(74) Representative: **White, Martin David et al**
MARKS & CLERK,
57/60 Lincoln's Inn Fields
London WC2A 3LS (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 540 223 B1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention:

This invention relates to an ornamental button, such as a male-female button to be used on a garment or a tack button to be used on a garment of denim, and more particularly to an ornamental button body assembly and a method for manufacturing the same.

2. Description of the Related Art:

An ornamental button body assembly is currently known (from Japanese Patent Publication No. HEI 1-37122) which comprises an ornamental button body made of hard plastics, and having in its rear surface a recess with a groove extending along the deepest portion of its peripheral wall, and a metallic clasp in the form of a tube having at its base a ridged flange adapted to be deformed to expand outwardly; in assembling, the flange is inserted into the recess and is then compressed and expanded by a tool so as to be fitted in the groove.

Another known type ornamental button body assembly (Japanese Utility Model Laid-Open Publication No. HEI 2-130214) comprises an ornamental button body having in its rear surface a recess having a frustoconical peripheral wall increasing in diameter progressively from the bottom to the mouth, and a clasp having a flange larger in diameter than that of the mouth of the recess; in assembling, the clasp is forcibly pressed against the ornamental button body to bend the peripheral portion of the flange in such a manner that the flange is inserted into the recess until it comes in contact with the peripheral wall of the recess.

Regarding the first-named prior art, in the ornamental button body assembly made of hard plastics, bone or ivory, since when the ridged flange of the metallic tubular clasp is inserted into the recess and is then compressed and expanded by a tool so as to be fitted into the groove extending along the deepest portion of the peripheral wall of the groove, the mouth edge of the groove would be damaged or expanded to receive the flange loosely, thus causing the ornamental button body to pivotally move with respect to the clasp. Furthermore, since a tool is used to forcibly press the ridged flange against the ornamental button body, the pressing force is directly transferred to the ornamental button body placed on a holding die, thus causing the front surface of the ornamental button body to be damaged.

In the second-named prior art, since the clasp having a flange larger in diameter than the mouth

of the recess formed in the rear surface of the ornamental button body is forcibly pressed against the ornamental button body by a tool to bend the peripheral portion of the flange in such a manner that the flange is fitted in the recess, the mouth edge of the recess would be damaged to receive the flange loosely, the pressing force is directly transferred to the ornamental button body placed on a holding die, thus causing the front surface of the ornamental button body to be damaged.

DE-A-1 936 163, on which the preamble of claim 1 is based, discloses an ornamental button body assembly comprising an ornamental button body and a tubular clasp;

said ornamental button body having a recess in a rear surface of said ornamental button body; said recess having a bottom, an inside wall and a mouth with an edge;

said tubular clasp having at one end a flange substantially equal in diameter to said edge of said mouth of said recess, said flange being received in said recess.

SUMMARY OF THE INVENTION

It is therefore an object of this invention to provide an ornamental button body assembly in which a tubular clasp can be attached to the rear surface of an ornamental button body easily in a very simple construction without giving any damage not only to the clasp but also the front surface of the ornamental button body. Another object of the invention is to provide a method of manufacturing such an ornamental button body assembly.

According to a first aspect of the invention there is provided an ornamental button body assembly comprising an ornamental button body and a tubular clasp;

said ornamental button body having a recess in a rear surface of said ornamental button body; said recess having a bottom, an inside wall and a mouth with an edge;

said tubular clasp having at one end a flange substantially equal in diameter to said edge of said mouth of said recess, said flange being received in said recess;

characterised in that said bottom of said recess is larger in diameter than said edge of said mouth of said recess;

and in that the ornamental button body assembly further comprises an annular spring disposed between said flange and said inside wall of said mouth of said recess.

The recess may have an inverted frustoconical contour, the flange of the clasp being bent along an outer peripheral edge so as to form a complement to the sloping inside wall of the frustoconical recess.

According to a second aspect of the invention, there is provided a method of manufacturing an ornamental button body assembly, comprising the steps of: inserting a flange of a tubular clasp into a recess formed in a rear surface of an ornamental button body with a bottom larger in diameter than a mouth, the flange being substantially equal in diameter to a mouth edge of the recess; forcibly inserting an annular spring between a surface of the flange and the inside wall of the mouth of the recess while compressing the annular spring; and then restoring the compressed annular spring.

In assembling the ornamental button body assembly of this invention, a tubular clasp having at one end a flange is placed in the recess formed in the rear surface of the ornamental button body, with an annular spring sandwiched between the inside wall of the recess and the front surface of the flange, so that the tubular clasp is attached to the ornamental button body stably, thus making the ornamental button body assembly durable in any use.

When this ornamental button body assembly is used in an ornamental button such as a female button, a male button or a tack button, the tubular portion projecting from the rear surface of the ornamental button body is pierced through, for example, a piece of cloth and then the distal end of the tubular portion is clenched against a female body, or the clasp having a U-shape tubular portion is placed on one surface of a piece of cloth and then the tack is pieced through the cloth from the other surface so as to be secured to the tubular clasp.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a cross-sectional view of a female button;

FIG. 2 is an exploded perspective view of an ornamental button body assembly;

FIG. 3 is a cross-sectional view of an ornamental button body assembly according to one embodiment of this invention;

FIG. 4 is a cross-sectional view of a modified ornamental button body assembly according to another embodiment;

FIG. 5 is a cross-sectional view of another modified ornamental button body assembly according to still another embodiment;

FIG. 6 is a cross-sectional view of a modified tubular clasp; and

FIG. 7 is a cross-sectional view of an apparatus for manufacturing an ornamental button body assembly.

DETAILED DESCRIPTION

Several embodiments of an ornamental button body assembly according to this invention will now be described in detail with reference to the accompanying drawings.

As shown in FIGS. 1 and 2, an ornamental button body assembly according to a first embodiment of the invention includes an ornamental button body 1 for an ornamental button, such as a female-male button or a tack button, formed of hard plastics, bone, ivory or metal. The ornamental button body 1 has a recess 2 which is formed centrally in a rear surface of the ornamental button body 1 and which has a frustoconical inside wall 3 increasing in diameter progressively from the mouth to the bottom in such a manner that the area of the bottom of the recess 2 is slightly larger than that of the mouth. The ornamental button body assembly also includes a tubular clasp 5 having at one end a flange 4 which is substantially equal in diameter to a mouth edge 10 of the recess 2 and which is inserted in the recess 2. An annular spring 6 having a circular cross section and a cutout is inserted between the flange 4 and the inside wall 3 of the mouth of the recess 2. The annular spring 6 serves to hold the flange 4 of the tubular clasp 5 stably in the recess 2, preventing the flange 4 from being removed from the recess 2.

The annular spring 6 used in this embodiment should by no means be limited to a cutout-ring spring and may be a disk spring or a rubber spring, if it is a resilient member shrinkable and extendible radially within a constant circle. The tubular clasp 5 may be a clasp having a tubular portion whose distal end is folded into a U shape, as shown in FIG. 6. In FIG. 1, reference numeral 7 designates a female button body; and 8, a piece of cloth through which the tubular portion of the clasp 5 attached to the rear surface of the ornamental button body 1 is pierced, whereupon the distal end of the tubular portion is clenched against the tubular portion of the female button body 7 to thereby attach the female button body 7 to the cloth 8.

According to a second embodiment, as shown in FIG. 3, the shape of a recess 2 formed centrally in the rear surface of an ornamental button body 1 is totally identical with that of the first embodiment. The shape of an outer peripheral edge 9 of a flange 4 of a tubular clasp 5 is different from that of the previous embodiment, being bent so as to complement to the slant inside wall 3 of the inverted frustoconical recess 2. A cutout annular spring 6 is inserted between the bent outer peripheral edge 9 of the flange 4 and the inside wall 3 of the mouth of the recess 2.

With this arrangement, when a force is exerted on the button so as to remove the tubular clasp 5

from the recess 2 of the ornamental button body 1, the annular spring 6 will shrink so as to move along the slant inside wall 3 of the recess 2 or will expand to move along the bent outer peripheral edge 9 of the flange 4, thus keeping a balanced condition so that the flange 4 will hardly be removed from the recess 2.

In a third embodiment shown in FIG. 4, a recess 2 formed in the rear surface of an ornamental button body 1 is similar to that of the previous embodiment except that the mouth edge 10' of the recess is rounded to facilitate insertion of an annular spring 6. The annular spring 6 has a generally triangular cross section. Partly since one side surface of the annular spring 6 is complementary to the inside wall 3 of the recess 2, partly since one apex of the annular spring 6 is positioned inwardly of the rounded mouth edge 10' of the recess 2, and partly since another apex is in contact with the flange 4 of the tubular clasp 5, it is possible to compress the annular spring 6 easily so as to remove from the recess 2 so that the ornamental button body 1 can be exchanged with a new one.

In a fourth embodiment shown in FIG. 5, a recess formed in the rear surface of an ornamental button body with a bottom larger in diameter than a mouth is different from the inverted frustoconical shape of the foregoing embodiments and has a mere peripheral groove. The rounded mouth edge 10' of the recess 2 is rounded to facilitate insertion of an annular spring 6. The annular spring 6 has a trapezoidal cross section; for insertion, the annular spring 6 is forced into the recess 2 with its slant surface facing the rounded mouth edge 10' of the recess 2 of ornamental button body 1, with its apex contacting a flange 4 of a tubular clasp 5 and with its bottom surface facing the inside wall 3 of the mouth of the recess 2. Therefore the annular spring 6 can be inserted in a simple operation and serves to secure the tubular clasp 5 to the ornamental button body 1 stably.

According to another feature of this invention, there is provided a method of manufacturing an ornamental button body assembly, comprising the steps of: inserting the flange 4 of the tubular clasp 5 into the recess 2 formed centrally in the rear surface of the ornamental button body 1 with the bottom larger in diameter than the mouth, the flange 4 being substantially equal in diameter to the mouth edge of the recess 2; forcibly inserting the annular spring 6 between the front surface of the flange 4 and the inside wall 3 of the mouth of the recess 2 while compressing the annular spring 6; and then restoring the compressed annular spring 6 to secure the tubular clasp 5 to the ornamental button body 1.

To carry out this method, an apparatus such as shown in FIG. 7 may be used. The apparatus

comprises an ornamental button body holding die 11, an auxiliary die 12 and a punch 13. The holding die 11 has a flat upper surface for supporting an ornamental button body 1. The auxiliary die 12 is to be mounted on the upper surface of the holding die 11 and has vertically extending and axially aligned upper and lower through-holes 15, 14. The diameter of the upper through-hole 15 is equal not only to the outside diameter of the flange 4 of the tubular clasp 5 but also to the diameter of the edge of the recess 2 of the ornamental button body 1. The diameter of the lower through-hole 14 is equal to the outside diameter of the ornamental button body 1. The mouth edge 16 of the upper through-hole 15 is tapered to support the annular spring 6 for compression. The punch 13 has a diameter equal to the diameter of the upper through-hole 15 of the auxiliary die 12 and is reciprocatingly movable into and out of the upper through-hole 15, having an axial hollow 17 large enough to receive the tubular portion of the clasp 5.

In use, the ornamental button body 1 with its front surface facing downwardly is placed on the holding die 11, and then the flange 4 of the tubular clasp 5 is inserted into the recess 2 of the ornamental button body 1, whereupon the auxiliary die 12 is positioned above the ornamental button body 1. Meanwhile the ornamental button body 1 is placed in the lower through-hole 14 and then the annular spring 6 is placed on the tapered mouth edge 16 of the upper through-hole 15. Then the punch 13 is lowered to compress the annular spring 6 and then to insert the compressed annular spring 6 into the recess of the ornamental button body 1, whereupon the compressing action is released to restore and hence expand the annular spring 6 to secure the tubular clasp 5 to the ornamental button body 1.

With the ornamental button body assembly of this invention, since the tubular clasp is attached to the ornamental button body merely by compressing and expanding the annular spring, it is very simple in construction and can be manufactured with ease.

Particularly since no mechanical deformation process is given to the flange of the tubular clasp while the tubular clasp is attached to the ornamental button body, precise and reliable attachment can be achieved, thus guaranteeing products free from defects. Furthermore, since no forcible pressing force of the punch is exerted directly on the ornamental button body during assembling, any damage would not be given to the front surface of the ornamental button body, thus obtaining a neat ornamental button body assembly.

Claims

1. An ornamental button body assembly comprising an ornamental button body (1) and a tubular clasp (5);
 said ornamental button body (1) having a recess (2) in a rear surface of said ornamental button body (1); said recess (2) having a bottom, an inside wall (3) and a mouth with an edge (10);
 said tubular clasp (5) having at one end a flange (4) substantially equal in diameter to said edge (10) of said mouth of said recess (2), said flange (4) being received in said recess (2);
 characterised in that said bottom of said recess (2) is larger in diameter than said edge (10) of said mouth of said recess (2);
 and in that the ornamental button body assembly further comprises an annular spring (6) disposed between said flange (4) and said inside wall (3) of said mouth of said recess (2).
2. An ornamental button body assembly according to claim 1, wherein said recess (2) has an inverted frustoconical contour.
3. An ornamental button body assembly according to claim 2, wherein said flange (4) of said clasp (5) being bent along an outer peripheral edge (9) so as to form a complement to the sloping inside wall of said frustoconical recess (2).
4. A method of manufacturing an ornamental button body assembly, comprising the steps of:
 - (a) inserting a flange (4) of a tubular clasp (5) into a recess (2) formed in a rear surface of an ornamental button body (1) with a bottom larger in diameter than a mouth, the flange (4) being substantially equal in diameter to a mouth edge (10) of said recess (2);
 - (b) forcedly inserting an annular spring (6) between a surface of the flange (4) and the inside wall (3) of said mouth of the recess (2) while compressing the annular spring (6); and
 - (c) then restoring the compressed annular spring (6).

Patentansprüche

1. Zierknopfkörperbaugruppe, umfassend einen Zierknopfkörper (1) und ein rohrförmiges Befestigungsteil (5);
 wobei der Zierknopfkörper (1) eine Ausnehmung (2) in einer Rückseite des Zierknopf-

körpers (1) aufweist; wobei die Ausnehmung (2) einen Boden, eine Innenwand (3) und eine Mündung mit einem Rand (10) hat;

wobei das rohrförmige Befestigungsteil (5) an einem Ende einen Flansch (4) aufweist, dessen Durchmesser im wesentlichen demjenigen des Randes (10) der Mündung der Ausnehmung (2) entspricht, wobei der Flansch (4) in die Ausnehmung (2) eingesetzt ist;

dadurch **gekennzeichnet**, daß der Boden der Ausnehmung (2) einen größeren Durchmesser hat als der Rand (10) der Mündung der Ausnehmung (2);

und daß die Zierknopfkörperbaugruppe ferner einen Federring (6) umfaßt, der zwischen dem Flansch (4) und der Innenwand (3) der Mündung der Ausnehmung (2) angeordnet ist.

2. Zierknopfkörperbaugruppe nach Anspruch 1, wobei die Ausnehmung (2) den Umriß eines umgedrehten Kegelstumpfes hat.
3. Zierknopfkörperbaugruppe nach Anspruch 2, wobei der Flansch (4) des Befestigungsteils (5) entlang einem Umfangsrand (9) ungebogen ist, so daß er zu der geneigten Innenwand der kegelstumpfförmigen Ausnehmung (2) komplementär ist.
4. Verfahren zur Herstellung einer Zierknopfkörperbaugruppe, umfassend die Schritte:
 - (a) Einsetzen eines Flansches (4) eines rohrförmigen Befestigungsteils (5) in eine in einer Rückseite eines Zierknopfkörpers (1) ausgebildete Ausnehmung (2), deren Boden einen größeren Durchmesser hat als eine Mündung, wobei der Flansch (4) im wesentlichen den gleichen Durchmesser hat wie der Mündungsrand (10) der Ausnehmung (2);
 - (b) zwangsweises Einsetzen eines Federrings (6) zwischen eine Oberfläche des Flansches (4) und die Innenwand (3) der Mündung der Ausnehmung (2), während der Federring (6) zusammengedrückt wird; und
 - (c) sodann Rückstellen des zusammengedrückten Federrings (6).

Revendications

1. Ensemble de corps de bouton décoratif qui comprend un corps de bouton décoratif (1) et une agrafe tubulaire (5),
 ledit corps de bouton décoratif (1) comportant une cavité (2) dans sa face arrière, ladite cavité (2) ayant un fond, une paroi intérieure (3) et une embouchure avec un bord (10)

ladite agrafe tubulaire (5) comportant en une extrémité une collerette (4) dont le diamètre est sensiblement égal à celui du bord (10) de ladite embouchure de la cavité (2), ladite collerette (4) étant reçue dans ladite cavité (2), caractérisé en ce que ledit fond de la cavité (2) a un diamètre plus grand que ledit bord (10) de l'embouchure de ladite cavité (2), et en ce que l'ensemble de corps de bouton décoratif comprend en outre un ressort annulaire (6) placé entre ladite collerette (4) et ladite paroi intérieure (3) de l'embouchure de ladite cavité (2).

2. Ensemble de corps de bouton décoratif selon la revendication 1, dans lequel ladite cavité (2) a un contour tronconique inversé.
3. Ensemble de corps de bouton décoratif selon la revendication 2, dans lequel ladite collerette (4) de l'agrafe (5) est repliée le long d'un bord périphérique extérieur (9) afin d'être complémentaire à la paroi intérieure inclinée de ladite cavité tronconique (2).
4. Procédé de fabrication d'un ensemble de corps de bouton décoratif, comprenant les étapes consistant à :
 - (a) introduire la collerette (4) d'une agrafe tubulaire (5) dans une cavité (2) formée dans la face arrière d'un corps de bouton décoratif (1) avec un fond de plus grand diamètre que l'embouchure, la collerette (4) ayant un diamètre sensiblement égal à celui du bord (10) de l'embouchure de ladite cavité (2),
 - (b) introduire de force un ressort annulaire (6) entre une surface de la collerette (4) et la paroi intérieure (3) de ladite embouchure de la cavité (2) tout en comprimant le ressort annulaire (6), et
 - (c) laisser ensuite le ressort annulaire comprimé (6) reprendre sa forme.

45

50

55

FIG. 1

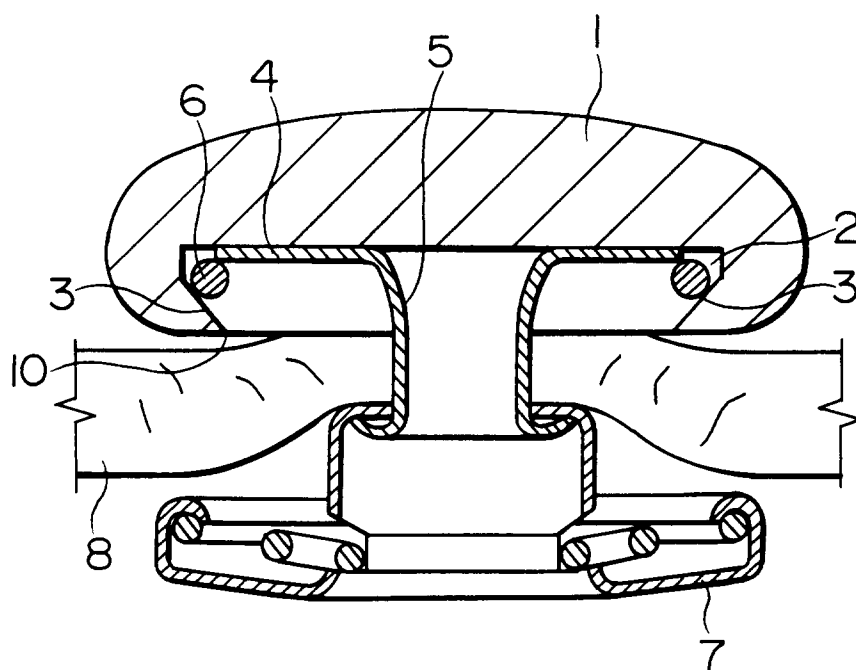


FIG. 2

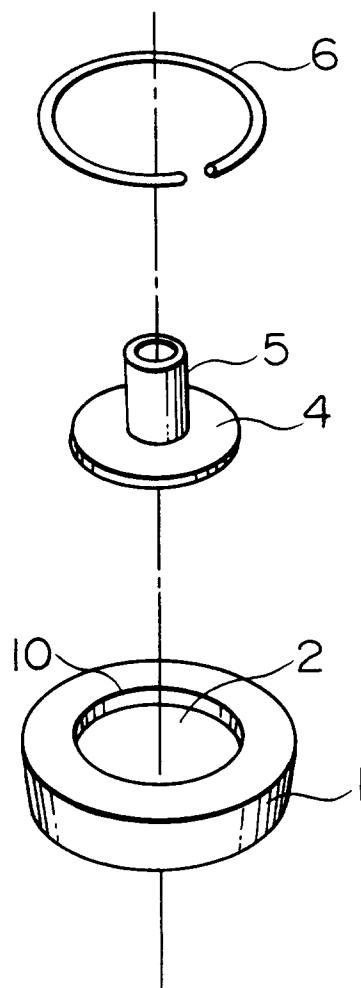


FIG. 3

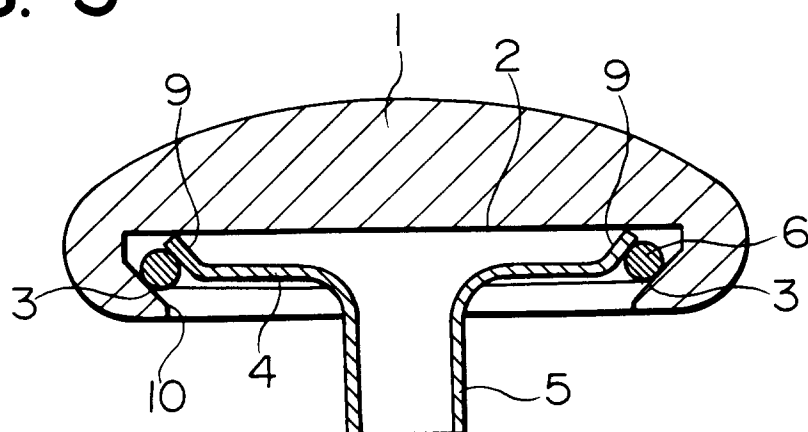


FIG. 4

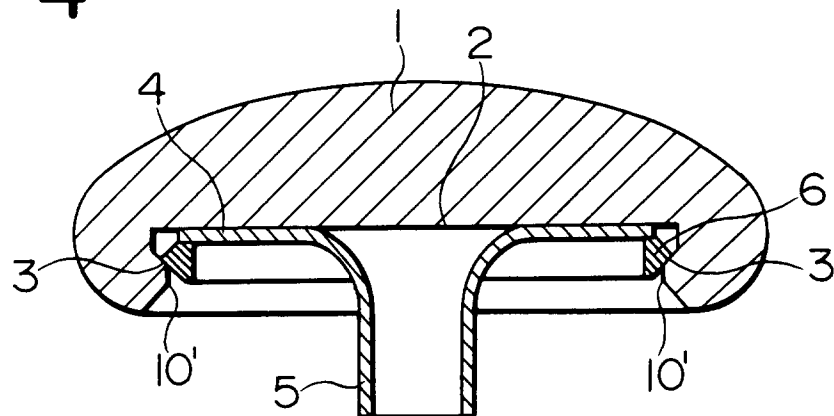


FIG. 5

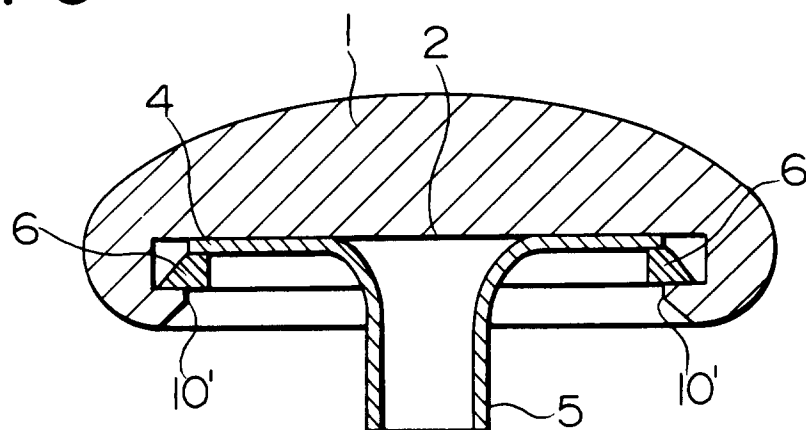


FIG. 6

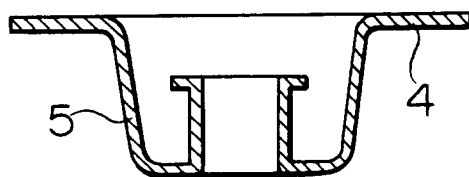


FIG. 7

