

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 543 014 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art.
158(3) EPC

(21) Application number: **92910178.0**(51) Int. Cl.⁵: **B21B 13/14**(22) Date of filing: **18.05.92**(86) International application number:
PCT/JP92/00639(87) International publication number:
WO 92/20471 (26.11.92 92/29)

(30) Priority: **16.05.91 JP 139428/91**
16.05.91 JP 139431/91
21.05.91 JP 144152/91
04.07.91 JP 189467/91
04.07.91 JP 189468/91
04.07.91 JP 189469/91
04.07.91 JP 189470/91
07.01.92 JP 942/92

(43) Date of publication of application:
26.05.93 Bulletin 93/21(84) Designated Contracting States:
DE FR GB IT

(71) Applicant: **KAWASAKI STEEL CORPORATION**
No. 1-28, 1-chome Kitahonmachi-dori
Fukiai-ku Kobe-shi Hyogo 651(JP)

(72) Inventor: **HIRUTA, Toshiki, Kawasaki Steel Corporation**
Techn.Res. Div., 1, Kawasaki-cho, Chuo-ku Chiba-shi, Chiba 260(JP)
Inventor: **KITAMURA, Kunio, Kawasaki Steel Corporation**
Techn.Res. Div., 1, Kawasaki-cho, Chuo-ku Chiba-shi, Chiba 260(JP)
Inventor: **YARITA, Ikuo, Kawasaki Steel Corporation**
Techn. Res. Div., 1, Kawasaki-cho, Chuo-ku Chiba-shi, Chiba 260(JP)

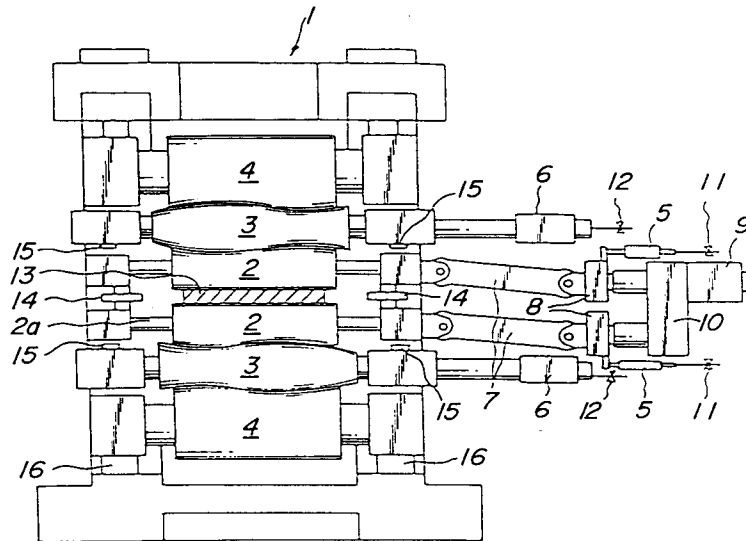
(74) Representative: **Overbury, Richard Douglas et al**
Haseltine Lake & Co Hazlitt House 28,
Southampton Buildings Chancery Lane
London WC2A 1AT (GB)

(54) **SIX-STAGE ROLLING MILL.**

(57) A six-stage rolling mill provided with a pair of top and bottom work rolls, intermediate rolls and backup rolls, at least the intermediate rolls out of the intermediate rolls and the work rolls capable of being shifted in the axial direction, wherein, barrel lengths larger than those of the backup rolls are provided to the respective intermediate rolls in such a manner that, even in the maximum and minimum shift attitudes, the barrel ends of the intermediate rolls can project outwardly beyond those of the backup rolls, so that the six-stage rolling mill particularly high in longitudinal rigidity can be provided.

EP 0 543 014 A1

FIG. 1



Technical Field

This invention relates to a hot rolling mill, in particular to a hot finish rolling mill for hot rolling a sheet bar rolled by a rough rolling mill into a thickness of a product, and to a six high rolling mill for cold rolling strip sheet rolled by the hot finish rolling mill, in particular, to precisely control a sheet crown which is defined as a difference in the sheet thickness between a central portion in sheet width and portions in the vicinity of edges, thereby preventing the sheet edges from extremely reducing to thin thickness by edge drop.

10 Background art

Generally, when a hot rolled steel sheet is produced by means of a hot finish rolling mill, rolls are deflected due to rolling load, thereby sheet thickness at a central portion in sheet width becomes thicker than sheet thickness at portions in the vicinity of opposite edges of the rolled sheet, that is a sheet crown is formed in the rolled sheet. By the way, the sheet crown, if the sheet crown becomes large, makes it difficult to provide an adequate sheet profile in cold rolling in the next step, which also provides deficiency in the shape and unavoidably results in reduction in yield, so that it is required for the hot finish rolling mill to make the sheet crown as small as possible.

Thus, for a purpose of controlling the shape of sheet to reduce the sheet crown, for example, JP-A-62-10722 discloses a six high rolling mill to be installed in a post-stage stand, wherein a rolling mill array includes intermediate rolls having a constant diameter over the full length thereof arranged between backup rolls and work rolls, respectively, and these intermediate rolls are adapted to shift in the mutually opposite axial direction, thereby the ability to control the sheet crown is enhanced. Furthermore, JP-A-57-91807 discloses a rolling mill in which an S-shaped crown is formed on any one of a work roll, an intermediate roll or a backup roll, and the roll having the S-shaped crown is shifted in the axial direction, thereby the ability for controlling the sheet crown is enhanced.

However, in the former prior art disclosed in JP-A-62-10722, the length of the intermediate roll is made approximately the same as each length of the backup roll and the work roll, so that when the intermediate roll is shifted in order to make the sheet crown small, the length of contact of the intermediate roll with the backup roll and the work roll becomes short, and the mill rigidity of the rolling mill decreases, and hence, there has been such a problem that when the rolling load changes due to temperature deviation in the sheet bar or the like, the roll gap between a pair of work rolls greatly changes, and no predetermined accuracy in the sheet thickness can be provided, and there has been such a problem that when the center in sheet width deviates from the center of the rolling mill due to deviation of the sheet bar or the like, meanderings resulting from the difference in rigidity of right and left portions of the rolling mill take place, sometimes it is fallen into impossibility of rolling from occurring of reduction ears caused by miss rolling.

In addition, there has been such another problem that spalling occurs on the surfaces of rolls resulting from the increase in pressure between rolls on account of the short length of contact of the intermediate roll, and the service life of the rolls decrease.

It is noted that the problem mentioned above can be avoided by decreasing the shift amount of the intermediate rolls, but the ability for controlling the crown of the work rolls in the rolling mill is greatly limited.

And also in the later prior art disclosed in JP-A-57-91807, there has been such a problem, when the profile control is performed by shifting intermediate rolls provided with an S-shaped crown, the control of crown becomes impossible due to the abrasion of rolls.

Furthermore, when the profile control is performed by producing a curved roll crown on the intermediate roll or the backup roll, it becomes necessary to enlarge the roll crown in order to ensure a large control amount for the crown, but when a sheet bar having a relatively narrow width is rolled with small rolling load by providing such a large roll crown, non-contact portions are generated between the backup roll and the intermediate roll or between the backup roll and the work roll, and the mill rigidity of the rolling mill becomes low, which unavoidably results in the decrease in accuracy of the sheet thickness. In addition, there has been another problem that when the non-contact portions are generated, meander and reduction ears occur in the rolled sheet as a result of a difference of rigidity in the axial direction of the rolls and as a result sometimes rolling of sheet becomes impossible.

Disclosure of the Invention

This invention solves all such problems in the prior art and provides a six high rolling mill adapted for controlling both the sheet crown and edge drop of sheet to prevent decrease in mill rigidity of the rolling mill and meander of sheet resulting from the great shifting of the intermediate roll and to attain increase in service life of rolls.

A six high rolling mill according to the present invention comprising pairs of upper and lower work rolls, intermediate rolls and backup rolls, at least the intermediate rolls among the intermediate and backup rolls being adapted for shifting in mutually opposite axial directions, wherein each of the intermediate rolls has a barrel length longer than that of the backup roll such that the opposite ends of the barrel of the intermediate roll protrude beyond the opposite end of the barrel of the backup roll still in the maximum and minimum shifting positions of the intermediate roll, and has a roll crown such that roll crowns of the pair of the upper and lower intermediate rolls are in point symmetry relationship.

In a preferred embodiment of the present invention, the barrel length of the intermediate roll may be 1.2~2.5 times longer than that of the backup roll and the barrel length of the work roll must be longer than that of the intermediate roll and preferably 1.4~2.5 times longer than that of the backup roll.

The shape of the roll crown in the intermediate roll may be advantageously selected from S shape, one end taper shape by which the barrel diameter is gradually reduced toward one end of the roll barrel and opposite ends taper shape by which the barrel diameter is gradually reduced toward the opposite ends from the center of the barrel length. The "S" shaped roll crown may be defined by one pitch portion of a high order curve formed by a high order function not lower than a third order function, a sine curve or approximate curves of the high order curve or the sine curve.

The work roll may be provided with a roll crown having a shape such as the one end taper shape defined by that the barrel diameter is gradually reduced toward one end of the roll barrel or the opposite ends taper shape defined by that the barrel diameter is gradually reduced toward the opposite ends from the center of the barrel length. Such work rolls and the intermediate rolls having one of the one end taper shaped roll crown and the opposite ends taper shaped roll crown as mentioned above may be appropriately combined to constitute the six high rolling mill.

The six high rolling mill according to the invention is able to reduce a load affected between rolls, in particular, barrel end portions of the intermediate and work rolls by providing the roll crown for the intermediate rolls, thereby improving the ability for controlling the crown. Particularly, the "S" shaped roll crown can effectively reduce the rolling load applied on the both edge portions of the sheet, and when the intermediate roll are respectively shifted in the opposite directions relative to each other in the spot symmetry relationship, the aforementioned function is more remarkably attained and as a result a greater crown control ability can be attained.

In the rolling mill according to the invention, since the intermediate roll has a barrel length longer than that of the backup roll as mentioned above, even if the intermediate roll is greatly shifted, the intermediate roll can always effectively contact the backup roll over the full length thereof so that the mill rigidity of the rolling mill is effectively prevented from decreasing due to profile control, therefore accuracy of the sheet thickness is greatly improved without any affection caused by variation in width of the sheet to be rolled. Furthermore, even if the sheet to be rolled has camber, the sheet is subjected to uniform reduction through the whole sheet width so that occurring of meander can be effectively reduced.

It should be noted that when the roll barrel of the intermediate roll has a length as long as the roll barrel of the backup roll, it is necessary to use a large roll crown so as to provide a large difference between the maximum diameter and minimum diameter of the roll barrel of the intermediate roll in order to attain a necessary crown control. As a result, a contact pressure generated between rolls which are contacted with each other in a line increases to occur spalling on the surfaces of the rolls and also reduce the service life of the rolls. Furthermore, when a sheet bar has a relatively narrow width and a rolling load is small, non-contact portions are generated between roll barrels of the intermediate and backup rolls or between roll barrels of the intermediate and work rolls. Thus, the mill rigidity of the rolling mill reduces and as a result, a necessary accuracy of the sheet thickness can not be obtained. Therefore, in order to remove the aforementioned problems, it is preferable that the barrel length of the intermediate roll is 1.2~2.5 times as long as the back roll.

Furthermore, the barrel length of the work roll must be longer than that of the intermediate roll, and preferably the barrel length of the work roll is 1.4~2.5 times as long as the backup roll so that the work roll always effectively contacts the intermediate roll in spite of a shift amount of the intermediate roll to improve the mill rigidity of the rolling mill and particularly reduce meandering of the sheet. Moreover, the service life of the roll is improved by increasing the contact range between rolls and restraining the contact pressure

between rolls from increasing.

Brief Description of Drawing

- 5 Fig. 1 is a schematic front view of a rolling mill according to the present invention;
- Fig. 2 is a diagrammatic view illustrating a roll crown for an intermediate roll;
- Fig. 3 is a schematic view illustrating the intermediate rolls in shifted positions;
- Fig. 4 is a block diagram of a control system of the rolling mill;
- Fig. 5 shows graphs showing a relationship between the pressure between rolls and the sheet crown;
- 10 Fig. 6 is a graph showing a relationship between ratio of barrel length of the intermediate and backup rolls and the maximum pressure between rolls;
- Fig. 7 is a graph showing contact conditions between rolls with respect to the ratio of barrel length of the intermediate and backup rolls;
- Fig. 8 is a diagrammatic view illustrating a bending of the intermediate roll;
- 15 Fig. 9 is a graph showing a relationship between the ratio of barrel length of the intermediate and backup rolls and the deflection amount of the intermediate roll;
- Fig. 10 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- Fig. 11 is a diagrammatic view illustrating a supply of lubricant;
- Fig. 12 is a diagrammatic view illustrating a supply of lubricant;
- 20 Fig. 13 is a graph showing a relationship between the diameter of the work roll and crown control amount;
- Fig. 14 is a schematic front view illustrating a rolling mill;
- Fig. 15 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- Fig. 16 is a graph showing amount of occurred edge drops;
- 25 Fig. 17 is a schematic front view illustrating a rolling mill;
- Fig. 18 is a diagrammatic view illustrating a tapered portion of a roll;
- Fig. 19 is a schematic view illustrating intermediate rolls in shifted position;
- Fig. 20 is a graph showing a distribution of pressure between rolls;
- Fig. 21 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- 30 Fig. 22 is a schematic front view illustrating a rolling mill;
- Fig. 23 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- Fig. 24 is a schematic front view illustrating a rolling mill;
- Fig. 25 is a diagrammatic view illustrating a tapered portion of a roll;
- Fig. 26 is a schematic view illustrating intermediate rolls in shifted position;
- 35 Fig. 27 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- Fig. 28 is a schematic front view illustrating a rolling mill;
- Fig. 29 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- Fig. 30 is a schematic front view illustrating a rolling mill;
- Fig. 31 is a diagrammatic view illustrating the work rolls in shifted position;
- 40 Fig. 32 is a graph showing a variation of the edge drop;
- Fig. 33 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- Fig. 34 is a graph showing an amount of occurred edge drop;
- Fig. 35 is a schematic front view illustrating a rolling mill;
- Fig. 36 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- 45 Fig. 37 is a schematic front view illustrating a rolling mill;
- Fig. 38 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- Fig. 39 is a schematic front view illustrating a rolling mill;
- Fig. 40 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- Fig. 41 is a schematic front view illustrating a rolling mill;
- 50 Fig. 42 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- Fig. 43 is a schematic front view illustrating a rolling mill;
- Fig. 44 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- Fig. 45 is a schematic front view illustrating a rolling mill;
- Fig. 46 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- 55 Fig. 47 is a graph showing a distribution of sheen crown with respect to the number of rolled sheets;
- Fig. 48 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
- Fig. 49 is a schematic front view illustrating a rolling mill;
- Fig. 50 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;

Fig. 51 is a schematic front view illustrating a rolling mill;
 Fig. 52 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
 Fig. 53 is a schematic front view illustrating a rolling mill;
 Fig. 54 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets;
 5 Fig. 55 is a schematic front view illustrating a rolling mill; and
 Fig. 56 is a graph showing a distribution of sheet crown with respect to the number of rolled sheets.

The Best Mode for Carrying the Invention

10 This invention will be explained hereinafter on the basis of examples shown in drawings.

Fig. 1 illustrates a six high rolling mill according to the present invention.

Referring to Fig. 1, a housing 1 is provided with pairs of upper and lower work rolls 2, intermediate rolls 3 and backup rolls 4, respectively. The both work rolls 2 are made capable of shifting in mutually opposite direction toward each of the axial directions thereof by means of shifting units 5 for each of them, and the
 15 both intermediate rolls 3 are also made capable of shifting in mutually opposite direction toward each of the axial directions by means of other shifting units 6 for each of them.

Each of the backup rolls 4 is constituted by so-called plain roll having a constant barrel diameter throughout the entire length, and each of the intermediate rolls 3 is constituted by a roll having a barrel length longer than that of the backup roll and a "S" shaped roll crown.

20 In this case, a forming curve of "S" shaped roll crown may be selected from curves which are represented by one pitch of a high order curve formed by a high order function not lower than a third order function, a sine curve and approximate curves of the high order curve or the sine curve. It is preferred that the "S" shaped roll crown to be applied for the intermediate rolls has a difference between maximum and minimum roll diameters not larger than 1 mm.

25 The intermediate rolls 3 with such a roll crown are arranged in mutually opposite position as shown in Fig. 1 and shifted in mutually opposite direction between maximum and minimum shift positions shown in Fig. 3(a) and (b) by means of shifting units 6.

In the minimum shift position shown in Fig. 3(a), one barrel end 3a of the intermediate roll 3 is just aligned to one barrel end 4a of the backup roll 4, while in the maximum shift position shown in Fig. 3(b) the
 30 other barrel end 3b of the intermediate roll 3 is just aligned to the other barrel end 4b of the backup roll 4.

As can be seen from Figs. 1 and 3, the work rolls 2 are plain rolls having a constant diameter and the same barrel length as that of the barrel length of the backup rolls.

Referring to Fig. 1, in the rolling mill with rolls 2, 3 and 4 arranged as mentioned above, each of the work rolls 2 is joined to a reduction gear 10 attached to a motor 9 successively through a spindle 7 and a
 35 pinion stand 8. In this case, the shifting position of the work roll 2 by the shifting unit 5 joined to the work roll 2 through the spindle 7 and the pinion stand 8 is detected by a position detecting unit 11 which can be, for example, a magnet scale, and the shifting position of the intermediate roll 3 by the shifting unit 6 joined to the intermediate roll 3 is detected by another position detecting unit 12 which can be also, for example, a magnet scale, respectively.

40 Incidentally, in the figure, 13, 14 and 15 indicate a rolled sheet as a product, a work roll bender and an intermediate roll bender, respectively, and 16 indicates a load cell.

Fig. 4 is a diagrammatic view of a control system of the rolling mill as described above.

In the figure, 21 indicates an arithmetic unit, and into this arithmetic unit 21 are inputted beforehand rolling conditions in one cycle such as a shape and a size of the tapered portion of the work roll 2, a roll
 45 crown and size of the intermediate roll 3, a plate width, a draft of each roll stand, a finish plate thickness, a target sheet crown, a target sheet shape and the like, and the arithmetic unit 21 calculates setting values of a shifting amount of the intermediate roll 3 and bending force of each of the roll benders 14 and 15 on the basis of such information and a cyclic shifting amount of the work roll 2 in order to provide a sheet crown and a sheet shape as the target.

50 And on the basis of the calculation result, each of a shifting control unit 22 and a bender control unit 23 controls the operations of the shifting unit 6 and the roll benders 14 and 15 there by each of the shifting amount of the intermediate roll 3 and the roll bending force is made as setting values to wait for the start of rolling in such a state.

On the other hand, during the rolling, on the basis of feedback signals from a sheet shape detecting unit
 55 24 and a plate crown detecting unit 25 to the arithmetic unit 21, in order to realize the target sheet shape and the target sheet crown with high accuracy, the arithmetic unit 21 calculates corrected values of the intermediate roll shifting amount and the roll bending force, and the shifting control unit 22 and bender control unit 23 adjust the shift amount of the intermediate roll 3 and the bending force of the roll benders

14, 15 in accordance with the correction values.

When rolling is carried out by the aforementioned rolling mill, especially under the function of the roll crown acting on the intermediate roll 3, the rolling load given to the side edge portions of a sheet bar from the work roll can be very effectively lowered. Therefore, in addition to the actions of the roll benders 14, 15, not only the sheet crown can be controlled with high accuracy but by shifting the intermediate roll 3, its control range can be sufficiently extended.

Next, a method to give a roll crown to the intermediate roll 3 will be explained, by way of an example in which a roll crown is given in accordance with an equation of the third order as shown in Fig. 2.

That is, the lower roll profile of the intermediate roll 3 shown in Fig. 2(a) is the same as the curve shown in Fig. 2(b), and this curve can be expressed by the following equation (1).

$$y_1(x) = -a\{x - (\delta + OF)/L\}^3 + b(x/L) \quad (1)$$

where

- y : generating line of the roll crown,
- a : coefficient of the third order,
- b : coefficient of the first order,
- x : coordinate of the barrel center,
- L : 1/2 of the barrel length of the intermediate roll,
- δ : shift amount of the intermediate roll (The start point is $x = L_B$), and
- OF: offset amount in the axial direction.

On the other hand, the upper roll profile of the intermediate roll 3 being in point symmetry to the lower roll profile with respect to a point can be expressed as following equation (2).

$$y_2(x) = -a\{x + (\delta + OF)/L\}^3 + b(x/L) \quad (2)$$

From the aforementioned equations (1) and (2), a gap Δy between the upper and lower rolls is expressed by the following equation.

$$\Delta y(x) = y_1 - y_2 = 2 \cdot a \cdot \left(\frac{\delta + OF}{L} \right) \left[3 \left(\frac{x}{L} \right)^2 + \left(\frac{\delta + OF}{L} \right)^2 \right] \quad \dots \dots (3)$$

Composite roll crown CR formed by the upper and lower intermediate rolls can be expressed by the following equation (4), wherein the mill center is set to be zero (0).

$$CR = \Delta y(0) - \Delta y(x) = -6a\{(\delta + OF)/L\}(x/L)^2 \quad (4)$$

The maximum shift amount δ_{\max} to give the maximum composite roll crown can be expressed as follows.

$$\delta_{\max} = L - L_B \quad (5)$$

where L_B : 1/2 of the barrel length of the backup roll. In order to make the composite crown of the upper and lower intermediate rolls to be zero when the shift amount is the minimum value of $\delta_{\min} \{ = -(L - L_B) \}$, the offset amount OF must be as follows.

$$OF = L - L_B \quad (6)$$

In a normal hot rolling process, the minimum crown amount may be when the composite crown of the upper and lower rolls is zero. However, when it is necessary to make the minimum composite crown larger or smaller than zero, offset amount OF using the position where the shift amount of the intermediate roll is zero ($x = L$) as a starting point, may be determined as follows.

$$OF = C(L - L_B)$$

where C is a constant.

In order to reduce difference between the maximum and minimum diameters of the intermediate roll without changing the composite roll crown, it is effective to use the following equation obtained when equations (5) and (6) are substituted for equation (4).

$$5 \quad CR = -6a\{1 + C\}(L - L_B)/L^3 \cdot x^3 \quad (8)$$

and to make the third order coefficient "a" to be minimum, therefore to make $(L - L_B)/L^3$ to be maximum in the aforementioned equation. In order to make $(L - L_B)/L^3$ to be maximum, the following equation is applied.

$$10 \quad L = 1.5L_B \quad (9)$$

Accordingly, when the barrel length of the intermediate roll is made 1.5 times as long as that of the backup roll, the maximum and minimum diameter differences of the intermediate roll can be made small, that is, when an S-shaped roll crown is formed on the intermediate roll, the grinding amount can be reduced, so that the life of the intermediate roll can be lengthened in the process of roll grinding.

Fig. 5 shows the result of a comparison of the pressure distribution between rolls and the sheet crown with a case using intermediate roll of $L = 1.1L_B$. As shown in Fig. 5, when the barrel length is $1.5L_B$ (solid line), the work roll is bent along the intermediate roll, so that the sheet crown is reduced as compared with a case in which the barrel crown is $1.1L_B$. Also, as shown in Table 1, it is apparent that the maximum pressure is smaller when the barrel length is $1.5L_B$, so that it contributes to improve the roll life.

Table 1

Length of intermediate roll	Line pressure (kgf/mm) between intermediate and backup rolls	Line pressure (kgf/mm) between intermediate and work rolls
$1.5L_B$	911	986
$1.1L_B$	1140	1155

[Experimental Example]

Next, the results of an experiment about an intermediate roll especially barrel length will be explained as follows.

That is the barrel length of a work roll used was 2300 mm, its diameter was 680 mm, the barrel length of a backup roll used was 2300 mm, and its diameter was 1330 mm. The barrel length of an intermediate roll was variously changed in which the third order coefficient "a" of equation (8) was 0.833. Sheet bars, having width of 1500 mm and thickness of 5.2 mm, were rolled to the thickness of 4.16 mm, and various investigations were made.

First, Fig. 6 shows a relation between the ratio (L/L_B) of the intermediate and backup roll barrel lengths, and the maximum pressure between the intermediate and backup rolls. As shown in the drawing, when the ratio (L/L_B) is increased not less than 1.2 times, the pressure is gently lowered, so that it is apparent that the intermediate roll of long barrel length is favorable.

Fig. 7 shows a contact condition between the intermediate and backup rolls with respect to a ratio of barrel length under the condition that the same sheet crown is obtained. As can be seen from Fig. 7, when the ratio is increased not less than 1.2 times, the occurrence of a noncontact region can be prevented, and it is effective to improve the sheet thickness accuracy and to inhibit the occurrence of meander and reduction ears of sheet.

In general, when a gap is formed between a block installed in a mill housing for shifting an intermediate roll, and a chock of the intermediate roll (this gap is formed due to abrasion caused by the slide of the intermediate roll, and also due to defective accuracy of the machine), a deflection is generated in the intermediate roll 2 as shown in Fig. 8(a). Fig. 9 shows a relation between the horizontal deflection amount t and the ratio (L/L_B) of barrel length of the intermediate and backup rolls under the condition that the aforementioned gap is 3 mm, wherein the maximum displacement amount t between the chocks shown in Fig. 8(b) is defined as the horizontal deflection amount.

As shown in Fig. 9, the more the ratio is increased, the more the horizontal deflection amount is increased. When the horizontal deflection amount is increased, a gap between the upper and lower work rolls is changed, a gap between the upper and lower work rolls is changed, and when the horizontal deflection amount of the upper intermediate roll and that of the lower intermediate roll becomes different, a roll gap between the upper and lower work rolls becomes varied in the axial direction, therefore the sheet crown and the sheet profile fluctuate during the rolling operation. For that reason, in order to reduce the barrel length ratio, the intermediate roll length is preferred to be short. However, in the case where the horizontal bending amount is to the extent of 0.45 mm, it has little influence on the sheet crown and profile, so that it causes no problem in a normal rolling operation. Further, the aforementioned gap is usually controlled to be not more than 3 mm. Therefore, it is apparent that when the barrel of the intermediate roll is not more than 2.5 times as long as the backup roll, the rolling can be carried out.

[Specific Example]

A comparative example will be explained as follows in which a crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a rolling mill train in which the six high rolling mills structured as shown in Fig. 1 were arranged in three rolling stands in the rear stage, sheet bars of 900 to 1600 mm width and 40 mm thickness, were rolled to a low carbon steel thin sheet of 1.6 to 3.2 mm finished thickness, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the barrel length of the work rolls as 2300 mm, that of the intermediate roll was 3450 mm, and that of the backup roll was 2300 mm. Also, a difference between the maximum and minimum diameters of the intermediate roll was 0.8 mm, and the intermediate roll was shifted within a range from 0 mm to 700 mm.

Rolling Mill of the Prior Art

In a rolling mill train in which six high mills were arranged in three rolling stands in the rear stage including the final rolling stand, provided with work rolls, intermediate rolls and backup rolls, all of them being plain rolls and the barrel length of them being 2300 mm while the intermediate rolls were being shifted, rolling operations were carried out in the same manner as the rolling mill of the invention, and the sheet crown was measured in the same manner.

Results of Experiments

Results of measurement are shown in the graph of Fig. 10.

According to the results shown in Fig. 10, when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown close to a target sheet crown was able to be carried out even when the target crown was changed. In this case, the rolling schedule with respect to the sheet width of the rolling mill of the present invention was set to be the same as that of the rolling mill of the prior art.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 2 in the case where 100,000 tons of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 2

	Average crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Frequency of ears (time)
Inventive rolling mill	40	± 46	2
Conventional rolling mill	45	± 60	11

In the rolling mill as described above, it is preferable to supply lubricant to gaps between the backup and intermediate rolls and/or the intermediate and work rolls.

Referring to Fig. 11, lubricant supplying nozzles 26 are arranged to direct lubricant from these nozzles to a gap between the backup roll 4 and the intermediate roll 3 and a gap between the intermediate roll 3 and the work roll 2. The lubricant is supplied to the lubricant supplying nozzles 26 through supply pipes 29 from a lubricant tank 27 by means of a pump 28. Furthermore, coolant is supplied to the intermediate rolls 3 and the work rolls 2 from cooling nozzles 32 through coolant supply pipes 31 by means of a coolant pump 30. The preferred lubricant is highly concentrated emulsion of basic oil including a high pressure agent, but when the lubricant is also used for cooling the rolls, a lubricant having a low concentration may be used.

Referring to Fig. 12, the distance between the lubricant supply nozzles 26 for the barrel portion having large diameter of the intermediate roll 3 is preferably smaller than that for the barrel portion having small diameter to increase the supply amount of lubricant. Instead of increasing of lubricant supply amount, the concentration of the lubricant may be varied in the axial direction of the intermediate roll to obtain the same effect as mentioned above.

The rolling mill shown in Fig. 1 was used to roll the sheet bars as mentioned above with use of lubricant of 10% emulsion and coolant of industrial water in a manner as shown in Fig. 11 and at least 120 strips were rolled without occurring of roll seizure. In comparison example using only industrial water as coolant, the sheet bars were rolled in the same manner as mentioned above with using only industrial water as coolant, the roll seizure occurred on the work roll and the intermediate roll when 100 strips have been rolled and rolling operation was stopped.

In the rolling mill including the intermediate roll provided with the roll crown, distribution of the contact pressure between rolls is varied to vary the bending of the work roll, thereby being possible to control the sheet crown, therefor the shape of sheet. Thus, the amount of crown control is not varied by the change of rolling load. Accordingly, when the diameter of the work roll is small, the deflection amount of the center line of the work roll is greatly varied so that the amount of crown control generated by shifting the intermediate roll becomes large. While, when the diameter of the work roll is large, change in the deflection amount of the center line of the work roll is small so that the amount of crown control generated by shifting the intermediate roll becomes small.

Results of test carried on rolled sheets of 1500 mm width with respect to the diameter of work roll and the amount of crown control are shown in Fig. 13. As can be seen from Fig. 13, when the diameter of the work roll is small, preferably not more than 700 mm, the amount of crown control becomes large, but when the diameter of the work roll is smaller than 400 mm, the amount of horizontal bending of the work roll becomes large and the roll profile becomes wrong so that the work roll is difficult to be driven and the effect caused by bending of the work roll is decreased. Accordingly, the diameter of the work roll of at least of 400 mm is desirable.

[Example 2]

Fig. 14 shows a rolling mill which is improved in the mill rigidity by extending the roll barrel of the work roll 2 to make its barrel length longer than that of the intermediate roll 3 in the six high rolling mill shown in Fig. 1. The mill rigidity of the rolling mill is determined by an amount of gap between work rolls when the rolling load is changed. The amount of gap is influenced by the deflection of the backup rolls, the elastic deformation of the housing and others and the flat deformation between rolls. When the barrel length of the work roll is long and then the region contacting the work roll and the intermediate roll is long, the mill rigidity of the rolling mill is great since the contacting pressure between rolls is smaller than that of the case of a shorter contacting region even if the rolling load is changed. Therefor, when the barrel length of the work roll is long, even if the sheet passes in a position deviated from the center of the rolling mill, the variation in the pressure between rolls is small and then the difference between the amounts of deformation at the left and right side with respect to the center line of the sheet is small. Accordingly the work roll having a long roll barrel is effective for preventing from meandering of sheet occurring of reduction ears.

It should be noted that a preferred range of the barrel length is 1.5~2.5 times as long as that of the backup roll as described above, and a reason of such limited range is substantially the same as the aforementioned reason for the intermediate roll.

A comparative test will be explained in connection with a crown distribution with respect to the number of rolled sheets and others which were investigated in a case using the rolling mill according to this example and also in a case using a conventional rolling mill.

In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 14 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same conditions as in the aforementioned Example 1, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the barrel length of the work roll was 3400 mm, that of the intermediate roll was 3000 mm, and that of the backup roll was 2300 mm. Also, a difference between the maximum and minimum diameters of the intermediate roll was 0.8 mm, and the intermediate roll was shifted within a range from 0 mm to 700 mm.

It is noted that a specification of the conventional rolling mill used in this comparative test is the same as in the case of the Example 1.

Results of Experiments

Results of measurement are shown in the graph of Fig. 15. According to the results shown in Fig. 15, when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed.

The frequency of occurring reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 3 in the case where 100,000 tones of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 3

	Average Crown E ₂₅ (μm)	Sheet thickness accuracy 1σ (μm)	Frequency of ears (time)
Inventive rolling mill	45	±38	1
Conventional rolling mill	50	±60	11

In a cold rolling mill train consisting of four rolling stands in which the six high rolling mills structured as shown in Fig. 1 were arranged in the first rolling stand, sheet bars of 900 to 1600 mm width and 2~3 mm thickness, were rolled to a low carbon steel thin sheet of 1.6 to 0.5 mm finished thickness, and then the sheet thickness deviation was investigated at a position spaced from the edge by 100 mm.

In this case, the barrel length of the work roll was 2000 mm, that of the intermediate roll was 2700 mm, and that of the backup roll was 2000 mm. Also, a difference between the maximum and minimum diameters of the intermediate roll was 0.8 mm, and the intermediate roll was shifted within a range from 0 mm to 700 mm.

Rolling Mill of the Prior Art

A six high mill is arranged in the first rolling stand and provided with work rolls, intermediate rolls and backup rolls, all of them being plain rolls and the barrel length of them being 2000 mm while the intermediate rolls were being shifted, rolling operations were carried out in the same manner as the rolling mill of the invention, and the sheet thickness deviation was measured in the same manner.

Results of Experiments

Results of measurement are shown in the graph of Fig. 16. According to the results shown in Fig. 16, when the rolling mill of the present invention was used, it is apparent that occurring of edge drop is

reduced.

The frequency of occurring of reduction ears and amount of edge drop are shown in Table 4 in the case where 100,000 tons of sheets were rolled by use of the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill. The amount of edge drop is defined by thickness deviations at positions spaced from the edge by 100 mm and 7.5 mm.

Table 4

	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	12	0
Conventional rolling mill	15	3

In case of applying the six high rolling mill according to the present invention for cold rolling sheet, in particular for controlling the edge drop in the sheet, since deformation of the sheet in a direction of sheet width decreases as the sheet passes through the rear stands in the cold rolling mill train, the six high rolling mill should be arranged in the first stand, and preferably the six high rolling mills are applied for the rear stands in order from the first stand. The strip sheet is subjected to a tension between the stands of the cold rolling mill train so that the meander of the sheet is restrained, but if the hot rolled sheet has a large camber and wedge, the reduction ear sometimes occurs owing to the camber and wedge. In the rolling mill of the present invention, however the intermediate roll has a long roll barrel to secure the mill rigidity so that it is possible to prevent the reduction ear from occurring in the sheet.

Next, a six high rolling mill including intermediate rolls having a roll crown which is tapered toward one end or both ends will be described.

[Example 4]

Fig. 17 illustrates a rolling mill having a construction similar to the rolling mill shown in Fig. 1, except that each of intermediate rolls 3 has a roll crown which is tapered toward one end of the roll barrel. That is each of the intermediate roll 3 has a tapered barrel end portion 3a at mutually opposite side and a plain barrel portion 3b extending over the greater part of the barrel length from the tapered barrel end portion a and having a constant diameter.

Furthermore, the roll barrel of each of the intermediate roll 3 has such a barrel length that the roll barrel contacts with the roll barrel of the backup roll 4 over the full length thereof in the maximum shifted position of the intermediate roll and the tapered barrel end portion 3a of the intermediate roll 3 extends beyond the barrel end of the backup roll 4 in no shift position of the intermediate roll.

Under a rolling load, the tapered barrel end portion 3a contacts with at least the backup roll 4, usually both the work roll 2 and backup roll 4 even if the work roll 2 is shifted to effectively reduce the contact pressure between these rolls. Therefore, the sheet crown can be controlled by appropriately selecting positions contacting the tapered barrel end portion 3a with the work roll 2 and the backup roll 4 by shifting the intermediate roll 3, if necessary.

The contour shape of the tapered portion 3a of the intermediate roll 3 may be made not only the tapered shape shown in Fig. 17, but also a sine or cosine curve shape as shown in Fig. 18(a), or a curve shape defined by a high order function such as second order, fourth order, sixth order or more high order function as shown in Fig. 18(b) depending on a required sheet crown, the maximum shift amount of the intermediate roll or the like.

In such a rolling mill, when the intermediate roll 3 is shifted in point symmetry, for example, as shown in Fig. 19, the contact pressure of the barrel portion of each of the roll 2 and 4 which contacts with the tapered portion 3a of the intermediate roll 3 can be reduced extremely effectively, and owing to this fact, in combination with the action of the roll benders 14 and 15, the plate crown can be optionally controlled over a wide range.

Fig. 20 is a graph showing a distribution of contact pressure between the upper side work roll 2 and the intermediate roll 3, wherein in the contact state of the both rolls 2 and 3, the pressure acting from the intermediate roll 3 to the work roll 2 at the contact portion of the work roll 2 with the tapered portion 3a

decreases as its diameter becomes small corresponding to the tapered shape of the tapered portion 3a, which becomes the smallest value at the barrel end of the work roll 2. Therefore, the work roll 2 is curved into a shape forming a convex form downwardly all over the roll, the sheet crown of the sheet 13 is effectively reduced as compared with a case in which the intermediate roll 3 is not shifted.

5 Thus, according to this rolling mill, especially the intermediate roll 3 has the length which is longer than that of the backup roll 4, and even when the intermediate roll 3 is shifted, the contact length of the intermediate roll 3 between the backup roll 3 and the intermediate roll 3 between the work roll 2 do not change, and the mill rigidity of the rolling mill does not change, so that the sheet thickness accuracy of the hot finish rolling is greatly improved, and even when the center of a sheet bar has deviated from the center
10 line of the rolling mill, the change in pressure at the right and left side portions of the rolling mill becomes smaller than that in the prior art, and the change in roll flattening amount between rolls becomes small further the sheet wedge becomes small, so that the camber of the sheet can be effectively reduced.

Also in this case, even in a state in which the intermediate roll 3 is not shifted at all, the tapered portion 3a of the intermediate roll 3 contacts with the barrel end portion of each of the work roll 2 and the backup
15 roll 4, so that the occurrence of the sheet crown can be effectively reduced.

[Embodical example]

A comparative test will be explained hereinafter, in which a crown distribution with respect to the
20 number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

25 In a rolling mill train in which the six high rolling mills structured as shown in Fig. 17 were arranged in three rolling stands in the rear stage, sheet bars of 900 to 1600 mm width and 40 mm thickness, were rolled to a low carbon steel thin sheet of 1.6 to 3.2 mm finished thickness, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the barrel lengths of the work roll and backup roll were 2300 mm respectively, and that of
30 the intermediate roll was 3000 mm. Also, a tapered portion of the intermediate roll was tapered by 1.6×10^{-3} (0.32 mm/200 mm per diameter), and the intermediate roll was shifted within a range from 0 mm to 700 mm.

Rolling Mill of the Prior Art

35 In a rolling mill train in which six high mills were arranged in three rolling stands in the rear stage including the final rolling stand, provided with work rolls, intermediate rolls and backup rolls, all of them being plain rolls and the barrel length of them being 2300 mm while the intermediate rolls were being shifted, rolling operations were carried out in the same manner as the rolling mill of the invention, and the
40 sheet crown was measured in the same manner.

Results of Experiments

Results of measurement are shown in the graph of Fig. 21. According to the results shown in Fig. 21,
45 when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target sheet crown was changed. In this case, the rolling schedule with respect to the sheet width of the rolling mill of the present invention was set to be the same as that of the rolling mill of the prior art.

The frequency of occurring reduction ears, accuracy of sheet thickness, and average value of sheet
50 crown are shown in Table 5 in the case where 100,000 tons of sheets were rolled. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

55

Table 5

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Frequency of ears (time)
Inventive rolling mill	44	± 43	5
Conventional rolling mill	50	± 60	12

[Example 5]

Fig. 22 illustrates a rolling mill similar to the six high rolling mill shown in Fig. 17, except that the barrel length of the work roll 2 is longer than that of the intermediate roll 3.

A comparative test was carried out in which a crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 22 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same condition as in the aforementioned Example 4, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the barrel length of the work roll was 3400 mm, that of the intermediate roll was 3000 mm, and that of the backup roll was 2300 mm. Also, the intermediate roll is provided with the same taper shaped crown as in the Example 4, and the intermediate roll was shifted within a range from 0 mm to 700 mm. It is noted that a specification of the conventional rolling mill used in this comparative test is the same as in the case of the Example 4.

Results of Experiments

Results of measurement are shown in the graph of Fig. 23. According to the results shown in Fig. 23, when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 6 in the case where 100,000 tons of sheets were rolled by using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 6

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Frequency of ears (time)
Inventive rolling mill	46	± 36	3
Conventional rolling mill	50	± 60	12

[Example 6]

Fig. 24 illustrates a rolling mill having a construction similar to the rolling mill shown in Fig. 1, except that each of intermediate rolls 3 has a roll crown which is tapered from the center of the roll barrel toward the opposite barrel ends. That is, each of the intermediate rolls has a tapered end portion 3a and a gently tapered end portion 3b to form an asymmetric convex roll crown. Each of the intermediate roll 3 has such a

barrel length that the roll barrel contacts with the roll barrel of the backup roll 4 over the full length thereof in the maximum shifted position of the intermediate roll.

Under a rolling load, the tapered portion 3a contacts with at least the backup roll 4, usually, both the work roll 2 and backup roll 4 even if the work roll 2 is shifted to effectively reduce the contact pressure between these rolls. Therefor, the sheet crown can be controlled by appropriately selected a position of a boundary between the tapered portions 3a and 3b by shifting the intermediate roll 3, if necessary.

The contour shape of the roll crown of the intermediate roll may be made not only the tapered shape shown in Fig. 24, but also a sine or cosine curve shape as shown in Fig. 25(a) or a curve shape defined by a high order function such as second order, fourth order, sixth order or more high order function as shown in Fig. 25(b) depending on a required sheet crown, the maximum shift amount of the intermediate roll or the like. Moreover, the contour shape of both the tapered portions may be a similar shape or different shape.

In such a rolling mill, when the intermediate roll 3 is shifted in point symmetry, for example, as shown in Fig. 26, the contact pressure of the barrel portion of each of the rolls 2 and 4 which contacts with the tapered portions 3a and 3b of the intermediate roll 3 can be reduced extremely effectively, and owing to this fact, in combination with the action of the roll benders 14 and 15, the sheet crown can be optionally controlled over a wide range, if necessary.

Particularly, in case of providing the roll crown tapered toward the opposite ends of the roll barrel, the boundary between the tapered portions 3a and 3b can coincide with the center in the axial direction of the roll barrel of the backup roll 4 in the maximum shift position in which the barrel end 4a of the backup roll 4 coincides with the barrel end 3c of the intermediate roll 3 as shown in Fig. 26, thereby causing the rigidity of the rolling mill in the axial direction of the roll to make uniform.

A distribution of contact pressure between the upper work roll 2 and the upper intermediate roll 3 in this rolling mill is the same as that shown in Fig. 20, that is, the pressure acting from the intermediate roll 3 to the work roll 2 at the contact portion of the work roll 2 with the tapered portion 3a decreases as its diameter becomes small corresponding to the tapered shape of the tapered portion 3a, which becomes the smallest value at the barrel end of the work roll 2. Therefore, the work roll 2 is curved into a shape forming a convex form downwardly all over the roll, and the sheet crown of the sheet 13 is effectively reduced as compared with a case in which the intermediate roll 3 is not shifted.

[Embodical Example]

A comparative test will be explained hereinafter, in which a crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a rolling mill train in which the six high rolling mills structured as shown in Fig. 24 were arranged in three rolling stands in the rear stage, sheet bars of 900 to 1600 mm width and 40 mm thickness, were rolled to a low carbon steel thin sheet of 1.6 to 3.2 mm finished thickness, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the barrel lengths of the work roll and backup roll were 2300 mm, respectively, and that of the intermediate roll was 3000 mm. Also, tapered portions 3a and 3b of the intermediate roll were tapered by 1.6×10^{-3} (0.32 mm/200 mm per diameter) and 0.1×10^{-3} (0.02 mm/200 mm per diameter), respectively, and the intermediate roll was shifted within a range from 0 mm to 700 mm.

Rolling Mill of the Prior Art

In a rolling mill train in which six high mills were arranged in three rolling stands in the rear stage including the final rolling stand, provided with work rolls, intermediate rolls and backup rolls, all of them being plain rolls and the barrel length of them being 2300 mm while the intermediate rolls were being shifted, rolling operations were carried out in the same manner as the rolling mill of the invention, and the sheet crown was measured in the same manner.

Results of Experiments

Results of measurement are shown in the graph of Fig. 27. According to the results shown in Fig. 27, when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling

operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target sheet crown was changed. In this case, the rolling schedule with respect to the sheet width of the rolling mill of the present invention was set to be the same as that of the rolling mill of the prior art.

The frequency of occurring reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 7 in the case where 100,000 tons of sheets were rolled. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 7

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Frequency of ears (time)
Inventive rolling mill	42	± 40	4
Conventional rolling mill	50	± 60	12

[Example 7]

Fig. 28 illustrates a rolling mill similar to the six high rolling mill shown in Fig. 24, except that the barrel length of the work roll 2 is longer than that of the intermediate roll 3.

A comparative test was carried out in which a crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 28 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same condition as in the aforementioned Example 1, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the barrel length of the work roll was 3400 mm, that of the intermediate roll was 3000 mm, and that of the backup roll was 2300 mm. Also, the intermediate roll is provided with the same taper shaped crown as in the Example 6, and the intermediate roll was shifted within a range from 0 mm to 700 mm. It is noted that a specification of the conventional rolling mill used in this comparative test is the same as in the case of the Example 6.

Results of Experiments

Results of measurement are shown in the graph of Fig. 29. According to the results shown in Fig. 29, when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 8 in the case where 100,000 tons of sheets were rolled by using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 8

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Frequency of ears (time)
Inventive rolling mill	45	± 39	2
Conventional rolling mill	50	± 60	12

Various rolling mills having roll crowns of "S" shape, one end taper shape and both ends taper shape formed on the intermediate roll have been described, but various roll crowns can be combined as will be described hereinafter.

[Example 8]

Fig. 30 illustrates a six high rolling mill in which the intermediate rolls 3 are provided with the "S" shape roll crowns, respectively, and the work rolls 2 are provided with the one end taper shape roll crowns, respectively.

In this rolling mill, when the work rolls 2 are shifted from positions shown in Fig. 31(a) to positions shown in Fig. 31(b), respectively, roll gaps between the tapered portions 2a of the upper and lower work rolls 2 are directly increased at both edge portions of the sheet 13 to be rolled so that the edge drop can be reduced. As can be seen from Fig. 32, the edge drop can be modified by regulating a distance EL from the starting point of the tapered portion 2a to the edge of the sheet (referring to Fig. 31) so that the edge drop can be controlled in accordance with a predetermined target amount of edge drop.

A comparative test was carried out in which a crown distribution with respect to the number of rolled sheets and others investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a rolling mill train in which the six high rolling mills structured as shown in Fig. 30 were arranged in three rolling stands in the rear stage, sheet bars of 900 to 1600 mm width and 40 mm thickness, were rolled to a low carbon steel thin sheet of 1.6 to 3.2 mm finished thickness, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the barrel lengths of the work roll and backup roll were 2300 mm respectively, and that of the intermediate roll was 3000 mm. Also, a difference between the maximum and minimum diameters of "S" shape roll crown formed on the intermediate roll was 0.8 mm, the tapered portion 2a of the work roll was tapered by a 8×10^{-3} (0.16 mm/200 mm per diameter) and the intermediate roll was shifted within a range from 0 mm to 700 mm.

Rolling Mill of the Prior Art

In a rolling mill train in which six high mills were arranged in three rolling stands in the rear stage including the final rolling stand, provided with work rolls, intermediate rolls and backup rolls, all of them being plain rolls and the barrel length of them being 2300 mm while the intermediate rolls were being shifted, rolling operations were carried out in the same manner as the rolling mill of the invention, and the sheet crown was measured in the same manner.

Results of Experiments

Results of measurement are shown in the graph of Fig. 33. According to the results shown in Fig. 33, when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target sheet crown was changed. In this case, the rolling schedule with respect to the sheet width of the rolling mill of the present invention was set to be the same as that of the rolling mill of the prior art.

The frequency of occurring of reduction ears, amount of edge drop, accuracy of sheet thickness, and average value of sheet crown are shown in Table 9 in the case where 100,000 tons of sheets were rolled. According to this table, both the sheet thickness accuracy and the pass property (decrease in the

occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill. The amount of edge drop is measured by a difference between sheet thickness at positions spaced from one sheet edge by 100 mm and 25 mm.

Table 9

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	38	± 43	26	6
Conventional rolling mill	50	± 60	39	12

[Example 9]

In a cold rolling mill train consisting of four rolling stands in which the six high rolling mills structured as shown in Fig. 30 were arranged in the first rolling stand, sheet bars of 900 to 1600 mm width and 2~3 mm thickness, were rolled to a low carbon steel thin sheet of 0.5 mm finished thickness, and then the sheet thickness deviation was investigated at a position spaced from the edge by 100 mm.

In this case, the barrel length of the work roll was 2000 mm, that of the intermediate roll was 2700 mm, and that of the backup roll was 2000 mm. Also, a difference between the maximum and minimum diameters of the intermediate roll was 0.8 mm, and the intermediate roll was shifted within a range from 0 mm to 700 mm.

Rolling Mill of the Prior Art

A six high mill is arranged in the first rolling stand and provided with work rolls, intermediate rolls and backup rolls, all of them being plain rolls and the barrel length of them being 2000 mm while the intermediate rolls were being shifted, rolling operations were carried out in the same manner as the rolling mill of the invention, and the sheet thickness deviation was measured in the same manner.

Results of Experiments

Results of measurement are shown in the graph of Fig. 34. According to the results shown in Fig. 34, when the rolling mill of the present invention was used, it is apparent that occurring of edge drop is greatly reduced.

The frequency of occurring of reduction ears and amount of edge drop are shown in Table 10 in the case where 100,000 tons of sheets were rolled by use of the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention far superior to those of the conventional rolling mill.

Table 10

	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	3	0
Conventional rolling mill	15	3

[Example 10]

Fig. 35 illustrates a rolling mill similar to the six high rolling mill shown in Fig. 30, except that each of the work rolls 2 is provided with a roll crown tapered toward opposite ends.

A comparative test was carried out in which a crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

5 Rolling Mill of the Present Invention

In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 35 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same conditions as in the aforementioned Example 8, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the opposite tapered barrel portions 2a and 2b of the work roll were tapered by 0.4×10^{-3} (0.08 mm/200 mm per diameter). Also, a difference between the maximum and minimum diameters of the intermediate roll was 0.8 mm, and the intermediate roll was shifted within a range from 0 mm to 700 mm. It is noted that a specification of the conventional rolling mill used in this comparative test is the same as in the case of the Example 8.

Results of Experiments

Results of measurement are shown in the graph of Fig. 36. According to the results shown in Fig. 36, when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 11 in the case where 100,000 tons of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 11

	Average Crown E ₂₅ (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	40	±40	28	7
Conventional rolling mill	50	±60	39	12

[Example 11]

Fig. 37 illustrates a rolling mill similar to the six high rolling mill shown in Fig. 35, except that the barrel length of the work roll 2 is longer than that of the intermediate roll 3.

A comparative test was carried out in which a crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 37 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same condition as in the aforementioned Example 10, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the barrel length of the work roll was 3400 mm, that of the intermediate roll was 3000 mm, and that of the backup roll was 2300 mm. Also, the intermediate roll is provided with the same taper shaped crown as in the Example 4, and the intermediate roll was shifted within a range from 0 mm to 700 mm. It is noted that a specification of the conventional rolling mill used in this comparative test is the same as in the case of the Example 4.

Results of Experiments

Results of measurement for the sheet crown are shown in the graph of Fig. 38. According to the results shown in Fig. 38, when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 12 in the case where 100,000 tons of sheets were rolled by using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 12

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	41	± 42	25	5
Conventional rolling mill	50	± 60	39	12

[Example 12]

Fig. 39 illustrates a rolling mill similar to the six high rolling mill shown in Fig. 37, except that each of the work rolls 2 is provided with a roll crown tapered toward opposite ends.

A comparative test was carried out in which a crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 39 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same conditions as in the aforementioned Example 11, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the opposite tapered barrel portions 2a and 2b of the work roll were tapered by 0.8×10^{-3} (0.16 mm/200 mm per diameter) and 0.01×10^{-3} (0.02 mm/200 mm per diameter), respectively, and the intermediate roll was shifted within a range from 0 mm to 700 mm. It is noted that a specification of the conventional rolling mill used in this comparative test is the same as in the case of the Example 11.

Results of Experiments

Results of measurement are shown in the graph of Fig. 40. According to the results shown in Fig. 40, when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 13 in the case where 100,000 tons of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 13

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	40	± 46	24	2
Conventional rolling mill	45	± 60	39	11

[Example 13]

Fig. 41 illustrates an example of the six high rolling mill, wherein each of the intermediate rolls 3 and the work rolls is provided with a roll crown tapered toward one end of the roll barrel.

A comparative test is carried out in which a crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a rolling mill train in which the six high rolling mills structured as shown in Fig. 41 were arranged in three rolling stands in the rear stage, sheet bars of 900 to 1600 mm width and 40 mm thickness, were rolled to a low carbon steel thin sheet of 1.6 to 3.2 mm finished thickness, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the barrel lengths of the work roll and backup roll were 2300 mm, and that of the intermediate roll was 3000 mm. Also, the tapered portion 3a of the intermediate roll is tapered by 1.6×10^{-3} (0.32 mm/200 mm per diameter) and the tapered portion 2a of the work roll is tapered by 0.8×10^{-3} (0.16 mm/200 mm per diameter) and the intermediate roll was shifted within a range from 0 mm to 700 mm.

Rolling Mill of the Prior Art

In a rolling mill train in which six high mills were arranged in three rolling stands in the rear stage including the final rolling stand, provided with work rolls, intermediate rolls and backup rolls, all of them being plain rolls and the barrel length of them being 2300 mm while the intermediate rolls were being shifted, rolling operations were carried out in the same manner as the rolling mill of the invention, and the sheet crown was measured in the same manner.

Results of Experiments

Results of measurement are shown in the graph of Fig. 42. According to the results shown in Fig. 42 when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed. In this case, the rolling schedule with respect to the sheet width of the rolling mill of the present invention was set to be the same as that of the rolling mill of the prior art.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 14 in the case where 100,000 tons of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 14

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	36	± 45	26	8
Conventional rolling mill	50	± 60	39	12

[Example 14]

Fig. 43 illustrates a rolling mill having a construction similar to that of the six high rolling mill shown in Fig. 41, except that each of the work rolls is provided with a roll crown tapered at the opposite end portions.

A comparative test is carried out in which a crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 43 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same conditions as in the Example 12, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the size of the rolls is the same as that of the Example 14 and the shape of the intermediate rolls is the same as that of the Example 13, but the work roll 2 has tapered barrel portions 2a and 2b tapered by 0.4×10^{-3} (0.8 mm/200 mm per diameter), and the intermediate roll was shifted within a range from 0 mm to 700 mm. A specification of the conventional rolling mill used in this comparative test is the same as in the case of the Example 13.

Results of Experiments

Results of measurement are shown in the graph of Fig. 44. According to the results shown in Fig. 44 when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed. In this case, the rolling schedule with respect to the sheet width of the rolling mill of the present invention was set to be the same as that of the rolling mill of the prior art.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 15 in the case where 100,000 tons of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence or reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 15

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	37	± 47	27	7
Conventional rolling mill	50	± 60	39	12

[Experiment 15]

Fig. 45 illustrates a rolling mill similar to the six high rolling mill shown in Fig. 41, except that the barrel length of the work roll 2 is longer than that of the intermediate roll 3.

A comparative test was carried out as follows in which a sheet crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

5 Rolling Mill of the Present Invention

In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 45 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same condition as in the aforementioned Example 1. The sheet crown of rolled sheet was measured every 5 coils at a position
10 spaced from the edge by 25 mm.

In this case, the barrel length of the work roll was 3400 mm, that of the intermediate roll was 3000 mm, and that of the backup roll was 2300 mm. Also, each of the intermediate and work rolls is provided with a roll crown tapered toward one end of the roll barrel similar to that of the Example 11, and the intermediate roll was shifted within a range from 0 mm to 700 mm. It is noted that a specification of the conventional
15 rolling mill used in this comparative test is the same as in the case of Example 13.

Results of Experiments

Results of measurement are shown in the graph of Fig. 46. According to the results shown in Fig. 46
20 when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed. In this case, the rolling schedule with respect to the sheet width of the rolling mill of the present invention was set to be the same as that of the rolling mill of the prior art.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet
25 crown are shown in Table 16 in the case where 100,000 tons of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

30 Table 16

	Average Crown E ₂₅ (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
35 Inventive rolling mill	35	±46	22	3
Conventional rolling mill	50	±60	39	12

40 [Example 16]

Fig. 47 illustrates a rolling mill having a construction similar to that of the six high rolling mill shown in Fig. 43, except that each of the work rolls is provided with a roll crown tapered at the opposite end portions thereof.

45 A comparative test is carried out in which a sheet crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

50 In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 47 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same conditions as in the Example 13, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

55 In this case, the size and shape of the rolls are the same as those of the Example 15 and the work roll 2 has tapered barrel portions 2a and 2b tapered by 0.8×10^{-3} (0.16 mm/200 mm per diameter) and 0.1×10^{-3} (0.02 mm/200 mm per diameter), respectively.

The intermediate roll was shifted within a range from 0 mm to 700 mm. A specification of the conventional

rolling mill used in this comparative test is the same as those in the case of the Example 13.

Results of Experiments

Results of measurement of the sheet crown are shown in the graph of Fig. 48. According to the results shown in Fig. 48 when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed. In this case, the rolling schedule with respect to the sheet width of the rolling mill of the present invention was set to be the same as that of the rolling mill of the prior art.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 17 in the case where 100,00 tons of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 17

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	38	± 45	26	4
Conventional rolling mill	50	± 60	39	12

[Example 17]

Fig. 49 illustrates an embodiment of the six high rolling mill having intermediate rolls 3 provided with the roll crown tapered toward to the opposite ends of the roll barrel and work rolls 2 provided with the roll crown tapered at one end portion of the roll barrel.

A comparative test was carried out as follows in which a sheet crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a rolling mill train in which the six high rolling mills structured as shown in Fig. 49 were arranged in three rolling stands in the rear stage, sheet bars of 900 to 1600 mm width and 40 mm thickness, were rolled to a low carbon steel thin sheet of 1.6 to 3.2 mm finished thickness, and then the sheet crown was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the barrel length of the work roll was 2300 mm, that of the intermediate rolls as 3000 mm, and that of the backup roll was 2300 mm. Also, the tapered portion 3a and 3b of the roll barrel of the intermediate roll are tapered by 1.6×10^{-3} (0.32 mm/200 mm per diameter) and 0.1×10^{-3} (0.02 mm/200 mm per diameter), respectively, and the tapered portion 2a of the roll barrel of the work roll is tapered by 0.8×10^{-3} (0.16 mm/200 mm per diameter). The intermediate roll was shifted within a range from 0 mm to 700 mm.

Rolling Mill of the Prior Art

In a rolling mill train in which six high mills were arranged in three rolling stands in the rear stage including the final rolling stand, provided with work rolls, intermediate rolls and backup rolls, all of them being plain rolls and the barrel length of them being 2300 mm while the intermediate rolls were being shifted, rolling operations were carried out in the same manner as the rolling mill of the invention, and the sheet crown was measured in the same manner.

Results of Experiments

Results of measurement are shown in the graph of Fig. 50. According to the results shown in Fig. 50 when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed. In this case, the rolling schedule with respect to the sheet width of the rolling mill of the present invention was set to be the same as that of the rolling mill of the prior art.

the frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 18 in the case where 100,000 tons of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 18

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	39	± 49	23	7
Conventional rolling mill	50	± 60	39	12

[Experiment 18]

Fig. 51 illustrates a rolling mill having a construction similar to that of the six high rolling mill shown in Fig. 49, except that each of the work rolls 2 is provided with a roll crown tapered at the opposite end portions.

A comparative test was carried out as follows in which a sheet crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 51 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same conditions as in the Example 17, and then the sheet crown was measured very 5 coils at a position spaced from the edge by 25 mm.

In this case, the tapered portions 3a and 3b of the intermediate roll 3 and the tapered portion 2a of the work roll are tapered similarly as in the aforementioned Example 17 and the other tapered portion 2b of the work roll 2 is tapered by 0.4×10^{-3} (0.08 mm/200 mm per diameter). The intermediate roll was shifted within a range from 0 mm to 700 mm. A specification of the conventional rolling mill used in this comparative test is the same as in the case of the Example 17.

Results of Experiments

Results of measurement are shown in the graph of Fig. 52. According to the results shown in Fig. 52 when the rolling mill of the present invention was used, it is apparent that a high accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed. In this case, the rolling schedule with respect to the sheet width of the rolling mill of the present invention was set to be the same as that of the rolling mill of the prior art.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 19 in the case where 100,000 tons of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 19

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	35	± 46	26	9
Conventional rolling mill	50	± 60	39	12

[Example 19]

Fig. 53 illustrates a rolling mill similar to the six high rolling mill shown in Fig. 49, except that the barrel length of the work roll 2 is longer than that of the intermediate roll 3.

A comparative test was carried out as follows in which a sheet crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 53 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same condition as in the aforementioned Example 17. The sheet crown of rolled sheet was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the barrel length of the work roll was 3400 mm, that of the intermediate roll was 3000 mm, and that of the backup roll was 2300 mm. Also, each of the intermediate rolls is provided with a roll crown tapered toward opposite ends of the roll barrel similar to that of the Example 17 and each of the work rolls is provided with a roll crown tapered toward one end of the roll barrel similar to that of the Example 17. The intermediate roll was shifted within a range from 0 mm to 700 mm. It is noted that a specification of the conventional rolling mill used in this comparative test is the same as that in the case of Example.

Results of Experiments

Results of measurement are shown in the graph of Fig. 54. According to the results shown in Fig. 54 when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed. In this case, the rolling schedule with respect to the sheet width of the rolling mill of the present invention was set to be the same as that of the rolling mill of the prior art.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 20 in the case where 100,000 tons of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 20

	Average Crown E_{25} (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	39	± 49	22	5
Conventional rolling mill	50	± 60	39	12

[Example 20]

Fig. 55 illustrates a rolling mill having a construction similar to that of the six high rolling mill shown in Fig. 51, except that each of the work rolls is provided with a roll crown tapered at the opposite end portions

thereof.

A comparative test is carried out in which a sheet crown distribution with respect to the number of rolled sheets and others were investigated in a case using a rolling mill according to the present invention and also in a case using a conventional rolling mill.

Rolling Mill of the Present Invention

In a hot finish rolling mill train in which the six high rolling mills structured as shown in Fig. 55 were arranged in three rolling stands in the rear stage, sheet bars were rolled under the same conditions as in the Example 17. The sheet crown of rolled sheet was measured every 5 coils at a position spaced from the edge by 25 mm.

In this case, the size and shape of the intermediate rolls are the same as those of the Example 19 and the work roll 2 has tapered barrel portions 2a and 2b tapered by 0.8×10^{-3} (0.16 mm/200 mm per diameter) and 0.1×10^{-3} (0.02 mm/200 mm per diameter), respectively. The intermediate roll was shifted within a range from 0 mm to 700 mm. A specification of the conventional rolling mill used in this comparative test is the same as those in the case of the Example 17.

Results of Experiments

Results of measurement are shown in the graph of Fig. 56. According to the results shown in Fig. 56 when the rolling mill of the present invention was used, it is apparent that a highly accurate sheet rolling operation to obtain a sheet crown extremely close to a target sheet crown was able to be carried out even when the target crown was changed.

The frequency of occurring of reduction ears, accuracy of sheet thickness, and average value of sheet crown are shown in Table 21 in the case where 100,000 tons of sheets were rolled in a thin cycle rolling schedule using the aforementioned rolling mills of the invention and conventional rolling mills. According to this table, both the sheet thickness accuracy and the pass property (decrease in the occurrence of reduction ears) of the rolling mill of the invention are far superior to those of the conventional rolling mill.

Table 21

	Average Crown E ₂₅ (μm)	Sheet thickness accuracy 1σ (μm)	Amount of edge drop (μm)	Frequency of ears (time)
Inventive rolling mill	35	±46	26	7
Conventional rolling mill	50	±60	39	12

Industrial Utilizability

According to the present invention, rolled sheets having a target sheet shape of desired sheet crown and edge drop can be rolled in high accuracy. Thus, the yield in the after process can be improved and the rolling operation can be carried out in stable condition. Furthermore, the life of intermediate roll and the work roll can be improved.

Claims

1. A six high rolling mill comprising each pair of upper and lower work rolls, intermediate rolls and backup rolls, at least the intermediate rolls of the work rolls and intermediate rolls being adapted for shifting in axial directions thereof, wherein each of the intermediate rolls has a barrel length longer than that of the backup roll such that barrel ends of the intermediate roll extend beyond barrel ends of the backup roll at maximum and minimum shifted positions of the intermediate roll, and the pair of the upper and lower intermediate rolls are provided with roll crowns in point symmetry positions.
2. The six high rolling mill claimed in claim 1, wherein the barrel length of the intermediate is 1.2~2.5 times as long as that of the backup roll.

3. The six high rolling mill claimed in claim 1 or 2, wherein the barrel length of the work roll is not less than that of the intermediate roll.
4. The six high rolling mill claimed in claim 3, wherein the barrel length of the work roll is 1.4~2.5 times as long as that of the backup roll.
5. The six high rolling mill as claimed in claim 1 or 2, wherein the intermediate roll has a roll crown selected from a group of "S" shape, taper shape which is tapered toward one of the barrel ends, and both taper shape which is tapered toward both the barrel ends.
6. The six high rolling mill as claimed in either one of claims 1, 2, 3 and 4, wherein the pair of upper and lower work rolls have taper shaped roll crowns which are tapered toward one of barrel ends, respectively, in point symmetry position.
7. The six high rolling mill claimed in either one of claims 1, 2, 3 and 4, wherein the upper and lower intermediate rolls are provided with "S" shaped roll crowns, and the upper and lower work rolls are provided with taper shaped roll crowns which are tapered toward the opposite barrel ends from intermediate regions of the work roll barrels, at point symmetry positions, respectively.
8. The six high rolling mill, claimed in either one of claims 1, 2, 3, and 4, wherein the upper and lower intermediate rolls are provided with taper shaped roll crowns which are tapered toward one of the barrel ends, respectively, and the upper and lower work rolls are provided with taper shaped roll crowns which are tapered toward one of the barrel ends, at point symmetry positions, respectively.
9. The six high rolling mill claimed in either one of claims 1, 2, 3 and 4, wherein the upper and lower intermediate rolls are provided with taper shaped roll crowns which are tapered toward one of the barrel ends, and the upper and lower work rolls are provided taper shaped roll crowns which are tapered toward both the barrel ends in point symmetry positions, respectively.
10. The six high rolling mill claimed in either one of claims 1, 2, 3 and 4, wherein the upper and lower intermediate rolls are provided with roll crowns which are tapered toward both barrel ends, and the upper and lower work rolls are provided with roll crowns which are tapered toward one of barrel ends, in point symmetry positions, respectively.
11. The six high rolling mill claimed in either one of claim 1, 2, 3 and 4, wherein upper and lower intermediate rolls are provided with a taper shaped roll crowns which are tapered toward both barrel ends, and the upper and lower work roll are provided with roll crowns which are tapered toward both barrel ends, in point symmetry positions, respectively.
12. The six high rolling mill claimed in either one of claim 1~11, wherein the work roll has a barrel diameter in a range of 400~700 mm.

FIG. 1

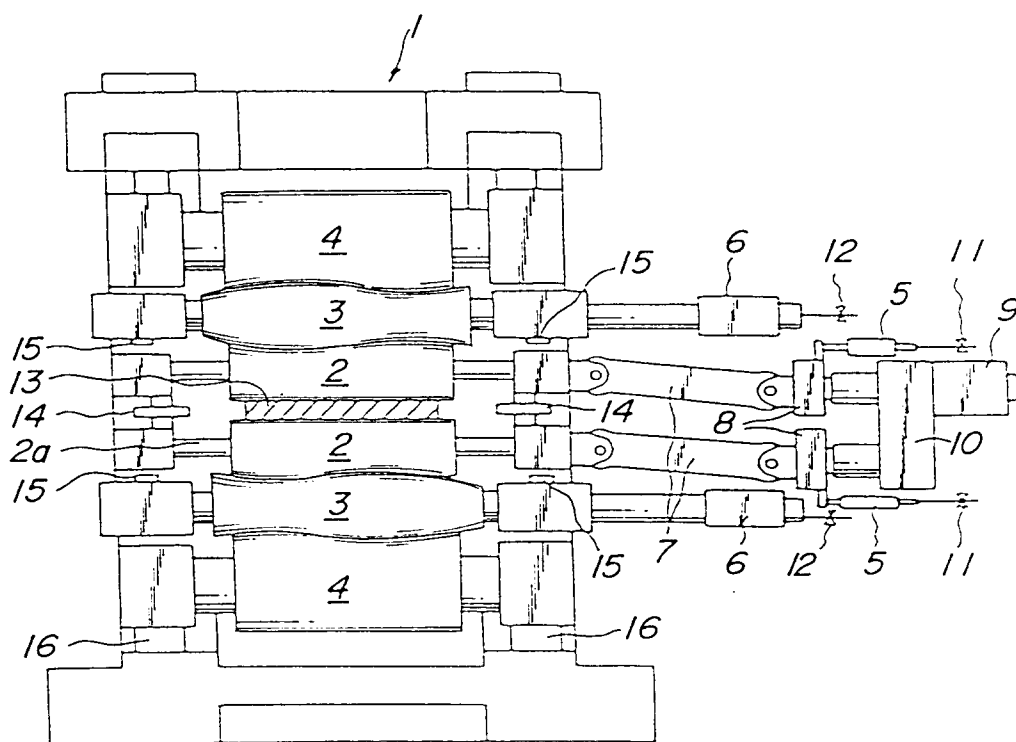
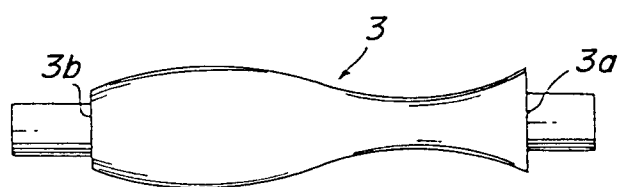


FIG. 2

(a)



(b)

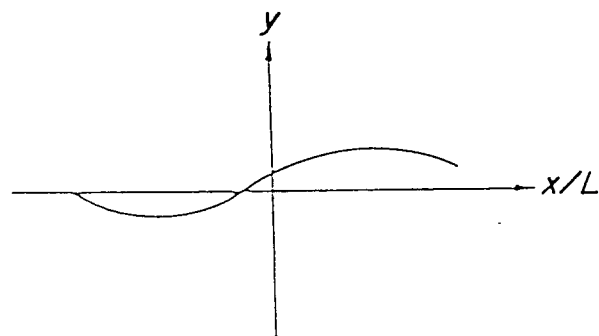
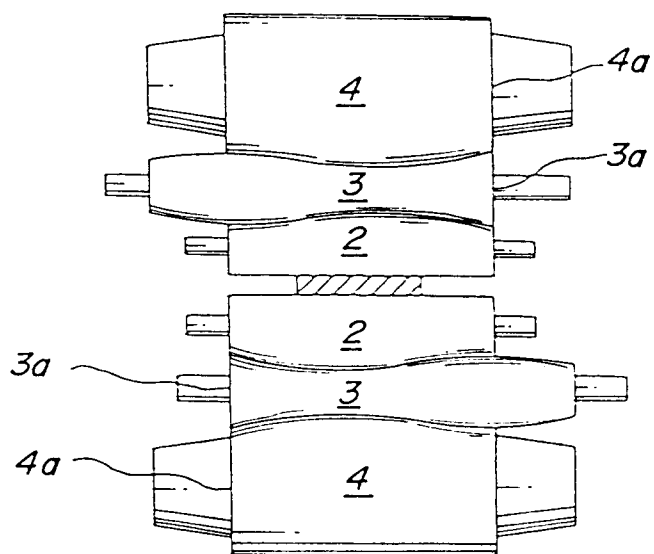


FIG. 3

(a)



(b)

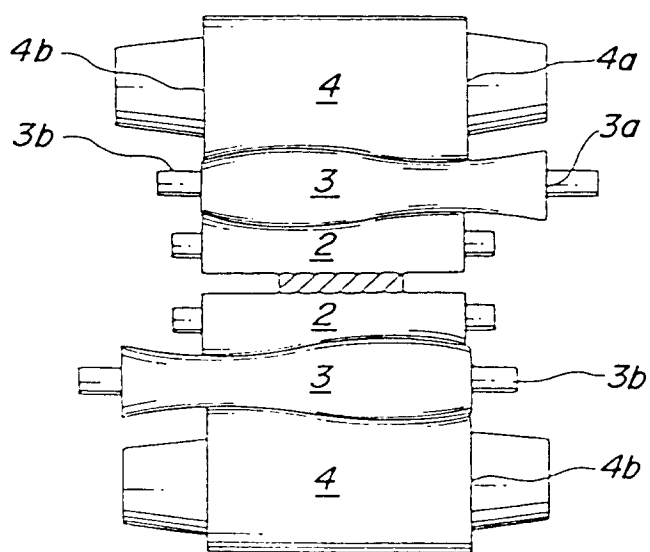


FIG. 4

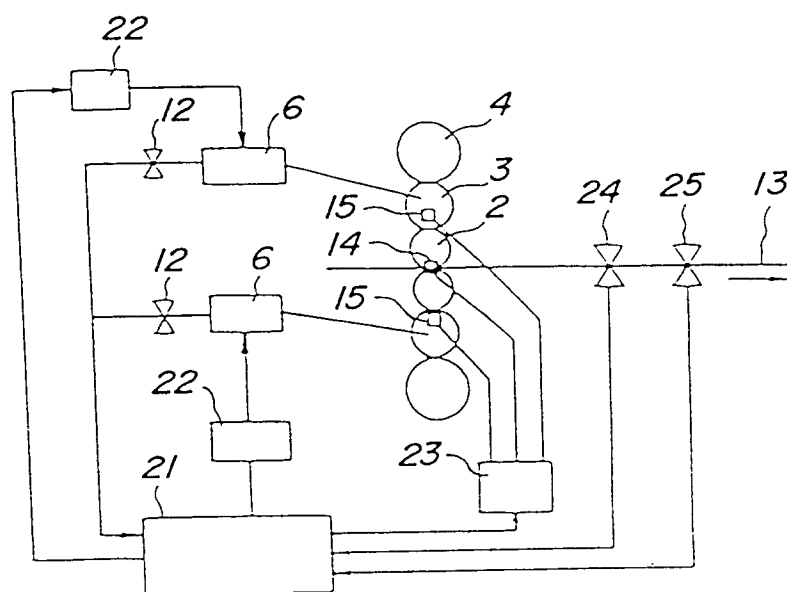


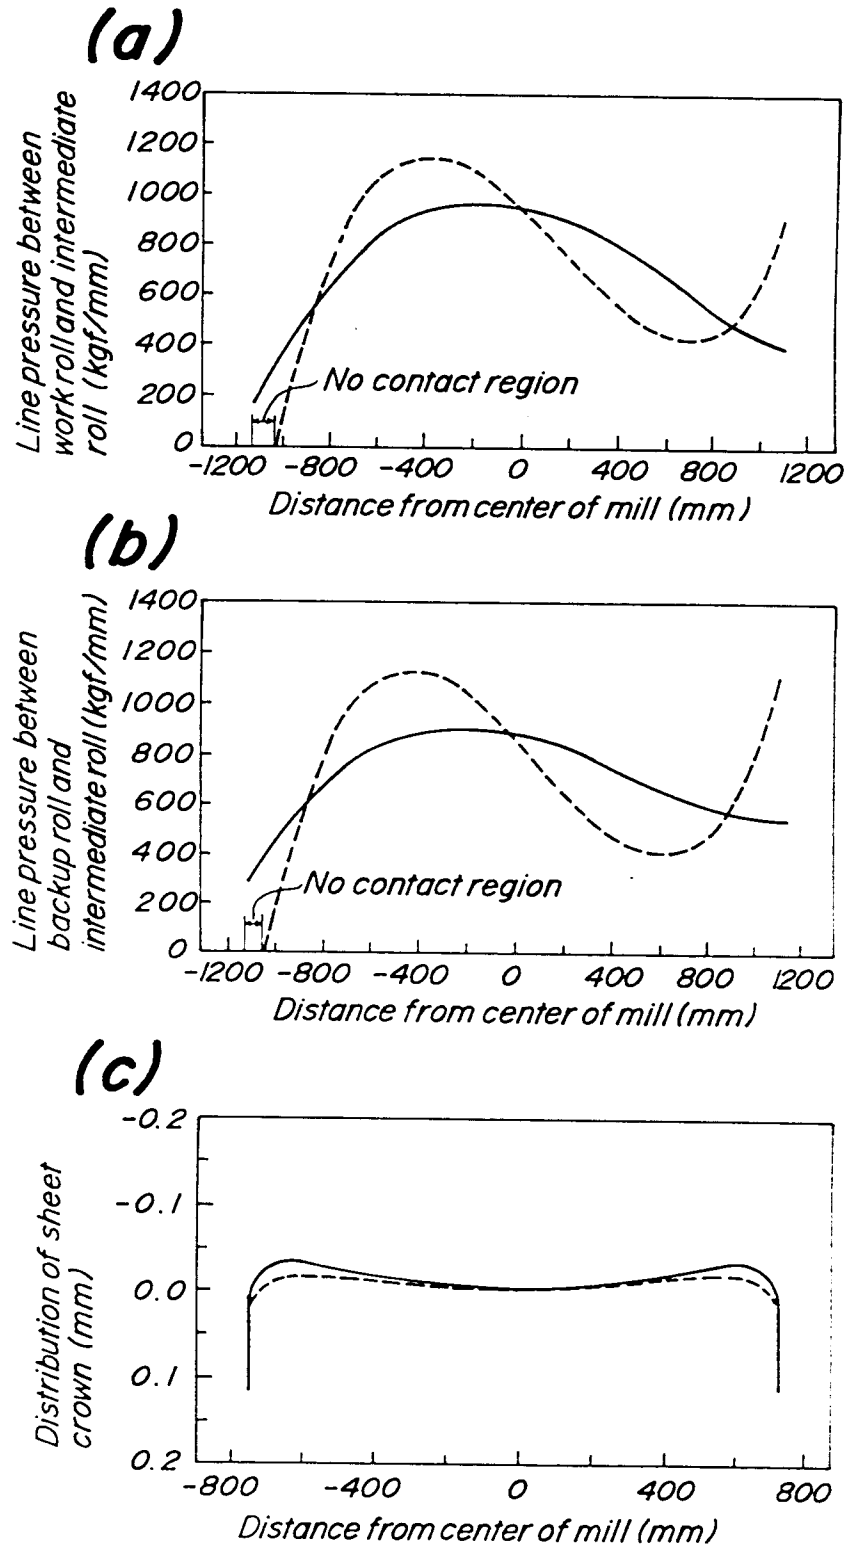
FIG. 5

FIG. 6

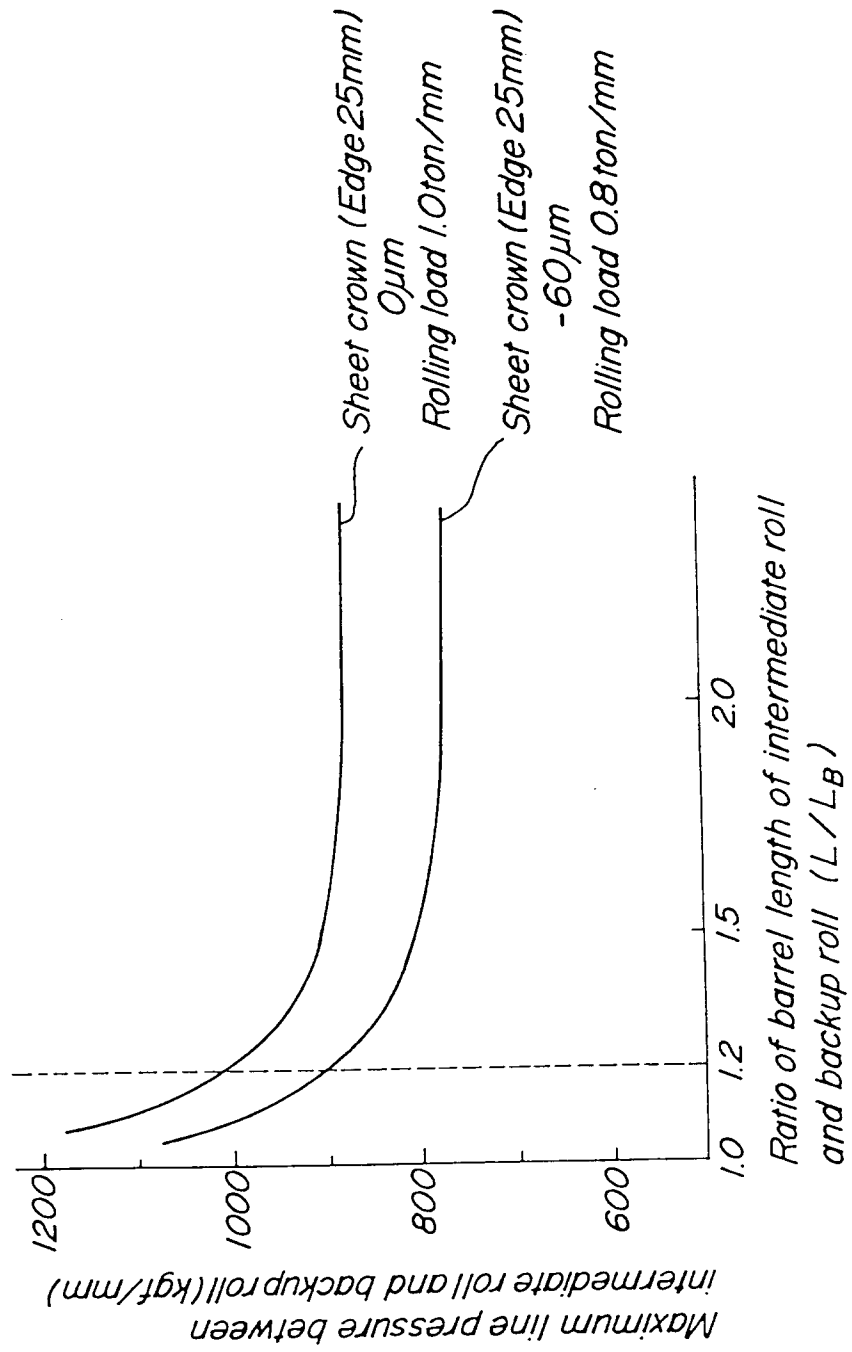


FIG. 7

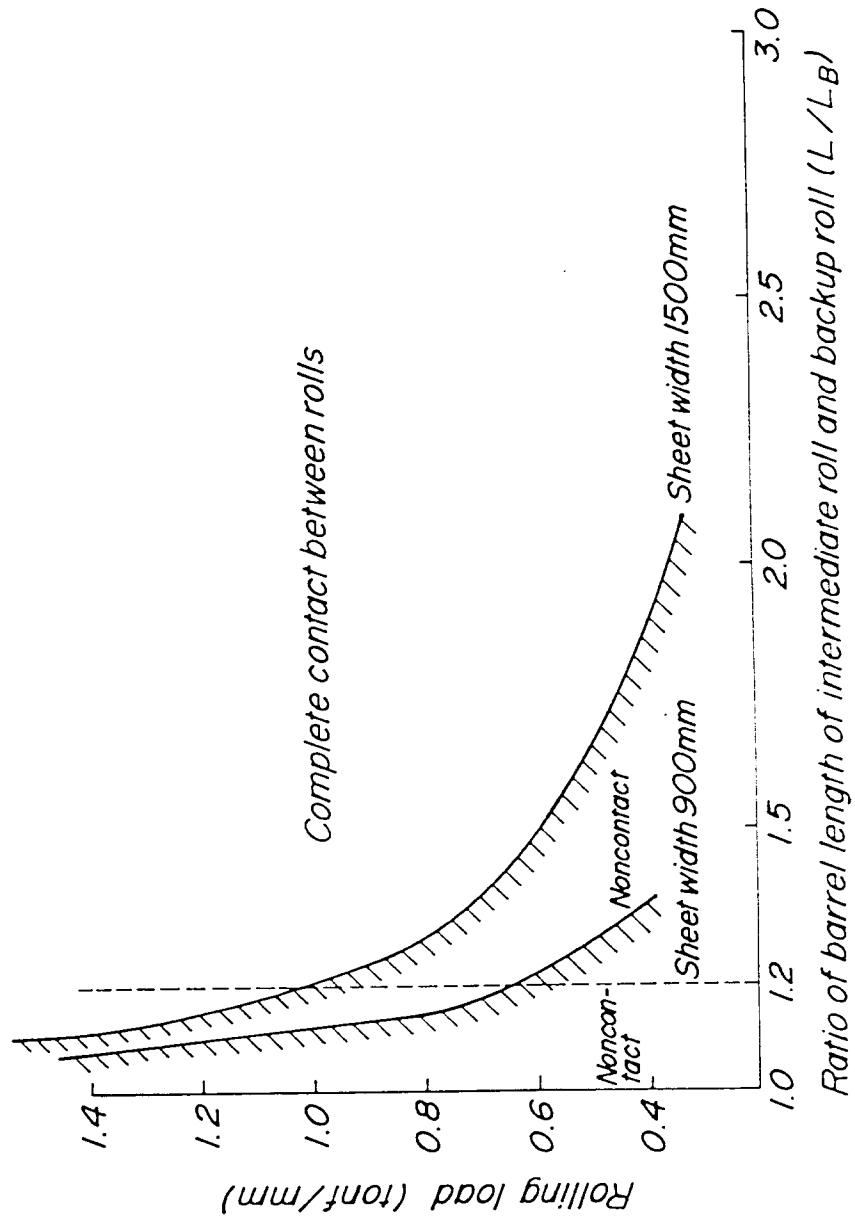


FIG. 8

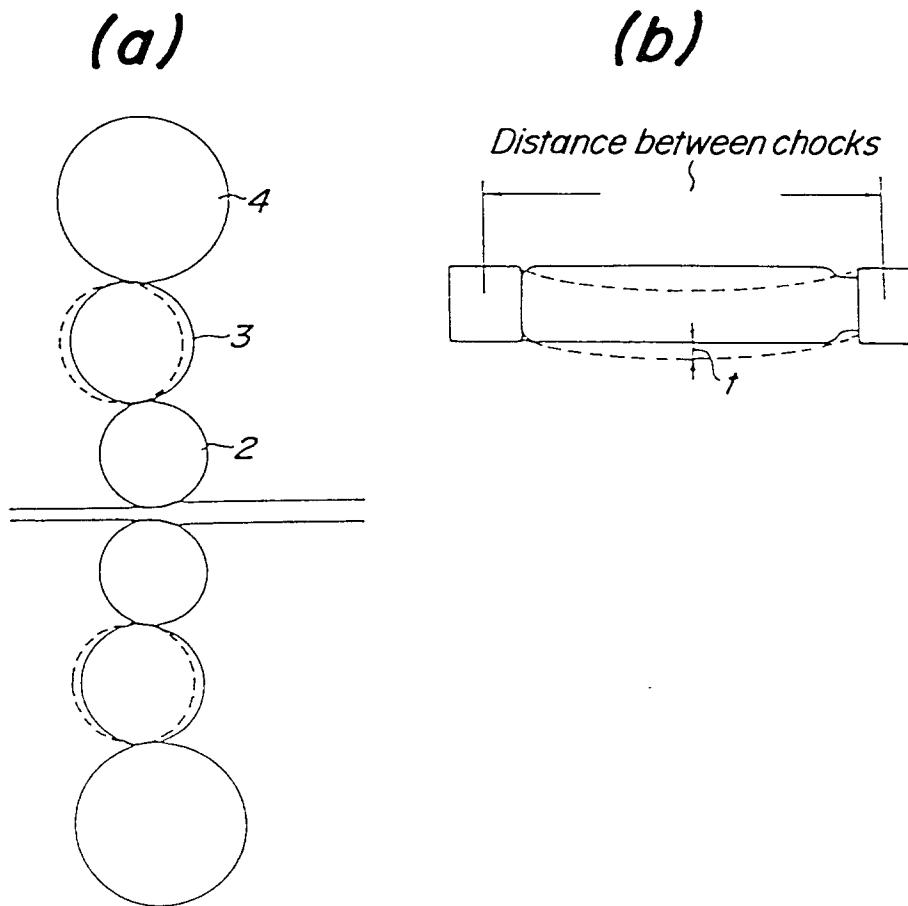


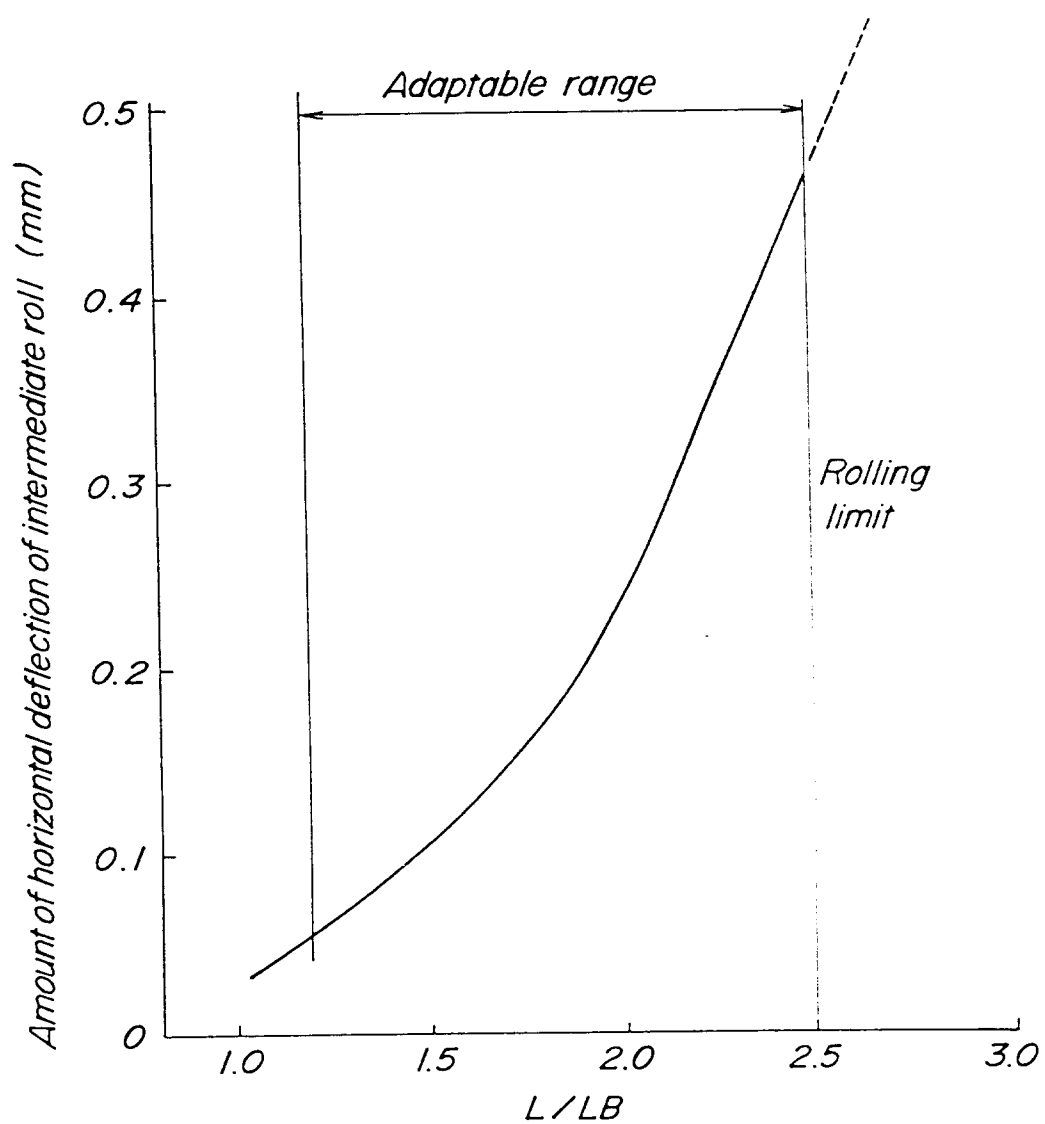
FIG. 9

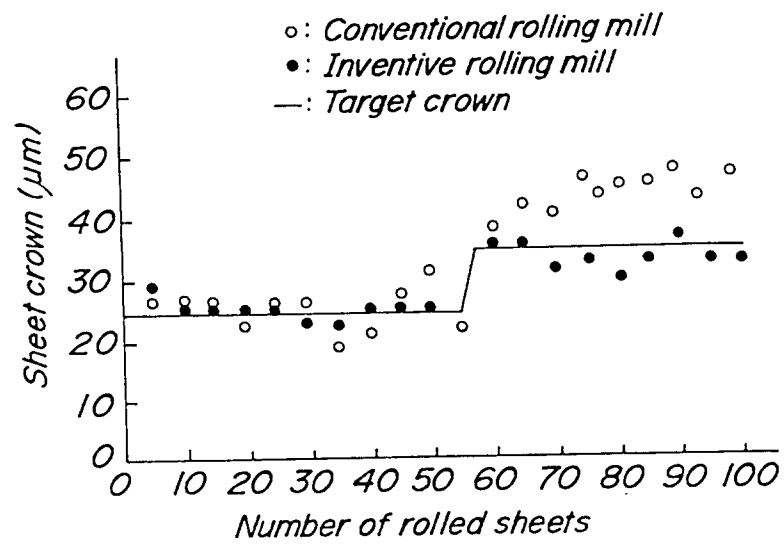
FIG. 10

FIG. 11

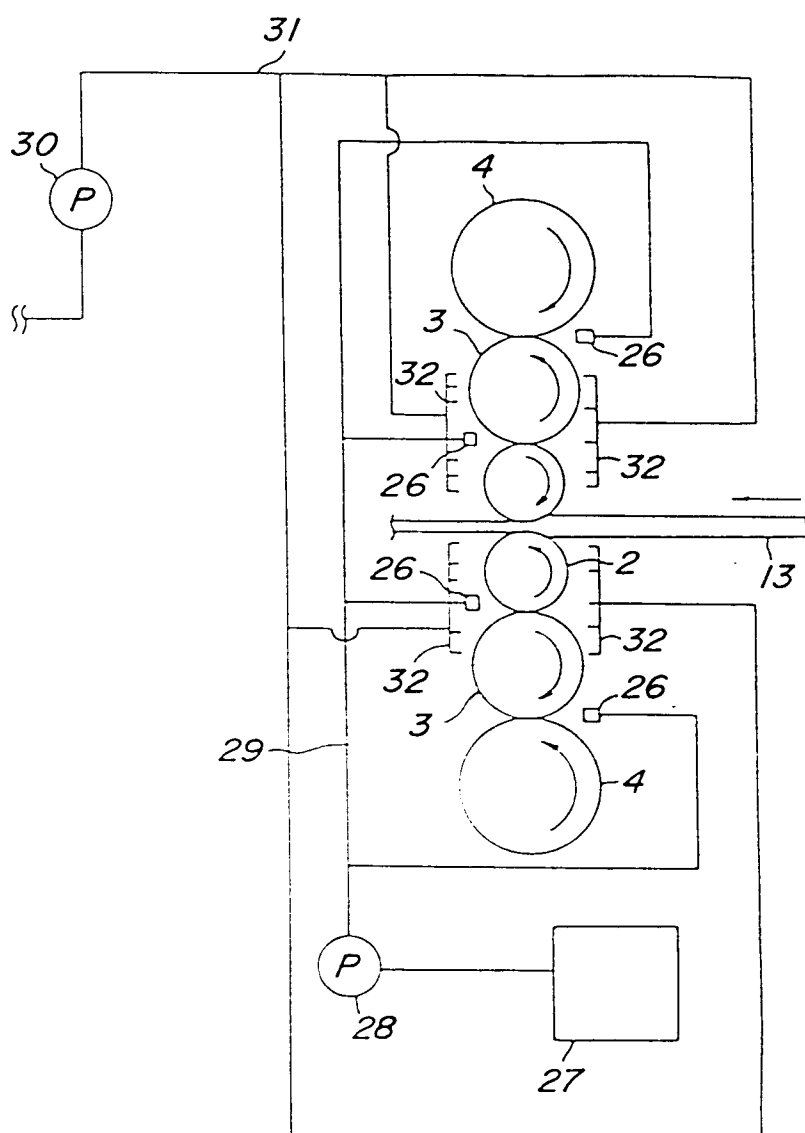


FIG. 12

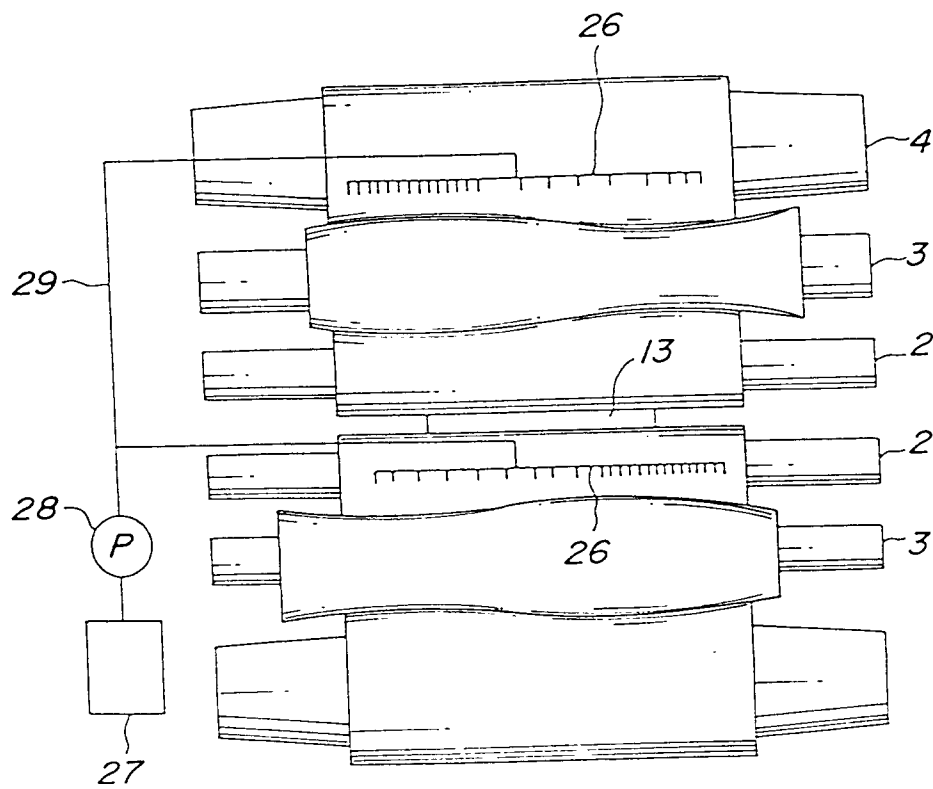


FIG. 13

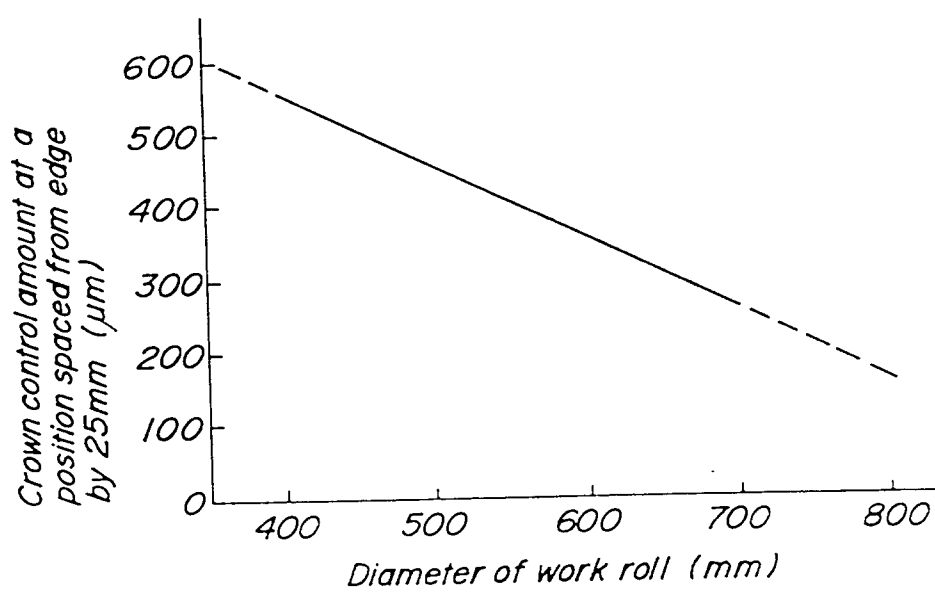


FIG. 14

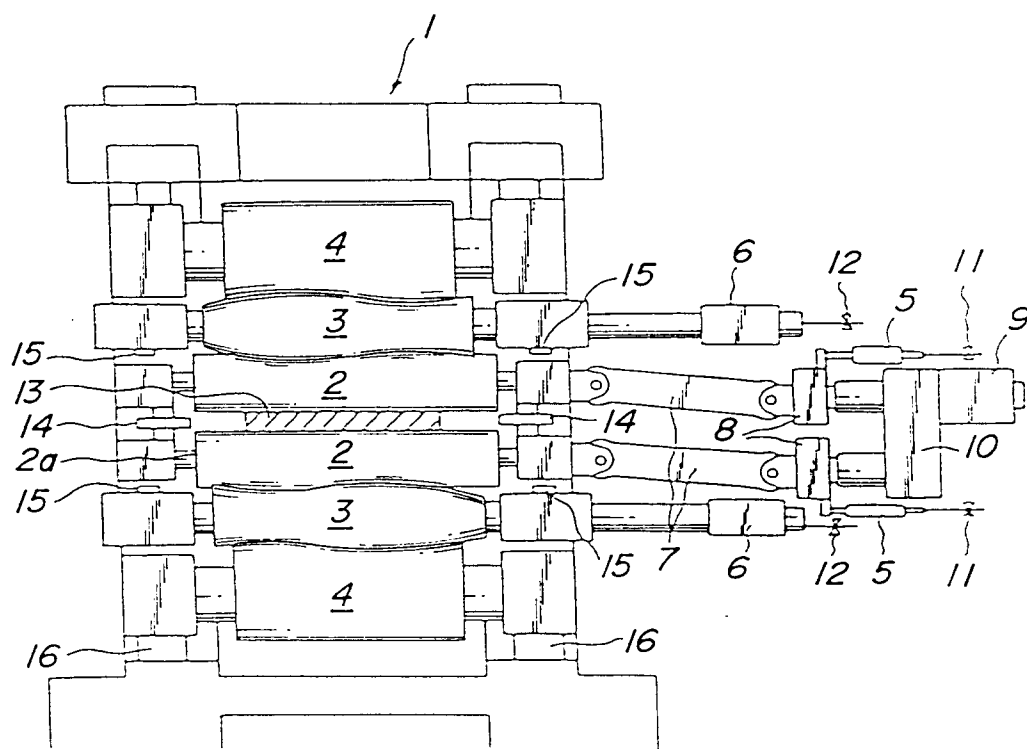


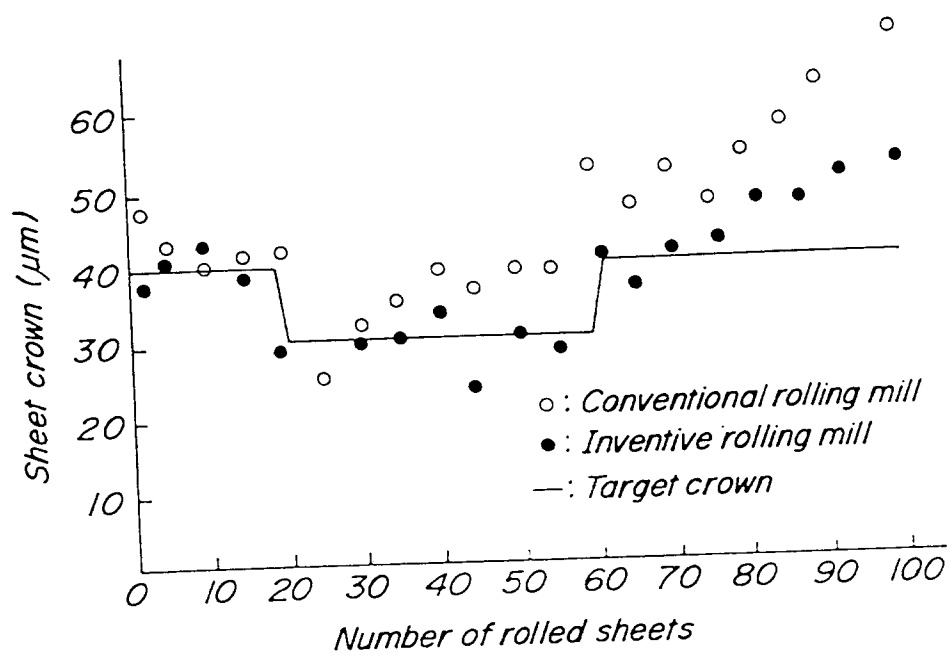
FIG. 15

FIG. 16

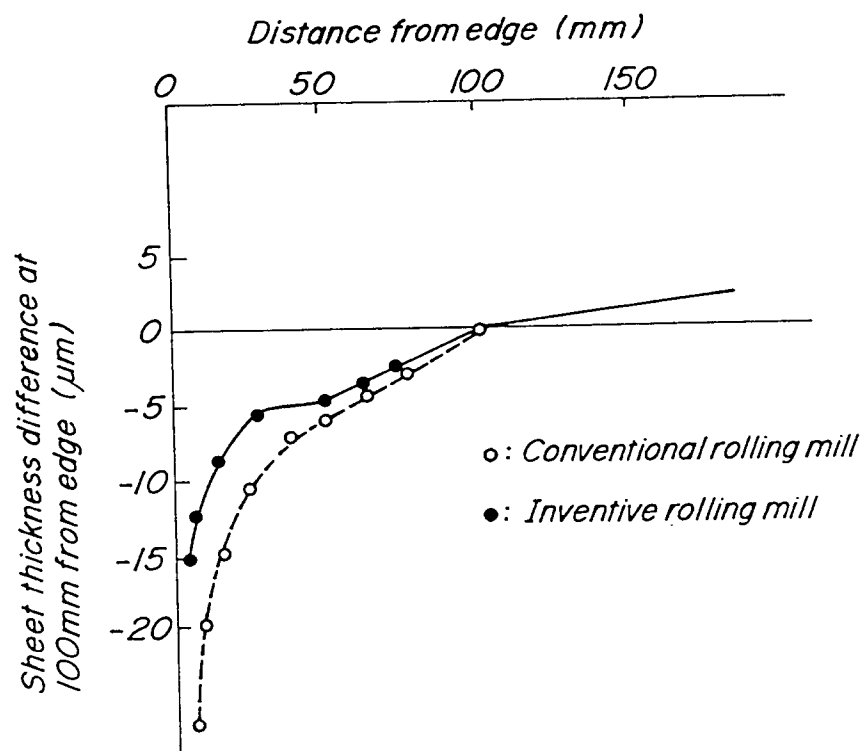


FIG. 17

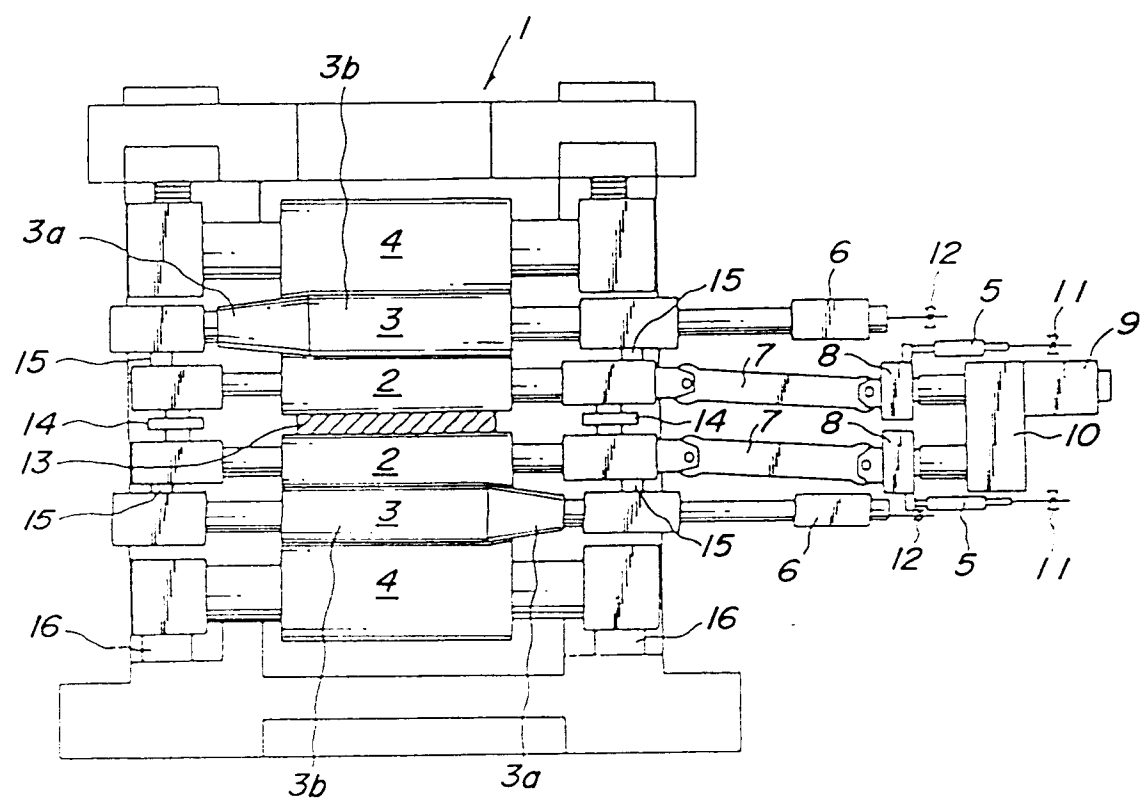
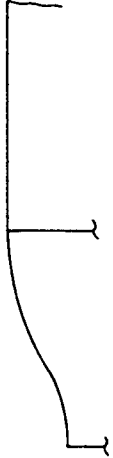
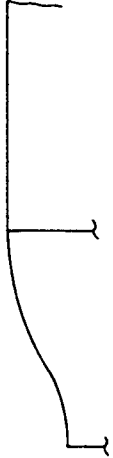




FIG. 18

	Shape (3a)	Shape (3b)
Sine · cosine curve shape		
2th, 4th, 6th order function curve shape		

(a)

(b)

FIG. 19

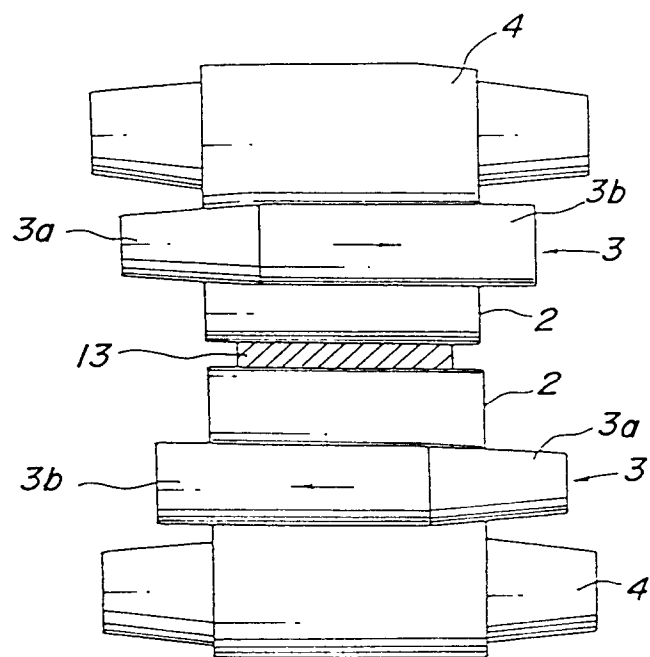


FIG. 20

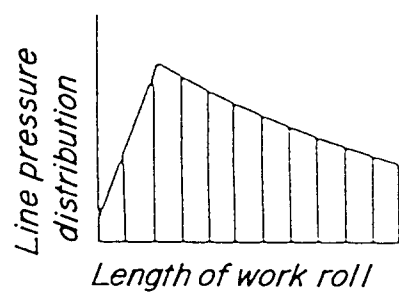


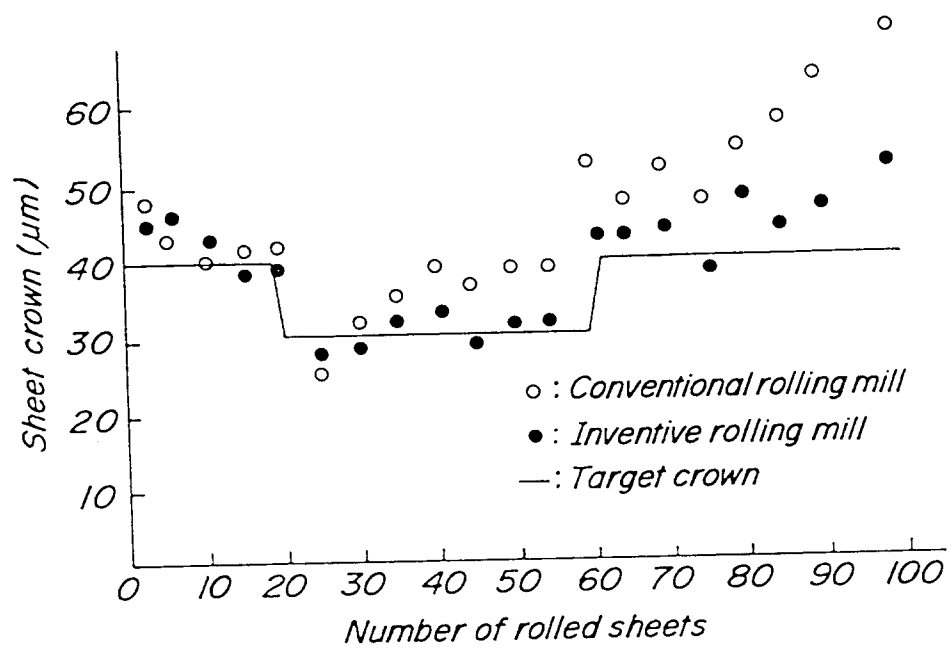
FIG. 21

FIG. 22

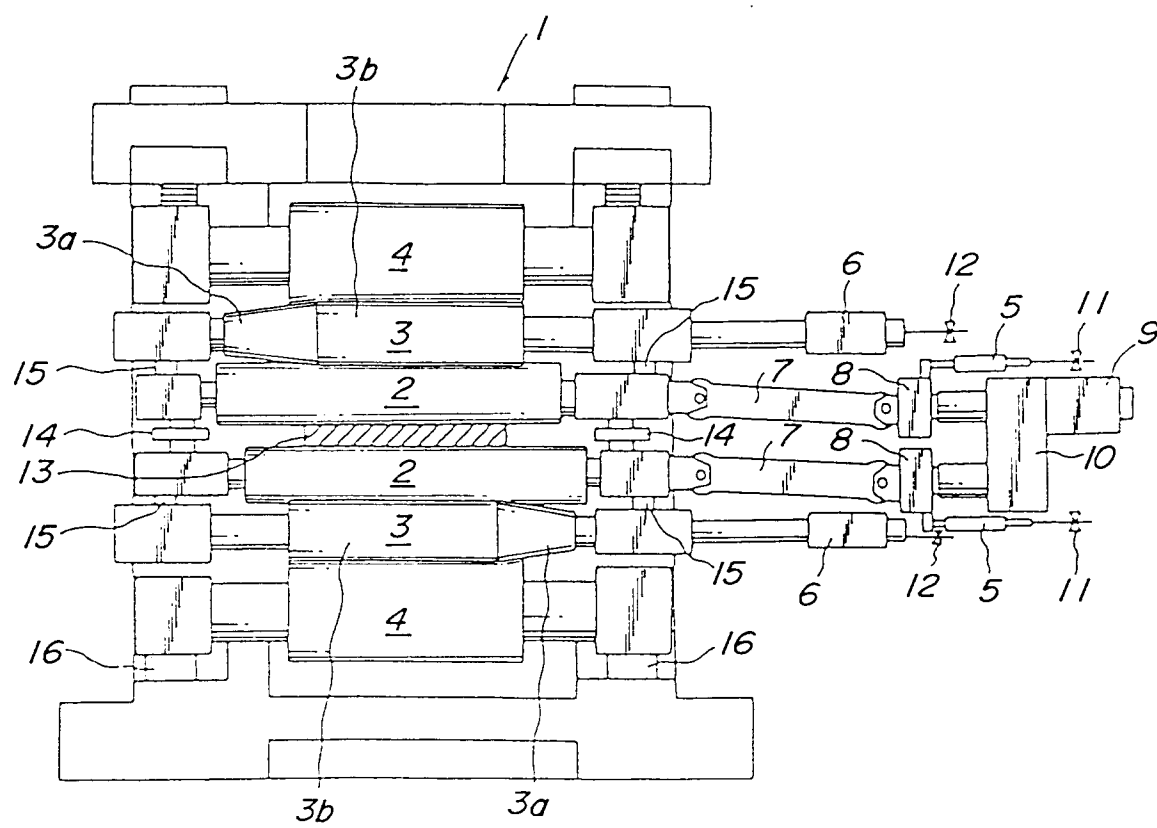


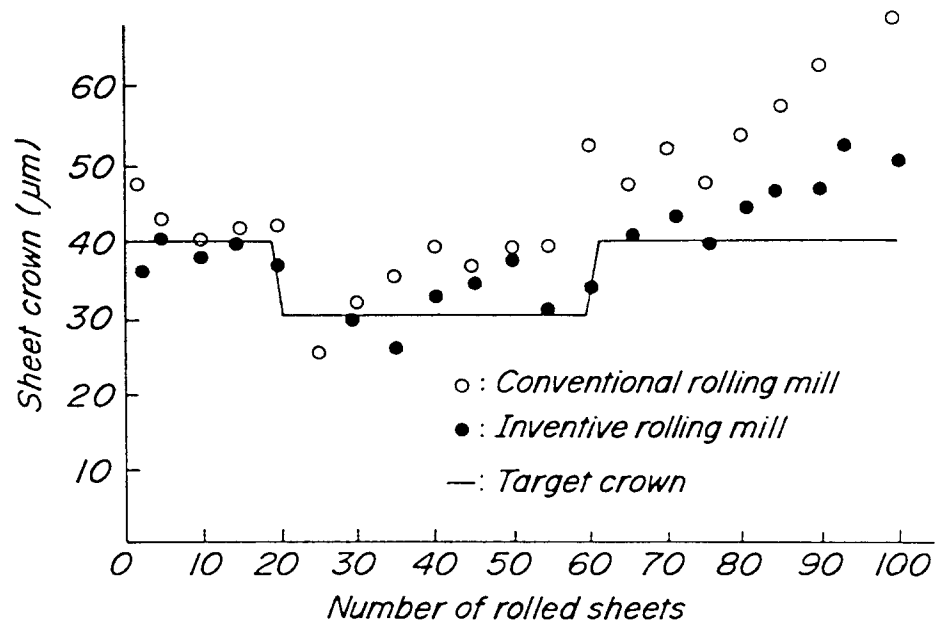
FIG. 23

FIG. 24

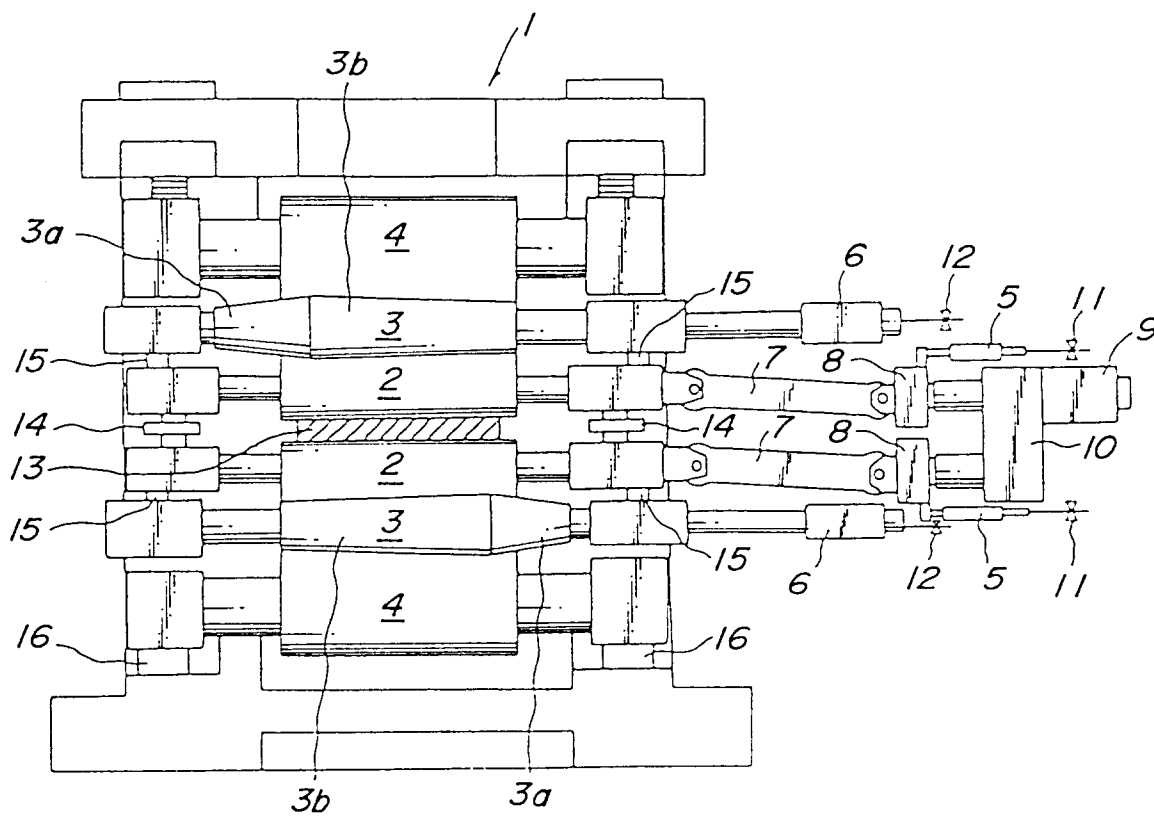


FIG. 25

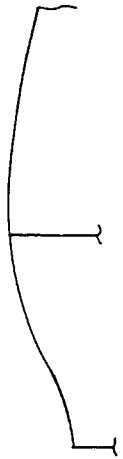

	<i>Shape</i>
<i>Sine · cosine curve shape</i>	
<i>2th, 4th, 6th order function curve shape</i>	

FIG. 26

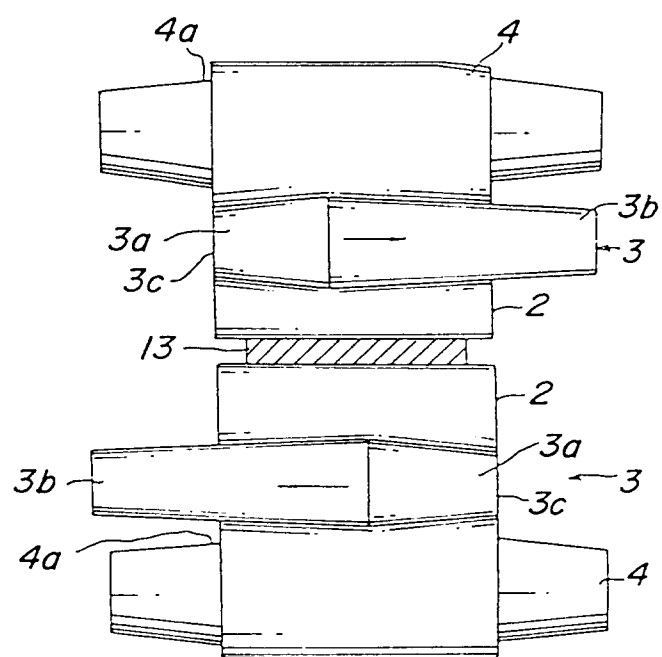


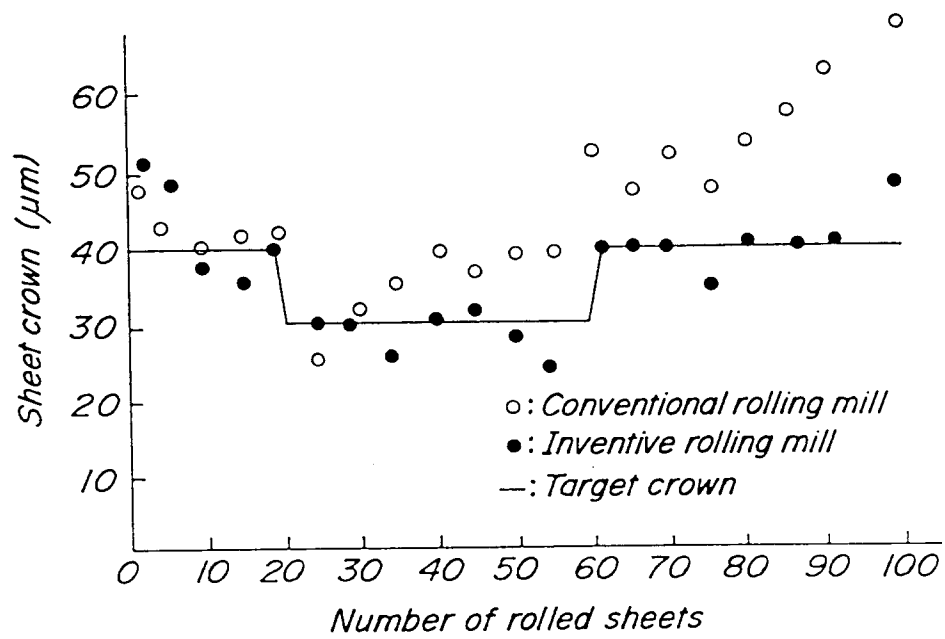
FIG. 27

FIG. 28

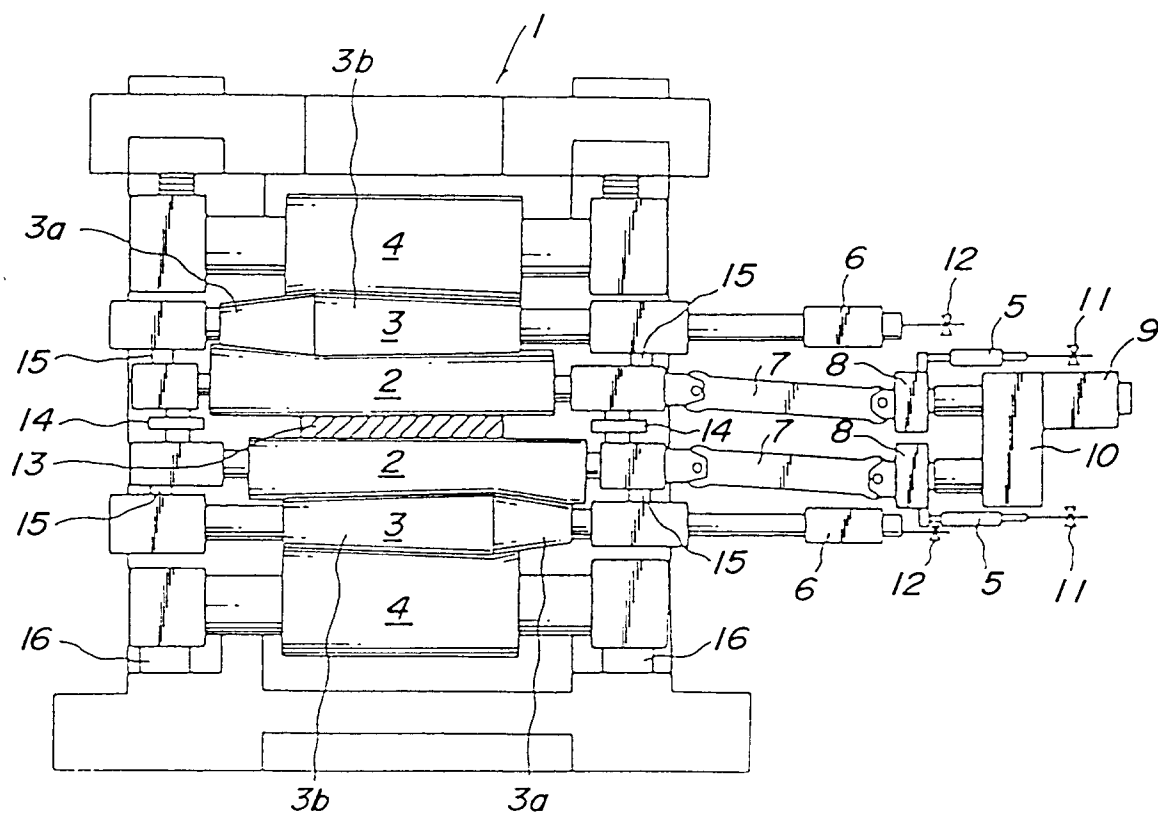


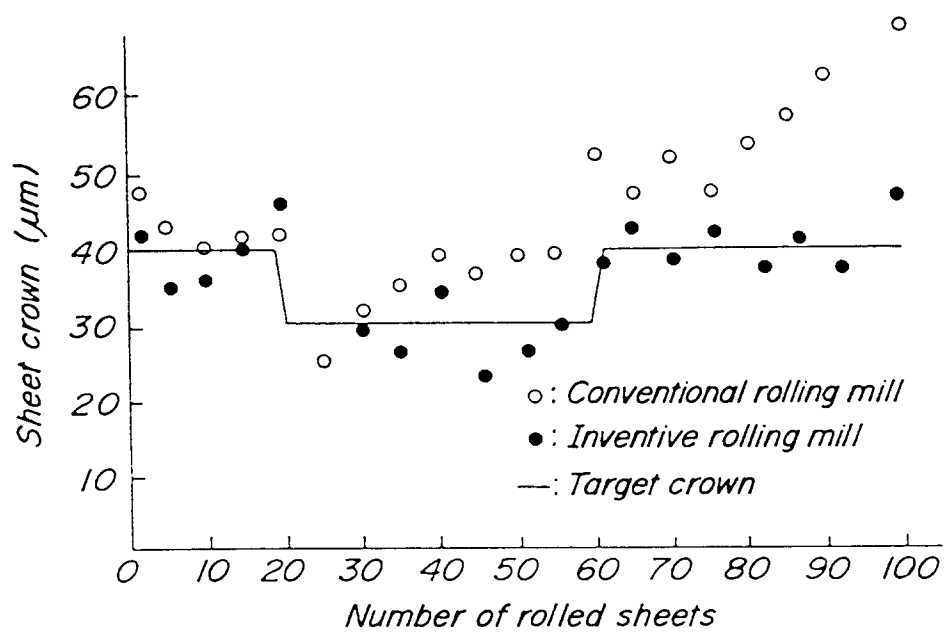
FIG. 29

FIG. 30

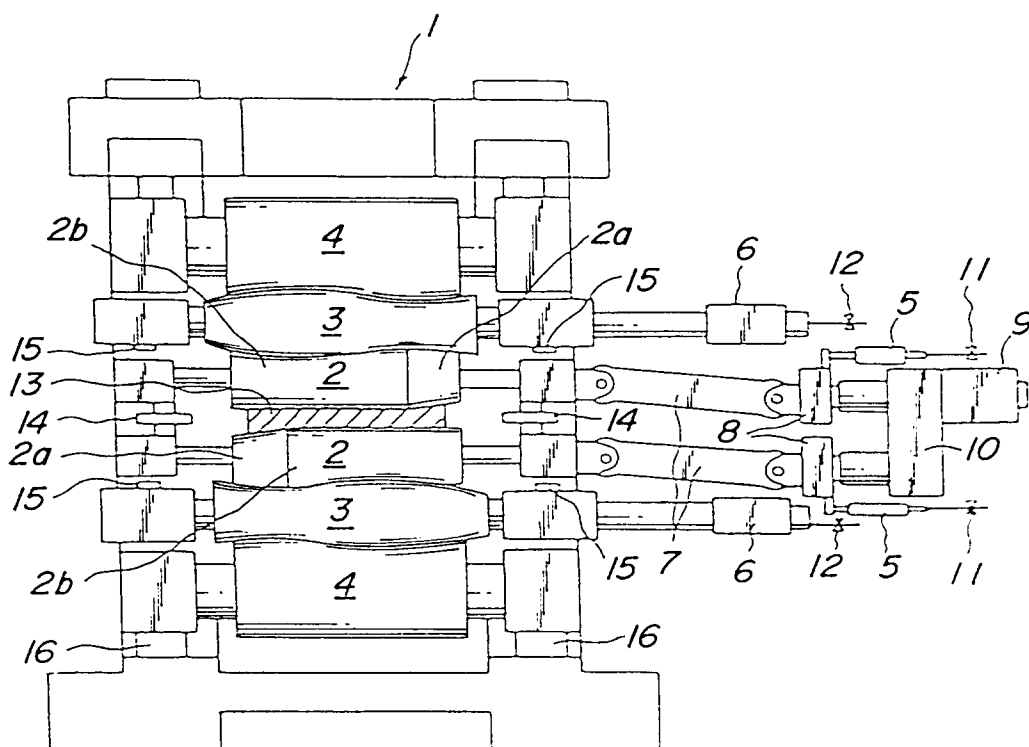


FIG. 31

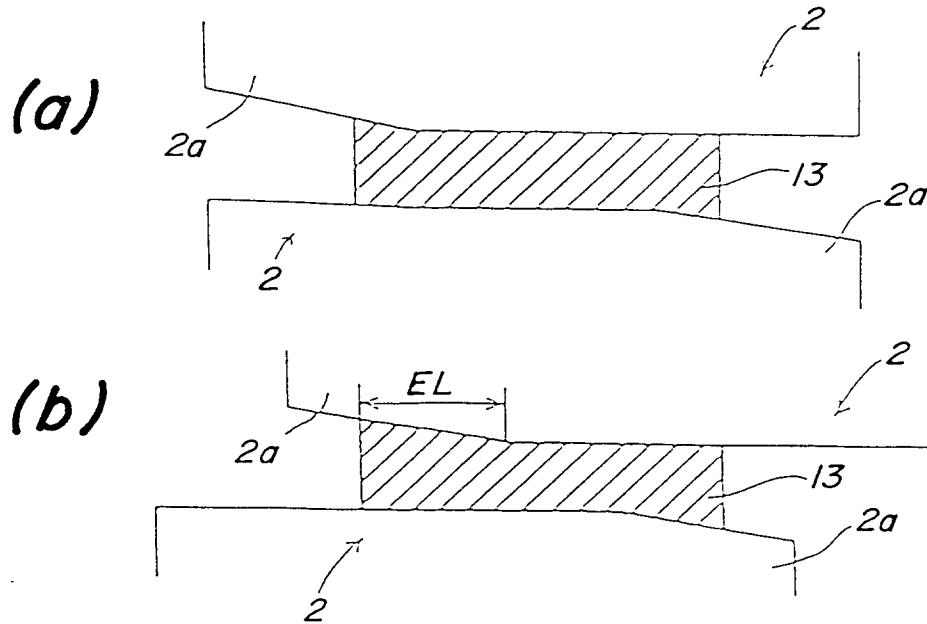


FIG. 32

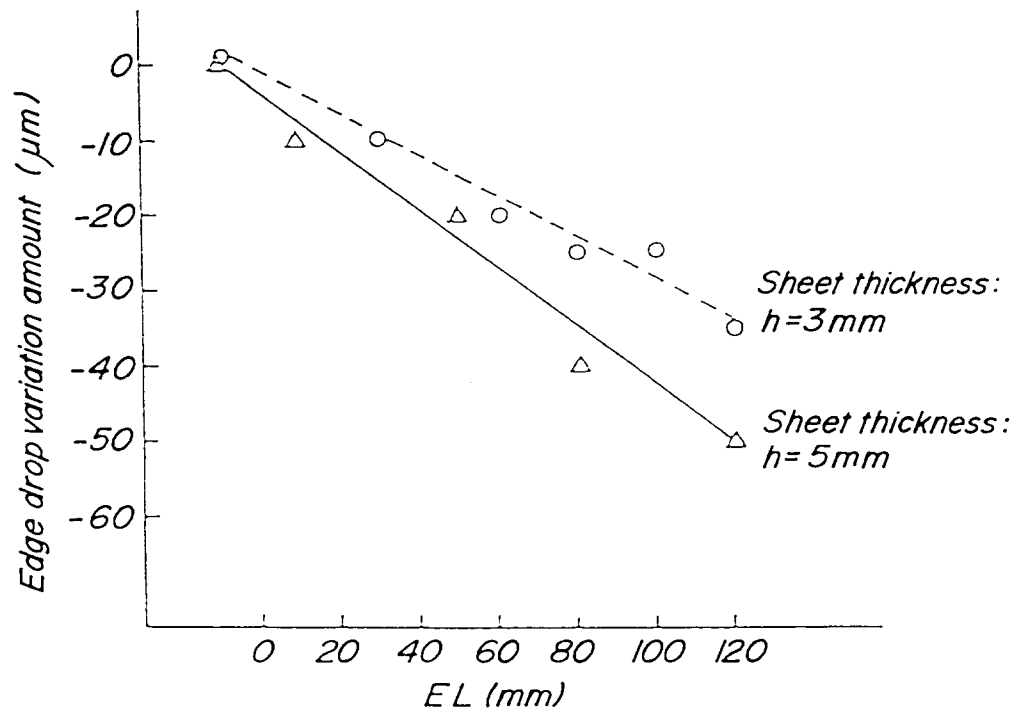


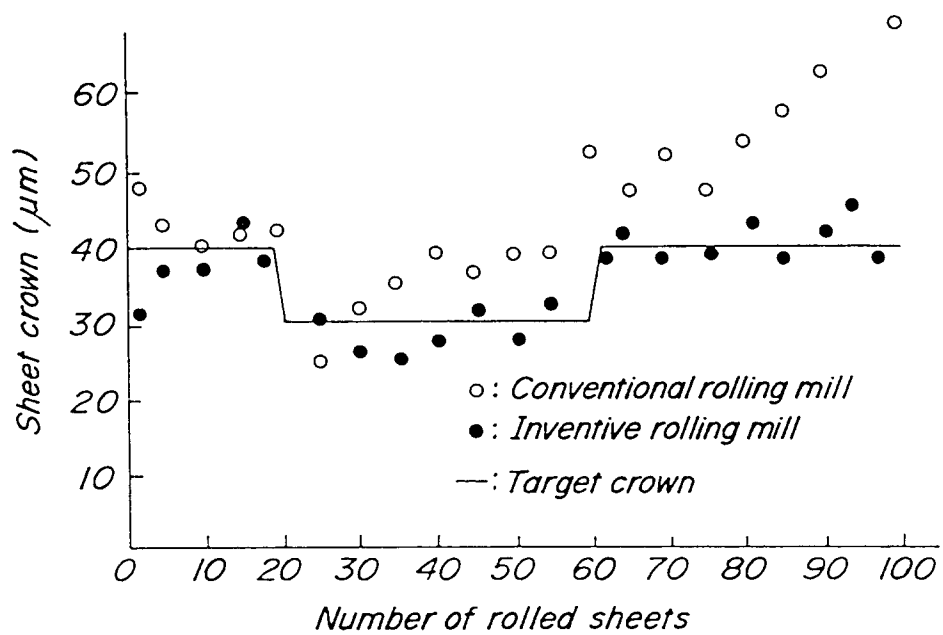
FIG. 33

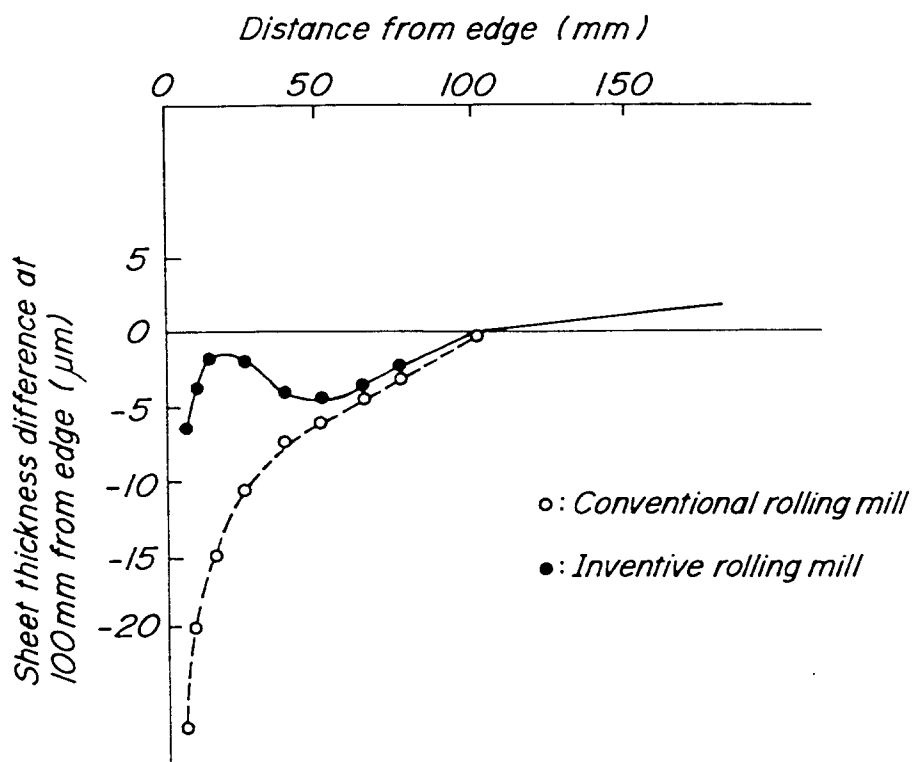
FIG. 34

FIG. 35

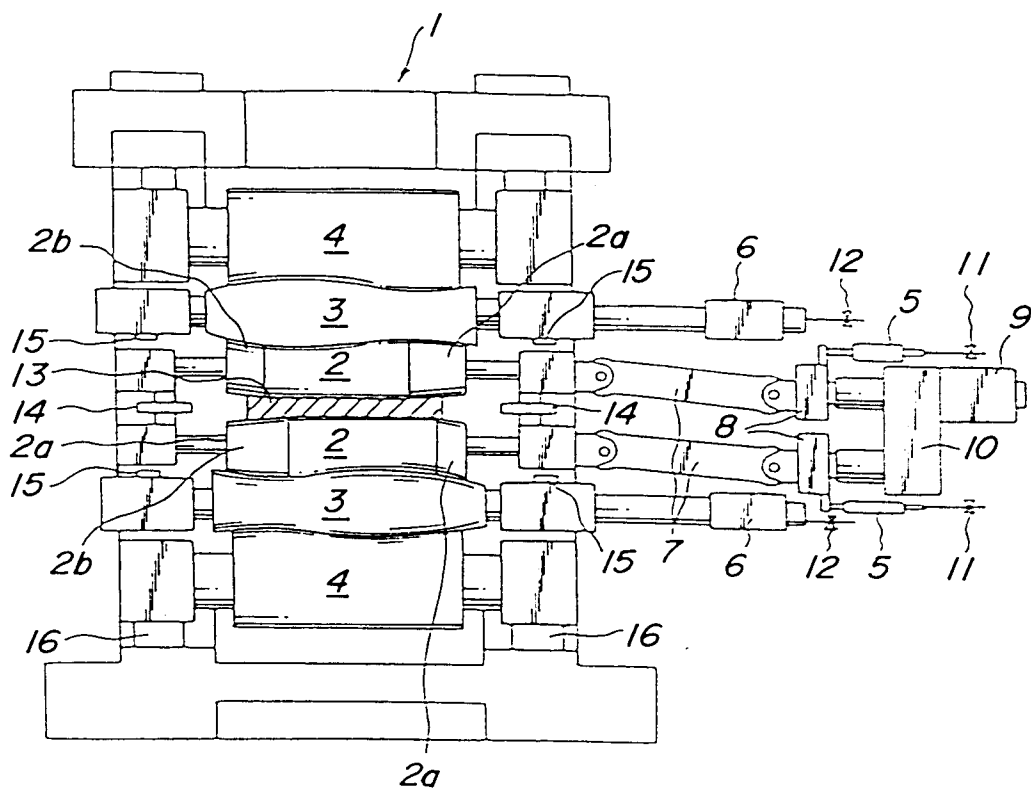


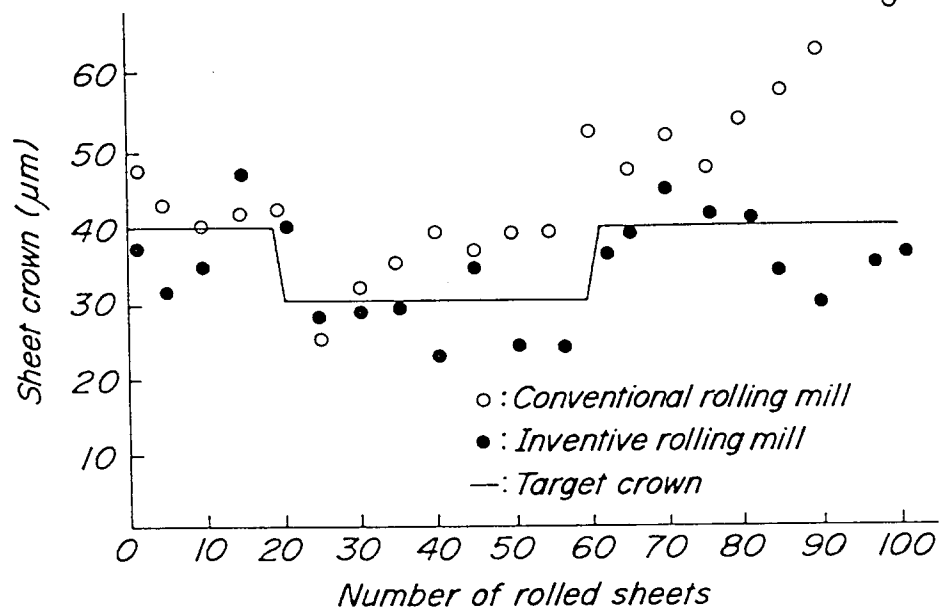
FIG.36

FIG. 37

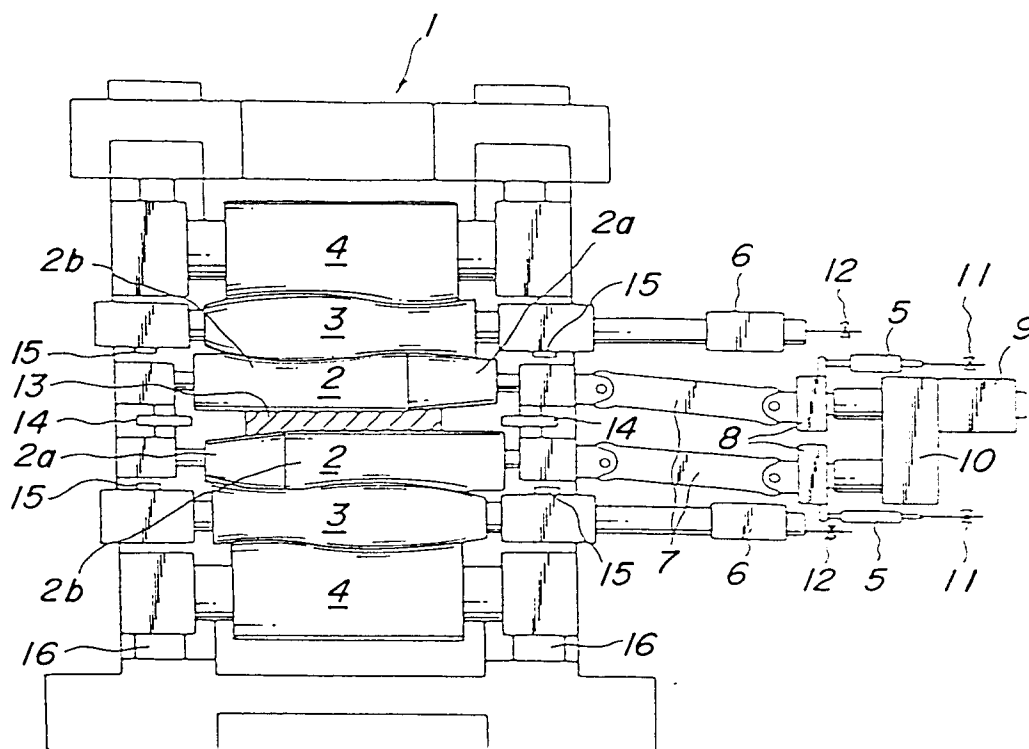


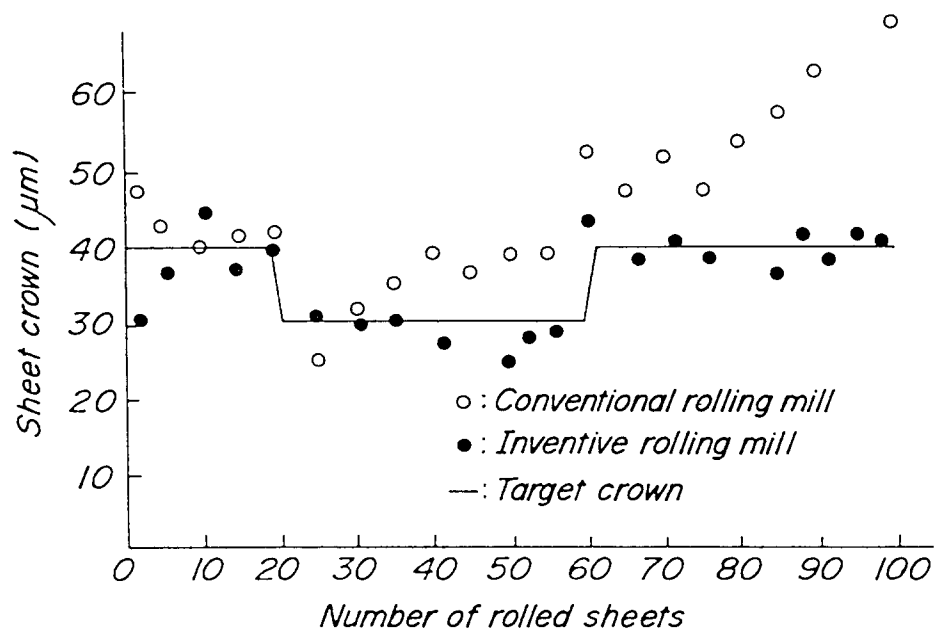
FIG. 38

FIG. 39

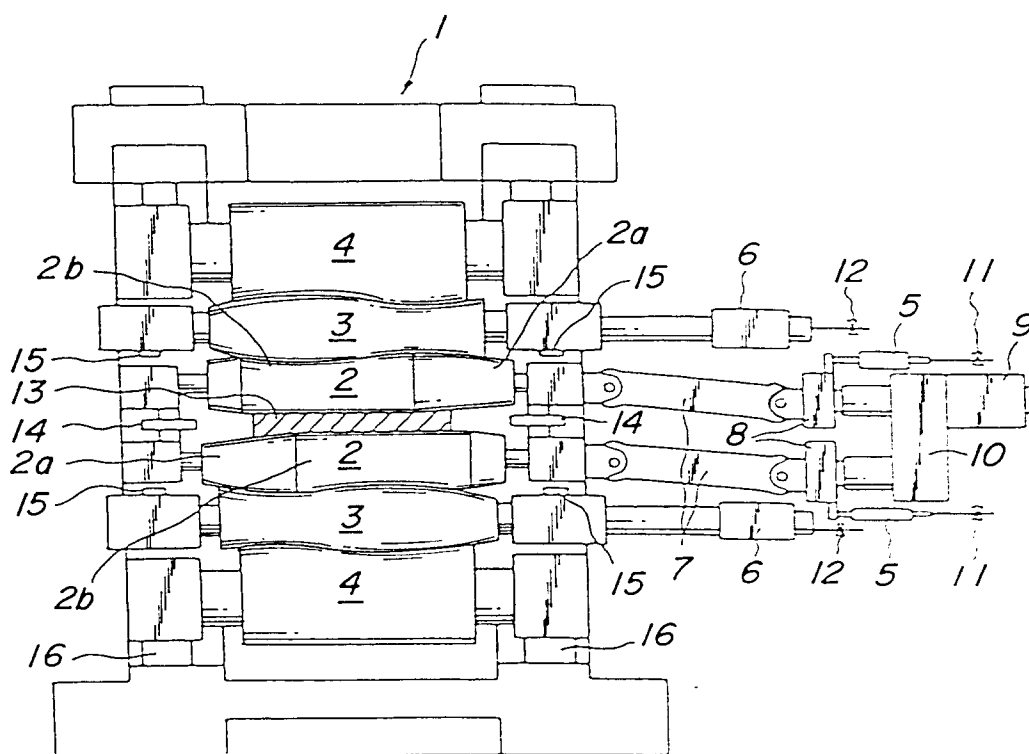


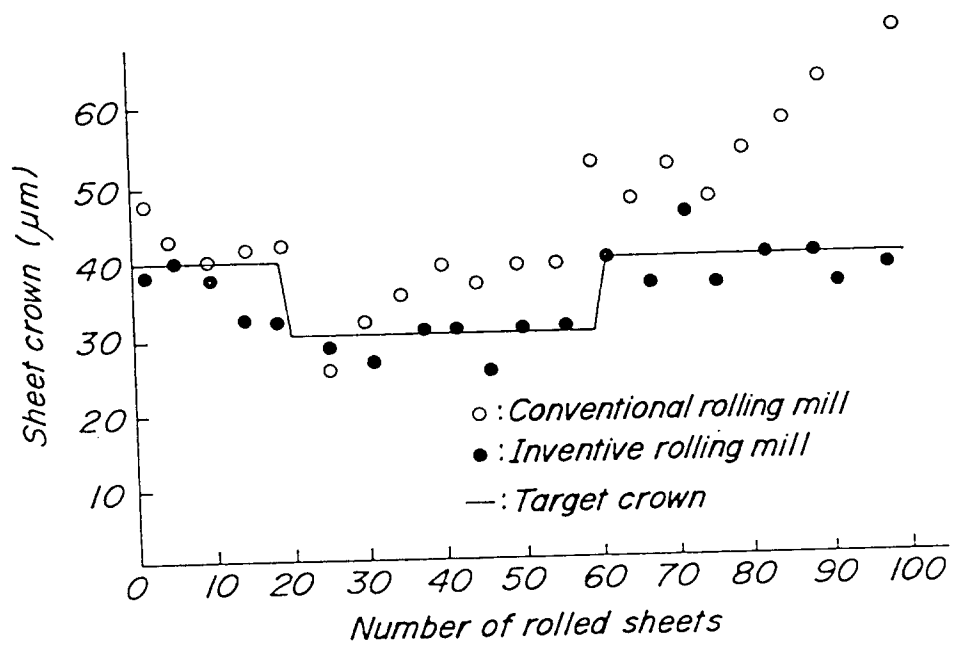
FIG. 40

FIG. 41

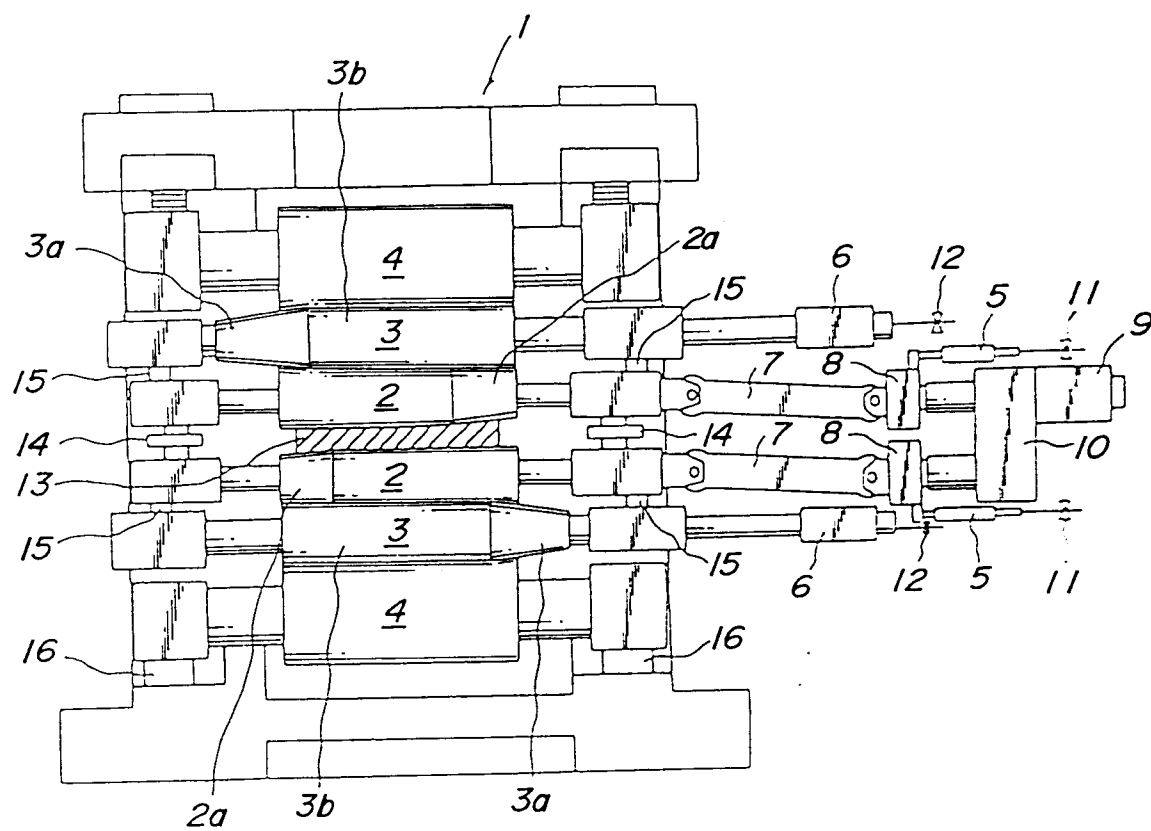


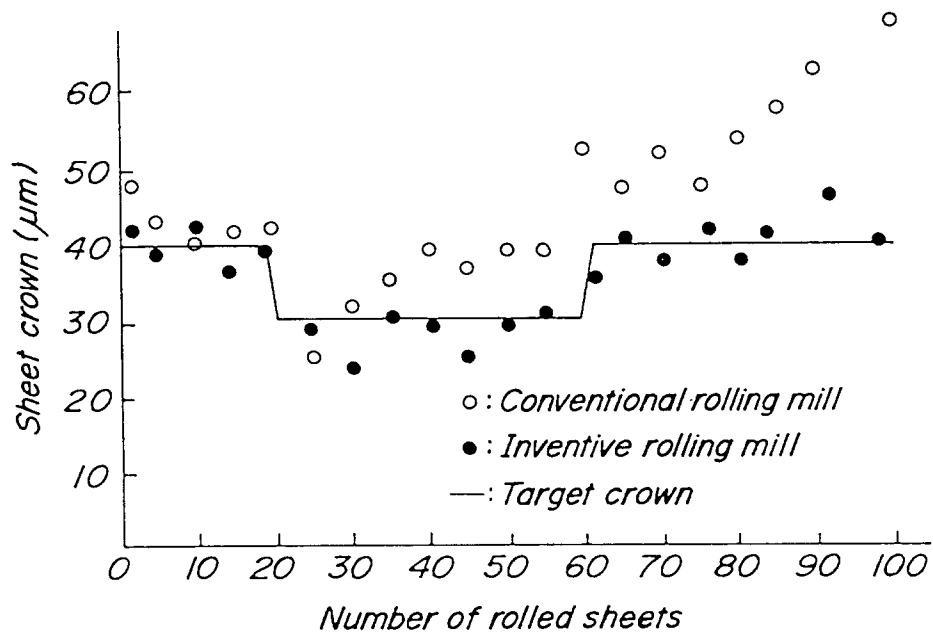
FIG. 42

FIG.43

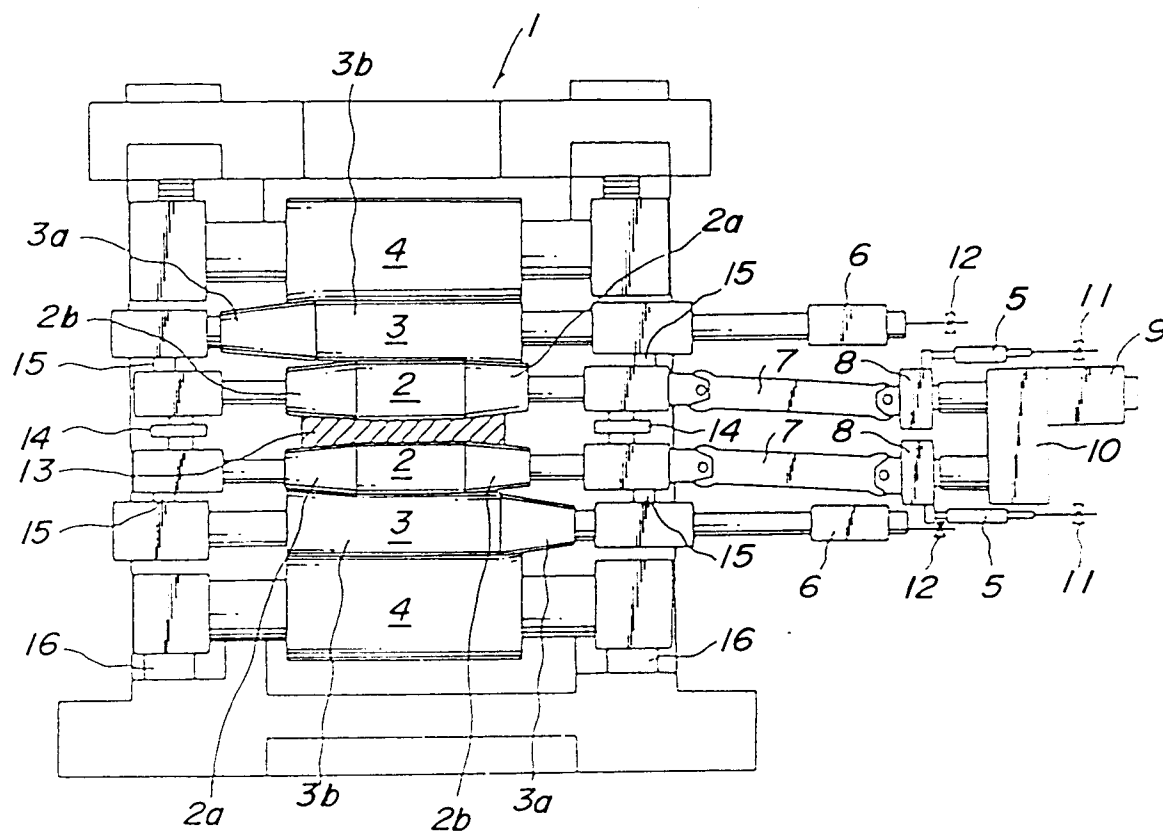


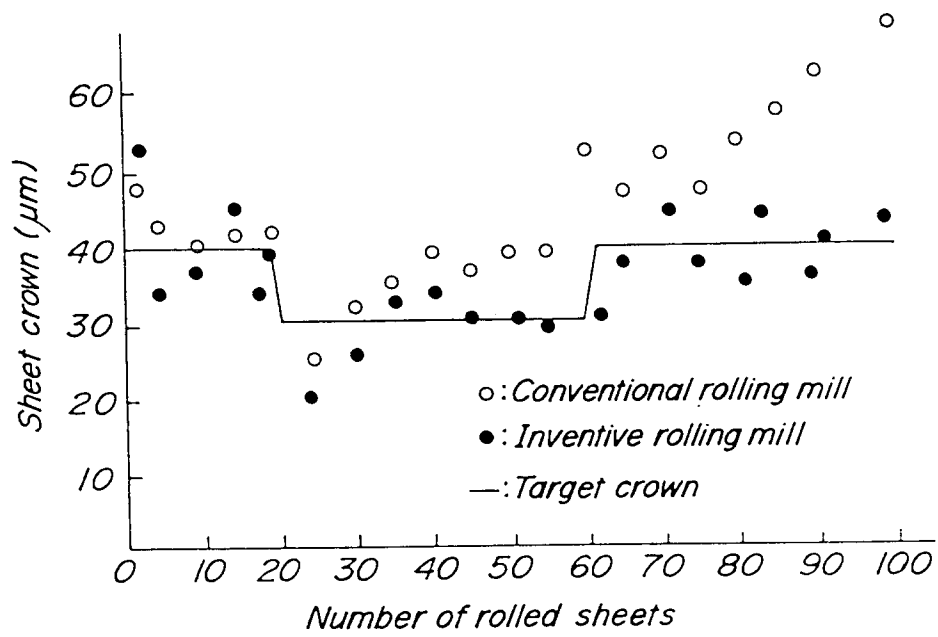
FIG. 44

FIG. 45

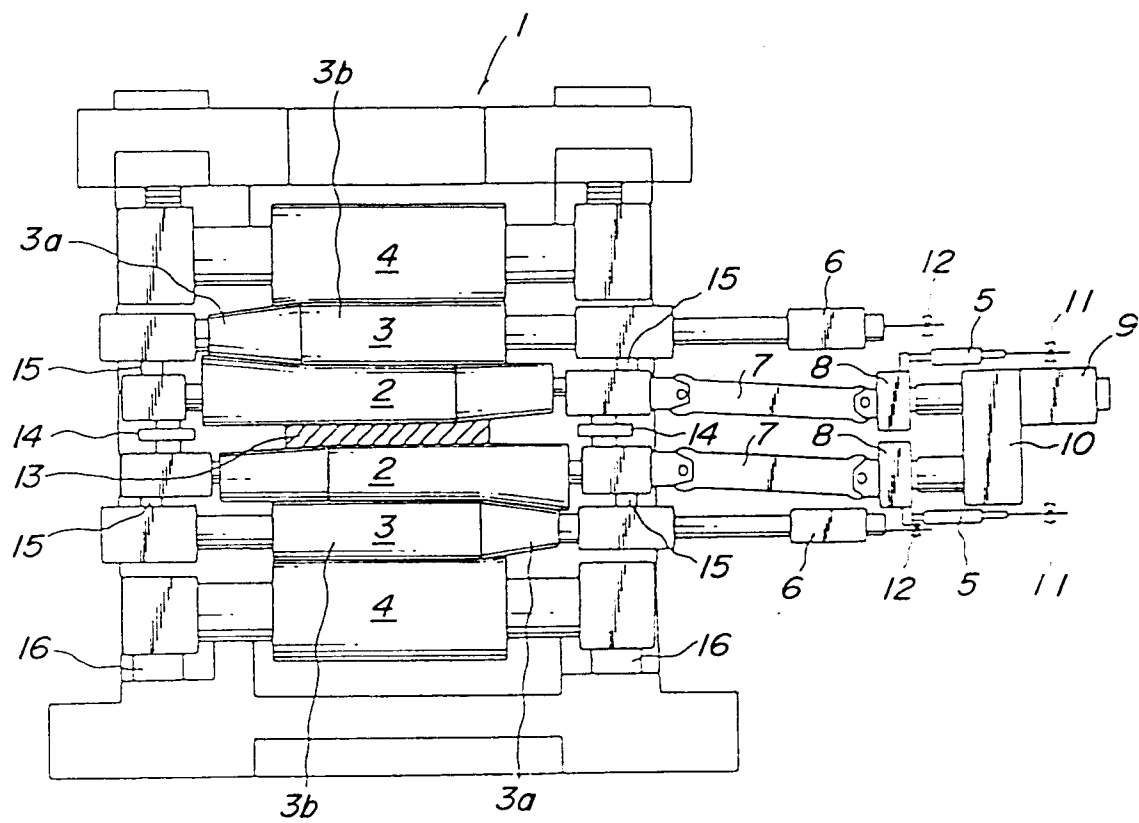


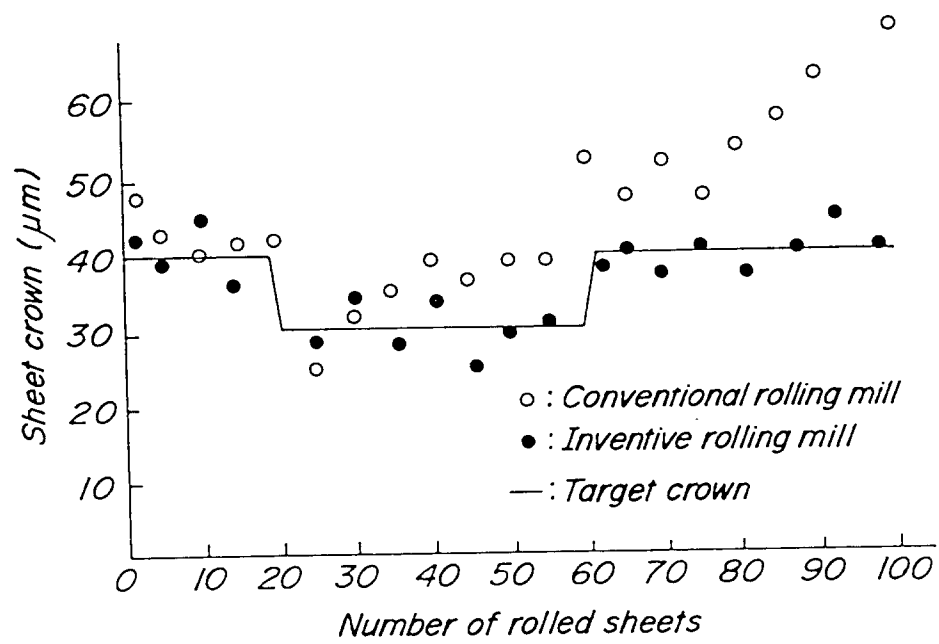
FIG.46

FIG.47

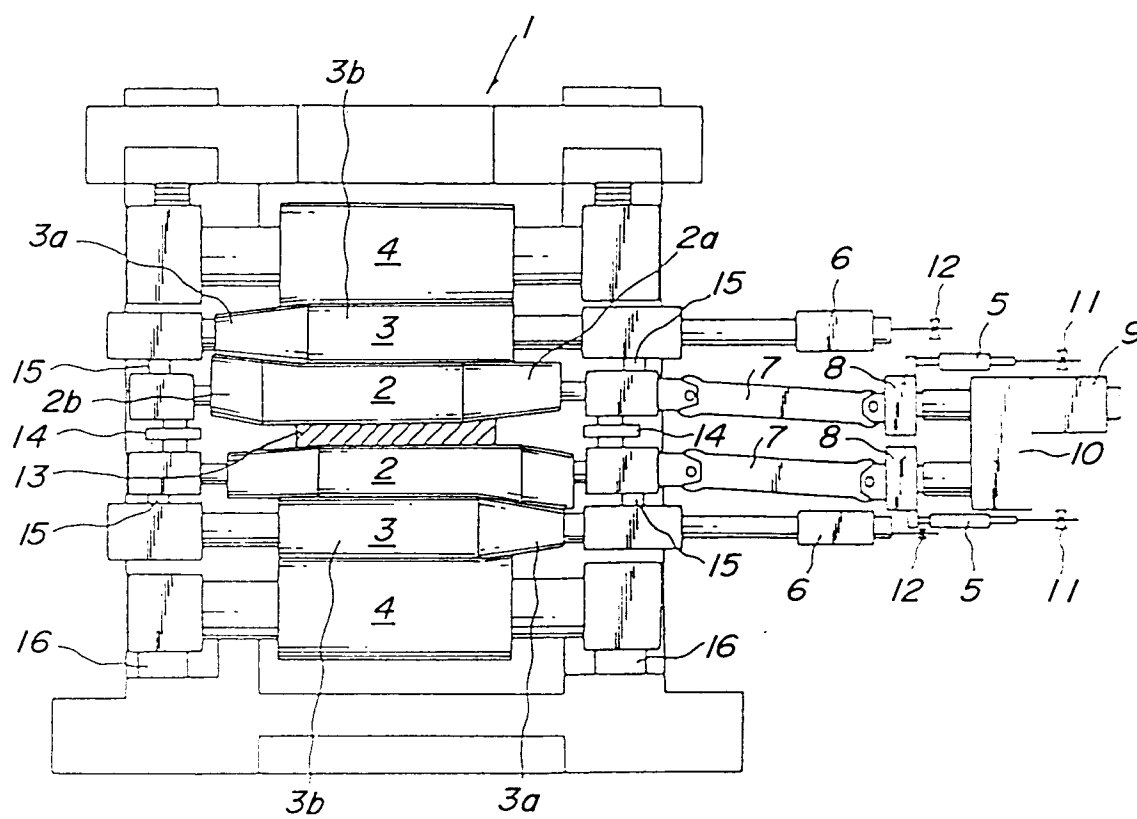


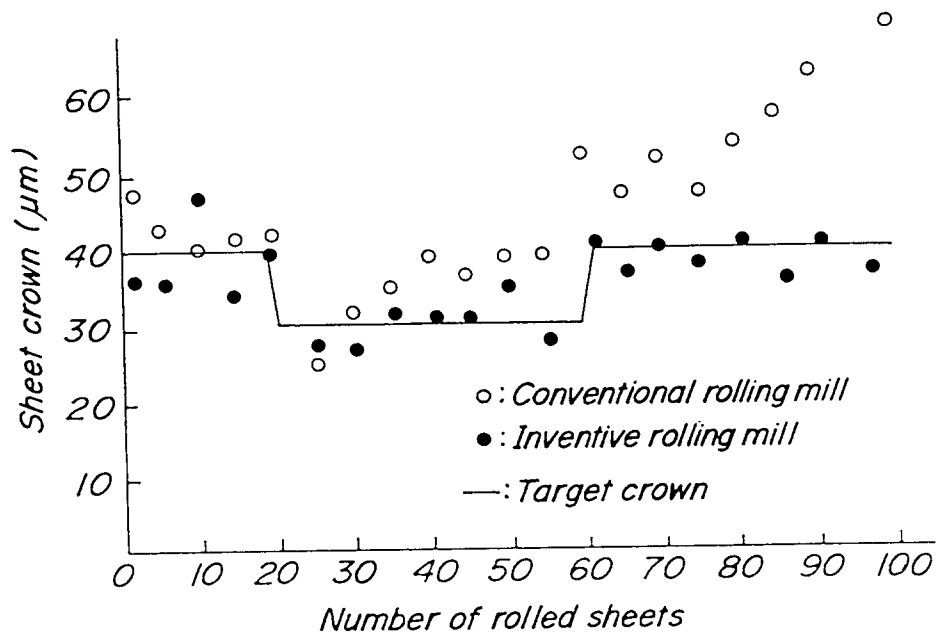
FIG. 48

FIG. 49

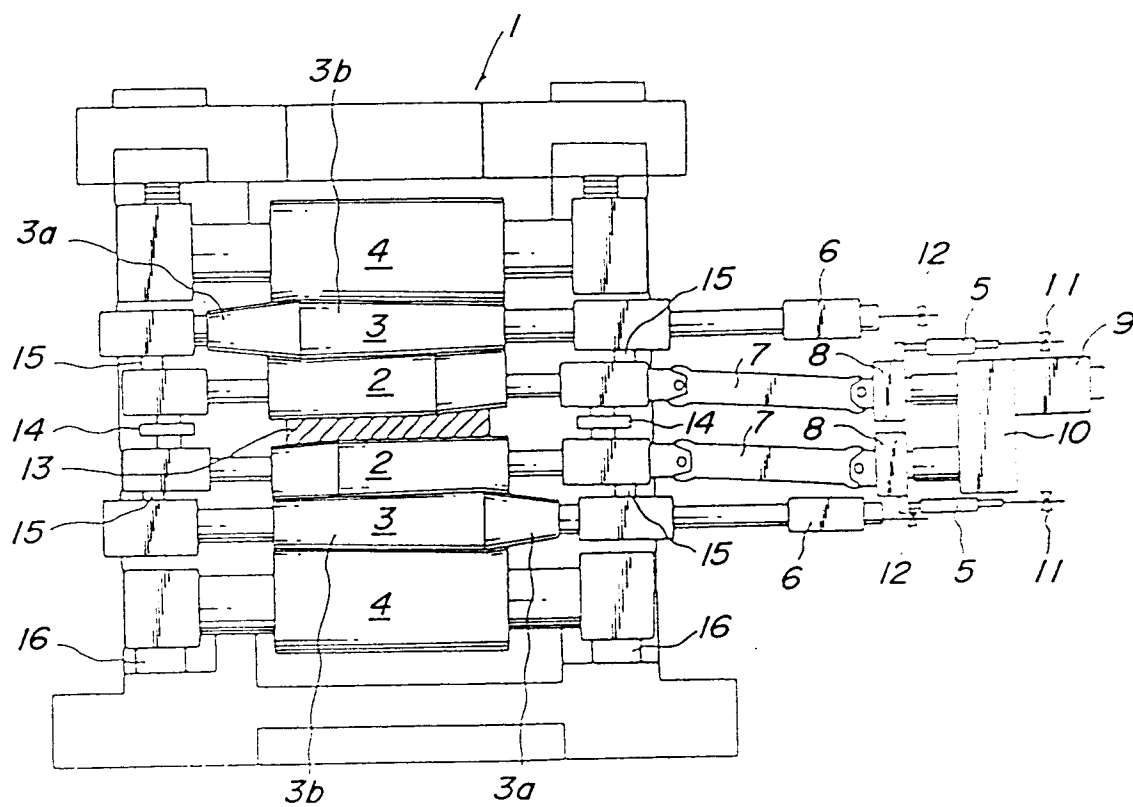


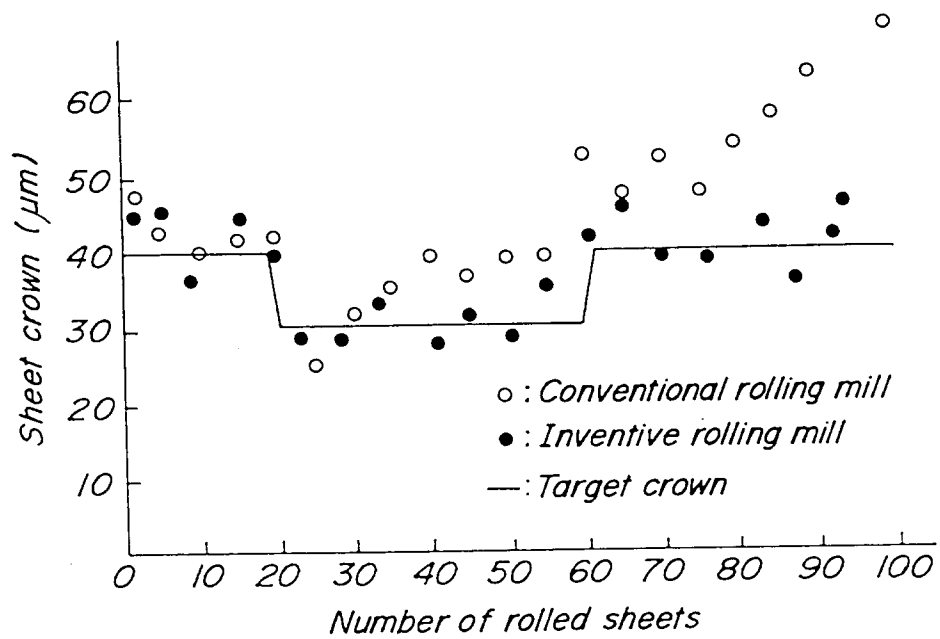
FIG. 50

FIG. 5I

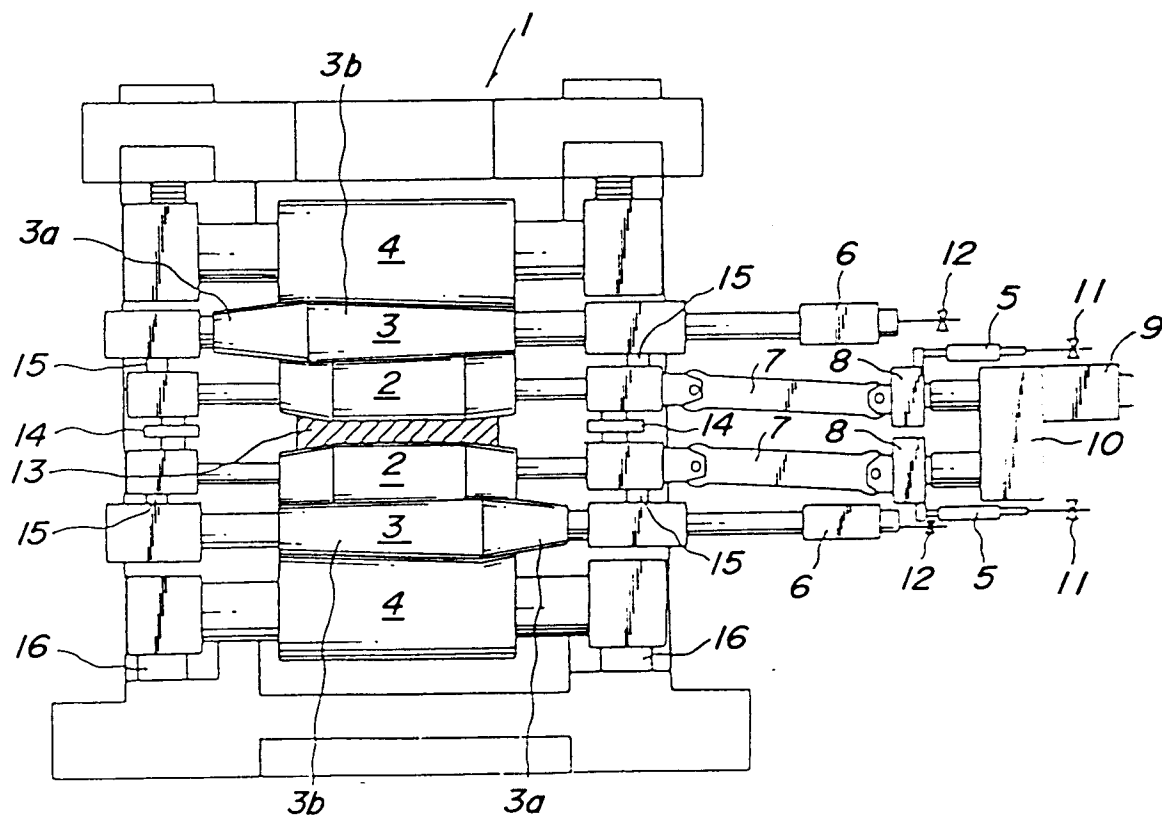


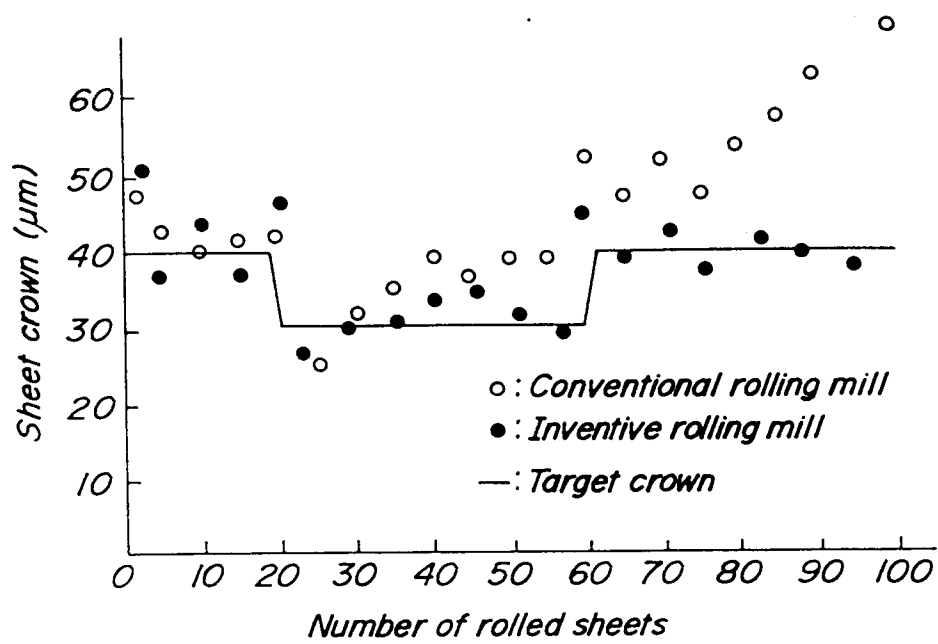
FIG. 52

FIG. 53

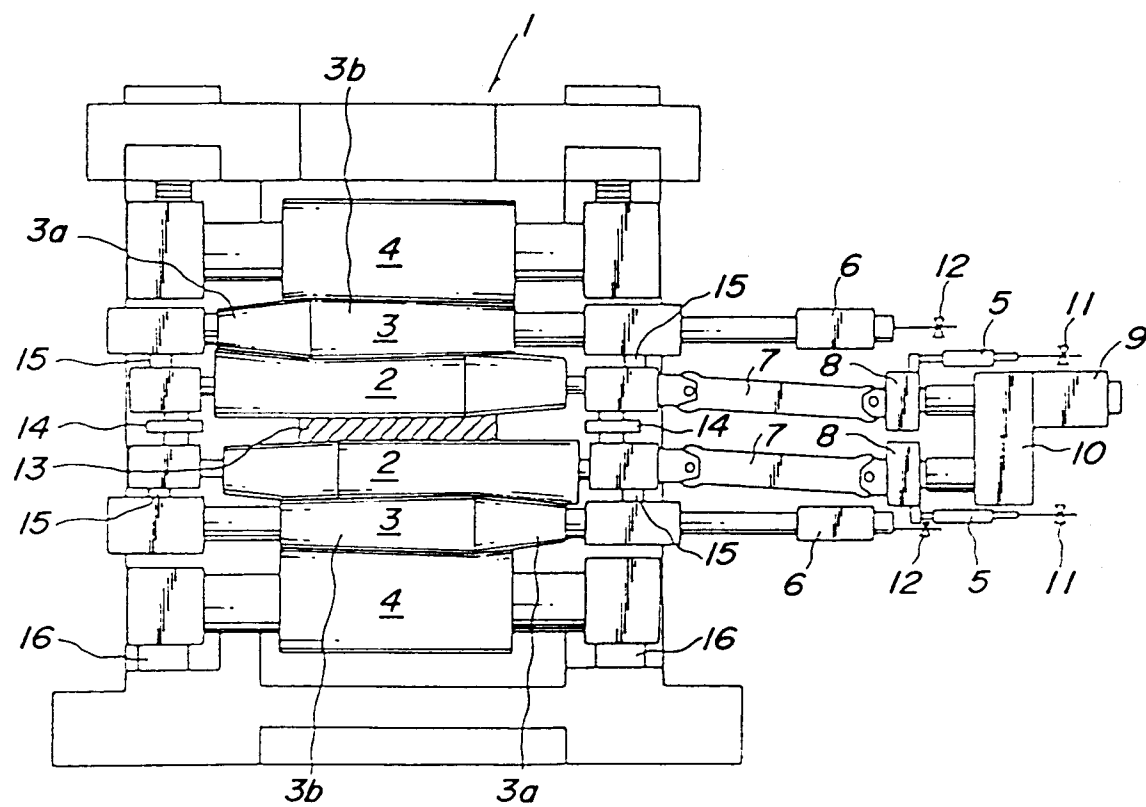


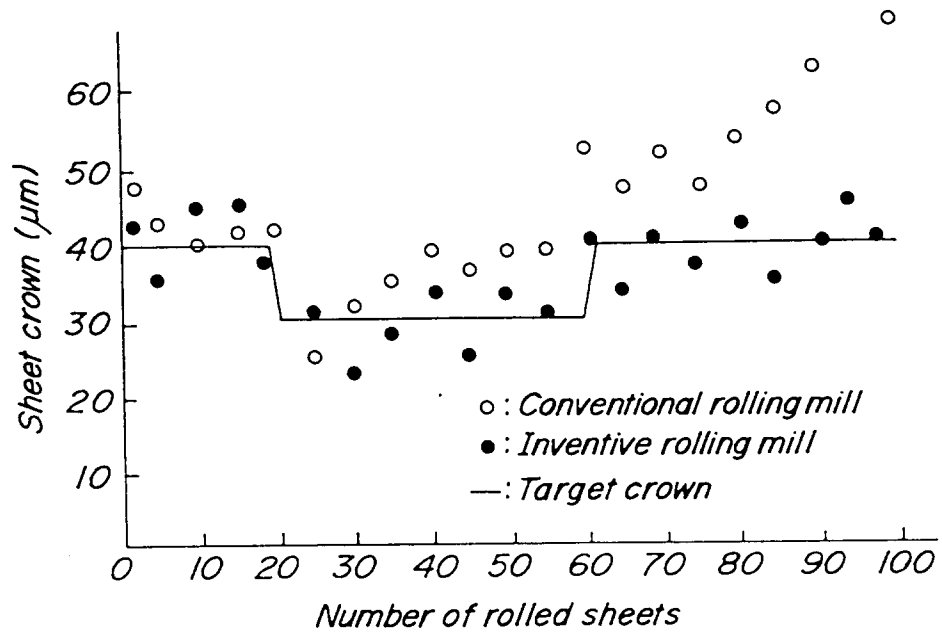
FIG. 54

FIG. 55

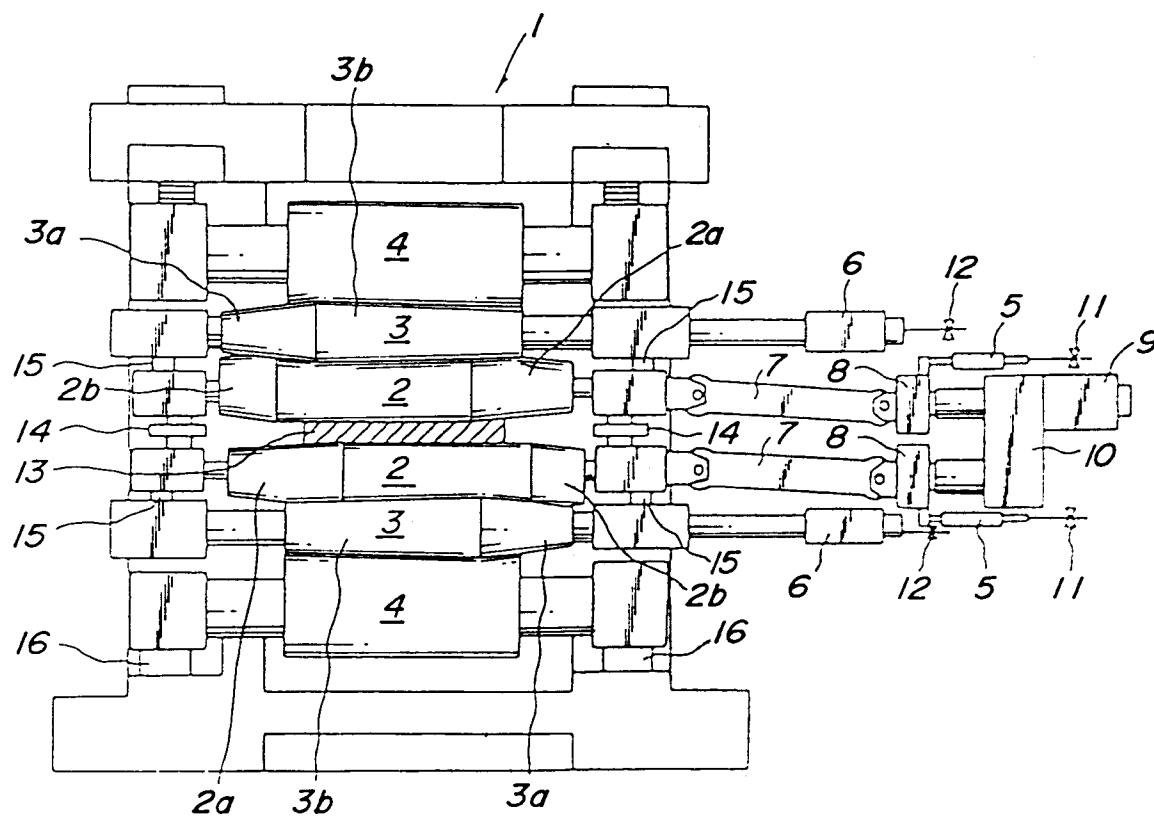
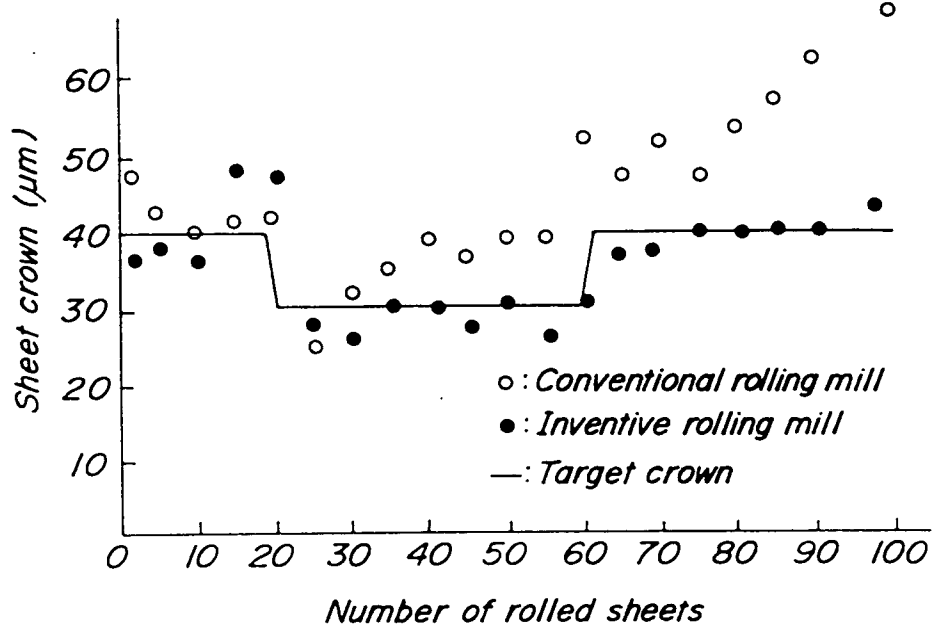


FIG. 56

INTERNATIONAL SEARCH REPORT

International Application No PCT/JP92/00639

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int. Cl ⁵ B21B13/14		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC	B21B13/00-13/04, 13/14	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
Jitsuyo Shinan Koho	1926 - 1991	
Kokai Jitsuyo Shinan Koho	1971 - 1991	
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
Y	JP, A, 58-187207 (SMS Schloemann-Siemag AG.), November 1, 1983 (01. 11. 83), Lines 4 to 17, upper left column, page 5 & EP, A1, 91540 & US, A, 4519233 & DE, A1, 3213496	1-12
Y	JP, A, 62-282717 (Kawasaki Heavy Industries, Ltd.), December 8, 1987 (08. 12. 87), Line 11, upper right column to line 5, lower right column, page 4 (Family: none)	1-12
Y	JP, A, 59-56905 (Kawasaki Steel Corp.), April 2, 1984 (02. 04. 84), Lines 4 to 11, lower left column, page 1 (Family: none)	1-12
A	JP, A, 54-13442 (Hitachi, Ltd.), January 31, 1979 (31. 01. 79), Line 19, loer left column to line 11, lower right column, page 4 (Family: none)	1-12
<p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
August 7, 1992 (07. 08. 92)	August 18, 1992 (18. 08. 92)	
International Searching Authority	Signature of Authorized Officer	
Japanese Patent Office		