

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 550 752 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art.
158(3) EPC

(21) Application number: **91916946.6**(51) Int. Cl.⁵: **D03D 49/62**(22) Date of filing: **26.09.91**(86) International application number:
PCT/JP91/01310(87) International publication number:
WO 92/06234 (16.04.92 92/09)(30) Priority: **28.09.90 JP 101865/90 U**
16.11.90 JP 119338/90 U(43) Date of publication of application:
14.07.93 Bulletin 93/28(84) Designated Contracting States:
CH DE FR GB IT LI(71) Applicant: **Citizen Watch Co. Ltd.**
1-1 Nishishinjuku 2-chome
Shinjuku-Ku Tokyo 160(JP)

(72) Inventor: **MIYA, Yukio**
1261-10, Miami-Otsuka
Kawagoe-shi, Saitama 350(JP)
Inventor: **KIZAKI, Shigeru**
141-4, Akazawa
Hanno-shi, Saitama 3357-01(JP)
Inventor: **SUGIYAMA, Osamu**
4-25-5, Minami-cho
Fuchu-shi, Tokyo 183(JP)
Inventor: **HATAYAMA, Akiteru**
370-10, Oaza-Ootsukashinden
Kawagoe-shi, Saitama 350(JP)
Inventor: **SHIBUYA, Yoshitsugu**

260, Niiso
Toda-shi, Saitama 335(JP)
Inventor: **ENOMOTO, Mitsugu**
2-11-67, Yahata-cho
Higashikurume-shi, Tokyo 203(JP)
Inventor: **NAOI, Koichi**
4-20-27, Sayamada
Sayama-shi, Saitama 350-13(JP)
Inventor: **FUKAZAWA, Yuji**
3-14-4, Shimoshakujii
Nerima-ku, Tokyo 177(JP)
Inventor: **NANYA, Takanori**
4-46-17, Sayamada
Sayama-shi, Saitama 350-13(JP)
Inventor: **SHIMIZU, Shotaro**
1-13-11, Higashi
Kunitachi-shi, Tokyo 186(JP)
Inventor: **TAGAWA, Hiroshi**
3-15-2, Kitakashiwa
Kashiwa-shi, Ciba 277(JP)

(74) Representative: **Lawrence, John Gordon et al**
McNeight & Lawrence Regent House Heaton
Lane
Stockport, Cheshire SK4 1BS (GB)


(54) **REED FOR HIGH SPEED LOOM.**

(57) A diamond-like carbon (DLC) film is spread over the dents of a reed as a part of a high speed loom at a part of the dents requiring the highest resistance-to-wear. When using stainless steel as a base material of the dents, DLC film is spread through an intermediate layer comprising, for example, a titanium carbide layer. Reed dents covered with a DLC layer are arranged at side ends of the reed which are likely to wear severely and, at the middle portion of the reed, dents covered with comparatively inexpensive hard film or non-treated dents are arranged so that degrees of wear of reed dents may be uniform throughout the reed for enabling reduction in cost. A reed of this invention is applicable to a variety of fibers such as natural fibers, synthetic ones, and new

EP 0 550 752 A1

material ones, whereby durability of a reed is markedly increased at low cost.

FIG. 4

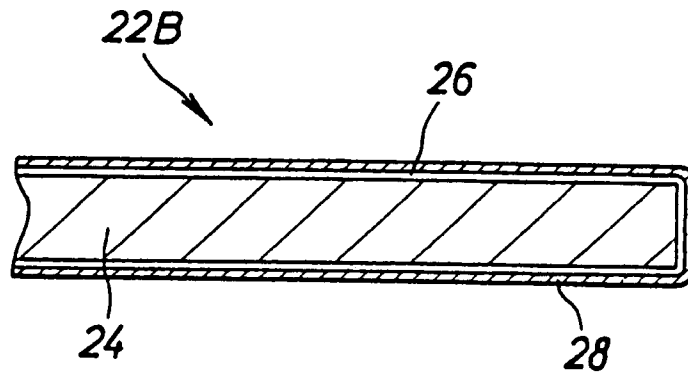

[Technical Field]

The present invention relates to a reed for a high-speed loom and, more particularly, to a reed for a high-speed loom which has reed blades coated with a hard film in order to increase the wear resistance of the reed blades constituting the reed.

[Background Art]

A reed as a component of a loom is used to align and press the warps and wefts, respectively, of the loom, thereby straightening the weave pattern. The reed is constituted by arranging a large number of reed blades comprising thin metal plates parallel to each other at small gaps, and fixing the reed blades by a frame comprising right and left side master blades and upper and lower metal side portions. In a high-speed loom, reed blades made of a stainless steel are generally used. However, due to an increase in operating speed of the loom and introduction of new material fibers, wear of the reed blades is severe, and the wear resistance of the reed blades poses an important problem.

More specifically, wear of the reed blades causes raising of the woven fabric and end breakage. Since exchange of the reed requires a large amount of labor and cost, the durability of the reed blades is the most significant factor that determines the operating efficiency and cost of the loom. In a woven fabric, since the width of the woven fabric becomes smaller than the total width of the arranged warps to cause a phenomenon called "crimp", an especially large frictional force acts on the reed blades arranged in the vicinities of the two sides of the reed. Hence, the durability of these portions determines the service life of the entire reed.

Therefore, in order to improve the durability of the reed, it is proposed to coat the surfaces of the reed blades especially in the vicinities of the two sides of the reed with a hard film which has an excellent wear resistance, e.g., a hard chrome plating film, a ceramic film (Japanese Patent Laid-Open No. 60-52658) made of tungsten carbide, titanium carbide, titanium nitride or the like, and a chrome oxide film (Japanese Patent Laid-Open No. 61-245346, and U.S.P. No. 4,822,662).

A hard chrome plating film is formed by electroplating. However, the hard chrome plating film has poor wear resistance as well as poor adhesive properties and corrosion resistance. A ceramic film is formed in accordance with PVD (Physical Vapor Deposition), CVD (Chemical Vapor Deposition), flame spraying, or the like. However, the ceramic film has poor adhesive properties and it causes softening of the base material upon a high temperature treatment. A chrome oxide film is formed thermochemically and has an effect when it is formed on the reed blades and applied to a polyester fiber. However, the chrome oxide film does not provide a sufficient effect when it is formed on the reed blades and applied to a natural or new material fiber.

Wear of the reed blades is a phenomenon in which the types of fibers, frictional force, vibration characteristics of the reed, and the like are closely related to each other in a complex manner. It is known that a hard film having a high surface hardness does not always provide a good effect. Accordingly, although a hard film matched with the types of fibers, the operating speed of the loom, and other conditions is employed, it provides an improvement in durability of only about 2 to 5 times that of a stainless steel base material not coated with a hard film.

[Disclosure of Invention]

It is, therefore, an object of the present invention to provide a reed blade suitable to many types of fibers, ranging from a natural fiber to a synthetic and new material fibers, and having a remarkably improved durability at a relatively low cost.

In order to achieve the above object, according to the present invention, a diamond-like carbon film (to be referred to as a DLC film hereinafter) is formed on a portion of a reed blade requiring a highest wear resistance. When a stainless steel is used as the base material of the reed blade, an intermediate layer comprising, e.g., a titanium carbide layer is interposed between the base material and the DLC film to improve the adhesive properties. Furthermore, reed blades each coated with a DLC film are arranged in the vicinities of the two sides of the reed where wear progresses most quickly, and reed blades each coated with a hard film requiring a relatively low cost, or non-coated reed blades are arranged in the central portion of the reed, thereby uniforming the wear amount of the reed blades throughout the entire reed. As a result, an improvement in total durability is realized at a relatively low cost.

The DLC film employed in the present invention is a hydrogen-coupled amorphous carbon film and is introduced in, e.g., L. P. Anderson, A Review of Recent Work On Hard i-C Films, Thin solid Films, 86

(1981), pp. 193 - 200.

An example of a method of forming a DLC film is plasma CVD in a hydrocarbon gas atmosphere. A DLC film exhibits a large hardness next to diamond, a large thermal conductivity of about 5 times that of copper, and a very small coefficient of friction. These characteristics are utilized in the slidable surfaces of mechanical components and the like. Since the large tensile strength and small internal friction of the DLC film realize vibration characteristics suitable to acoustic appliances, a DLC film is also formed on a diaphragm of a loudspeaker and the like. Not much is known regarding the behavior of the DLC film in the wear mechanism of a reed blade driven at a high speed. However, not only the large surface hardness and small coefficient of friction but also the thermal conductivity and vibration characteristics are assumed to contribute to improvement in durability of the reed blade.

[Brief Description of Drawings]

Fig. 1 is a front view of a reed as the target of the present invention and the prior art, Fig. 2 is a plan view of a flat reed blade as the target of the present invention and the prior art, Fig. 3 is a plan view of a modified reed blade as the target of the present invention and the prior art, Fig. 4 is a sectional view of the main part of a reed blade according to an embodiment of the present invention, Fig. 5 is a partially cutaway front view of a reed according to another embodiment of the present invention, and Fig. 6 is a graph showing the relationship between the position and wear amount of the reed blades in the present invention and the prior art.

[Best Mode of Carrying Out the Invention]

The preferred embodiments of the present invention will be described with reference to the accompanying drawings.

Fig. 6 is a graph schematically showing the relationship between the position and wear amount of the reed blades under average operating conditions of a high-speed loom for three types of reed blades. The axis of abscissa represents the position of a reed blade by way of the number of reed blades counted from a side portion of the reed. A curve ADHM indicates the wear amount of reed blade made of a non-coated stainless steel base material, a curve BEFKN indicates the wear amount of reed blades coated with hard chrome plating films, and a curve CGL indicates the wear amount of reed blades coated with DLC films according to the present invention.

The service life of the reed is determined by the wear of the outermost (1st) reed blades which are worn most, as described above. However, when the hard chrome plating films are formed on the reed blades made of the stainless steel base material, the wear amount of the outermost reed blades is decreased to half from A to B. Since this wear amount B corresponds to a wear amount D of the non-coated 30th reed blades, the wear amount of the entire reed can be decreased to a level of B or less by coating the 1st to 30th reed blades with hard chrome plating films. However, even if plating films are formed on the internal reed blades following the 30th reed blades, the service life of the entire reed is not prolonged.

In contrast to this, when DLC films are formed on the reed blades according to the present invention, the wear amount of the outermost reed blades is greatly decreased from A to C. This wear amount C corresponds to a wear amount H of the non-coated 110th reed blades. Therefore, in order to obtain a sufficiently high effect by forming DLC films, the reed blades must be coated at least up to the 110th ones with the DLC films.

To form a DLC film requires a relatively high cost. However, since the DLC film improves the durability of the reed remarkably, it has a sufficiently high practicality depending on the weaving conditions. To combine a DLC film with other hard films is also a very effective means. In the case shown in Fig. 6, the wear amount C of the outermost reed blades coated with the DLC films corresponds to a wear amount F of the 45th reed blades coated with hard chrome plating films. Therefore, when DLC films are formed on the 1st to 45th reed blades and hard chrome plating films are formed on the 46th to 110th reed blades, the same practical effect as that obtained when LCD films are formed on all the reed blades can be obtained. In this manner, when a plurality of hard films having different coating costs and wear resistances are combined to uniform wear of the reed blades throughout the entire reed, the durability of the reed can be remarkably improved at a relatively low cost.

Fig. 1 is a front view of a reed as the target of the present invention and the prior art.

A reed 10 holds a large number of reed blades 20 at predetermined gaps with a frame 16 constituted by upper and lower metal side portions 12 and right and left side master blades 14. The reed blades 20

comprise thin metal plates and have a shape as shown in Fig. 2 or 3.

A reed blade 20A shown in Fig. 2 is a simple belt-shaped one called a flat reed blade.

A reed blade 20B shown in Fig. 3 is called a profiled reed blade and used in a water jet loom or air jet loom. In either reed blade, a hatched portion 22A or 22B shown in Fig. 2 or 3, i.e., the central portion of the reed blade is the maximum wear portion which is worn most. In the reed blade of the present invention, part of the reed blade at least including this portion is coated with a DLC film.

A stainless steel is generally used as the base material of the reed blade. However, when a DLC film is directly formed on the surface of the stainless steel, sufficiently high adhesive properties cannot be obtained, and the object of the present invention cannot be attained.

Therefore, according to the present invention, an intermediate film is interposed between the stainless steel base material and the DLC film to improve the adhesive properties. As the intermediate layer, a two-layered film having a chromium (Cr) or titanium (Ti) lower layer exhibiting good adhesive properties with the stainless steel, and a silicon (Si) upper layer exhibiting good adhesive properties with the DLC film, and a carbide film of, e.g., titanium (Ti), zirconium (Zr), and hafnium (Hf) are effective. Especially, a titanium carbide film (Japanese Patent Laid-Open No. 64-79372) containing an excessive amount of carbon is most effective.

Fig. 4 is a sectional view of the main part of the maximum wear portion 22B of the reed blade 20B shown in Fig. 3.

A titanium carbide film is formed as an intermediate layer 26 on the surface of a base material 24 made of a stainless steel, and a DLC film 28 is formed on the surface of the intermediate layer 26. The titanium carbide film can be formed in accordance with plasma CVD in a vacuum chamber in which a hydrocarbon gas is introduced.

Fig. 5 is a front view of a reed showing the arranged state of reed blades according to another embodiment of the present invention.

Reed blades 20 are divided into first, second, and third groups 201, 202, and 203 sequentially from the groups close to master blades 14 on two sides toward the center. Each first group 201 is a group of reed blades each obtained by forming a DLC film on the surface of a stainless steel base material through an intermediate layer, each second group 202 is a group of reed blades each obtained by forming a hard film different from the DLC film on the surface of a stainless steel base material, and each third group 203 is a group of reed blades each made of a non-coated stainless steel base material.

Various types of fibers were woven into fabrics by using a reed according to the present invention having a plurality of reed blade groups in this manner, a reed according to the present invention in which DLC films were formed on all the reed blades, a reed of the prior art in which hard films different from the DLC films were formed on the reed blades, and a general reed in which the reed blades are made only of a stainless steel base material. The durabilities of the reeds were studied. Tables 1 and 2 show the obtained results.

[Table 1] Fiber: Cotton Yarn

	Side Portion	-----	Central Portion	Oper- at- ing Time	Ratio of Dura- bil- ity	Cost
Com- para- tive Exam- ple 1	Stainless steel (SS) base material 100%			12 hr	1.0	1.0
Com- para- tive Exam- ple 2	Chrome plating 10%		SS base material 90%	26 hr	2.2	1.1
Com- para- tive Exam- ple 3	Cr ₂ O ₃ 20%		SS base material 80%	36 hr	3.0	1.8
Exam- ple 1	DLC film 40%		SS base material 60%	80 hr	6.7	4.7
Exam- ple 2	DLC film 10%	Cr ₂ O ₃ 10%	Chrome 20% SS base material 60%	80	6.7	2.5

Table 1 shows the result of a durability test wherein standard weaving was performed by a high-speed loom by using a cotton yarn which is the most general as the fiber. As shown in Comparative Example 1, when weaving was executed under predetermined conditions by using a conventional reed made of only the stainless steel base material, defects such as end breakage and raising of the woven fabric occurred after an operation of about 12 hours. The ratio of durability was calculated from the operating time until a defect occurred by using the result of this reed as a reference value of 1.0 for the durability.

As shown in Comparative Example 2, in the conventional reed in which hard chrome plating films are formed on the reed blades on the two sides of the reed that correspond to 10% of all the reed blades, the durability is increased to twice or more. As shown in Comparative Example 3, in a conventional reed in which chrome oxide (Cr_2O_3) films are formed on the reed blades on the two sides of the reed that correspond to 20% of all the reed blades, the durability is increased to about three times or more.

In contrast to this, as shown in Example 1, in the reed of the present invention in which DLC films are formed on the reed blades corresponding to 40% of all the reed blades from the side portions, the durability is increased to about seven times.

In this case, although the cost of the reed itself is increased to about five times, when the quality of the woven fabric and the operating efficiency of the loom are considered, the cost performance of the reed is high enough. In Example 2, three groups of reed blades made of a stainless steel are arranged in a reed. In each first group, DLC films are formed on the reed blades of the side portions of the reed which correspond to 10% of all the reed blades and on which the largest frictional force acts. In each second group next to the first group, reed blades coated with chrome oxide films and reed blades coated with hard chrome plating films are arranged. In each third group corresponding to 60% of the central portion of the reed, reed blades made of a stainless steel base material are arranged. In this reed, a durability similar to that obtained in the Example 1 can be obtained, and the cost can be decreased to half. In this manner, to uniform the wear amount throughout the whole reed by adopting a plurality of types of hard films is a means effective in

decreasing the cost.

[Table 2] Fiber: Modified Polyester

	Side ----- Central Portion Portion		Oper- at- ing Time	Ratio of Dura- bil- ity	Cost
Com- para- tive Exam- ple 4	Stainless Steel (SS) 100%		4	1.0	1.0
Com- para- tive Exam- ple 5	Chrome plating 30%	SS base material 70%	22	5.5	1.3
Exam- ple 3	DLC film 70%		42	10.5	7.3
Exam- ple 4	DLC film 40%	Chrome plating 30%			
		SS base material 30%	40	10.0	4.9

It is known that when modified polyester fibers having complex sectional shapes are to be woven into a fabric, wear of the reed blades made of a stainless base material is severe, and the operating efficiency of the loom is considerably low. Table 2 shows Examples wherein the reed of the present invention is applied to weaving of modified polyester fibers together with Comparative Examples. As shown in Comparative Example 4, wear of the reed blades made of a stainless steel base material is severe, and the durability is decreased to about 30% that obtained when weaving is performed using a cotton yarn. Hence, as shown in Comparative Example 5, a reed in which hard chrome plating films are formed on the reed blades in the vicinities of the side portions of the reed is used.

In contrast to this, as shown in Example 3, in the reed of the present invention in which DLC films are formed on the reed blades corresponding to 70% of all the reed blades from the side portions of the reed, the durability is remarkably improved. Furthermore, as shown in Example 4, when both DLC films and hard chrome plating films are used, the cost can be decreased.

[Table 3]

Fiber: Cotton Yarn Sized With Special Fabric Size

	Side ----- Central Portion Portion	Oper- at- ing Time	Ratio of Dura- bil- ity	Cost
Com- para- tive Exam- ple 6	Stainless steel (SS) 100%	0.33	1.0	1.0
Com- para- tive Exam- ple 7	Titanium nitride (TiN) film 100%	2.5	7.6	5.0
Exam- ple 5	DLC film 100%	8.0	24.0	10.0
Exam- ple 6	DLC film 30% Titanium nitride film 70%	8.0	24.0	6.5

A fiber on which a fine ceramic powder having a special function is applied together with a fabric size is attracting attention as a functional new material fabric. As shown in Comparative Example 6, when such a new material fabric is woven into a fabric by using conventional stainless steel reed blades, a defect occurs within a very short period of time, and thus a practical operation using this fiber is impossible. Hence, as shown in Comparative Example 7, a reed in which titanium nitride (TiN) films known as ultra-hard films are formed on all the reed blades is used. In this case, however, the wear amount of the reed blades is large to cause a defect within 2 to 3 hours. Therefore, the operability is poor, and the operating efficiency of the loom is very low.

In contrast to this, as shown in Example 5, when the reed of the present invention in which DLC films are formed on all the reed blades is used, a continuous operation of 8 hours is possible, and no problem occurs in the weaving operability. In addition, when reed blades coated with DLC films are arranged in the vicinities of the two side portions of the reed and reed blades coated with titanium nitride films are arranged at the central portion of the reed, a similar effect can be obtained while decreasing the cost.

As has been described above, according to the present invention, the specific effects as follows can be obtained.

- (1) The reed of the present invention is suitable to various types of fibers, ranging from a natural fiber to synthetic and new material fibers, and exhibits an excellent durability.
- (2) Since a sufficient effect can be obtained with a DLC film having a thickness of 2 to 3 microns including the intermediate layer, the DLC film can be applied to a reed having a small blade pitch.
- (3) When the quality of the fabric and the operating efficiency of the loom are considered, a decrease in total cost is enabled.

Claims

1. A reed for a high-speed loom, in which a large number of reed blades comprising thin metal plates are arranged parallel to each other at predetermined gaps in a direction of thickness thereof and are fixed and held with a frame comprising right and left side master blades and upper and lower side metal portions, characterized in that at least a portion of each of at least a plurality of reed blades adjacent to

said master blades including a maximum wear portion is coated with a diamond-like carbon film (to be referred to as a DLC film hereinafter).

5 **2.** A reed for a high-speed loom according to claim 1, characterized in that said reed blades are made of a stainless steel, and said DLC film is formed through an intermediate layer.

3. A reed for a high-speed loom according to claim 2, characterized in that said intermediate layer comprises a titanium carbide layer.

10 **4.** A reed for a high-speed loom according to claim 1, characterized in that assuming that said plurality of reed blades adjacent to said master blades form a first group and that a plurality of reed blades adjacent to said first group form a second group, said reed blades of said first group are coated with DLC films, and said reed blades of said second group are coated with hard films different from said DLC films.

15 **5.** A reed for a high-speed loom according to claim 4, characterized in that said reed blades of said second group are further divided into a plurality of groups, and reed blades of the divided groups are coated with different types of hard films, respectively.

20 **6.** A reed for a high-speed loom according to claim 4, characterized in that reed blades of a third group which are made of only a stainless steel are arranged adjacent to said reed blades of said second group.

25 **7.** A reed for a high-speed loom according to claim 4, 5, or 6, characterized in that said different types of hard films are selected from the group consisting of hard compound films of an oxide, a carbide, or a nitride, and hard chrome plating films.

30

35

40

45

50

55

FIG. 1

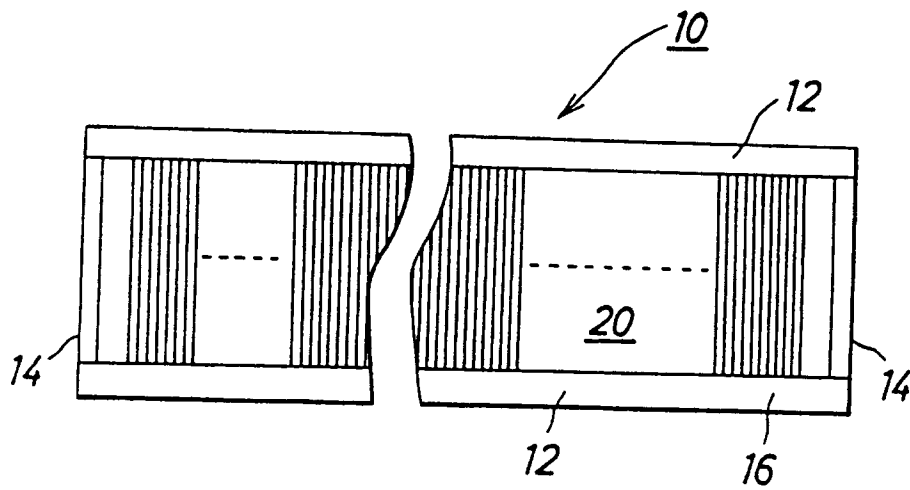


FIG. 2

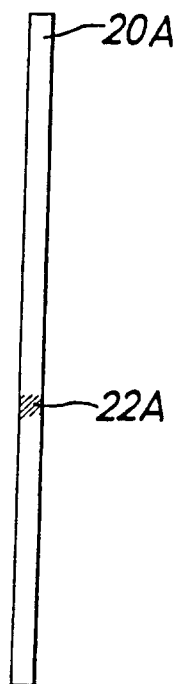


FIG. 3

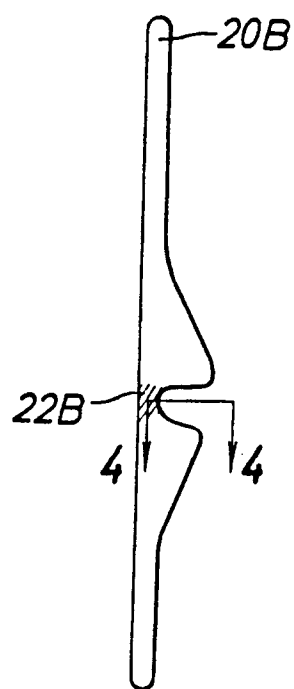


FIG. 4

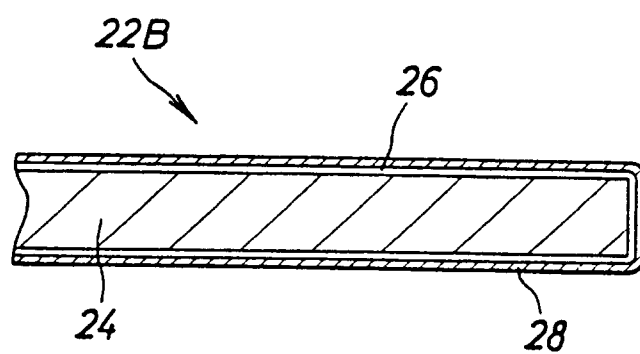


FIG. 5


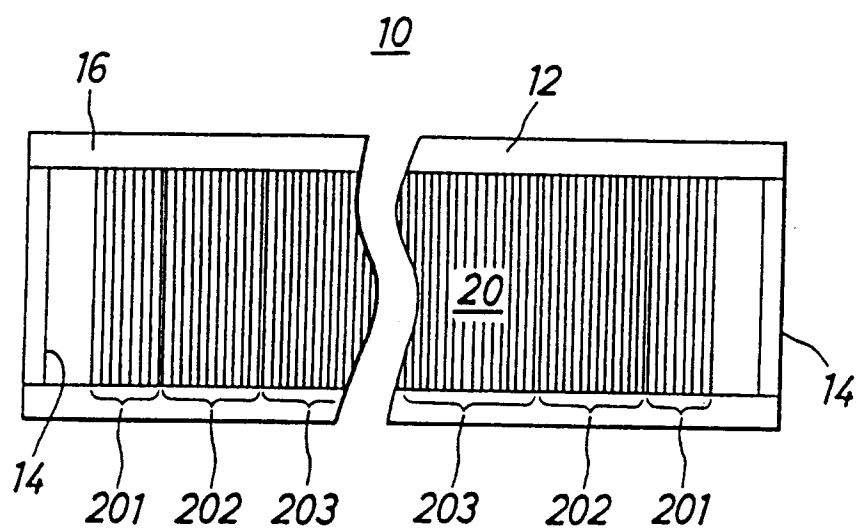


FIG. 6

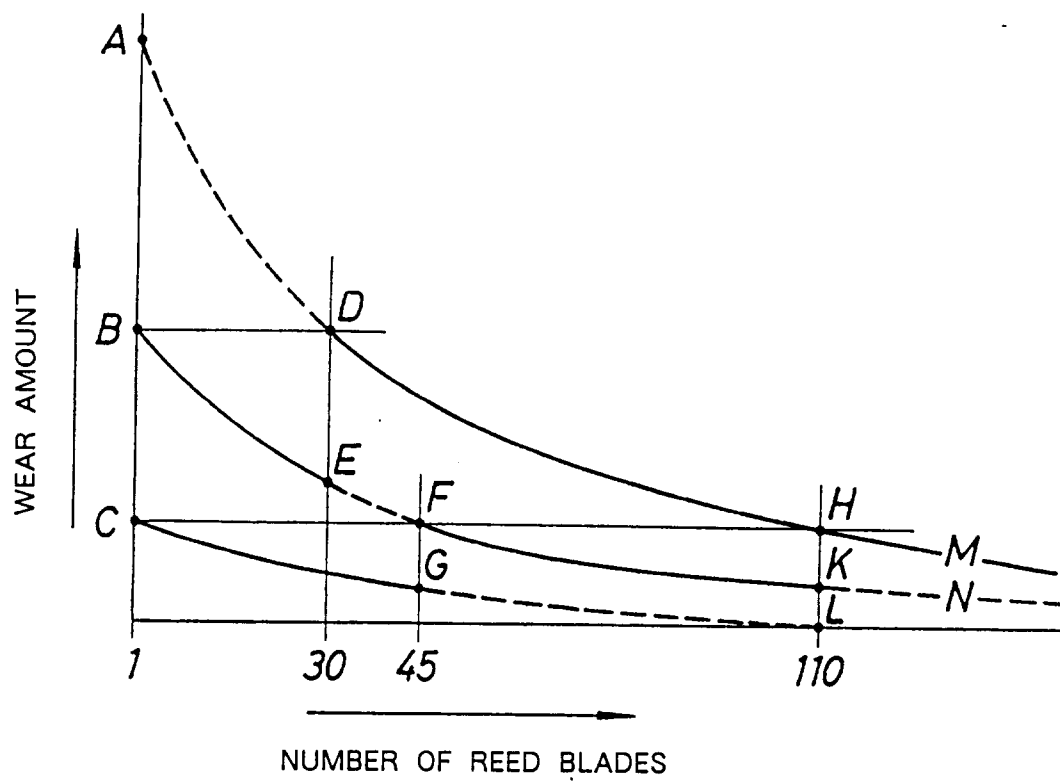

INTERNATIONAL SEARCH REPORT

International Application No PCT/JP91/01310

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int. Cl ⁵ D03D49/62		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC	D03D49/62, B41J3/20, C23C14/00	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
Jitsuyo Shinan Koho 1975 - 1991 Kokai Jitsuyo Shinan Koho 1975 - 1991		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹		
Category [*]	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
Y	JP, U, 61-59688 (Kuroda Plating K.K.), April 22, 1986 (22. 04. 86), (Family: none)	1-7
Y	JP, A, 62-199851 (Asahi Chemical Industry Co., Ltd.), September 3, 1987 (03. 09. 87), (Family: none)	3-7
A	JP, U, 61-102535 (TDK Corp.), June 30, 1986 (30. 06. 86), (Family: none)	1-7
Y	JP, A, 61-91354 (Canon Inc.), May 9, 1986 (09. 05. 86), (Family: none)	1-7
[*] Special categories of cited documents: ¹⁰ "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search		Date of Mailing of this International Search Report
December 12, 1991 (12. 12. 91)		January 14, 1992 (14. 01. 92)
International Searching Authority		Signature of Authorized Officer
Japanese Patent Office		