

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 560 990 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art.
158(3) EPC

(21) Application number: **92920902.1**(51) Int. Cl.⁵: **G03G 15/16**(22) Date of filing: **02.10.92**(86) International application number:
PCT/JP92/01282(87) International publication number:
WO 93/07542 (15.04.93 93/10)(30) Priority: **03.10.91 JP 281922/91**(43) Date of publication of application:
22.09.93 Bulletin 93/38(84) Designated Contracting States:
DE FR GB(71) Applicant: **SONY CORPORATION**
7-35 Kitashinagawa 6-chome Shinagawa-ku
Tokyo 141(JP)

(72) Inventor: **TOKUNAGA, Hiroshi**
Sony Corporation, 7-35, Kitashinagawa
6-chome
Shinagawa-ku, Tokyo 141(JP)
Inventor: **SHIRAKURA, Akira**
Sony Corporation, 7-35, Kitashinagawa
6-chome
Shinagawa-ku, Tokyo 141(JP)
Inventor: **MATSUZAKA, Hideki**
Sony Corporation, 7-35, Kitashinagawa
6-chome
Shinagawa-ku, Tokyo 141(JP)
Inventor: **IKEMOTO, Yuichirou**
Sony Corporation, 7-35, Kitashinagawa
6-chome
Shinagawa-ku, Tokyo 141(JP)
Inventor: **FUKUOKA, Toshimi**
Sony Corporation, 7-35, Kitashinagawa

6-chome
Shinagawa-ku, Tokyo 141(JP)
Inventor: **MORI, Takaki**
Sony Chemicals Corporation, 18,
Satsuki-cho
Kanuma-shi, Tochigi 322(JP)
Inventor: **IWASAKI, Norikazu**
Sony Chemicals Corporation, 18,
Satsuki-cho
Kanuma-shi, Tochigi 322(JP)
Inventor: **YAKURA, Yuji**
Sony Corporation, 7-35, Kitashinagawa
6-chome
Shinagawa-ku, Tokyo 141(JP)
Inventor: **ANDOH, Hisashi**
Sony Chemicals Corporation, 18,
Satsuki-cho
Kanuma-shi, Tochigi 322(JP)
Inventor: **KAWASUMI, Koichi**
Sony Corporation, 7-35, Kitashinagawa
6-chome
Shinagawa-ku, Tokyo 141(JP)


(74) Representative: **Schmidt-Evers, Jürgen,**
Dipl.-Ing. et al
Patentanwälte Mitscherlich & Partner,
Sonnenstrasse 33, Postfach 33 06 09
D-80066 München (DE)

(54) **IMAGE RECORDING METHOD.**

(57) An electrostatic latent image is formed on a substrate (photosensitive member) by a Carlson process, etc, and is developed by a solid developing agent prepared by dispersing colorant particles in a dispersion medium which remains solid at normal temperature and repeats reversibly change phases above and below its melting

EP 0 560 990 A1

point. Then, the substrate and a transfer member are brought into pressure contact and heated, and this pressure contact heating temperature is raised above the melting point of the dispersion medium to melt the latter. Subsequently, the dispersion medium is cooled to a temperature below the melting point and the transfer member is peeled to transfer the developed image to the transfer member. Alternatively, the pressure contact heating temperature is set to a temperature not exceeding the melting point to soften the dispersion medium, and then the transfer member is peeled to transfer the developed image to the latter. A resin layer having compatibility with the dispersion medium of the developing agent is formed on the surface of recording paper.

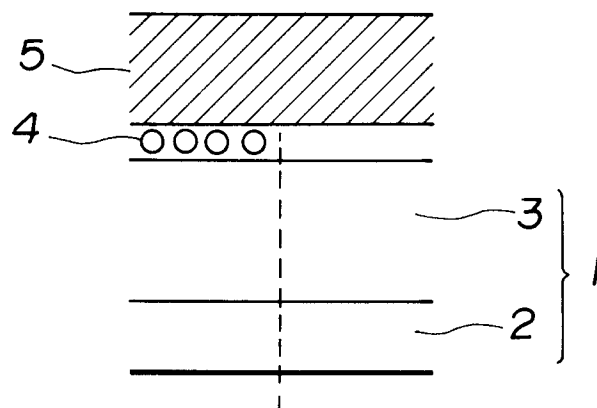**FIG.4**

Technical Field

This invention relates to a picture recording method for carrying out printing or picture printing on the basis of a picture signal.

Background Art

For example, in printer devices, etc. for use in computers or word processors, various printing systems have been proposed. A thermal transfer recording system is one of these printing systems.

This thermal transfer recording system is a system using a thermal transfer ribbon having a thermal fusible ink as an ink layer, and its transfer principle is as follows.

First, a thermal transfer ribbon on which a thermal fusible ink in a solid state at an ordinary temperature is coated on a base is caused to be tightly in contact with a transferred paper by pressing force of a thermal head. At this time, the thermal fusible ink in a solid state at an ordinary temperature is softened and fused by heat of the thermal head. Then, the thermal transfer ribbon is peeled off from the transferred paper when the ink is brought into the solid state for a second time. As a result, the thermal fusible ink at the softened/fused portion is transferred onto the transferred paper. Thus, print, etc. is formed on the transferred paper.

Meanwhile, the above-described thermal transfer recording system can simplify the device configuration, and is thus very useful for providing a compact and low cost printer device, but has the following drawbacks.

Initially, with the thermal transfer recording system, only binary recording can be carried out, failing to exhibit gradation. This is not so great problem in the case of carrying out only printing, but constitutes a great obstacle in the case of forming a picture (pictorial image).

Further, the recording energy is a large value of 4~6 J/cm², and the speed is also low. Furthermore, there is a limit in the pixel density. (In the existing technology, the pixel density of the thermal head has a limit of about 300 dpi).

In addition, there are many problems in view of the running cost and the environmental protection, etc. Namely, an ink of a non-picture portion of the thermal fusible ink is left in the ink ribbon as it is, but the ink remaining in the thermal transfer ribbon cannot be repeatedly used. Accordingly, the greater part of the ink is subjected to disposal. This leads to an increase in the running cost, and results in the possibility that environmental destruction may take place.

On the other hand, as a system for recording picture, there is also known a system of developing an electrostatic latent image formed on a photosensitive body by a developer in which toners including coloring agent particles are dispersed in a liquid state in an electric insulating dispersion medium. This is so called an electrophotographic process. In accordance with the wet developing method, resolution and gradation comparable to silver salt photograph can be provided. Especially, a wet developing process using a solidification developer, in which a dispersion medium in a solid state at an ordinary temperature and adapted so that it is fused (molten) by heating and is solidified by cooling is caused to be in a heated and fused state to carry out the wet development is very excellent in view of stability of preservation or handling property, etc. of a developer.

However, in the case of formation of a pictorial image by the above-mentioned wet developing method using solidification developer, there is the problem that transfer of a pictorial image is difficult.

For example, the applicant of this application has already proposed, in the Japanese Patent Application Laid Open No. 81073/1990 publication, a method of heating a developer pictorial image (picture) including a coloring agent (or toner) and a dispersion medium on a base (e.g., a photosensitive body) to allow a transferred body to be in contact therewith in a fused state, thus to transfer such an image, or a method of allowing a developer pictorial image (picture) to be in pressure-contact with a transferred body at the time of cooling and solidification to transfer such an image.

However, if a transferred body is caused to be in contact with a base (e.g., a photosensitive body) and is peeled off therefrom when a developer pictorial image (picture) is in a fused state, there is the possibility that such a pictorial image may be disturbed, and uniform transfer is difficult, so unevenness is often observed. Further, in the case where a developer image is caused to be in pressure-contact with a transferred body at the time of cooling and solidification, the developer image cannot be sufficiently transferred, so the quality of a transferred image is remarkably degraded. In addition, there is also the problem that a recording pictorial image transferred onto a transferred body lacks in abrasion resistance.

As described above, in the thermal transfer recording system, there are the problems that gradation cannot be obtained, and the resolution is insufficient, etc. On the other hand, in the wet developing system

using a solidification developer, difficulty of transfer and insufficient durability of a recorded picture, etc. are great problem. Accordingly, solution of these problems is expected.

In view of this, an object of this invention is to provide a picture recording method in which gradation is obtained in a recorded picture, a picture having a high resolution is obtained, and transferability and durability of a recorded picture are both excellent.

In addition, an object of this invention is to provide a picture recording method in which the recording energy for formation of a picture can be reduced, an ink is not wastefully consumed, and the recording speed is extremely high.

Disclosure of the Invention

To achieve the above-described objects, a picture recording method according to a first invention of this invention comprising the steps of: forming an electrostatic latent image on a base; developing the electrostatic latent image by using a solidification developer in which coloring agent particles are dispersed into a dispersion medium which is in a solid-state at an ordinary temperature, and is adapted to reversibly repeat fusing by application of heat at a temperature above a melting point and solidification by cooling to thereby form a developer pictorial image (picture) comprised of the coloring agent particles and the dispersion medium on the surface of the base; thereafter allowing the base and the transferred body to be in pressure-contact with each other to apply heating thereto; fusing the dispersion medium at a pressure-contact and heating temperature above the melting point of the dispersion medium; subsequently cooling the dispersion medium so that its temperature becomes equal to a temperature below the melting point; and thereafter peeling the transferred body from the base to transfer the developer picture on the surface of the base onto the transferred body, thus to record a picture.

Further, a picture recording method according to a second invention of this invention comprises the steps of forming an electrostatic latent image on a base; developing the electrostatic latent image by using a solidification developer in which coloring agent particles are dispersed into a dispersion medium which is in a solid-state at an ordinary temperature, and is adapted to reversibly repeat fusing by application of heat at a temperature above a melting point and solidification by cooling to thereby form a developer pictorial image (picture) comprised of coloring agent particles and the dispersion medium on the surface of the base; thereafter allowing the base and the transferred body to be in pressure-contact with each other to apply heating thereto; softening the dispersion medium at a pressure-contact and heating temperature set in a range where it is not above the melting point of the dispersion medium; subsequently peeling the transferred body from the base to thereby transfer the developer picture on the surface of the base onto the transferred body, thus to record a picture.

In this invention, a picture is formed by the wet developing process using a solidification developer. Accordingly, gradation can be provided in a recorded picture. As a result, a resolution far greater than that in the case of a thermal head can be provided. In addition, it is sufficient that a recording energy for forming a picture is the order of 10^{-6} J/cm².

On the other hand, a solidification developer pictorial image (picture) formed undergoes pressure-contact and heating process at a temperature more than a melting point where the dispersion medium is fused, or at a temperature sufficient for softening the dispersion medium. Thus, a toner image is transferred onto the transferred body substantially by 100 %. Since transfer is collectively carried out without using a thermal head, etc., the transfer speed is very high, and sufficient durability is ensured.

In addition, since an ink (toner) is used only at necessary portions of a picture, ink is not wastefully consumed. This is advantageous in respective of running cost, or environmental protection, etc.

Brief Description of the Drawings

FIG. 1 is a model view showing a charging process.

FIG. 2 is a model view showing an exposure process.

FIG. 3 is a model view showing a development process.

FIG. 4 is a model view showing a transfer process.

FIG. 5 is a model view showing an example of the configuration of a printer for a monochromatic picture using a drum of a photosensitive body.

FIG. 6 is a model view showing an example of the configuration of a printer for a monochromatic picture using a belt of a photosensitive body.

FIG. 7 is a model view showing an example of the configuration of a printer for a color picture using a drum of a photosensitive body.

FIG. 8 is a model view showing an example of the configuration of a printer for a color picture using a belt of a photosensitive body.

FIG. 9 is a model view showing the configuration of a printer used in the embodiment.

FIG. 10 is a schematic cross sectional view of the essential part showing the state where a photosensitive body belt and a transfer sheet are in a pressure-contact state.

FIG. 11 is a schematic cross sectional view showing, in a model form, the state of a developer and a surface resin layer in the transfer process.

FIG. 12 is a characteristic diagram showing a typical example of a DSC curve obtained by the differential scanning calorimetry.

FIG. 13 is a characteristic diagram showing a DSC curve of a wax actually used.

Best Mode for Carrying Out the Invention

A picture formation process in this invention comprises a charging process step, an exposure process step, a development process step, a pressure-contact and heating process step, and a peeling process step. Further, a transferred body undergoes a heat treatment process step according to need so that a recorded picture is provided. On the other hand, a base (photosensitive body) is used in the picture formation process for a second time after undergoing a cleaning process step.

The charging process step and the exposure process step mentioned above are the same as in the case of an ordinary Carlson method electrophotography. Namely, as shown in FIG. 1, a photosensitive body 1 including a photosensitive layer 3 provided on a conductive base 2 is first charged uniformly minus, for example, by using a suitable charging means such as a corona discharger, etc. at a charging process.

Here, as the photosensitive layer 3 of the photosensitive body 1, well known organic photoconductors or inorganic photoconductors may be used. As the organic photoconductor, for example, an arbitrary material may be selected from well known materials of a broad range. As materials put into practice, there are enumerated an electrophotographic photosensitive base material comprised of poly-N-vinylcarbazole and 2, 4, 7-trinitrofluoren-9-one; material obtained by sensitizing poly-N-vinylcarbazole by using pyrylium salt coloring matter; material obtained by sensitizing poly-N-vinylcarbazole by using cyanine coloring matter; an electrophotographic photosensitive base material including an organic pigment as a major component, an electrophotographic photosensitive base material including, as a major component, eutectic complex comprised of dye and resin, and the like. As the inorganic photoconductor, there are enumerated zinc oxide, zinc sulfide, cadmium sulfide, selenium, selenium-tellurium alloy, selenium-arsenic alloy, selenium-tellurium-arsenic alloy, amorphous silicon material, and the like.

In the subsequent exposure process step, selective light irradiation corresponding to picture information is carried out by using suitable exposure means such as a semiconductor infrared laser light source, etc. As a result, minus charges at the exposed portion disappear as shown in FIG. 2. Thus, an electrostatic latent image is formed.

It is to be noted that the above-mentioned electrostatic latent image may be formed on the surface of a dielectric base by the electrostatic system such as the multi-stylus system or the ion-flow system, etc without using a photosensitive body.

In the above-mentioned development process, the photosensitive body 1 on which the electrostatic latent image is formed as described above is developed by the developer. Thus, developing agent pictorial images 4 including coloring agent particles are formed in correspondence with the electrostatic latent image as shown in FIG. 3.

At this time, as the developer, there is used a solidification developer in which coloring agent particles charged plus are dispersed in an electric insulating dispersion medium in a solid state at an ordinary temperature. This developer is heated and fused by heating means. The developer is in a liquid state at the time of development, but is solidified for a second time when cooled.

The dispersion medium used in the developer is an electric insulating organic material. Its melting point is set to more than 30 degrees in consideration of an ordinary use environment and handling property, and is more preferably more than 40 degrees. Although the upper limit of the melting point is not particularly limited, it is about 100 degrees in a practical use, and is more preferably less than 80 degrees. Why such a temperature range is employed is allow for the fact that even if the melting point is too high, an extra energy is consumed for heating, the fact that in the case where such dispersion medium is used in a manner held on a support body, the melting point does not exceed a heat resistance temperature of a material generally used as a support body, and the like.

As a material of a dispersion medium to satisfy there requirements, there are enumerated paraffin, wax, and mixture of these materials. Initially, as the paraffin, there are various orthoparaffin having the number of

carbons of 19 to 60 from nonadecane up to hexacontane. Further, as the wax, there are enumerated plant wax such as carnauba wax, cotton wax, etc., animal wax such as bees wax, etc., ozokerite; petroleum wax such as paraffin wax, microcrystalline wax or petrolatum, etc. These materials are a dielectric material generally having dielectric constant ϵ of about 1.9 to 2.3. It is to be noted that ethylene polyvinyl acetate copolymer, etc. may be added for the purpose of improving cohesive force of a dispersion medium.

In addition, there may be used crystalline polymer having a long alkyl group at the side chain such as homopolymer or copolymer of polyacrylate such as polyethylene, polyacrylamide, poly-n-stearyl acrylate, or poly-n-stearyl methacrylate, etc. (e.g., copoly-n-stearyl acrylate-ethyl methacrylate, etc.), or the like. When viscosity, etc. at the time of heating is taken into consideration, the above-mentioned paraffin and wax are suitable.

Further, as coloring agent particle dispersed in the electric insulating organic material, inorganic pigment, organic pigment and dye which are conventionally known, and mixture thereof may be used.

For example, as the inorganic pigment, there are enumerated chromium pigment, cadmium pigment, iron pigment, cobalt pigment, ultramarine, prussian blue, etc. Moreover, as the organic pigment and the dye, there are enumerated Hansa Yellow (C.I. 11680), Benzidine Yellow G (C.I. 21090), Benzidine Orange (C.I. 21110), Fast Red (C.I. 37085), Brilliant Carmine 3B (C.I. 16015-Lake), Copper Phthalocyanine Blue (C.I. 74160), Victorian Blue (C.I. 42595-Lake), Spirit Black (C.I. 50415), Oil Blue (C.I. 74350), Alkali Blue (C.I. 42770A), Fast Scarlet (C.I. 12315), Rhodamine 6B (C.I. 45160), Rhodamine Lake (C.I. 45160-Lake), Fast Sky Blue (C.I. 74200-Lake), Nigrosine (C.I. 50415), Carbon Black, etc. Individual materials mentioned above may be respectively used, or mixture including more than two kinds of materials mentioned above may be used. Any material having a desired color development (coloring) selected may be used.

As the developer, in addition these electric insulating organic materials or coloring agent particles, resin may be used in combination for the purpose of improving dispersion property or charging ability of a coloring agent, etc. As such resin, any one of known materials suitably selected may be used. For example, there are enumerated rubber such as butadiene rubber, styrene-butadiene rubber, cyclized rubber, or natural rubber, etc.; synthetic resin such as styrene resin, vinyl toluene resin, acryl resin, methacryl resin, polyester resin, polycarbonate resin or polyvinyl acetate resin, etc.; alkyd resin including colophonium (rosin) resin, hydrogenated colophonium resin, denaturated alkyd such as linseed oil denaturated alkyd resin, etc.; natural resin such as polyterpene, and the like. In addition, phenol resin, denaturated phenol resin such as phenol formalin resin, etc.; pentaerythritol phthalate, cumarone-indene resin, ester gum resin, vegetable oil polyamide resin, and the like are also useful. Further, halogenated hydro carbon polymer such as polyvinyl chloride, or chlorinated polypropylene, etc.; synthetic rubber such as vinyl toluene-butadiene, butadiene-isoprene, etc.; polymer of acryl monomer having long chain alkyl group such as 2-ethyl hexyl methacrylate, lauryl methacrylate, or stearyl methacrylate, lauryl acrylate, octyl acrylate, etc., or copolymer with other polymeric monomers (e.g., styrene-lauryl methacrylate copolymer, or acrylic acid-lauryl methacrylate copolymer, etc.); polyolefin such as polyethylene, polyterpene, and the like may be used.

Moreover, charge donating agent or donator is ordinarily added to the developer. Also with respect to developer used here, this is not exception. As the charge donating agent used, there are, for example, metal salt of fatty acid such as naphthenic acid, octenoic acid, oleic acid, stearic acid, isostearic acid, or lauric acid, etc., metal salt of sulfosuccinic acid ester, oil soluble sulfonic acid metal salt, phosphoric acid ester metal salt, metal salt of abietic acid, etc., aromatic carboxylic acid metal salt, or aromatic sulfonic acid metal salt, and the like.

Further, in order to improve electrification charges of the coloring agent particles, metal oxide fine particles such as SiO_2 , Al_2O_3 , TiO_2 , ZnO , Ga_2O_3 , In_2O_3 , GeO_2 , SnO_2 , PbO_2 , or MgO , etc., or mixture of these materials may be added as a charge enhancement agent.

After the developer picture 4 is formed by the above-mentioned development process, a transferred body 5 is caused to be superimposed as shown in FIG. 4 to carry out a transfer process step.

It is here preferable that a material having a large adhesive force with respect to a solidification developer as described above is employed as a material which can be used as the transferred body. Depending upon use, any material may be suitably selected. As an example, there are various papers such as natural paper, or synthetic paper, etc., cloth or nonwoven fabric cloth comprised of vegetable fiber such as cotton or hemp, etc., or animal fiber such as silk, or wool, etc.; cloth or nonwoven fabric cloth comprised of organic synthetic fiber such as polyamide, polyester, polyacetal, polyurethane, etc. or inorganic fiber such as ceramic or carbon, etc.; polymeric (high molecular) foaming agent, e.g., mesh or polyurethane form, etc. such as metal or organic high polymer, etc. In order to preserve a picture in the form of an ordinary document, it is preferable to use white paper, etc. as a transferred body in view of enhancement of visibility. However, it is a matter of course that the transferred body is limited to such white paper.

It is to be noted that a resin layer compatible with a dispersion medium of the solidification developer may be formed on the surface of the transferred body 5 with a view to ensuring an adhesive force with respect to the solidification developer. Thus, transfer of the developer picture 4 can be more reliably carried out.

5 As the resin constituting a resin layer formed on the surface of the transferred body, any resin which can be compatible with a dispersion medium may be employed. For example, thermal plastic elastomer, low density polyolefin, ionomer resin, polyvinyl acetate copolymerized polyolefin, light molecular weight polyolefin, or adhesive agent for hot melt, etc. may be used. These resin materials are available on the market as the trade name "Chemipearl" (A type, M type, S type, V type, W type) (all are manufactured by
10 Mitsui Sekiyu Kagaku Company Ltd.), or the trade name "Aquilift" (manufactured by Sumitomo Kagaku Company Ltd.).

In the pressure-contact and heating process, e.g., a pressure roller, etc. is used to allow the transferred body 5 to be in pressure-contact with the base (photosensitive body) 1 surface on which the developer picture 4 is formed to apply heating to the entire surface thereof to fuse or soften it. Namely, the entire
15 surface is heated so that its temperature reaches a value more than the melting point of the dispersion medium constituting the developer picture 4 to fuse it, or is heated so that its temperature reaches a value which is not above the melting point and higher than an ordinary temperature.

Thereafter, in the case of the former (in the case where the entire surface is heated to a temperature more than the melting point and is fused), it is cooled so that the temperature of the developer picture 4 is in correspondence with a temperature lower than the melting point for a second time to peel the transferred
20 body 5 therefrom. It is to be noted that cooling may be a natural cooling, or cooling means may be provided to carry out cooling. It is preferable that cooling is carried out through the transferred body. On the other hand, in the case of the latter (in the case where the entire surface is softened at a temperature which is not above the melting point), the transferred body 5 may be peeled as it is, or it may be peeled after
25 temperature is lowered by cooling.

Attention should be drawn to the fact that if the developer picture 4 is not sufficiently solidified in peeling the transferred body 5, cohesive force becomes insufficient and cohesive breakage thus takes place, so the transfer rate does not reach 100%. Further, when heating is applied from the base 1 side in peeling to allow an adhesive force between the base 1 and the developer picture 4 to be weaker than an
30 adhesive force between the transferred body 5 and the developer picture 4, the transfer rate is further improved.

Except for the case where the pressure-contact and heating condition, etc. does not especially require heat treatment, the peeled transferred body 5 is caused to undergo heat treatment at a temperature higher than the pressure-contact and heating temperature irrespective of the temperature upper limit determined
35 by the heat resistance of the base 1, thereby making it possible to enhance a coupling force to the transferred body 5 of a recorded picture thus to improve abrasive resistance. While heat cannot be applied so much to the substrate 1 serving as a photosensitive body, heat can be freely applied to the transferred body 5 after peeling. Namely, it is possible to freely implement the heat treatment. The heat treatment temperature in the heat treatment process is arbitrary. However, in the case where the heat treatment
40 temperature is above the pressure-contact and heating temperature, or a resin layer is formed on the transferred body, it is preferable that the heat treatment temperature is set to a temperature more than the softening temperature of the resin layer. In addition, in the case where the heat treatment process is unnecessary by the pressure-contact and heating condition, etc., the device can become compact.

On the other hand, in the cleaning process step, the remaining solidification developer on the surface of
45 the substrate 1 is removed, and is subjected to a series of process steps starting with the charging process step for a second time.

The fundamental process in the picture recording method of this invention has been described above, and an example of a device in a more practical form for carrying out the method of this invention will now be described.

50 FIG. 5 shows a device corresponding to a laser printer for monochromatic picture, which serves to form a picture comprised of the above-described solidification developer on a drum 11 of a photosensitive body (hereinafter referred to as a photosensitive body drum) 11 to transfer it onto a recording paper 12.

Accordingly, around the photosensitive body drum 11, there are arranged a cleaning roller 13, a corona charger 14 for charging, a light source for carrying out exposure process by a laser beam h_v , and a
55 developing unit 15 by the solidification developer. Thus, a picture comprised of a solidification developer is formed in advance on the photosensitive body drum 11.

The recording paper 12 is pressed onto the photosensitive body drum 11 by a heat roller 16. By this pressed portion, the picture comprised of the solidification developer on the photosensitive body drum 11 is

fused or softened. Thereafter, the recording paper 12 runs along the photosensitive body drum 11 for a short time. For this time period, the solidification developer picture is cooled and solidified. When the recording paper 12 is away from the photosensitive body drum 11, the solidification developer picture is transferred onto the recording paper 12.

FIG. 6 shows an example of a device using a belt of a photosensitive body (hereinafter referred to as a photosensitive body belt) 21 in place of the photosensitive body drum 11.

In this example, a ring-shaped photosensitive body belt 21 is caused to be cyclically run through guide rolls 22, 23, 24. To the surface of the photosensitive body belt 21, charging, exposure, and developing processes are implemented in succession by a corona charger 25, a light source for carrying out exposure process by laser beam $h\nu$, and a developing unit 26 for carrying out developing process by a solidification developer. The developer picture thus formed is similarly transferred onto a recording paper 28 by a heat roller 27. In addition, light is irradiated by a static charge reducing lamp after transfer has been completed. Then, remaining toner is removed by a cleaning blade 29. Thus, the process shifts to the charging process step for a second time.

In this example, since the time period during which the recording paper 28 and the photosensitive body belt 21 run in such a manner that they are in contact with each other is long, the developer picture fused and softened by the heat roller 27 can be sufficiently cooled and solidified. Thus, reliable transfer can be conducted.

In the case where the printer is constructed as a color printer, respective color developing units 31, 32, 33 and 34 of yellow (Y), magenta (M) and cyan (C), and black (K) according to need may be arranged around the photosensitive body drum 11 in place of the developing unit 15 in the device shown in FIG. 5. Also in a device using the photosensitive body belt, respective color developing units 41, 42, 43 and 44 of Y, M, C and K may be arranged in succession along the running direction of the photosensitive body belt 21 in place of the developing unit 26 as shown in FIG. 8 in a manner similar to the above.

In the case of a color printer, there are a system in which color superposition of Y, M, C, K is carried out on the photosensitive body to carry out batch transfer, and a system in which Y, M, C, K images are transferred every time to carry out color superposition on a recording paper. Any one of these systems may be employed.

An embodiment in a practical sense to which this invention is applied will now be described in detail with reference to the attached drawings.

Initially, the configuration of a printer used in the experiment is shown in FIG. 9. This printer includes, within a printer body 66 serving as a casing, a photosensitive body belt 54, a charging exposure unit comprised of an electrification charger 55 and a laser optical system 56, etc., a developing unit 57, and a transfer unit, etc.

A paper feed cassette 71 is detachably loaded into the printer body 66. A developer picture is recorded onto a transfer sheet 52 set within the paper feed cassette 71.

The above-mentioned photosensitive body belt 54 is extending over various rollers which will be described later, and is caused to run in a clockwise direction in the figure. Around the photosensitive body belt 54, there are arranged electrification charger 55, laser optical system 56, developing unit 57, a pressure-contact mechanism 58, a separation unit 59, a static charge reducing lamp 72, and a cleaning unit 62 for repeatedly carrying out a series of processes of charging, exposure, development, transfer, peeling, static charge reduction, and cleaning.

A solidification developer 67 to repeat fusing and solidification by heating and cooling as previously described is delivered to the developing unit 57. This developer 67 is brought into a fused state by heating. Similarly to the case of the wet development using a liquid developer, an electrostatic latent image on the photoconductive body belt 54 is developed.

At the position on the back side opposite to the electrification charger 55, the laser optical system 56 and the developing unit 57 of components constituting the photosensitive body belt 54, a heater 73 for heating the photosensitive body belt 54 is provided. Further, at the position on the exit side of the developing unit 57, a cooling plate 65 (or cooling means such as a cooling roller or a cooling fan, etc.) is provided according to need.

It is to be noted that the reason why the photosensitive body belt is used in place of the photosensitive body drum is that the latter has a smaller calorific or heat capacity and has a more excellent sensitivity with respect to temperature in carrying out cooling/heating process.

On the other hand, the pressure-contact mechanism 58 is comprised of a pressure roller 58a and a pressure-contact roller 58b, and is of a structure such that the photosensitive body belt 54 is put between the pressure roller 58a and the pressure-contact roller 58b. The pressure-contact roller 58b of these rollers also serves as a guide roller of the photosensitive body belt 54, and the pressure roller 58a serves to allow

the transfer sheet 52 to be superimposed on the developed photosensitive body belt 54. It is to be noted that in the case where pressure by the transfer sheet 52 itself is sufficient, the pressure roller 58a may be omitted.

At the position where the transfer sheet 52 is peeled from the photosensitive body belt 54, a peeling roller 68 is provided in a manner to be in contact with the back side of the photosensitive body belt 54. This peeling roller 68 function as a guide roller, so the running direction of the photosensitive body belt 54 is changed. At the position opposite to the peeling roller 68, a cooling plate 69 is provided in a manner to be in contact with the back side of the transfer sheet 52. According to need, the photosensitive body belt 54 is heated by the peeling roller 68, or the transfer sheet 52 is cooled by the cooling plate 69.

In the vicinity of the peeling roller 68, a separation unit 59 such as a separation pawl, etc. is disposed. This separation unit 59 is of such a structure to carry out peeling from the photosensitive body belt 54 of the transfer sheet 52. It is to be noted that in the case where peeling of the transfer sheet 52 is carried out by the curvature separation on the peeling roller 68, the above-mentioned separation unit 59 is unnecessary.

In the advancing direction of the peeled transfer sheet 52, a guide plate 74 and a fixing unit 70 are disposed, and an ejection unit 61 may be disposed according to need so that the transfer sheet 52 can be smoothly ejected. A fixing unit 70 provided in front of the ejection unit 61 is comprised of a thermal roll or a thermal oven, etc., and is of a structure to heat the transfer sheet 52 which has undergone transfer process so that the visible image can be fixed.

It is to be noted that, in the case of heating the roller in a printer of the previously described structure, a roller, etc. included in the heater is used.

In the above-described printer, an electrostatic latent image is formed on the photosensitive body belt 54, and is developed by using the developer 67. Namely, the photosensitive body belt 54 is rotationally driven in a clockwise direction in the figure, and the surface thereof is charged by the electrification charger 55. Then, laser beams from the laser optical system 56 are irradiated thereto to form an electrostatic latent image. This electrostatic latent image is caused to be a visible image by the developer 67 when passed through the developing unit 57.

Thereafter, the temperature of the developer picture 80 is caused to be lower than the melting point of the dispersion medium by the cooling plate 65 (or a cooling roll or a cooling fan) provided inside the photosensitive body belt 54 according to need, thus allowing the developer picture 80 to be in a solid-state.

On the other hand, the transfer sheet 52 is delivered in a direction indicated by an arrow in the figure from the paper feeder 51 to grasp the timing by the resist rollers 53 to convey the transfer sheet 52 to a latent image carrier comprised of the photosensitive body belt 54. Then, the visible image (developer picture 80) comprised of the developer 67 is transferred onto the transfer sheet 52 conveyed to the photosensitive body belt 54 by the pressure-contact unit 58 and the separation and peeling unit 59. Thereafter, the transfer sheet 52 caused to be tightly in contact with the surface of the photosensitive body belt 54 is mechanically separated.

Transfer is carried out by conveying the photosensitive body belt 54 up to transfer roll pair 58 entrance with the developed picture being held to allow its timing to be in correspondence with the timing of the transfer sheet 52 to cause it to be tightly in contact therewith to apply pressure and heating (pressure-contact and heating) thereto with the transfer sheet 52 being put between the transfer roller pair 58.

The pressure-contact mechanism (transfer roller pair) 58 is of a structure also as previously described such that the photosensitive body belt 54 is put between the pressure roller 58a and the pressure-contact roller 58b. As shown in FIGS. 10A and B, by fusing or softening the developer picture 80 by heating applied to the pressure roller 58a and the pressure-contact roller 58b, transfer is carried out onto the transfer sheet 52.

After pressure-contact process by the pressure-contact mechanism 58, the photosensitive body belt 54 and the transfer sheet 52 are conveyed in the state where they are tightly in contact with each other. On the peeling roller 68, peeling is carried out by the separation unit 59 such as curvature separation or separation pawl, etc. In peeling, an approach may be employed to heat the peeling roller 68 to cool the transfer sheet 52 from the back side by the cooling plate 69 at the same time of heating the photosensitive body belt 54 from the back, thus allowing a visible image to be apt to be peeled off from the photosensitive body belt 54.

Thereafter, the transfer sheet 52 is conveyed to the fixing unit 70. Thus, the visible image on the transfer sheet 52 is fixed by the fixing unit 70, and is then ejected to the ejection unit 61 in a direction indicated by an arrow in the figure.

On the other hand, a residual developer on the photosensitive body belt 54 which has undergone the visible image transfer process is removed by the cleaning unit 62 having a cleaning blade. The developer 67 thus removed is collected into the cleaning unit 62.

In FIG. 11, a picture formation process in the device of this embodiment is shown as the state of the photosensitive body belt 54, the developer picture 80, and a sheet material 52a and a surface resin layer 52b of the transfer sheet 52.

Initially, before transfer, as a matter of course, as shown in FIG. 11A, a developer picture 80 on the photosensitive body belt 54 and the surface resin layer 52b (thickness is 0.1~0.08 mm) of the transfer sheet 52 are in a separate state.

Then, in the transfer process, application of pressure and heating are carried out, and the developer picture 80 and the surface resin layer 52b are caused to be in contact with each other. At this time, there results, in dependency upon the heating temperature, an adhesive state where contact portions are stuck as shown in FIG. 11B (a process transferred via such a state will be called an adhesive transfer hereinafter), or a compatible state where those portions are compatible state as shown in FIG. 11C (a process transferred via such a state will be called a compatible transfer hereinafter).

In the peeling process, the temperature of the developer picture 80 is caused to be lower than the temperature at the time of transfer so that there holds a relationship expressed as (adhesive force of the photosensitive body belt and the developer) < (adhesive force of the surface resin layer and the developer) < (cohesive force of the developer) to finely peel the developer picture 80 from the photosensitive body belt 54 as shown in FIG. 11D or E to transfer it to the transfer sheet 52 side.

Finally, in the fixing process, according to need, the developer picture 80 and the surface resin layer 52b are heated so that its temperature reaches a softening temperature of the surface resin layer 52b. Thus, they are caused to be compatible with each other as shown in FIG. 11F so that the fixing strength of the picture is substantially equal to the hardness of the surface resin layer 52b.

In a manner stated above, a transfer process can be carried out with the developing state having high gradation and resolution being maintained, and the transfer rate can become equal to substantially 100 %.

Then, the above-described printer was used to actually carry out transfer process under various temperature conditions. It is to be noted that the melting point of a dispersion medium of a developer used is determined by the peak of endothermic reaction in the differential scanning calorimeter (DSC) shown in FIG. 12. For example, the DSC chart of a wax used in the following experiment (Trade Name sp0110 by Nippon Seiro Company Ltd.,) is as shown in FIG. 13, and the melting point is 46 degrees.

Further, a developer having resin layer on the surface thereof and a developing agent having no resin layer thereon were used in transfer. The softening point of the resin layer was measured in accordance with the Vicat softening temperature test method of thermal plastic resin standardized by the Japanese Industrial Standard JIS K7206.

The kind of transfer processes is shown in Table 1, and transfer processes and temperature conditions in respective embodiments are shown in Table 2. It is to be noted that the transfer process is a compatible transfer (fusing) in the case where heating is conducted so that its temperature is above the temperature more than the melting point for convenience irrespective of presence or absence of the surface resin layer of the transfer sheet, and is an adhesive transfer (softening) in the case where heating is conducted so that its temperature is less than the melting point under the same condition as above. In addition, advantages in the respective embodiments are described together in the Table 2.

Table 1

SYSTEM	PROCESS	TRANSFER PROCESS	FIXING PROCESS	MATERIAL	
				DEVELOPER	SURFACE RESIN LAYER
A	TRANSFER SIMULTANEOUS FIXING PROCESS	COMPATIBLE TRANSFER (FUSION)	NO HEAT TREATMENT	DISPERSION MEDIUM COMPOSITION MELTING POINT T_m	NON
B		ADHESIVE TRANSFER (SOFTENING)		DISPERSION MEDIUM COMPOSITION MELTING POINT T_m	NON
C		COMPATIBLE TRANSFER (FUSION)		DISPERSION MEDIUM COMPOSITION MELTING POINT T_m	RESIN COMPOSITION SOFTENING POSITION T_s
D		ADHESIVE TRANSFER (SOFTENING)		DISPERSION MEDIUM COMPOSITION MELTING POINT T_m	RESIN COMPOSITION SOFTENING POSITION T_s
E	TRANSFER PROCESS + FIXING PROCESS	COMPATIBLE TRANSFER (FUSION)	HEAT TREATMENT	DISPERSION MEDIUM COMPOSITION MELTING POINT T_m	NON
F		ADHESIVE TRANSFER (SOFTENING)		DISPERSION MEDIUM COMPOSITION MELTING POINT T_m	NON
G		COMPATIBLE TRANSFER (FUSION)		DISPERSION MEDIUM COMPOSITION MELTING POINT T_m	RESIN COMPOSITION SOFTENING POSITION T_s
H		ADHESIVE TRANSFER (SOFTENING)		DISPERSION MEDIUM COMPOSITION MELTING POINT T_m	RESIN COMPOSITION SOFTENING POSITION T_s

Table 2

	SYSTEM	CONDITION	FEATURE
5	EMBODIMENT 1	A DEVELOPER MELTING POINT = 70°C PRESSURE-CONTACT TEMPERATURE = 100°C PEELING TEMPERATURE = 40°C	ORDINALY PAPAER CAN BE USED. DEVELOPER MELTING POINT IS HIGH. SUFFICIENT FIXING STRENGTH.
	EMBODIMENT 2	A DEVELOPER MELTING POINT = 53°C PRESSURE-CONTACT TEMPERATURE = 100°C PEELING TEMPERATURE = 40°C	ORDINALY PAPAER CAN BE USED. PRESSURE-CONTACT TEMPERATURE IS HIGH.
10	EMBODIMENT 3	A DEVELOPER MELTING POINT = 46°C PRESSURE-CONTACT TEMPERATURE = 48 °C PEELING TEMPERATURE = 30°C	ORDINALY PAPAER CAN BE USED. PRESSURE-CONTACT TEMPERATURE CAN BE LOWERED. FIXING STRENGTH IS INSUFFICIENT.
	EMBODIMENT 4	B DEVELOPER MELTING POINT = 70°C PRESSURE-CONTACT TEMPERATURE = 60 °C PEELING TEMPERATURE = 40°C	ORDINALY PAPAER CAN BE USED. MELTING POINT OF DEVELOPER IS HIGH.
15	EMBODIMENT 5	B DEVELOPER MELTING POINT = 46°C PRESSURE-CONTACT TEMPERATURE = 43 °C PEELING TEMPERATURE = 30°C	ORDINALY PAPAER CAN BE USED. PRESSURE-CONTACT TEMPERATURE CAN BE LOWERED. FIXING STRENGTH IS INSUFFICIENT.
	EMBODIMENT 6	F DEVELOPER MELTING POINT = 46°C PRESSURE-CONTACT TEMPERATURE = 43 °C PEELING TEMPERATURE = 30°C HEAT TREATMENT TEMPERATURE = 60 °C	ORDINALY PAPAER CAN BE USED. FIXING PROCESS CAN BE INDEPENDENTLY CARRIED OUT. PRESSURE-CONTACT TEMPERATURE CAN BE LOWERED.
20	EMBODIMENT 7	E DEVELOPER MELTING POINT = 46°C PRESSURE-CONTACT TEMPERATURE = 48 °C PEELING TEMPERATURE = 30°C HEAT TREATMENT TEMPERATURE = 60 °C	SAME AS THE ABOVE.
25	EMBODIMENT 8	D DEVELOPER MELTING POINT = 70°C PRESSURE-CONTACT TEMPERATURE = 60 °C TRANSFERRED BODY = IONOMER (S120) VICAT SOFTENING POINT = 59°C PEELING TEMPERATURE = 40°C	COAT PAPER CAN BE USED. DEVELOPER MELTING POINT IS HIGH.
30	EMBODIMENT 9	D DEVELOPER MELTING POINT = 46°C PRESSURE-CONTACT TEMPERATURE = 43 °C TRANSFERRED BODY = VINYL ACETATE COPOLYMER POLYOLEFIN (V100) VICAT SOFTENING POINT = 40°C PEELING TEMPERATURE = 30°C	COAT PAPER CAN BE USED. PRESSURE-CONTACT TEMPERATURE CAN BE LOWERED. FIXING STRENGTH IS INSUFFICIENT.
35	EMBODIMENT 10	C DEVELOPER MELTING POINT = 46°C PRESSURE-CONTACT TEMPERATURE = 48 °C TRANSFERRED BODY = VINYL ACETATE COPOLYMER POLYOLEFIN (V100) VICAT SOFTENING POINT = 40°C PEELING TEMPERATURE = 30°C	SAME AS THE ABOVE.
40	EMBODIMENT 11	C DEVELOPER MELTING POINT = 53°C PRESSURE-CONTACT TEMPERATURE = 100°C TRANSFERRED BODY = IONOMER (S120) VICAT SOFTENING POINT = 59°C PEELING TEMPERATURE = 40°C	COAT PAPER CAN BE USED. PRESSURE-CONTACT TEMPERATURE IS HIGH. SUFFICIENT FIXING STRENGTH.
45	EMBODIMENT 12	G DEVELOPER MELTING POINT = 46°C PRESSURE-CONTACT TEMPERATURE = 48°C TRANSFERRED BODY = VINYL ACETATE COPOLYMER POLYOLEFIN (V100) VICAT SOFTENING POINT = 40°C PEELING TEMPERATURE = 30°C HEAT TREATMENT TEMPERATURE = 60 °C	COAT PAPER CAN BE USED. FIXING PROCESS CAN BE INDEPENDENTLY CARRIED OUT. PRESSURE-CONTACT TEMPERATURE CAN BE LOWERED. SUFFICIENT FIXING STRENGTH.
50	EMBODIMENT 13	H DEVELOPER MELTING POINT = 46°C PRESSURE-CONTACT TEMPERATURE = 43°C TRANSFERRED BODY = VINYL ACETATE COPOLYMER POLYOLEFIN (V100) VICAT SOFTENING POINT = 40°C PEELING TEMPERATURE = 30°C HEAT TREATMENT TEMPERATURE = 60 °C	SAME AS THE ABOVE.

55 Claims

1. A picture recording method comprising the steps of:
forming an electrostatic latent image on a base;

developing said electrostatic latent image by using a solidification developer in which coloring agent particles are dispersed into a dispersion medium in a solid-state at an ordinary temperature and adapted to reversibly repeat fusion by heating at a temperature above a melting point and solidification by cooling to thereby form, on the surface of said base, a developer picture comprised of said coloring agent particles and said dispersion medium;

thereafter allowing said base and said transferred body to be in pressure-contact state to apply heating thereto;

fusing said dispersion medium at a pressure-contact and heating temperature set to a value more than said melting point of said dispersion medium; and

subsequently cooling said dispersion medium so that its temperature reaches a temperature lower than said melting point thereafter to peel said transferred body from said base to thereby transfer said developer picture on the surface of said base, thus to record a picture.

2. A picture recording method comprising the steps of:

forming an electrostatic latent image on a base;

developing said electrostatic latent image by using a solidification developer in which coloring agent particles are dispersed into a dispersion medium in a solid-state at an ordinary temperature and adapted to reversibly repeat fusion by heating at a temperature above a melting point and solidification by cooling to thereby form, on the surface of said base, a developer picture comprised of said coloring agent particles and said dispersion medium;

thereafter allowing said base and said transferred body to be in a pressure-contact state to apply heating thereto;

softening said dispersion medium at a pressure-contact and heating temperature set so that it falls within a range which is not above said melting point of said dispersion medium; and

subsequently peeling said transferred body from said base to thereby transfer said developer picture on the surface of said base onto said transferred body, thus to record a picture.

3. A picture recording method as set forth in claim 1 or 2, wherein said base is a belt-shaped base.

4. A picture recording method as set forth in claim 1 or 2, wherein heating is applied from the back side of said base in peeling said transferred body from said base.

5. A picture recording method as set forth in claim 1 or 2, wherein heat treatment is implemented to said transferred body at a temperature more than said pressure-contact temperature after said transferred body is peeled from said substrate.

6. A picture recording method as set forth in claim 1 or 2, wherein the surface of said transferred body is comprised of a resin compatible with said dispersion medium.

7. A picture recording method as set forth in claim 6, wherein heat treatment is implemented to said transferred body at a temperature more than a softening point of the resin on the surface of said transferred body after said transferred body is peeled from said base.

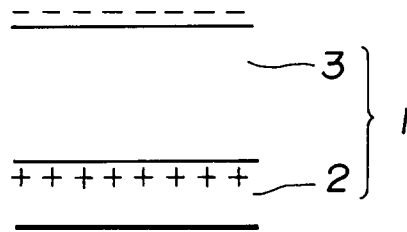


FIG.1

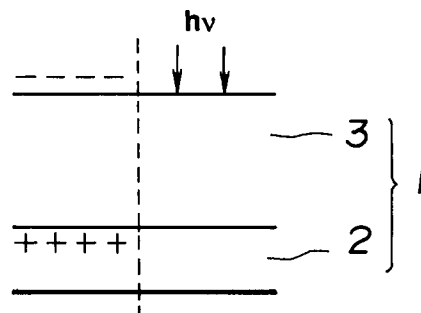


FIG.2

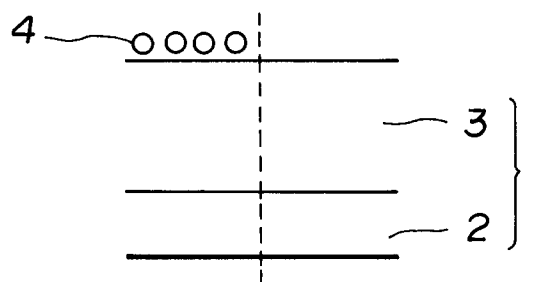


FIG.3

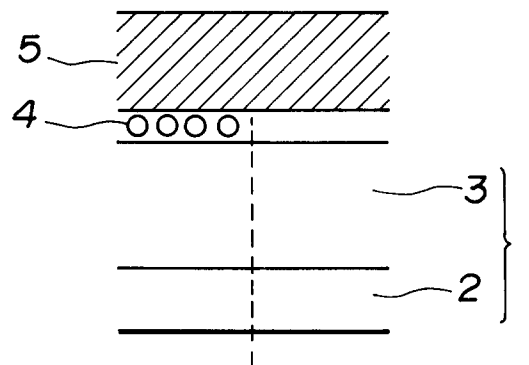


FIG.4

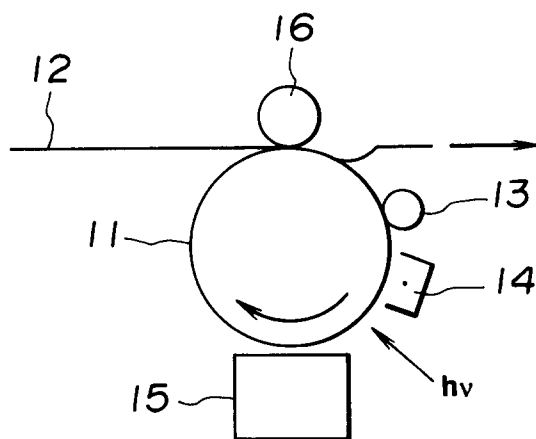


FIG.5

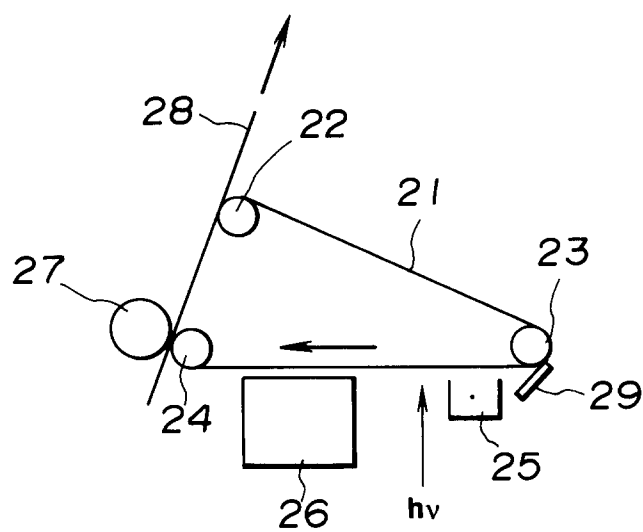


FIG.6

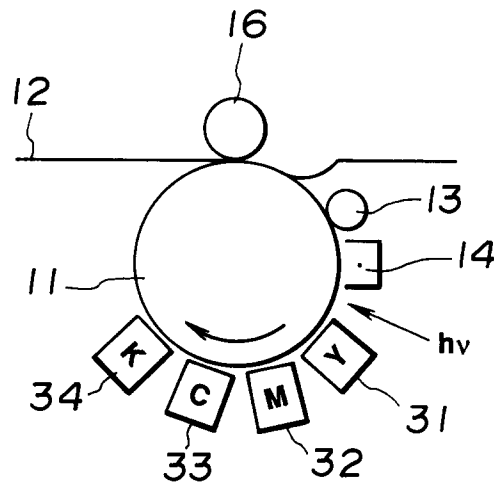


FIG. 7

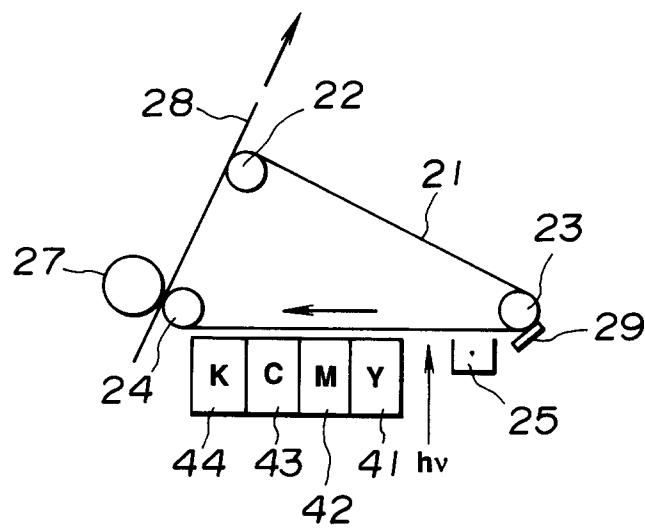


FIG. 8

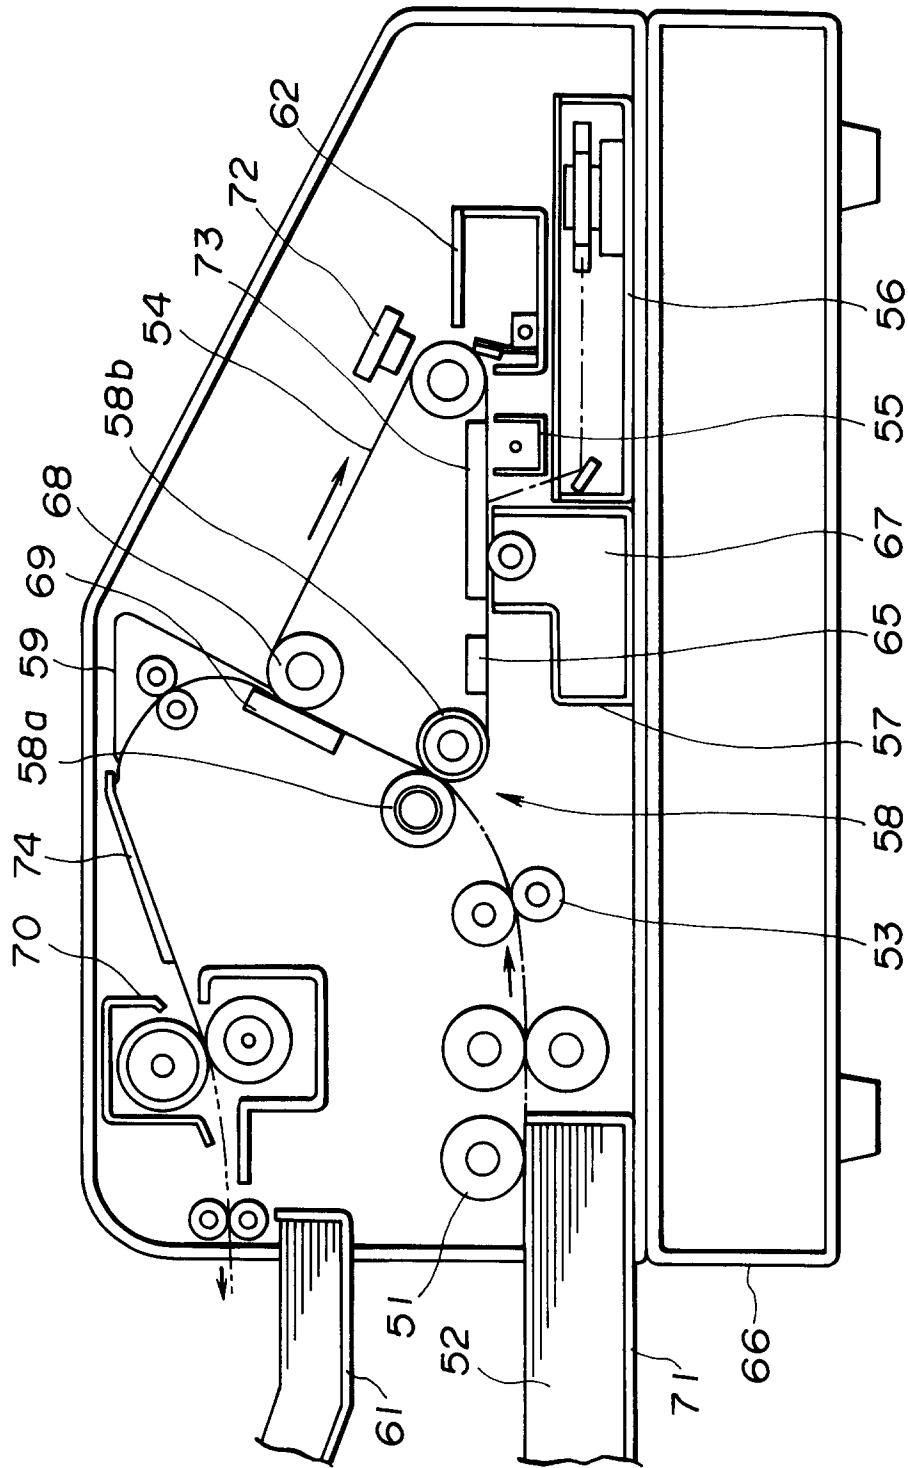


FIG. 9

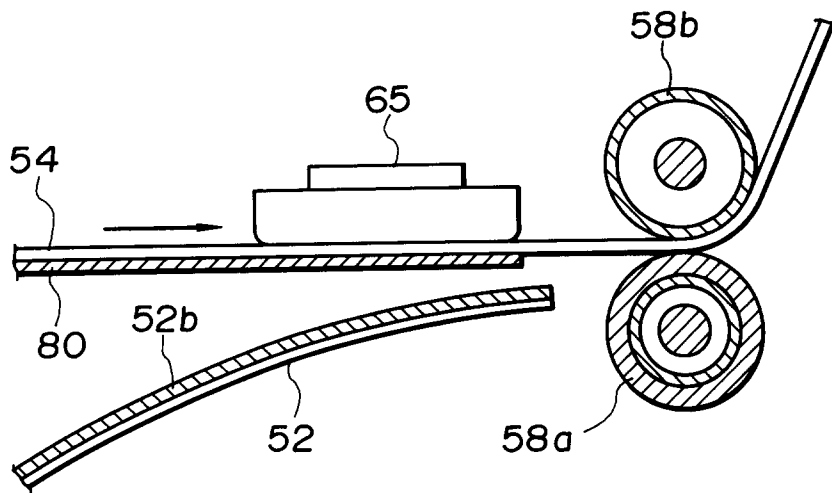


FIG.10A

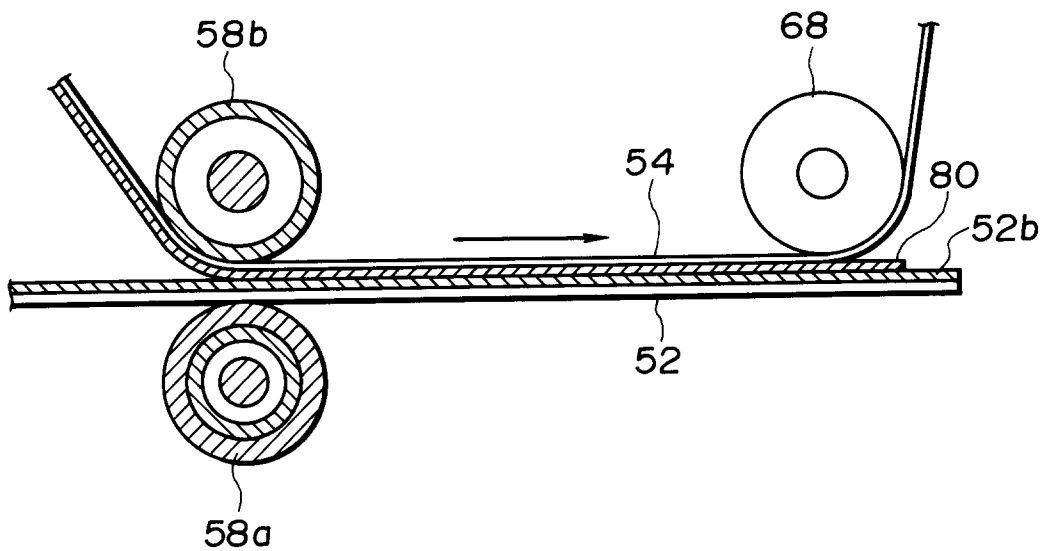
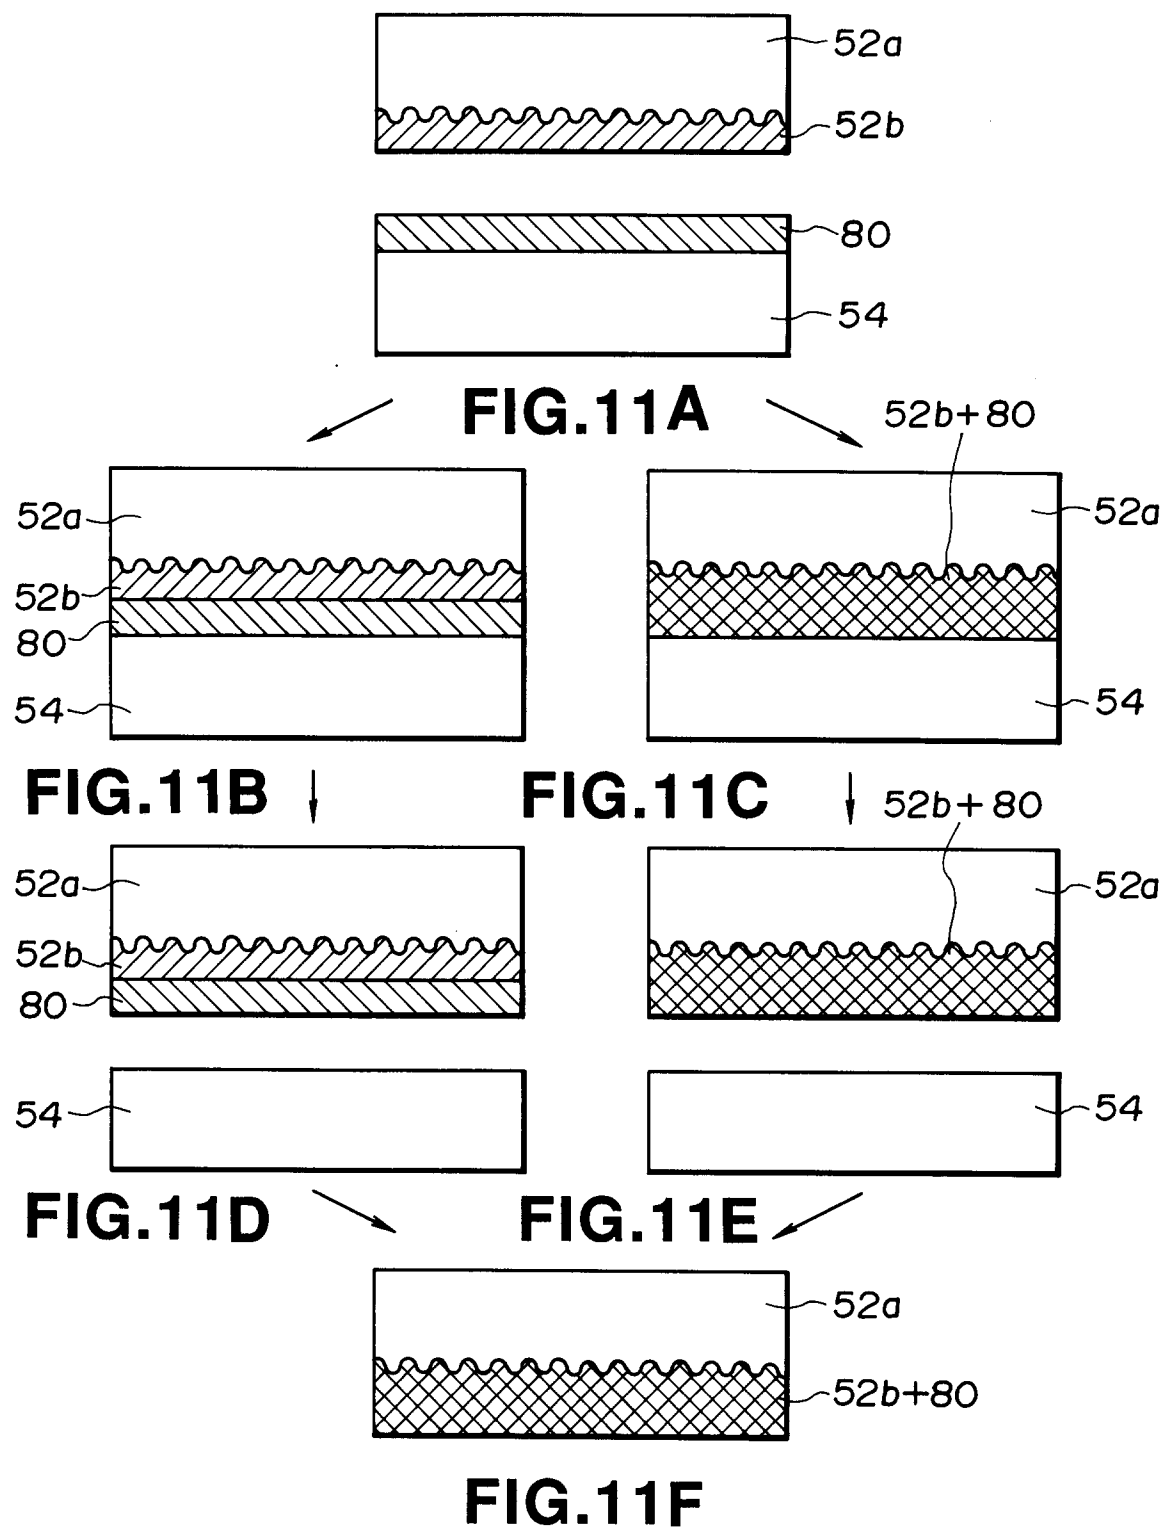


FIG.10B



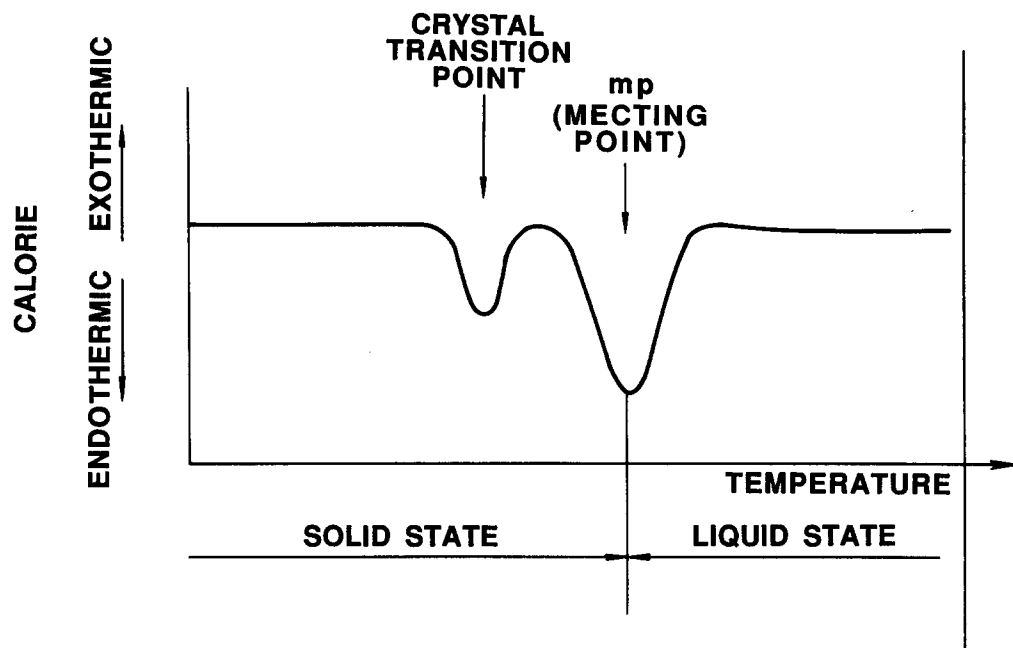


FIG.12

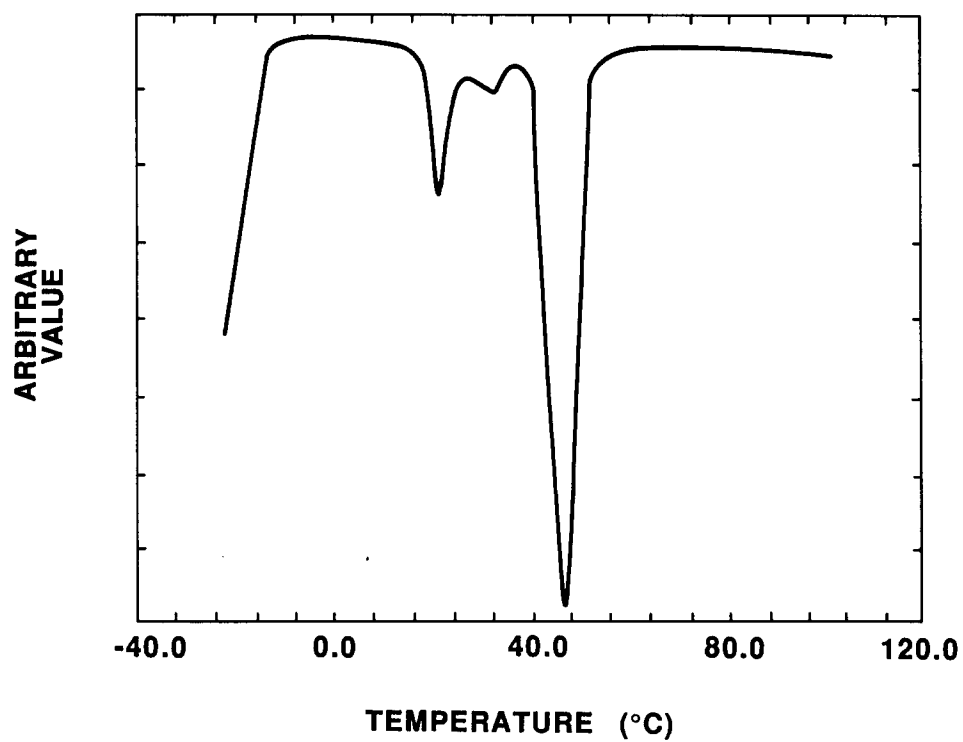


FIG.13

INTERNATIONAL SEARCH REPORT

International Application No PCT/JP92/01282

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int. Cl. ⁵ G03G15/16		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC	G03G13/14, 13/16, 15/14, 15/16, 15/20	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
Jitsuyo Shinan Koho	1962 - 1991	
Kokai Jitsuyo Shinan Koho	1971 - 1991	
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	JP, B2, 44-16473 (Konica Corp.), July 21, 1969 (21. 07. 69), (Family: none)	1, 2
Y	JP, A, 56-151970 (Canon Inc.), November 25, 1981 (25. 11. 81), Lines 5 to 11, lower left column, page 1 (Family: none)	1, 2
Y	JP, A, 57-17962 (Konica Corp.), January 29, 1982 (29. 01. 82), Lines 2 to 16, upper left column, page 8, Fig. 1 & DE, A1, 3126174	3
Y	JP, A, 58-105178 (Coulter Systems Corp.), June 22, 1983 (22. 06. 83), (Family: none)	3, 4, 6
Y	JP, A, 59-37578 (Ricoh Co., Ltd.), March 1, 1984 (01. 03. 84), Lines 5 to 11, lower left column, page 3, Fig. 2 (Family: none)	3, 4
<p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
November 16, 1992 (16. 11. 92)	December 15, 1992 (15. 12. 92)	
International Searching Authority	Signature of Authorized Officer	
Japanese Patent Office		

FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

Y	JP, A, 59-90856 (Coulter Systems Corp.), May 25, 1984 (25. 05. 84), & EP, A1, 104627 & US, A, 4510225	2, 4, 5, 6, 7
Y	JP, A, 61-126566 (Sony Corp.), June 14, 1986 (14. 06. 86), Lines 5 to 10, lower left column, page 1 (Family: none)	6

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers , because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claim numbers , because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claim numbers , because they are dependent claims and are not drafted in accordance with the second and third sentences of PCT Rule 6.4(a).

VI. ☐ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING ²

This International Searching Authority found multiple inventions in this international application as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.
2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:
3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:
4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

Remark on Protest

- ☐ The additional search fees were accompanied by applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.