



(12)

EUROPEAN PATENT APPLICATION

(21) Application number : **93830256.9**

(51) Int. Cl.⁵ : **E03F 5/22, F04D 15/02,
F04B 49/02, F04C 15/04**

(22) Date of filing : **10.06.93**

(30) Priority : **21.07.92 IT FI92148
14.12.92 IT FI92235**

(43) Date of publication of application :
26.01.94 Bulletin 94/04

(84) Designated Contracting States :
CH DE ES FR GB IT LI SE


(71) Applicant : **DITTA LENCIONI CARLO**
Via V. Emanuele n. 85
I-55041 Camaione, Lucca (IT)

(72) Inventor : **Lencioni, Carlo**
Via Vittorio Emanuele No.85
I-55041 Camaione, Lucca (IT)

(74) Representative : **Mannucci, Gianfranco,**
Dott.-Ing. et al
Ufficio Tecnico Ing. A. Mannucci Via della
Scala 4
I-50123 Firenze (IT)

(54) **Device for the control of elevating pumps in a drainage installation or similar.**

(57) The device for the control of elevating pumps in a drainage installation or similar comprises a sealed flexible chamber (5) containing a fluid and designed to be disposed below the level (L1) of the liquid to be elevated, the chamber (5) being provided with a pressure-operated switch (30) which generates a control signal for the elevating pump or pumps according to the pressure inside the said chamber (5).

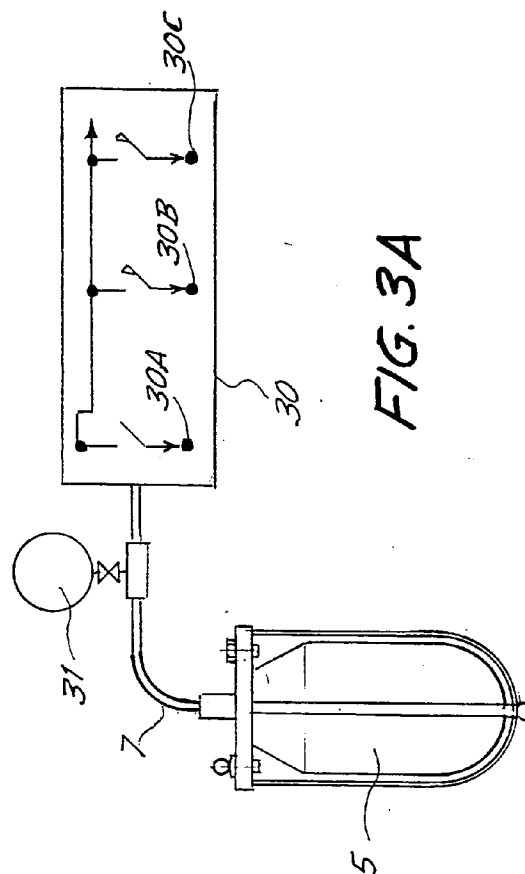

The invention relates to a device for controlling the starting and stopping of the elevating pumps in a drainage installation.

Dynamic drainage installations have collecting wells for waste water or sewage, in which one or more pipes converge, and from which the sewage is elevated by means of submerged pumps and sent to a higher section of the drainage installation. In installations of this type it is necessary to have a system which controls the starting and stopping of the submerged pumps to ensure, on one hand, that the pumps always remain submerged, and, on the other hand, that a safe level of the sewage is not exceeded. Normally, two pumps of equal capacity are disposed in a single well and are provided with a system of floats which control their starting and stopping. In particular, three floats are provided at three different levels, corresponding respectively to a minimum level of the liquid below which it must not fall if the pump is not to be uncovered, a second intermediate level at which at least one pump must be started, and a third higher level at which the second elevating pump must be started.

The floats contain mercury switches and are always supplied with electrical power. Each float is suitably counterweighted so that, when the liquid reaches the level of the float, the float is rotated in such a way as to cause the mercury switch to close.

These floats have considerable disadvantages, in the first place their high cost and the necessity of having a number of floats equal to the number of control levels of the liquid. In the second place, the electrical potential, although low, constitutes a hazard because of the presence of water in the installation area. Moreover, in the specific application to drainage installations, the presence of floating substances and froth generated by soaps poured into the drains leads to the formation of encrustations on the floats which alter their floating characteristics, so that in certain cases the necessary rotation of the float at the moment when the liquid reaches it does not take place.

The object of the invention is to provide a device for the objects specified above which overcomes the disadvantages of the conventional devices which use floats with mercury switches.

In essence, the subject of the invention is a device for the control of elevating pumps in a drainage installation or similar, characterised by the presence of a flexible chamber containing a fluid and designed to be disposed below the level of the liquid to be elevated, the chamber being provided with a pressure-operated switch which generates a control signal for the elevating pump or pumps according to the pressure inside the said chamber.

The chamber may advantageously be connected by a pressure transmission pipe to a pressure-operated switch which is disposed in the control panel outside the well in which the chamber and elevating pumps are disposed. In this way, the presence of any

type of electrical power supply inside the drainage installation for driving the pump control device is avoided.

If a pressure-operated switch with three trigger levels is fitted, it is possible to control with a single chamber the switching on and off of two elevating pumps at three different levels of the liquid or sewage accumulated in the well in which the pumps are located. The pressure-operated switch may also be provided with a bistable device, of a type known in itself and previously used in this type of application, which enables the pumps to be used alternately so that the number of operating cycles of each pump is decreased.

It will be seen from the above summary that, by using the flexible sealed chamber according to the invention, it is possible to produce a two-pump elevating installation while reducing substantially the cost of the control devices for the pumps, and that it is also possible to eliminate all the disadvantages inherent in floats. In particular, since the chamber has to remain constantly submerged, and is therefore located at a depth approximately equal to the depth of the pumps, no encrustations caused by floating detritus will be formed on it, and therefore its efficiency is not diminished over a period of time, whereas this does occur with the mercury switch floats of the conventional type.

The pressure line connecting the flexible chamber to the pressure-operated switch may be provided with a pressure gauge installed, for example, in the control panel of the installation, which makes it possible to check the level reached by the sewage without opening the manhole of the well in which the pumps are installed.

Further advantageous characteristics of the device according to the invention are indicated in the attached dependent claims.

The invention will be more clearly understood from an examination of the description and the attached drawing, which shows a non-restrictive practical example of the invention. In the drawing,

Fig. 1 is a highly schematic view of a well with the submerged elevating pumps and the control device according to the invention;

Fig. 2 is a side view and partial section of the flexible sealed chamber which forms the fundamental component of the device;

Figs. 3A and 3B are simplified electrical circuit diagrams to illustrate the operation of the device according to the invention; and

Figs. 4A and 4B show a modified electrical circuit diagram of an improved embodiment.

With reference to Fig. 1 initially, P indicates a well into which flow one or more sewage discharge pipes C. In the well P there are disposed two submerged pumps 1 and 3 for the elevation of the sewage from the well P to a higher section of the drainage instal-

lation which is not shown. L1, L2 and L3 indicate three control levels of the sewage. More specifically, L1 is the minimum level of the sewage below which it must not fall if the submerged pumps 1 and 3 are not to be uncovered. L2 is the level at which one of the pumps 1 and 3 must be started to initiate the emptying of the well P. If the capacity of the pump which has been started is greater than the capacity of the pipes C which discharge into the well, the level of the sewage is lowered until it again reaches the level L1, at which point the pump is switched off. Conversely, if the capacity of the started pump is lower than the capacity of the sewage entering from the pipes C, the level of the sewage in the well continues to rise even after the starting of the first pump until it reaches the level L3, at which level the second of the two pumps 1 and 3 is also started to provide a capacity greater than the total capacity of the pipes C which discharge into the well, and consequently a reduction of the level of the sewage to the minimum level L1 at which both pumps are switched off.

To control the pumps, a chamber 5, made from a flexible material, for example rubber or similar, with high strength and good sealing properties, is disposed inside the well P and is connected to a pipe 7 which represents a pressure transmission line leading from the interior of the chamber 5 to a pressure-operated switch, as will be described in greater detail in the following text. The chamber 5 is illustrated in particular in Fig. 2. It has an annular rim 7 which surrounds an aperture 9 and which is gripped between a first flange 11 and a second flange 13 by means of screw members 15 and 17. One or more of the screw members 15, 17 may have a ring 19 to enable the chamber to be anchored at a predetermined level in the well P. The flange 13 has a tubular joint 21 for connection to the flexible tube which connects the interior 5A of the chamber 5 to the pressure-operated switch.

In the embodiment illustrated in the attached drawing, the flange 11 has a mechanical system for protecting the chamber 5 consisting of a single pair of intersecting metal strips 23 and 25 which form a kind of cage. The structure formed by the strips 23 and 25 is sufficiently open not to be blocked by any detritus which may be present in the sewage, which might adversely affect the operation of the chamber. A further ring 27 is welded at the area of intersection of the strips 23 and 25 and is used, together with the upper ring 19, to maintain the chamber at a predetermined position inside the well P.

The system consisting of the tube 7 and the flexible chamber 5 is a closed system which contains a fluid, for example air, whose pressure is directly proportional to the head of liquid above the chamber 5, and therefore to the level which the sewage reaches in the well P. The pressure inside the chamber 5 and in the pipe 7 is detected by a pressure-operated switch indicated schematically by 30 in Fig. 3A. This

pressure-operated switch has three trigger levels indicated schematically by 30A, 30B, and 30C. The three trigger levels may be set so that the first contact is closed when the pressure inside the chamber 5 reaches the value corresponding to a level L1 of the sewage in the well P. The next levels 30B and 30C are set so that they correspond to the higher pressure when the head of liquid in the well P reaches levels L2 and L3 respectively.

As shown in Fig. 3A, the pipe 7 is also connected to a pressure gauge 31 which permits direct reading of the pressure and consequently reading of the level of the sewage in the well P. The electrical instruments comprising the pressure gauge 31 and the pressure-operated switch 30 are housed, for example, inside an electrical control panel 33 disposed outside the well in an area easily accessible to the maintenance and control personnel of the installation.

Fig. 3B shows the electrical circuit of the bistable starting and stopping device for the pumps 1 and 3, controlled by the three trigger levels 30A, 30B and 30C of the pressure-operated switch 30. The circuit in Fig. 3B is of a type known in itself. The circuit in Fig. 3B will therefore be described only very briefly since it is known to experts in the field. B1 and B3 indicate the coils of relays controlling the starting of the pumps 1 and 3 respectively. R1 and R3 are lamps indicating the operating condition of pumps 1 and 3 respectively, while V1 and V3 are lamps indicating the idle condition of the pumps.

35 and 37 indicate manual switches which enable each of the two pumps to be switched to a manual starting position (position shown by M), to a stop position (shown by the letter S), and to an automatic operation position indicated by A, in which the command for starting and stopping the pumps is obtained through the pressure-operated switch 30 and a bistable control device indicated by 39. By using the device 39 it is possible, by a method known in itself, each time the pressure-operated switch 30 is triggered, always to start up whichever pump was not started in the preceding cycle, in order to permit alternating operation of first the one and then the other pump, thus reducing the operating cycles of the pumps. 40A, 40B and 40C indicate the three contacts which are opened or closed by the pressure-operated switch 30 and which correspond to the three trigger levels of the pressure-operated switch indicated by 30A, 30B and 30C in Fig. 3A.

BIS indicates the coil of the relay controlling the movable element of the bistable device 39. I1 and I3 indicate various switches whose opening or closing is controlled by the relays connected with the pumps 1 and 3 respectively. The switches I1, I3 of the bistable device 39 and the switches I1, I3 of the lamps R1 and R3 are switches of the normally open type, as shown by the standard symbols used in the diagram, and are closed by the corresponding relays, which in turn are

controlled by the pressure-operated switch. The switches I1, I3 of the coil BIS of the relay of the bistable device 39 and the switches of the lamps V1 and V3 are of the normally closed type, and are opened by the corresponding relays.

When the pressure-operated switch 30 detects a pressure in the chamber 5 below that corresponding to the level L1, the contact 40A remains open and the pumps are both switched off. Conversely, when the level of the liquid rises above the level L1, the pressure-operated switch closes the contact 40A, and if the level L2 is also reached the pressure-operated switch 30 also closes the contact 40B. According to the state of the bistable device 39 at that instant, the closing of the contact 40B causes either pump 1 or pump 3 to start. If the starting of the pump leads to a reduction in the level of the liquid, the subsequent reaching of the level L1 causes the contact 40B to open and consequently causes the pump to be switched off and the bistable device to be switched to its second state, so that the next starting command will start the pump which did not operate in the preceding cycle. If the starting of a single pump is insufficient to reduce the level of the sewage, and the latter reaches the level L3, the pressure-operated switch also causes the contact 40C to close and consequently causes the second pump to start.

Figs. 4A and 4B show an improved embodiment of the invention, which enables the following further objects, in particular, to be achieved:

- automatic periodic removal of the detritus formed during operation from the well;
- periodic resetting of the internal pressure level in the flexible chamber, to compensate for possible leaks over a period of time.

Elements identical to or corresponding to those in the solution illustrated in Figs. 3A and 3B are indicated by the same reference numbers.

In this embodiment, the pipe 7 has a branch pipe 7A which leads to a second pressure-operated switch P5, set at a pressure value as required for the fluid (air) inside the chamber 5; through a branch 7B of the pipe 7A and through a solenoid valve EL5, a compressor C5 or any source of pressurised fluid may be put into communication with the closed space 5, 7, for the resetting of the pressure in the chamber 5, where the pressure may gradually decrease as a result of various leaks. GR indicates the resetting unit comprising the components P5, EL5 and C5.

In this embodiment, the trigger level 30A of the pressure-operated switch 30 takes the form of a branching contact 40A for connection to the line LOR of a clock OR; this clock OR makes a contact for a short time (for example 10-20 minutes) once in every twenty-four hours or equivalent period. In the said line LOR, in series with the clock and in parallel with each other, there are disposed a timer T1 (set for a short period), a relay RL1 whose contacts are con-

nected to the device 39, the control unit of the compressor C5 (if this is the source of fluid for 5) and the solenoid valve EL5 of the unit GR; the relay RL1 is in series with a contact of the timer T1 and the components C5 and EL5 are in series with the contact controlled by the pressure-operated switch P5 to open the solenoid valve EL5 and activate the compressor C5 when the pressure in 5 decreases below a predetermined trigger level, with a consequent reduction of the volume of the flexible chamber 5. The contact 40A of the pressure-operated switch 30 is also used to drive the time clock OR which constitutes a time switch.

When the pressure-operated switch 30 detects a pressure in the chamber 5 below that corresponding to the level L1, the branching contact 40A is switched to the line LOR and the pumps are both switched off. Conversely, when the level of the liquid rises above the level L1, the pressure-operated switch 30 closes the contact 40B, and if the level L2 is also reached the pressure-operated switch 30 also closes the contact 40C. According to the state of the bistable 39 at that instant, the closing of the contact 40B causes pump 1 or pump 3 to start. If the starting of the pump leads to a reduction in the level of the liquid, the subsequent reaching of the level L1 causes the contact 40B to open and consequently causes the pump to be switched off and the bistable device to be switched to its second state, so that the next starting command will start whichever pump did not operate in the preceding cycle. If the starting of a single pump is insufficient to reduce the level of the sewage, and the latter reaches the level L3, the pressure-operated switch also causes the contact 40C to close and consequently causes the second pump to start.

Periodically, when the clock OR makes the contact (for example, for a quarter of an hour once every 24 hours) the branching contact 40A switched to the line LOR allows current to the group T1, RL1, C5, EL5, that is the group GR to activate the operation of the pump, or preferably pumps, 1 and 3 to rapidly lower the level of the sewage in the well P to the level L0; in this way the pumps also remove the detritus - mostly floating detritus - which has accumulated in the well during operation, and send it to the section to which the pumps are intended to elevate the whole of the sewage. In this way, periodic, although partial, cleaning is obtained, which at least reduces or even eliminates the necessity of manual maintenance. This operation must be carried out in a short period, namely within the short interval established by T1, to prevent overheating of the pumps which will be uncovered.

At the time of the activation of the pump or pumps for discharge to the minimum emptying level L0, it is possible to reset the pressure in the flexible chamber 5 under the control of the second pressure-operated switch P5 by opening the solenoid valve EL5 to en-

able sufficient fluid to enter the closed space 5, 7, 7A to reset the pressure in the chamber 5, for the correct operation of the chamber. In this way the necessity of checks which would otherwise be required to ensure the operation of the device is avoided, or at least the frequency of such checks is reduced.

In this embodiment, the period of activation of the pumps with the sewage below the level L1 is limited by the timer T1. However, a situation may still occur in which the pumps operate for a certain time with the sewage at the level of the intake aperture, with a consequent intake of air. In order to avoid this problem, it is possible to replace the timer T1 with a device which switches off the pumps as soon as they begin to take in air. This may be done, for example, with a microprocessor which checks the power absorbed by the motors driving the pumps 1 and 3. When the sewage level falls sufficiently to uncover the intake apertures, the pumps begin to take in air, with a consequent abrupt decrease in the absorbed power. This decrease, detected by the microprocessor, may be used as the signal for switching off the pumps in time.

It is to be understood that the drawing shows only an example provided solely as a practical demonstration of the invention, and that this invention may be modified in its forms and dispositions without departure from the scope of the guiding principle of the invention.

Claims

1. Device for the control of elevating pumps in a drainage installation, characterised by the presence of a sealed flexible chamber containing a fluid and designed to be disposed below the level of the liquid to be elevated, the chamber being provided with a pressure-operated switch which generates a control signal for the elevating pump or pumps according to the pressure inside the said chamber.
2. Device according to Claim 1, characterised in that the interior of the said chamber is connected by a pressure transmission pipe to the pressure-operated switch which is located outside the drainage installation.
3. Device according to Claim 1 or 2, characterised in that the pressure-operated switch has three trigger levels to control the starting and stopping of two elevating pumps according to the level reached by the liquid.
4. Device according to Claim 3, characterised in that the pressure-operated switch is provided with a bistable control means which enables the said pumps to be started alternately.

5. Device according to one or more of the preceding claims, characterised in that the said chamber is filled with air.
6. Device according to one or more of the preceding claims, characterised in that the said chamber is provided with fastening means to fix the said chamber at a predetermined depth in the well in which the pumps are installed.
7. Device according to one or more of the preceding claims, characterised in that the said chamber is disposed inside a rigid protecting structure.
8. Device according to one or more of the preceding claims, characterised in that the said chamber is provided with a pressure gauge, from a reading of which it is possible to deduce the level of the liquid in the well in which the chamber is installed.
9. Device according to one or more of the preceding claims, characterised in that it also comprises means of periodically causing a more complete emptying (to the level LO) of the pump well, and thus a periodic removal of the detritus formed in the said well.
10. Device according to Claim 9, characterised in that it also comprises a resetting unit, connected to the interior of the flexible chamber, which is activated to reset the pressure inside the chamber, at the time of one of the periodic emptyings of the well, when such resetting is required.
11. Device according to Claim 9 or 10, characterised in that it comprises a branching contact moved cyclically by the pressure-operated switch to allow current to a time switch or clock, provided with means of causing the activation of at least one of the pumps for a periodic emptying of the well below a lower normal operating limit.
12. Device according to Claim 11, characterised in that it also comprises, in combination with the said clock, the said resetting unit, the latter comprising a compressor or equivalent, a pressure-operated switch capable of reading the internal pressure of the flexible chamber, and a solenoid valve, for the early resetting of the internal pressure of the said chamber in the event of leaks of fluid from the said chamber, at the time of a cyclical emptying of the well.
13. Device according to Claim 11, characterised in that the means which cause the activation of at least one of the pumps for the periodic emptying of the well comprise a relay and a timer.

14. Device according to Claim 11, characterised in that the means which cause the activation of at least one of the pumps for the periodic emptying of the well comprise a relay and a control system which inactivates the pump when the sewage level reaches the intake apertures of the pumps. 5

10

15

20

25

30

35

40

45

50

55

6






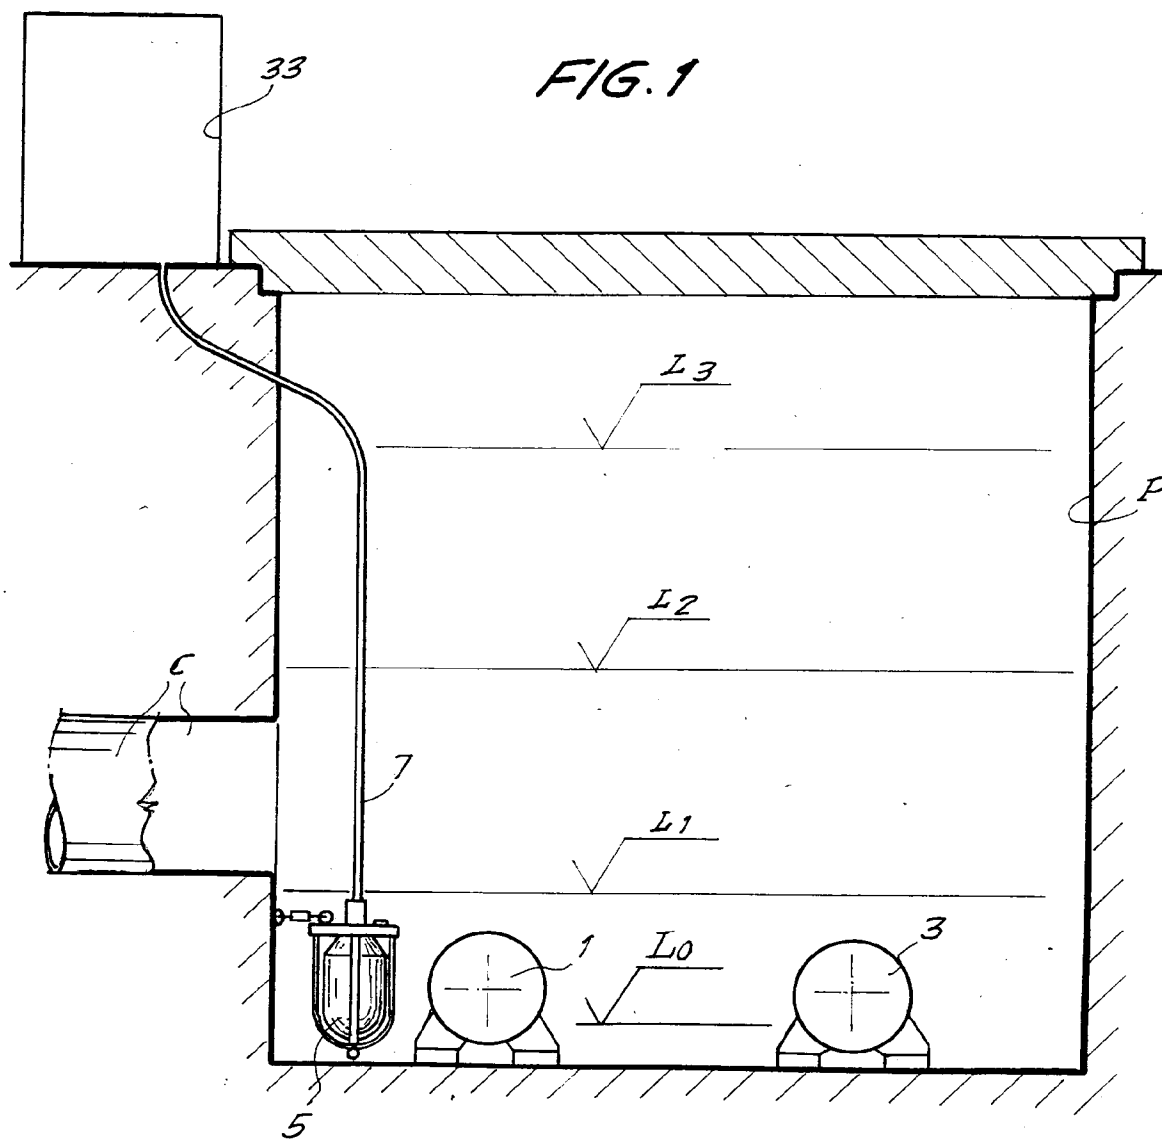


FIG. 2

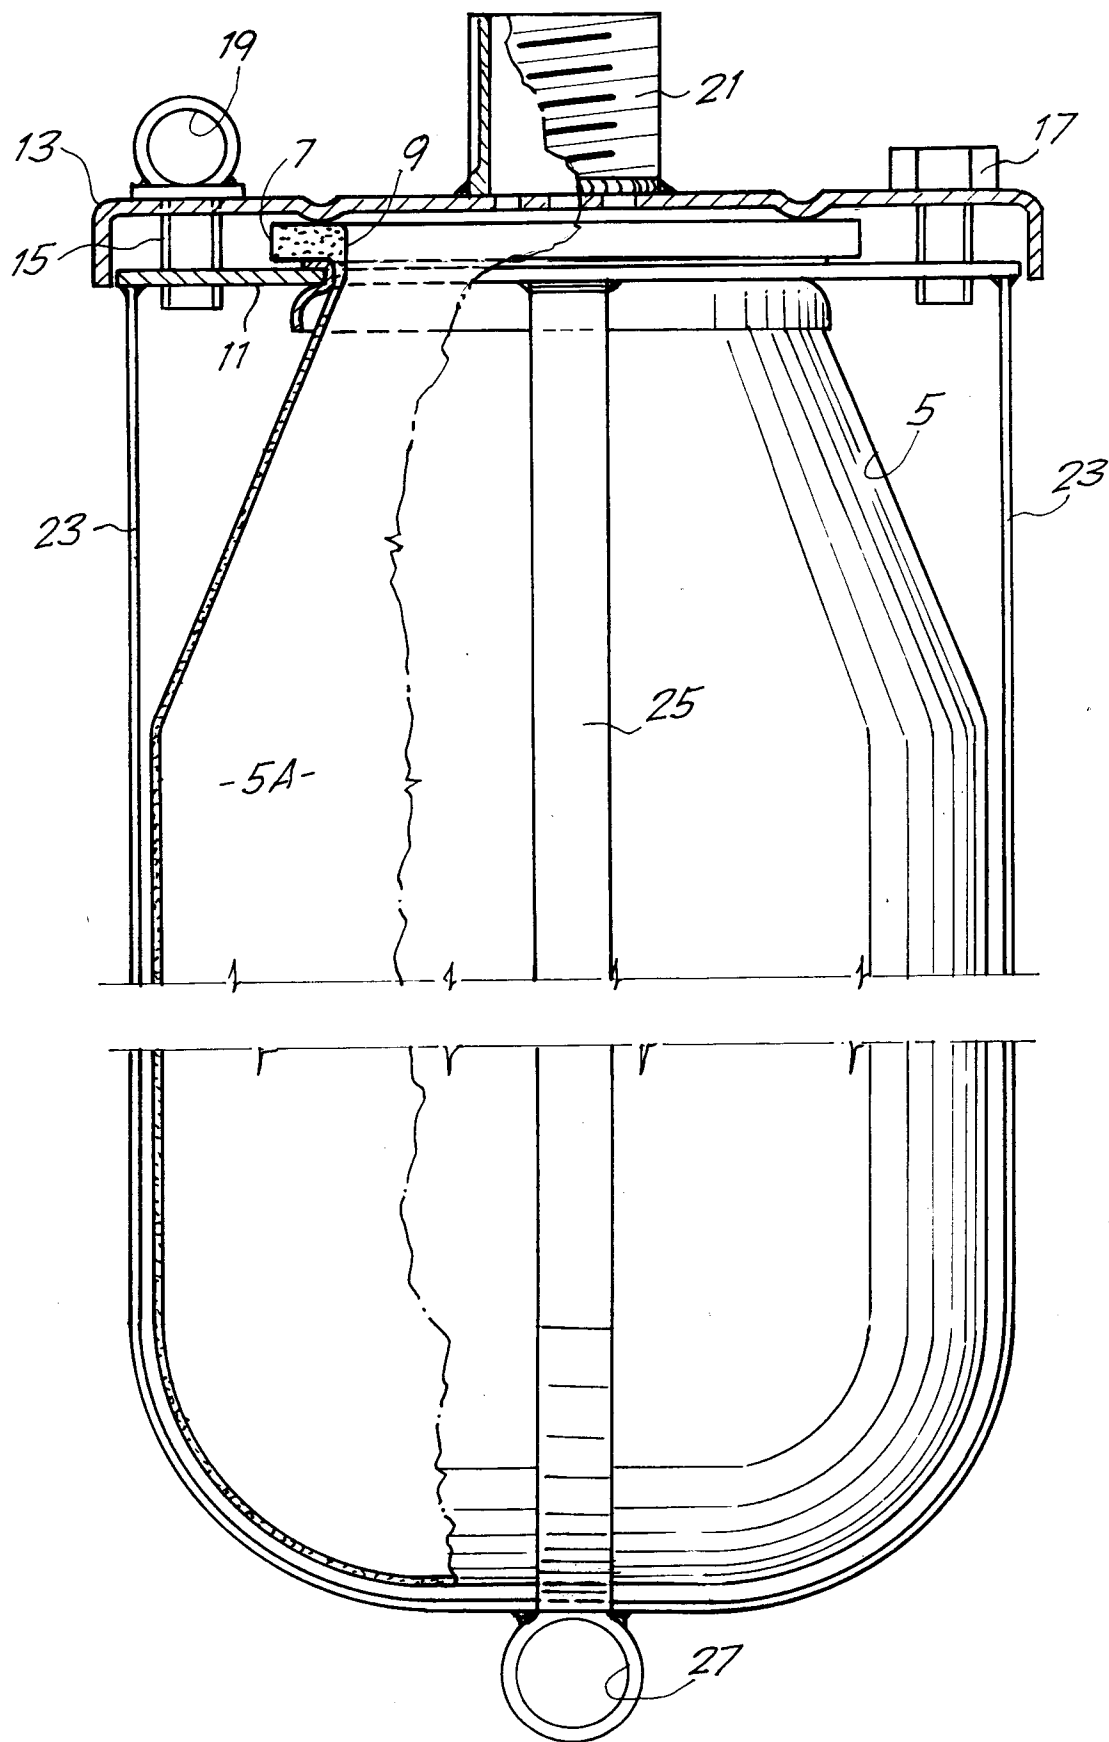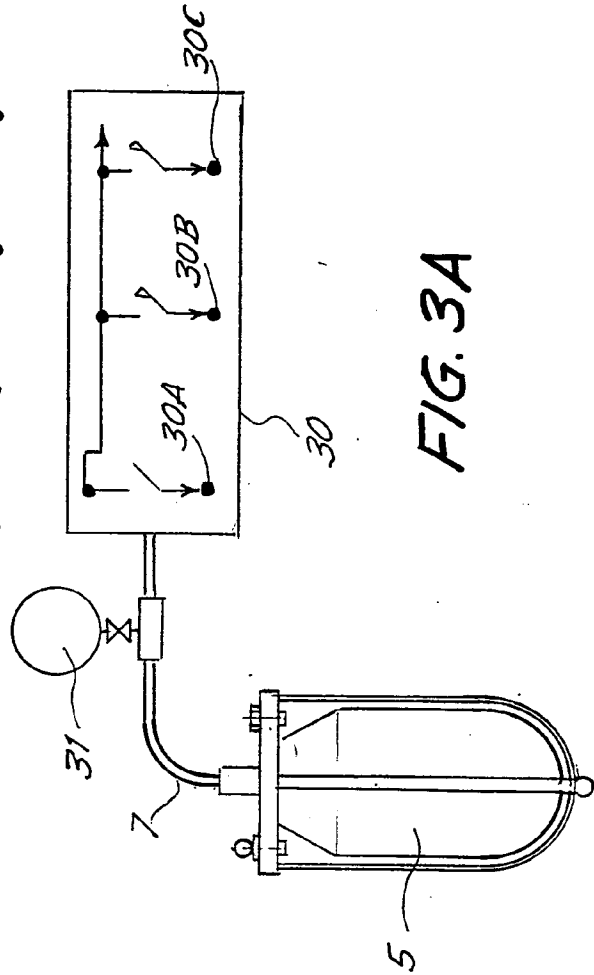

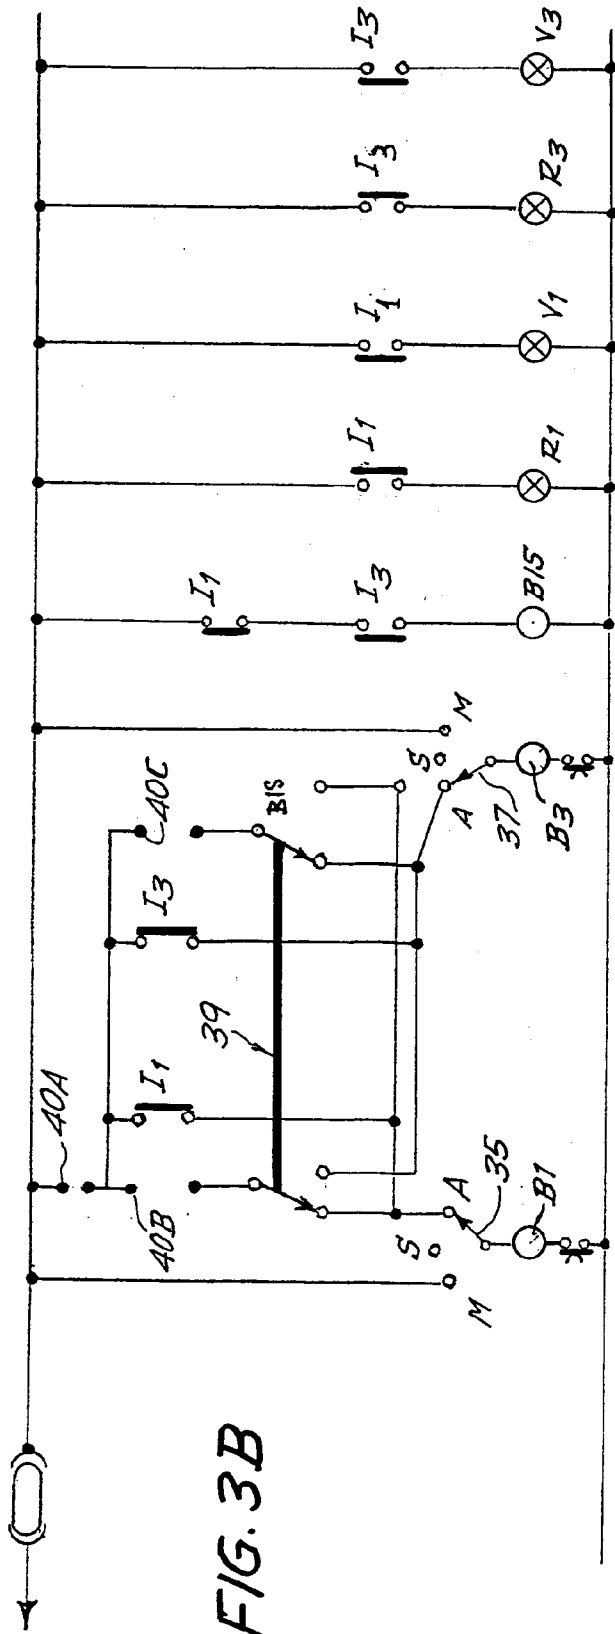

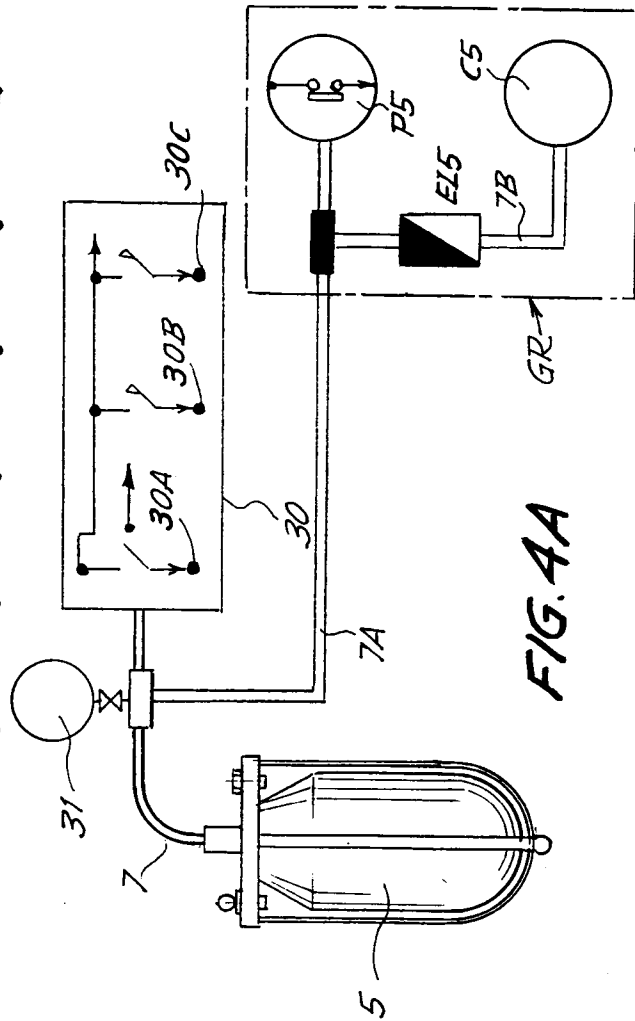

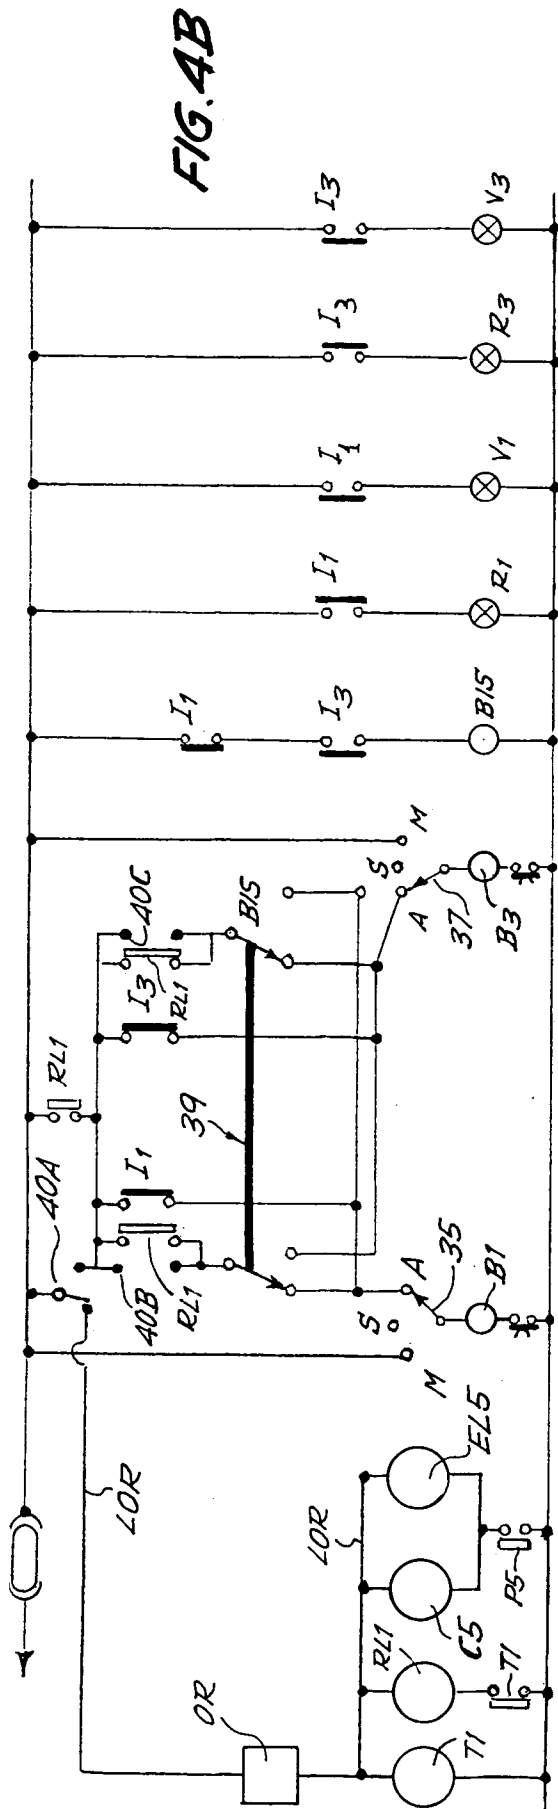

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 93 83 0256

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	US-A-3 637 326 (W. DOWELL) * column 2, line 32 - column 3, line 27; figures * ---	1,5	E03F5/22 F04D15/02 F04B49/02 F04C15/04
X	US-A-2 922 854 (A. NIELSEN) * column 1, line 24 - line 44 * * column 1, line 56 - column 2, line 15 * * column 3, line 61 - column 4, line 27 * * column 5, line 10 - line 27; figures 1,3 * ---	1,5,6,7	
A	US-A-4 304 526 (E. SHETLER) * column 3, line 6 - line 21 * * column 3, line 35 - column 4, line 2; figures 1,3-5,9 * ---	1,2,5,7	
A	US-A-3 639 081 (J. GRAY) * column 5, line 16 - column 6, line 39; figures * -----	1,6-8, 10,11, 13,14	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			E03F F04B F04D F04C
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 06 OCTOBER 1993	Examiner KRIEKOUKIS S.
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (P0401)