



⑪ Publication number: **0 580 950 A1**

⑫ **EUROPEAN PATENT APPLICATION**

⑳ Application number: **93105187.4**

⑤① Int. Cl.⁵: **F25C 1/08**

㉒ Date of filing: **29.03.93**

③① Priority: **31.07.92 JP 59652/92 U**
22.08.92 JP 64400/92 U

④③ Date of publication of application:
02.02.94 Bulletin 94/05

⑧④ Designated Contracting States:
DE ES FR GB IT

⑦① Applicant: **HOSHIZAKI DENKI KABUSHIKI KAISHA**
3-16, Minamiyakata,
Sakae-machi
Toyoake-shi, Aichi-ken(JP)

⑦② Inventor: **Sakai, Tadashi, c/o Hoshizaki Denki K.K.**
3-16, Minamiyakata,
Sakae-machi
Toyoake, Aichi(JP)
 Inventor: **Sanuki, Masao, c/o Hoshizaki Denki K.K.**
3-16, Minamiyakata,
Sakae-machi
Toyoake, Aichi(JP)


⑦④ Representative: **Prüfer, Lutz H.**
Patentanwalt,
Dipl.-Physiker Lutz H. Prüfer,
Dr. Habil, Jürgen Materne,
Harthausen Strasse 25d
D-81545 München (DE)

⑤④ **Cam control mechanism in ice making machine.**

⑤⑦ Disclosed is a cam control mechanism in an ice making machine, in which a multiplicity of freezing fingers (36,117) formed on the lower surface of a freezing base plate (34,118) are dipped in the water supplied to a freezing chamber (32,129) defined in a water tray (24,116) to carry out a freezing operation and form inverted dome-shaped ice pieces (70,121) gradually around the freezing fingers (36,117); characterized in that said mechanism consists of a control cam (13,136) to be rotated by an actuator motor (AM) for tilting and resetting said water tray (24,116); and a control switch (SW₁,SW₇) disposed on the fixed side corresponding to the location of said control cam (13,136) for giving a cam action in accordance with a predetermined timing; wherein said control cam (13,136) and said control switch

(SW₁,SW₇) are adapted to control at least tilting and resetting of said water tray (24,116), as well as, stopping thereof in such postures by the actuator motor (AM). The cam control mechanism of the invention can successfully attain a series of cam actions to be caused in accordance with the rotation of an actuator motor (AM) for driving the water tray (24,116): (1) tilting of the water tray (24,116) and resetting thereof to the horizontal posture; (2) supply of hot gas to an evaporator (22,131) for accelerating releasing of ice pieces in the ice releasing operation and stopping thereof; and (3) replenishment of water to be frozen after a cycle of freezing operation and stopping thereof, whereby to realize simplification of the control system and reduction of production cost.

FIG. 4

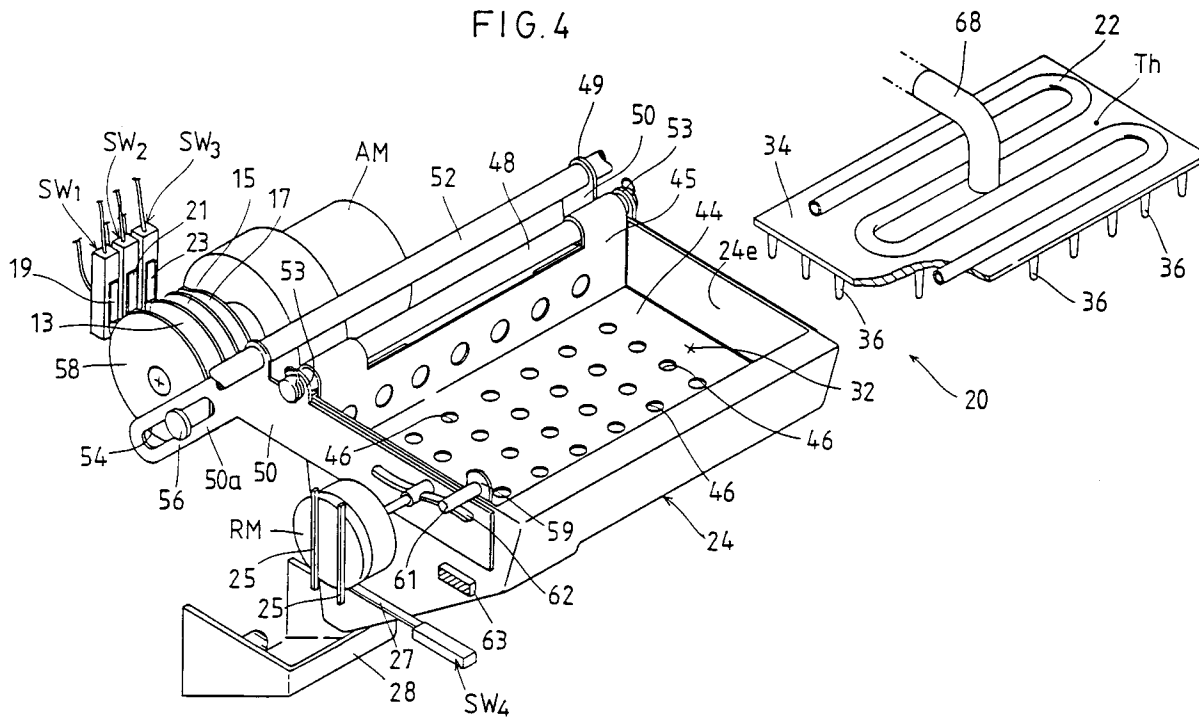

BACKGROUND OF THE INVENTION

This invention relates to a cam control mechanism in an ice making machine. More particularly, this invention relates to a cam control mechanism in an ice making machine, in which a multiplicity of freezing fingers formed on the lower surface of a freezing base plate are dipped in the water supplied to a freezing chamber defined in a water tray to carry out a freezing operation and form inverted dome-shaped ice pieces gradually around the freezing fingers. The cam control mechanism of the invention successfully carries out a series of cam actions to be caused in accordance with the rotation of an actuator motor for driving the water tray:

- (1) tilting of the water tray and resetting thereof to the horizontal posture;
- (2) supply of hot gas to an evaporator for accelerating releasing of ice pieces in the ice releasing operation and stopping thereof; and
- (3) replenishment of water to be frozen after a cycle of freezing operation and stopping thereof, whereby to realize simplification of the control system and reduction of production cost.

Various types of freezing systems have been proposed for automatic ice making machines for making a number of ice pieces such as cubes continuously, and they are suitably employed depending on the applications. For example, the following systems are known:

- (1) a so-called closed cell system ice making machine having a multiplicity of freezing cells opening downward defined by a multiplicity of partitions crossing one another, to which water is injected upward to the respective freezing cells, which are cooled by an evaporator connected to a freezing system, from a water tray disposed below the freezing cells to form ice cubes gradually therein;
- (2) a so-called open cell system ice making machine having such freezing cells opening downward, in which water is sprayed upward directly into the freezing cells using no water tray to form ice cubes therein; and
- (3) a flow-down system ice making machine having a perpendicular freezing plate, in which water is supplied to flow down on one surface of the freezing plate to form a semicylindrical ice block on the corresponding surface.

These three types of ice making machines all employ a forced circulation system and have a water tank for carrying therein a predetermined amount of water to be frozen, and the water in the tank is fed by a pump to the freezing cells or to the perpendicular freezing plate disposed in a freezing unit, while the unfrozen portion of the water is recovered into the tank to recirculate it to the freezing unit. Accordingly, incidental equipments

such as a water tank and a pump for circulating the water to be frozen become necessary in such types of ice making machines. This causes not only complication of the structure of the machine but also production cost elevation and enlargement of the machine. Meanwhile, there has already been proposed a more simplified ice making machine, in which freezing fingers extending downward from the lower surface of a freezing base plate provided with an evaporator thereon are dipped in a predetermined level of water carried in a water tray to form ice pieces around the freezing fingers. This type of ice making machine requires no mechanism for circulating the water to be frozen between the water tray and the water tank during the freezing operation, so that the structure of the machine can be simplified, leading to production cost reduction and down-sizing of the machine, advantageously.

As described above, the last mentioned ice making machine, in which ice pieces are designed to be formed around the freezing fingers merely by dipping them in the water carried in the water tray, enjoys a great advantage that the structure of the machine can be simplified. However, the control system of the machine is not necessarily simplified actually. Namely, in the ice making machine, the freezing cycle and the ice releasing cycle are repeated alternatively, and water to be frozen must be replenished whenever the freezing cycle is started. Meanwhile, after completion of the freezing cycle, a hot gas must be supplied to the evaporator after the water tray is tilted and stopped at a predetermined angle so as to accelerate dropping of the ice pieces formed around the freezing fingers by their own weights. It is also necessary to stop supply of the hot gas to the evaporator and supply a cooling medium instead thereto after dropping of the ice pieces, as well as, to allow the water tray stopping in the tilted posture to reset to the horizontal posture and resume the freezing operation. Accordingly, various types of sensors and a complicated control circuit become necessary in order to control such series of actions, contributing less to the overall production cost, disadvantageously, in spite of the simplified mechanical structure.

SUMMARY OF THE INVENTION

This invention is proposed in view of the problems inherent in the conventional ice making machine, in which ice pieces are designed to be formed around the freezing fingers by dipping them into the water carried in the freezing chamber defined in a water tray, and with a view to overcoming them successfully, and it is an object of this invention to provide a cam control mechanism

which can successfully attain a series of cam actions to be caused in accordance with the rotation of actuator motor for driving the water tray:

- (1) tilting of the water tray and resetting thereof to the horizontal posture;
- (2) supply of hot gas to an evaporator for accelerating releasing of ice pieces in the ice releasing operation and stopping thereof; and
- (3) replenishment of water to be frozen after a cycle of freezing operation and stopping thereof.

The mechanisms of this invention as set forth in the appended claims are proposed in order to overcome the above problems and attain the intended objects successfully. According to the mechanism in the ice making machine of this invention, in which a multiplicity of freezing fingers formed on the lower surface of a freezing base plate are dipped in the water carried in the freezing chamber defined in a water tray to carry out a freezing operation and form inverted dome-shaped ice pieces gradually around the freezing fingers, the following motions:

- (1) tilting of the water tray and resetting thereof to the horizontal posture;
- (2) supply of hot gas to an evaporator for accelerating releasing of ice pieces in the ice releasing operation and stopping thereof; and
- (3) replenishment of water to be frozen after a cycle of freezing operation and stopping thereof are designed to be carried out by a series of cam actions to be caused in accordance with the rotation of an actuator motor for driving the water tray, whereby to realize simplification of the control system and reduction of production cost.

In the cam control mechanism in the ice making machine according to this invention, in which a multiplicity of freezing fingers formed on the lower surface of a freezing base plate are dipped in the water to be frozen carried in the freezing chamber defined in the water tray, the tilting of the water tray and resetting thereof to the horizontal posture, as well as stopping thereof at such postures in an ice making machine are successfully achieved by a series of cam actions to be caused in accordance with the rotation of the actuator motor which is a driving source for a water tray tilting mechanism. Meanwhile, in addition to the tilting and resetting of the water tray, as well as, stopping thereof at such postures, supply of a hot gas to the evaporator for accelerating dropping of ice pieces in the ice releasing operation and stopping thereof and also replenishment of water to be frozen after a freezing operation and stopping thereof are also designed to be controlled by a series of cam actions in accordance with the rotation of the actuator motor. Accordingly, the constitution of the control system in the ice making machine can notably be simplified

to contribute greatly as a whole to the reduction of production cost. Moreover, since a plurality of cam surfaces are formed on one cam plate so as to control tilting and resetting of the water tray, as well as, stopping thereof at such postures by the switches disposed correspondingly to the respective cam surfaces, not only the number of parts can be reduced, but also the control system can be simplified.

Meanwhile, since the water tray is adapted to be pivotally supported at the pintles formed integrally therewith onto the main body of the ice making machine, the water tray can smoothly be tilted and reset on the pintle. Namely, since the load of the water tray is applied evenly to the pintles, no bias load is applied to the pivotal shaft and connection rod connected to the pintles to allow smooth pivoting of the water tray.

Moreover, since the pivotal shaft for tilting the water tray is pivotally supported onto the main body of the ice making machine, heat insulation at such portions can be facilitated, advantageously. Further, the drain pipe disposed to the water tray is allowed to serve also as a stopper for retaining the water tray in a tilted posture, so that there is no need of providing a stopper additionally, and the number of parts can be reduced, leading to cost reduction.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows schematically in perspective view a cam control mechanism in an ice making machine according to a first embodiment of the invention.

Fig. 2 shows a diagram of control circuit connected to the cam control mechanism.

Fig. 3 shows a timing chart for the control to be effected by the cam control mechanism.

Fig. 4 shows schematically in exploded perspective view a freezing unit in which the cam control mechanism is employed.

Fig. 5 shows in vertical section the major portion of the freezing unit shown in Fig. 4.

Fig. 6 shows in partially cut-away perspective view the water tray shown in Fig. 4, as well as, the rocking plate to be incorporated therein and a drainage for discharging the water to be frozen.

Fig. 7 shows schematically in vertical section the ice making machine in which the cam control mechanism is employed.

Fig. 8 shows in partially cut-away perspective view the ice making machine shown in Fig. 7.

Fig. 9 shows schematically a freezing system to be employed in the ice making machine.

Fig. 10 shows in vertical section the major portion of the freezing unit shown in Fig. 5, where the rocking plate is ascended during the freezing

operation.

Fig. 11 shows in vertical section the major portion of the freezing unit shown in Fig. 5, where the rocking plate is descended in the freezing operation.

Fig. 12 shows in vertical section the freezing unit, where ice formation is completed, together with the positional relationship between a cam follower and a cam slot.

Fig. 13 shows in vertical section the freezing unit, where the water tray is tilting, and the water remaining therein is partly discharged.

Fig. 14 shows in vertical section the freezing unit, where the water tray is stopping in the tilted posture, and the ice pieces are being released while the rocking plate is retained in a tilted posture at a position slightly above the water tray.

Fig. 15 shows in vertical section the freezing unit, where the water tray is reset to the original horizontal posture, and water to be frozen is being added afresh to the residual water.

Fig. 16 shows in exploded perspective view the major portion of the cam control mechanism in an ice making machine according to a second embodiment of the invention.

Fig. 17 shows schematically in vertical section the ice making machine in which the cam control mechanism according to the second embodiment of the invention is employed.

Fig. 18 shows in partially exploded perspective view the freezing unit in which the cam control mechanism is employed.

Fig. 19 shows in vertical section the major portion of the freezing unit shown in Fig. 18.

Fig. 20 shows in partially cut-away front elevation the water tray tilting mechanism and the rocking plate rocking mechanism shown in Fig. 18.

Fig. 21 shows schematically in perspective view the freezing unit shown in Fig. 18 disposed in a box-like chamber.

Fig. 22 shows in partially cut-away front elevation the freezing unit shown in Fig. 18.

Fig. 23 shows in perspective view the appearance of the ice making machine.

Fig. 24 shows in partially cut-away side view the freezing unit shown in Fig. 19, where the water tray is tilted.

Fig. 25 shows a diagram of control circuit connected to the cam control mechanism.

Fig. 26 shows an explanatory view of the freezing unit under rocking of the rocking plate during the freezing operation of the ice making machine and the rocking mechanism assuming a corresponding posture.

Fig. 27 shows an explanatory view of the freezing unit after completion of the freezing operation in the ice making machine according to the second embodiment of the invention and the rocking

mechanism assuming a corresponding posture.

Fig. 28 shows an explanatory view of the freezing unit after completion of the freezing operation in the ice making machine and the rocking mechanism assuming a corresponding posture, where the rocking protrusion of a rocking member is retracted from the tilting orbit of the engagement piece of the rocking plate.

Fig. 29 shows an explanatory view of the freezing unit after completion of the freezing operation in the ice making machine, and the rocking mechanism and tilting mechanism assuming corresponding postures respectively.

Fig. 30 shows an explanatory view of the freezing unit in the ice making machine, where the water tray is stopped in the tilted posture, together with the positional relationship between the cam plate of the tilting mechanism assuming a corresponding posture and the seventh and ninth switches.

Fig. 31 shows an explanatory view of the freezing unit in the ice making machine, where the water tray is resetting, together with the positional relationship between the cam plate of the tilting mechanism assuming a corresponding posture and the seventh and ninth switches.

Fig. 32 shows an explanatory view of the freezing unit in the ice making machine, where the water tray is counter-tilted over the horizontal posture, together with the positional relationship between the cam plate of the tilting mechanism assuming a corresponding posture and the seventh and ninth switches.

Fig. 33 shows an explanatory view of the motions of the rocking mechanism for the rocking plate in the ice making machine, where the rocking protrusion of the rocking member is retracting from the tilting orbit of the engagement piece of the rocking plate after detection of completion of the freezing operation.

Fig. 34 shows a timing chart of control to be effected by the cam control mechanism.

DESCRIPTION OF PREFERRED EMBODIMENTS

The cam control mechanism in the ice making machine according to this invention will be described below by way of preferred embodiments referring to the attached drawings.

(General constitution of the ice making machine)

Figs. 7 and 8 show schematically, in cross section and perspective view, respectively, the overall structure of the ice making machine in which the cam control mechanism according to a first embodiment of the invention is employed. A rectangular housing 10 constituting the main body of the ice making machine basically has defined

therein a lower machine chamber 14 in which the freezing system including a compressor CM and a condenser 18 are housed, an ice bin 12 which can be closed by a door 26, disposed above the lower machine chamber 14, surrounded with a heat insulating material and a freezing unit 20 disposed in the ice bin 12 at an upper position thereof. As will be described later referring to Figs. 4 and 5, the freezing unit 20 has a water tray 24 in which a predetermined level of water to be frozen is carried and a freezing base plate 34 having freezing fingers 36 to be dipped in the water to be frozen, wherein the water tray 24 is tilted to a predetermined angle upon switching to the ice releasing operation to discharge the water remaining therein to the outside of the machine through a water collecting section 28 and drain pipe 30 as well as to release the ice pieces into the ice bin 12.

(Freezing unit)

Fig. 5 shows minutely a vertical sectional view of the freezing unit 20, in which the water tray 24, the structure of which is as shown in Figs. 4 and 6, is designed to carry a predetermined level of water to be frozen in the freezing chamber 32 defined therein. In other words, the freezing chamber 32 is defined by a rectangular bottom 24a of the water tray 24 and four walls 24b, 24c, 24d, 24e standing upright from the four sides of the rectangular bottom 24a, respectively. A pair of supporting members 50 are fixed to the outer surfaces of the shorter walls 24d, 24e opposing to each other. As shown in Fig. 6, the supporting member 50 fixed to the wall 24d has a cam portion 50a bending diagonally downward at a position outer than the water tray 24, and a cam slot 54 is defined in the cam portion 50a, in which a cam follower 56 formed eccentrically on a cam disc 58 (to be described later) is fitted slidably. A tongue 49 having a through hole is formed adjacent to the corner of the bent portion in each supporting member 50 at a position outer than the water tray 24, and a pivotal shaft 52 is inserted to these through holes. The pivotal shaft 52 is fixed to the main body of the ice making machine, so that the water tray 24 may be tilted downward or reset to the horizontal posture on the pivotal shaft 52 under the cam action with the rotation of an actuator motor AM connected to the cam disc 58, as shown in Figs. 13 to 15.

(Freezing system)

Fig. 9 shows a schematic constitution of the freezing system to be employed in the ice making machine. The cooling medium vaporized under compression by the compressor CM is passed through a delivery pipe 33, liquefied by the con-

denser 18 and, after desiccation in a dryer 35, decompressed through a capillary 37. The thus treated cooling medium then flows into an evaporator 22 to be allowed to expanded suddenly to carry out heat exchange with the freezing base plate 32 and cool the freezing fingers 36 below the freezing point. The portion of the cooling medium vaporized in the evaporator 22 and the unvaporized portion of the cooling medium flow into an accumulator 39 in the form of gas-liquid mixture, where they are separated into the respective phases. The gaseous phase cooling medium is recirculated to the compressor CM through a suction pipe 41, while the liquid phase cooling medium is accumulated in the accumulator 39. Further, a hot gas pipe 43 branching out of the delivery pipe 33 of the compressor CM is connected to the inlet side of the evaporator 22 through a hot gas valve HV. The hot gas valve HV is open during the ice releasing operation to bypass the heated medium (hereinafter referred to as hot gas) delivered from the compressor CM through the evaporator 22 via the hot gas pipe 43 to heat the freezing fingers 36 and allow the ice pieces to drop by their own weights. Meanwhile, the hot gas delivered from the evaporator 22 heats the liquid phase cooling medium staying in the accumulator 39 to vaporize it, and the thus vaporized cooling medium is recirculated to the compressor CM through the suction pipe 41. Incidentally, the reference mark FM denotes a fan motor for the condenser 18.

(Water discharging mechanism of water tray)

As shown in Figs. 5 and 6, the water tray 24 has a drainage for discharging the water remaining in the freezing chamber 32 whenever the water tray 24 is tilted. More specifically, a water chute 38 is integrally formed on the bottom of the water tray 24 to extend diagonally downward therefrom, and a water collecting section 28 for discharging the thus collected water to the outside of the machine is defined in the ice bin 12 at an upper position (see Fig. 7). As shown in Fig. 5, the one longer wall on the free end side of the water tray 24 (locating opposite to the pivotal shaft 52) constitutes a dam plate 42, and an inner wall 24c covering the dam plate 42 is integrally formed with the water tray 24. Incidentally, the lower free end of the inner wall 24c is positioned adjacent to the bottom of the water tray 24 with a very small clearance therebetween. Accordingly, as shown in Fig. 5, the water to be frozen flows through the lower free end of the inner wall 24c to the dam plate 42, and flows further over the dam plate 42 to be discharged to the water chute 38. In other words, the water to be frozen to be carried in the freezing chamber 32 can be maintained at a predetermined level by the dam

plate 42. Upon switching to the ice releasing operation (to be described later), the water tray 24 is tilted downward 24, as shown in Fig. 13, to discharge the water remaining therein through the water chute 38. When the water tray 24 is stopped in the tilted posture, a part of the freezing water is held by the dam plate 42 to remain therein (see Fig. 14). The residual water is combined with another portion of water to be frozen supplied afresh from a water supply pipe 68 to cool effectively the temperature of the water to be frozen entirely.

The freezing base plate 34 is secured horizontally at an upper position of the rectangular housing 10, and the evaporator 22 led out of the freezing system housed in the machine chamber 14 is disposed zigzag on the upper surface of the freezing base plate 34. Meanwhile, a plurality of freezing fingers 36 protrude downward from the lower surface of the freezing base plate 34 at predetermined intervals, and these freezing fingers 36 are adapted to be dipped in the water to be frozen carried in the water tray 24 during the freezing operation. As heat exchange with the cooling medium in the evaporator 22 is proceeded by operating the freezing system, the freezing fingers 36 are cooled and maintained at a temperature of 0°C or lower to allow ice pieces 70 to grow gradually around the freezing fingers 36, as shown in Fig. 12.

(Cam control mechanism)

As shown in Fig. 1, a first cam 13, a second cam 15 and a third cam 17 are disposed coaxially to the rotary shaft 11 of the actuator motor AM at predetermined intervals. Meanwhile, a first switch SW₁, a second switch SW₂ and a third switch SW₃ are fixed to the main body of the ice making machine, and cam actions are designed to be added to the rotation of the actuator motor AM so as to control the following motions to be caused by the operation of the actuator motor AM:

- (1) tilting or resetting of the water tray 24 and stopping it at such postures;
 - (2) opening and closing of the hot gas valve HV; and
 - (3) opening and closing of the water valve WV for supplying water to be frozen, respectively.
- More specifically, the first cam 13 assumes a form of disc with a predetermined diameter having a couple of recesses 13a, 13b formed on the circumference thereof, and the roller of a lever 19 extending from the first switch SW₁ is designed to be abutted against the circumference of the first cam 13 and engaged with the recess 13a or 13b in accordance with a predetermined timing. These recesses 13a, 13b are not formed symmetrically on each side of the center of the cam with 180° angles but with a predetermined

central angle therebetween, as shown in Fig. 1. Provided that the circumferential section formed between the recesses 13a, 13b with a larger central angle is to be referred to as A₁, while the circumferential section formed therebetween with a smaller central angle is to be referred to as A₂, the circumferential section A₁ assumes the cam surface for controlling tilting of the water tray 24, and the circumferential section A₂ assumes the cam surface for controlling resetting of the water tray 24 to the horizontal posture, as will be described later. The first switch SW₁ is connected to a first relay X₁ in the control circuit shown in Fig. 2 to control tilting and resetting of the water tray 24 and stopping thereof at such postures. The timing of the cam actions between the first cam 13 and the first switch SW₁ is as shown in the timing chart of Fig. 3.

The second cam 15 also assuming a form of disc has a circumferential section having a central angle of about 270°, and the roller of a lever 21 extending from the second switch SW₂ is designed to be abutted against the circumference of the cam 15 and engaged with the recess having a central angle of about 90° in accordance with a predetermined timing. The second switch SW₂ is connected to a second relay X₂, as shown in Fig. 2, and controls opening and closing of the hot gas valve HV in cooperation with the opening and closing of a normally open contact X₂-a (as will be described later). The third cam 17 has a circumferential cam surface having a predetermined central angle, and the roller of a lever 23 extending from the third switch SW₃ is designed to be abutted against the circumference of the third cam 17. The third switch SW₃ is turned on when the lever 23 of the third switch is abutted against the cam surface. The third switch SW₃ is connected to a third relay X₃, as shown in Fig. 2, and controls opening and closing of the water valve WV interlocking with a normally open contact X₃-a₁ (as will be described later). Timing of the cam actions between the second cam 15 and the second switch SW₂ and that between the third cam 17 and the third switch SW₃ will be shown in the timing chart of Fig. 3.

(Rocking plate)

An L-shaped rocking plate 44 is disposed in the freezing chamber 32 defined in the water tray 24 so as to be able to be rocked freely therein by the rotation of the rocking motor RM. More specifically, the rocking plate 44 is of a planar plate having a vertical portion 45 and also a plurality of through holes 46 defined at predetermined intervals thereon, as shown in Fig. 6. The circumferential

size of the rocking plate 44 is designed to be slightly smaller than the inner circumferential size of the bottom 24a of the freezing chamber 32, and the upper end portion of the vertical portion 45 is rolled outward to form through holes on each side, in which a rocking shaft 48 is inserted. The end portions of the rocking shaft 48 is designed to be fitted into the through holes 53a of tongues 53 formed on the outer surfaces of the side walls of the water tray 24. With the rocking plate 44 pivotally supported by the rocking shaft 48, the rocking plate 44 is brought into intimate contact with the bottom of the freezing chamber 32, as shown in Fig. 5.

As shown in Fig. 6, the rocking plate 44 also has formed integrally therewith a vertical tongue 59 on one shorter edge thereof, and an engagement pin 61 extends outward horizontally therefrom. Meanwhile, as shown in Figs. 4 and 6, the rocking motor RM is disposed on the inner wall surface of the main body of the ice making machine in such a way that it can slightly be shifted vertically as will be described later. An engagement piece 62 protruding from the rotary shaft of the motor RM is designed to be engageable with the engagement pin 61 of the rocking plate 44 locating above the engagement piece 62. Accordingly, by rotating the rocking motor RM counterclockwise, the engagement piece 62 is rotated under engagement with the engagement pin 61 to lift the rocking plate 44 from the bottom of the freezing chamber 32 to a predetermined height, as shown in Fig. 10, and then allow it to drop onto the bottom of the freezing chamber 32 by its own weight upon disengagement of the engagement piece 62 from the engagement pin 61, as shown in Fig. 11. Namely, the rocking plate 44 repeats such rocking motion in the freezing chamber 32 on the rocking shaft 48 by rotating the rocking motor RM during the freezing operation, whereby the water to be frozen can constantly be agitated. Incidentally, since the rocking plate 44 has through holes 46, the water to be frozen flows through these through holes 46 upward and downward, whereby agitation of the water to be frozen can further be accelerated. However, these through holes 46 are not inevitable, but can be omitted, as desired. Further, while the rocking plate 44 is designed to be tilted as the water tray 24 is tilted before the ice releasing operation (to be described later) is started, a stopper 63 extending horizontally from the rectangular housing 10 is disposed on the tilting orbit of the engagement pin 61 provided on the rocking plate 44. By allowing the engagement pin 61 to engage with the stopper 63 during the process that the rocking plate 44 is tilted together with the water tray 24, the rocking plate 44 is separated from the water tray 24 and assumes there a predetermined tilted posture.

(Switch SW₄ for detecting completion of ice formation and switch Th for detecting completion of ice releasing operation)

As shown in Figs. 4 and 5, the rocking motor RM is disposed to be slightly shiftable vertically via fixtures 25 provided on the inner wall surface of the main body of the ice making machine and normally locate at the uppermost position. Upon application of a predetermined external force to the motor RM, the motor RM is designed to be shifted downward with a predetermined stroke. Meanwhile, the lever 27 of a switch SW₄ such as a microswitch for detecting completion of ice formation locates on the descending orbit of the motor RM so as to be able to be abutted against the rocking motor RM as it descends to turn on the switch SW₄. Namely, as will be described later referring to Fig. 12, when ice pieces 70 are formed around the freezing fingers 36 as the freezing operation proceeds, the rocking plate 44 is brought into contact with these ice pieces 70 in its upward stroke to exert a downward counterforce to the rocking motor RM through the engagement pin 61 and engagement piece 62. Accordingly, the rocking motor RM starts descending from the uppermost position to depress the lever 27 of the switch SW₄ in its descending process to turn on the switch SW₄, and thus completion of ice formation in the freezing unit 20 is detected. Meanwhile, as shown in Figs. 4 and 5, a thermometal switch Th for detecting completion of ice releasing operation is disposed on the upper surface of the freezing base plate 34 in the freezing unit 20, which is turned on by the sudden temperature rise caused by the dropping off of the ice pieces 70 from the freezing fingers 36 to rotate the actuator motor AM.

(Example of electric control circuit)

Fig. 2 shows an electric control circuit in the ice making machine according to the first embodiment of the invention, in which a fuse F and a switch SW₅ for detecting ice fullness are interposed in series between a power supply line R and a joint D, and a compressor CM is interposed between the joint D and a line T. Likewise, (1) a first switch SW₁ for the actuator motor AM shown in Fig. 1 and a relay X₁; (2) a second switch SW₂ for supplying hot gas shown in Fig. 1 and a second relay X₂; (3) a third switch SW₃ for supplying water to be frozen shown in Fig. 1 and a relay X₃; and (4) a switch SW₄ for detecting completion of ice formation shown in Fig. 4 and a relay X₄ are interposed in series respectively between the joint D and the line T. Meanwhile, a timer $\textcircled{T}$ for controlling timing of driving the rocking motor RM is also interposed, with one terminal thereof being con-

nected to the line T, while the other terminal being connected to the joint D through a normally open contact X_3-a_2 of the relay X_3 . Incidentally, a second normally open contact $T-a_2$ for the timer $\textcircled{T}$ is disposed in parallel to the normally open contact X_3-a_2 to achieve self-hold thereof.

One terminal of the actuator motor AM is connected to the line T, while the other terminal thereof is connected to the joint D through the elements connected in parallel: (1) a normally open contact X_4-a for the relay X_4 ; (2) an X_1-a for the relay X_1 ; and (3) the thermometal switch Th for detecting completion of ice releasing operation. Between the joint D and the line T are also interposed in series respectively (1) the rocking motor RM and a first normally open contact $T-a_1$ for the timer $\textcircled{T}$; (2) the hot gas valve HV and the X_2-a for the second relay X_2 ; and (3) the waver valve WV for supplying water to be frozen and the normally open contact X_3-a_1 for the relay X_3 .

Next, the actions of the cam control mechanism according to the first embodiment of the invention will be described referring to the timing chart shown in Fig. 3. Before the freezing operation is started, the water tray 24 is maintained in a horizontal posture, as shown in Fig. 5, and water to be frozen is supplied to the freezing chamber 32 defined in the water tray 24 through the water supply pipe 68. Feeding and stopping of the water from the water supply valve 68 is carried out by controlling opening and closing of the water valve WV by the cam action between the third cam 17 and the third switch SW_3 . Even if an excess amount of water should be supplied to the freezing chamber 32, the excess portion of water flows over the dam plate 42 and discharged to the outside of the machine through the water chute 38 and the water collecting section 28, as described above.

A cooling medium is supplied to the evaporator 22 from the circulation pipe of the freezing system, and cooling of the freezing fingers 36 formed on the freezing base plate 34 is started by the heat exchange action of the cooling medium. Since the freezing fingers 36 are dipped in the water to be frozen, the water starts to freeze around the freezing fingers 36 and grows gradually into inverted dome-shaped ice pieces 70, as shown in Fig. 12. During such freezing operation, the rocking motor RM is continuously rotated, the rotational timing of which is set by the timer $\textcircled{T}$. Accordingly, the engagement piece 62 provided on the rotary shaft of the motor RM is engaged with the engagement pin 61 provided on the vertical tongue 59 to lift the rocking plate 44, as shown in Fig. 10. Upon disengagement of the engagement piece 62 from the engagement pin 61, the rocking plate 44 drops by its own weight and is abutted against the bottom 24a of the freezing chamber 32, as shown in Fig.

11. Thus, the rocking plate 44 repeats such rocking motion in the water to be frozen in the freezing chamber 32 during the freezing operation to constantly agitate the water. Moreover, since through holes 46 are formed on the rocking plate 44, the water to be frozen flows through these through holes 46 as the rocking plate 44 is rocked to cause jet streams which further accelerate the agitation of the water to be frozen. Since the water to be frozen is constantly maintained in a dynamic state, as described above, opacification to white of the ice pieces 70 to be formed around the freezing fingers 36 can be prevented, and transparent and clear ice pieces 70 can be obtained.

As shown in Fig. 12, upon formation of inverted dome-like ice pieces 70 fully around the freezing fingers 36, the rocking plate 44 is brought into contact with the ice pieces 70 in its upward stroke and finally exerts a downward counterforce to the rocking motor RM through the engagement pin 61 and the engagement piece 62. Accordingly, the rocking motor RM starts descending from the uppermost position to depress the lever 27 of the switch SW_4 for detecting completion of ice formation to turn on the switch SW_4 , and thus completion of ice formation in the freezing unit 20 is detected. Whereupon the relay X_4 shown in Fig. 2 is actuated to close the normally open contact X_4-a which interlocks therewith and start rotation of the actuator motor AM. Thus, the cam disc 58 is turned clockwise to allow the cam follower 56 disposed eccentrically thereto to slide along the cam slot 54 formed on the cam 50a, and thus the water tray 24 starts tilting downward. By this tilting motion of the water tray 24, the water remaining in the freezing chamber 32 flows along the inner wall 24c and over the dam plate 42 to the water chute 38, in turn, to the water collecting section 28. Incidentally, while the lever 19 of the first switch SW_1 shown in Fig. 1 is engaged with the recess 13a of the first cam 13 immediately before the actuator motor AM is rotated, the lever 19 rides on the circumferential section A_1 when the motor AM is started to turn on the switch SW_1 . Thus, the relay X_1 is actuated to close the normally open contact X_1-a which interlocks therewith. Accordingly, the counterforce applied to the rocking motor RM is released by the tilting of the water tray 24, and the rotation of the actuator motor AM is continued by the closure of the normally open contact X_1-a even after the ice formation completion detection switch SW_4 is turned off.

Upon engagement of the lever 19 with the recess 13b of the first cam 13, the switch SW_1 is turned off to release actuation of the relay X_1 and open the normally open contact X_1-a which interlocks therewith. Accordingly, the water tray 24 stops at a predetermined angle, as shown in Fig. 14. In this state, while a portion of the water to be

frozen remains in the freezing chamber 32 due to the presence of the dam plate 42, such residual water, fully cooled during the previous freezing operation, is mixed with another portion of water to be supplied afresh to cool effectively the thus combined water to be frozen. Meanwhile, the ice pieces 70 formed around the freezing fingers 36 are exposed as such by tilting the water tray 24. Further, since the rocking plate 44 is also tilted as the water tray 24 is tilted, the engagement pin 61 is disengaged from the engagement piece 62 of the rocking motor RM. In the process that the water tray 24 is stopped in the tilted posture, the engagement pin 61 of the rocking plate 44 is engaged with the stopper 63, as shown in Fig. 14, so that the rocking plate 44 is allowed to locate diagonally above the bottom 24a of the freezing chamber 32 in the water tray 24 which stops later in the tilted posture. The rocking plate 44 also functions as a chute for guiding the ice pieces 70 dropping from the freezing fingers 36 into the ice bin 12.

In the process of tilting the water tray 24, the lever 21 of the second switch SW₂ is engaged with the recessed circumferential section (with a central angle of about 90°) of the second cam 15 to turn on the switch SW₂ and actuate the second relay X₂ shown in Fig. 2. Whereupon the normally open contact X₂-a interlocking with the relay X₂ is closed to open the hot gas valve HV and supply a hot gas instead of the cooling medium to the evaporator 22 in accordance with the timing chart shown in Fig. 3. Thus, the freezing fingers 36 are heated rapidly through the freezing base plate 34. Accordingly, the bondage between the freezing fingers 36 and the ice pieces 70 is released, and the ice pieces 70 drop by their own weights, slide on the upper surface of the rocking plate 44 maintained in a predetermined tilted posture by the stopper 63 and are guided into the ice bin 12 locating below.

The negative temperature load applied to the freezing base plate 34 is released by the dropping of the ice pieces 70, and the temperature of the freezing base plate 34 is suddenly elevated by the passage the hot gas through the evaporator 22. This temperature rise is detected by the thermometal switch Th and turned on to allow the actuator motor to resume its rotation. Accordingly, the cam portion 50a is turned counterclockwise on the pivotal shaft 52 under the cam action of the cam disc 58, cam follower 56 and cam slot 54, to allow the water tray 24 to turn counterclockwise and start resetting to the horizontal posture. As the motor AM resumes rotation, the second cam 15 resumes rotation to allow the lever 21 extending from the second switch SW₂ to ride on the circumferential cam surface of the second cam 15 and turn off the switch SW₂. Thus, the actuation of the second relay X₂ shown in Fig. 2 is released to

open again the normally open contact X₂-a which interlocks therewith and close the hot gas valve HV. Accordingly, supply of the cooling medium to the evaporator 22 is started again. Further, as the motor AM resumes rotation, the lever 23 of the third switch SW₃ is engaged with the circumferential cam surface of the third cam 17 to turn on the switch SW₃, whereby the third relay X₃ shown in Fig. 2 is actuated to close the normally open contact X₃-a₁ which interlocks therewith and open the water valve WV to supply water to be frozen to the freezing chamber 32. Upon disengagement of the third cam 17 from the third switch SW₃, the switch SW₃ is turned off to release actuation of the third relay X₃ to open the normally open contact X₃-a₁, as well as, to close the water valve WV and stop supply of water to be frozen.

Meanwhile, with the rotation of the actuator motor AM, the lever 19 of the first switch SW₁ engaged with the recess 13b of the first cam 13 rides on the cam surface on the circumferential section A₂ to actuate the relay X₁ and open the normally open contact X₁-a, whereby the motor AM is energized in cooperation with the thermometal switch Th which is closed immediately after cooling of the freezing base plate 34 is resumed by supplying the cooling medium to the evaporator 22, as described above.

Upon engagement of the lever 19 of the first switch SW₁ with the recess 13a, as the first cam 13 is rotated, the switch SW₁ is opened to release actuation of the relay X₁ and open the normally open contact X₁-a. Thus, the rotation of the actuator AM is stopped to allow the water tray 24 to stop in the horizontal posture.

Incidentally, when the third switch SW₃ for opening the water valve WV is turned on, the normally open contact X₃-a₂ which interlocks with the relay X₃ to energize the timer T. After passage of a predetermined time period set in the timer T, the first normally open contact T-a₁ which interlocks therewith is closed to start rotation of the rocking motor RM to allow the rocking plate 44 to resume its rocking motion during the freezing operation. Meanwhile, the second normally open contact T-a₂ of the timer T is closed to attain self-hold of the timer T. After passage of the preset time period in the timer T, the first and second normally open contacts T-a₁ and T-a₂ are opened to stop rotation of the rocking motor RM.

(Schematic constitution of the ice making machine according to second embodiment)

Figs. 17 and 23 show schematically, in cross section and perspective view, respectively the overall structure of the ice making machine in which the cam control mechanism according to a

second embodiment of the invention is employed. For convenience's sake, it should be appreciated that the expressions "front", "rear", "right" and "left" referred to herein are with respect to the front view of the ice making machine. A rectangular housing 110 constituting the main body of the ice making machine basically has defined therein a lower machine chamber 112 in which the freezing system including a compressor CM and a condenser 111 are housed, a box-like ice bin 114, disposed above the lower machine chamber 112, surrounded with a heat insulating material and having an ice chamber 183 defined therein, and a freezing unit 115 disposed in the ice bin 114 at an upper position thereof. As will be described later referring to Figs. 18 and 19, the freezing unit 115 has a water tray 116 in which a predetermined level of water to be frozen is carried and a freezing base plate 118 having freezing fingers 117 to be dipped in the water to be frozen, wherein the water tray 116 is tilted to a predetermined angle upon switching to the ice releasing operation to discharge the water remaining in the water tray 116 to the outside of the machine through a water collecting section 119 and drain pipe 120 as well as to release the ice pieces 121 into the ice chamber 183. Incidentally, an ice discharging mechanism 113 (to be described later) is disposed to the ice bin 114, and the ice pieces 121 stored in the ice chamber 183 are adapted to be discharged thereby to the outside of the machine.

(Outer structure of rectangular housing)

As shown in Fig. 23, the rectangular housing 110 consists of a main frame 122 surrounding all of the members described above and a front panel 123 disposed to the front surface of the main frame 122, and assumes as a whole a slim body having a very narrow transversal size. The front panel 123 is made of a synthetic resin and formed into the shape as shown in Fig. 23, in which a downward opening 123a for discharging the ice pieces 121 defined in the ice bin 114 is formed around at the half height thereof to be in alignment with the outlet 114a (see Fig. 17). A hollow table 124 is adapted to be removably fitted to the space below the opening 123a, on which a vessel such as a glass can be loaded whenever the ice pieces 121 are to be delivered. This table 124 has on the upper surface thereof a multiplicity of slits 124a for draining the water drops dripping from the outlet 114a and opening 123a to collect them therein so as to prevent splitting of the water drops around the machine. The front panel 123 also has a power supply indication lamp L and a push button 125 for the sixth switch SW₆ for discharging the ice pieces 121 stored in the ice chamber 183 provided on the

upper part thereof extending above the opening 123a, and the ice discharging unit 113 is designed to be operated to discharge the ice pieces 121 stored in the ice chamber 183 through the outlet 114a and the opening 123a, only while the push button 125 is depressed to turn on the sixth switch SW₆.

An opening (not shown) is defined on the bottom of the rectangular housing 110 to communicate to the machine chamber 112. The opening is designed to be removably covered by a filter 126. The filter 126 functions to collect dusts in the outer air to be introduced to the machine chamber 112 for cooling the condenser 111 thereby to prevent reduction in the cooling capacity thereof to be caused by the clogging of the condenser. Incidentally, the filter 126 is also designed to be easily drawn out from the front side of the rectangular housing 110.

(Inner cover)

As shown in Fig. 17, an inner cover 127 is removably applied to the front side of the ice bin 114, on which the actuator motor AM for tilting the water tray 116 in the freezing unit 115, the rocking motor RM for rocking a rocking plate 154 (to be described later) and a discharging motor GM for the ice discharging unit 113 are all mounted at the front surface thereof. Accordingly, the respective motors AM, RM, GM and members incidental thereto can all be exposed by removing the front panel 123, whereby maintenance and repair thereof can be facilitated. Meanwhile, the inner cover 127 having already mounted thereon the motors AM, RM, GM can be fitted on the front side of the ice bin 114, leading to reduction in the time required for the assembly of the automatic ice making machine, advantageously.

(Freezing unit)

Fig. 19 shows minutely a vertical sectional view of the freezing unit 115, and the water tray 116, the structure of which is as shown in Fig. 18, is designed to carry a predetermined level of water to be frozen in the freezing chamber 129 defined therein. In other words, the freezing chamber 129 is defined by a rectangular bottom 116a of the water tray 116 and four walls 116b, 116c, 116d, 116e standing upright from the respective sides of the rectangular bottom 116a. A plurality of pintles 130, are integrally formed and aligned horizontally on the outer surface of the right wall 116e in Fig. 18. These pintles 130 are pivotally fitted in the through holes 132a defined in the brackets 132 holding the freezing base plate 118 at an upper position in the ice bin 114, so that the water tray 116 can be

pivoted sideways on the pintles 130 (see Fig. 21). Incidentally, a water supply pipe 149 for supplying water to be frozen is removably disposed to the freezing base plate 118 at an appropriate position (to be described later), which is designed to supply a predetermined amount of water to be frozen to the freezing chamber 129 by opening the water valve WV in accordance with the timing to be described later (see Fig. 34). Since the freezing unit 115 can easily be separated from the brackets 132 by removing the inner cover 127 from the ice bin 114, assembly or maintenance and repair of the ice making machine can be facilitated, advantageously.

Meanwhile, a square hole 130a is defined in the foremost pintle 130, in which a square shaft 133a protruding from the free end of a pivotal shaft 133 (to be described later) is fitted. The pivotal shaft 133 is pivotally supported on the inner cover 127, and thus the water tray 116 is designed to be tilted downward and reset upward on the pintles 130 with the rotation of the actuator motor AM mounted on the inner cover 127, as shown in Figs. 29 to 32. Such constitution of the water tray 116, which is designed to be tilted sideways, can reduce width of the ice making machine. Incidentally, since the pintles 130 are formed integrally with the water tray 116 so that the water tray 116 can be tilted or reset by turning the pintles 130, not only the rigidity of the water tray itself can be enhanced, but also the tilting and resetting of the water tray 116 can be carried out smoothly. Moreover, the pintles 130 are formed horizontally along the longitudinal direction of the water tray 116 to allow the load of the water tray 116 to be applied evenly to the pintles, so that the water tray 116 can be maintained in the horizontal posture without tilting in the longitudinal direction thereof.

(Water tray tilting mechanism)

A cylindrical bearing 134 protruding forward is provided on the inner cover 127 at a position corresponding to the location of the pintles 130 of the water tray 116, and the pivotal shaft 133 is pivotally supported in the through hole 134a defined in the bearing 134. The square shaft 133a formed on the other end of the pivotal shaft 133 is fitted in the square hole 130a of the pintle 130. A lever 133b is formed integrally with the pivotal shaft 133 to extend radially from the front end portion thereof, and a protrusion 133c is formed on the front surface of the lever 133b at the free end portion thereof. As shown in Figs. 16 and 18, a cam plate 136, which is a disc having a predetermined diameter and a notch on the circumference thereof, is disposed to the rotary shaft of the actuator motor AM, mounted to the inner cover 127

through a bracket 135, protruding forward through the bracket 35. A connection rod 137 is pivotally supported eccentrically at one end portion thereof onto the front surface of the cam plate 136, and the other end portion of the connection rod 137 has a slot 137a in which the protrusion 133c of the lever 133b formed integrally with the pivotal shaft 133 is slidably engaged. Accordingly, the pivotal shaft 133 can be pivoted reciprocatingly within a predetermined range of angle through the cam plate 136 and the connection rod 137 by rotating the actuator motor AM, whereby to tilt the water tray 116. Incidentally, since the actuator motor AM is for pivoting the pintles 130 on which the water tray 116 is tilted, it may have a small output power.

The water tray 116 is designed to maintain a horizontal posture with the engagement protrusion 133c of the lever 133b being abutted against the lower extremity (the side directing to the supporting portion of the cam plate 136) of the slot 137a in the connection rod 137 (see Fig. 20). Meanwhile, an elliptic regulating piece 133d which can be inserted through the slot 137a of the connection rod 137 is disposed to the front end of the protrusion 133c, and this regulating piece 133d is elongated in the radial direction of the protrusion 133c, so that the connection rod 137 may not easily be disengaged from the protrusion 133c under engagement of the protrusion 133c with the slot 137a. Further, the lever 133b is designed to be shiftable within the allowance of the slot 137a relative to the connection rod 137 so as to tolerate any errors in the positions of the lever 133b and the connection rod 137 when the water tray 116 is stopped in the tilted posture. Incidentally, an engagement piece 133e is formed on the rear side of the lever 133b, with which one end of a torsion spring 139 (to be described later) is designed to urge a fixture 138 (to be described later), on which the rocking motor (RM) is mounted, in a predetermined direction.

(Water discharging mechanism of water tray)

As shown in Figs. 19 and 24, the water tray 116 has a drainage for discharging the water remaining in the freezing chamber 129 whenever the water tray 116 is tilted. More specifically, an auxiliary chamber 146 is defined backward on the rear wall 116c of the water tray 116 at that end portion which can assume the lowest position when the water tray 116 is tilted, and a duct 147 having a predetermined length is connected to the outer (rear) wall surface of the auxiliary chamber 146. The water collecting section 119 for discharging the thus collected water to the outside of the machine defined at the rear side of the ice bin 114 locates below the duct 147. The auxiliary chamber 146 and the freezing chamber 129 are demarcated with a

dam plate 148 which is lower than the wall 116c. Accordingly, the water to be frozen supplied to the water tray 116 is adapted to flow over the upper end of the dam plate 148 and to be discharged to the water collecting section 119 through the duct 147. In other words, the water to be frozen to be carried in the freezing chamber 129 can be maintained to a predetermined level by this dam plate 148. Upon switching to an ice releasing operation, the water tray 116 is tilted downward to discharge the water remaining therein through the duct 147, as shown in Fig. 24. With the water tray 116 stopping in this tilted posture, a part of the water to be frozen still remains therein due to the presence of the dam plate 148 (see Fig. 30) and combined with the water supplied afresh from the water supply pipe 149 for the next cycle of freezing operation to accelerate cooling of the water to be frozen.

Incidentally, the duct 147 also serves as a stopper for the water tray 116, which is abutted against the upper edge defining the water collecting section 119 and the ice bin, when the water tray 116 is tilted downward. Since the protrusion 133c of the pivotal shaft 133 is designed to be shiftable in the slot 137a of the connection rod 137 in the tilting mechanism, any possible load to be applied to the tilting mechanism to be caused by the displacement between the stopping position of the tilted water tray 116 and the stopping position of the actuator motor AM can be obviated.

The freezing base plate 118 is maintained horizontally at an upper position of the ice bin 114 through a plurality of brackets 132, and an evaporator 131 led out of the freezing system housed in the machine chamber 112 is disposed zigzag on the upper surface of the freezing base plate 118. Meanwhile, a plurality of freezing fingers 117 protrude downward from the lower surface of the freezing base plate 118, and these freezing fingers 117 are adapted to be dipped in the water to be frozen carried in the water tray 116 during the freezing operation. As heat exchange with the cooling medium in the evaporator 131 is proceeded by operating the freezing system, the freezing fingers 117 are cooled and maintained at a temperature of 0°C or lower to allow ice pieces 121 to grow gradually around the freezing fingers 117, as shown in Fig. 27. Incidentally, the freezing base plate 118 has a plurality of through holes 118a so as to improve heat exchange efficiency as well as to contribute to weight reduction of the ice making machine.

(Cam control mechanism)

As shown in Fig. 20, a first cam 150 and a second cam 151 are formed on the rear surface of the cam plate 136 disposed to the actuator motor

AM at radially staggered positions. Meanwhile, a seventh switch SW₇ and a ninth switch SW₉ are disposed to the bracket 135 at the positions corresponding to the locations of the first cam 150 and the second cam 151. By the cam actions to be added in accordance with predetermined timings to the rotation of the actuator motor AM, the following motions to be caused by the operation of the actuator motor AM are designed to be controlled:

(1) tilting or resetting of the water tray 116 and stopping it at such postures, as well as, opening of the hot gas valve HV; and

(2) opening and closing of the water valve WV for supplying water to be frozen. More specifically, the first cam 150 and the second cam 151 each assume a form of arcuate ridge having a predetermined radius and protruding in the axial direction, and a lever 152 extending from the seventh switch SW₇ is designed to be abutted against the first cam 150 or spaced therefrom with a predetermined timing. The seventh switch SW₇ is turned on, upon contact of the lever 152 of the seventh switch SW₇ with the first cam 150. The seventh switch SW₇ is connected to a relay X₂ and the actuator motor AM, as shown in the control circuit diagram of Fig. 25, and controls tilting and resetting of the water tray 116 as well as stopping thereof at such postures by the actuator motor AM and also opening of the hot gas valve HV, as will be described later. Incidentally, the timing of actuating the seventh switch SW₇ by the first cam 150 is shown in the timing chart of Fig. 34.

Meanwhile, the lever 153 extending from the ninth switch SW₉ is designed to be brought into contact with the second cam 151 and to be spaced therefrom in accordance with a predetermined timing. The ninth switch SW₉ is designed to be turned on upon contact of the lever 153 thereof with the second cam 151. As shown in Fig. 25, the ninth switch SW₉ is connected to the water valve WV to control opening thereof (as will be described later). The timing of the cam actions to be effected by the second cam 151 and the ninth switch is as shown in the timing chart of Fig. 34.

(Rocking plate and rocking mechanism)

A rocking plate 154 is disposed in the freezing chamber 129 defined in the water tray 116 in such a way that it can be rocked freely therein. The rocking plate 154 has a rectangular bottom plate 154a and side walls 154b, 154c, 154d standing upright from the three side edges of the bottom plate 154a, except for the side edge opposing to the left wall 116d, which is to assume the lowest position when the water tray 116 is tilted and is designed to be rocked by the rotation of the rocking motor RM.

A multiplicity of circular and/or square through holes 155 are defined at predetermined intervals on the bottom plate 154a and the right side wall 154b of the rocking plate 154. The circumferential size of the rocking plate 154 is designed to be slightly smaller than the inner circumferential size of the bottom 116a of the freezing chamber 129, and a pair of outward protrusions 156 formed on each longitudinal side of the side wall 154b are pivotally supported on the water tray 116 by a pair of pins 157. With the rocking plate 154 pivotally supported in the water tray 116, the rocking plate 154 is brought into intimate contact with the bottom of the freezing chamber 129, as shown in Fig. 19. Incidentally, the positions of the through holes 155 formed on the bottom plate 154a are designed to locate between every two adjacent freezing fingers 117.

As shown in Fig. 16, an inverted L-shaped engagement piece 158 is integrally formed with the front side wall 154c of the rocking plate 154, and the upper horizontal portion 158a thereof extends outward beyond the wall 116b of the freezing chamber 129. Meanwhile, a vertically elongated opening 127a is defined in the inner cover 127 at the position corresponding to the location of the upper horizontal portion 158a, in which a rocking member 159 rotated by the rocking motor RM is slidably fitted. A rocking protrusion 159a is eccentrically formed on the rear side of the rocking member 159, which is designed to be engageable, on the rear side of the inner cover 127, with the lower surface of the upper horizontal portion 158a of the rocking plate 154. Accordingly, the rocking protrusion 159a is rotated under engagement with the upper horizontal portion 158a, as shown in Fig. 26, by rotating the rocking member 159 counterclockwise, to lift the rocking plate 154 to a predetermined height from the bottom of the freezing chamber 129, whereas upon disengagement of the rocking protrusion 159a from the upper horizontal surface 158a, to allow the rocking plate 154 to drop by its own weight onto the bottom of the freezing chamber 129. Namely, by rotating the rocking motor RM during the freezing operation, the rocking plate 154 repeats such rocking motion in the freezing chamber 129 on the pins 157, whereby the water to be frozen can constantly be agitated. Incidentally, since the rocking plate 154 has through holes 155, the water to be frozen flows through these through holes 155 upward and downward, whereby agitation of the water to be frozen can further be accelerated.

While the rocking plate 154 is tilted as the water tray 116 is tilted upon switching to the ice releasing operation to be described later, a vertical member 160 extending upward over the height of the freezing base plate 118 is formed on the upper

edge of the right side wall 154b of the rocking plate 154. By allowing the vertical member 60 to engage with the freezing base plate 118 on the way that the rocking plate 154 is tilted together with the water tray 116, the rocking plate 154 can be separated from the water tray 116 and can assume a fixed tilted posture as such (see Fig. 30).

(Fitting structure of rocking motor RM)

As shown in Figs. 16 and 20, one end portion of the planar fixture 138 is pivotally fitted on the bearing 134 protruding from the inner cover 127, and the rocking motor RM is disposed onto the front surface of the fixture 138 at a position spaced from the pivotally fitted portion thereof. The rocking motor RM is connected to the cam 159b protruding forward from the rocking member 159 through the through hole 127a. Meanwhile, a vertical member 138a is formed on the front side of the fixture 138 at a position between the pivotally fitted portion thereof and the rocking motor RM, and one end portion 139a of the torsion spring 139 is engaged with the lower end of the vertical member 138a. The engagement piece 133e formed on the lever 133b locates adjacent to the vertical member 138a, and the other end portion 139b of the torsion spring 139 is engaged with the upper end of the engagement piece 133e. In the state where the water tray 116 is maintaining the horizontal posture, the upper end of the engagement piece 133e extends upward over the upper end of the vertical member 138a of the fixture 138, as shown in Fig. 26. Accordingly, in this state, the fixture 138 is constantly urged to turn clockwise on the bearing 134 under the resilient action of the torsion spring 139. Upon application of a predetermined external force to the rocking motor RM, the fixture 138 is designed to be pivoted by a predetermined angle on the bearing 134.

Namely, the torsion spring 139 functions to maintain the rocking protrusion 159a of the rocking member 159 at the operational position where it can be engaged with the engagement piece 158 of the rocking plate 154 while the water tray 116 is assuming a horizontal posture during the freezing operation. Meanwhile, when the water tray 116 is tilted upon switching from the freezing operation to the ice releasing operation, the upper end of the engagement piece 133e of the lever 133b is shifted to a position lower than the upper end of the vertical member 138a of the fixture 138, and the end portion 139b of the torsion spring 139 is engaged with the upper end of the vertical member 138a (see Fig. 33). Accordingly, the torsion spring 139 is adapted not to urge the fixture 138 while the water tray 116 is tilted.

Incidentally, a vertical slot 138b is defined in the fixture 138 at the distal end portion spaced from the pivotally supported portion thereof, and a regulating pin 161 provided on the inner cover 127 at the corresponding position is slidably fitted therein. The regulating pin 61 functions to regulate the pivoting range of the fixture 138 so that the lower extremity of the slot 138b may be normally abutted against the regulating pin 161 under the resilient action of the torsion spring 139 to allow the rocking member 159 to be in the operational position (see Fig. 26).

(Switch SW_{10} for detecting completion of ice formation and switch Th_1 for detecting completion of ice releasing operation)

A tenth switch SW_{10} such as a microswitch for detecting completion of ice formation is disposed on the inner cover 127 through a bracket 170 with the lever 162 of the switch SW_{10} being on the descending orbit of the cam 159b of the rocking member 159 so as to be able to be abutted against the cam 159b as the fixture 138 (rocking motor RM) is pivoted and operate the switch SW_{10} . Namely, as will be described later referring to Fig. 27, when ice pieces 121 are formed around the freezing fingers 117 as the freezing operation proceeds, the rocking plate 154 is brought into contact with these ice pieces 121 in its upward stroke to exert a downward counterforce to the rocking motor RM through the engagement piece 158 and the rocking protrusion 159a. Accordingly, the fixture 138 having mounted thereon the rocking motor RM is pivoted counterclockwise on the bearing 134 and allows the cam 159b to depress the lever 162 of the tenth switch SW_{10} in its pivoting process to change over the tenth switch SW_{10} from the contact "a" to the contact "b", and thus completion of ice formation is detected. Incidentally, since the bracket 170 is disposed to the inner cover 127 to be adjustable in the vertical direction, the position of the lever 162 of the tenth switch SW_{10} can be adjusted by adjusting vertically the position of the bracket 170. Thus, the size of the ice pieces 121 to be formed around the freezing fingers 117 can be changed.

It should be noted here that, if the rocking motor RM is stopped upon changing over of the tenth switch SW_{10} to the contact "b", the rocking protrusion 159a abutted against the engagement piece 158 of the rocking plate 154 interferes with the tilting motion of the rocking plate 154. Therefore, in the second embodiment, a notch 159c is formed on the cam 159b of the rocking member 159, which can change over the tenth switch SW_{10} to the contact "a" with the rocking motor RM being pivoted downward whereby to control the rocking

protrusion 159a to deviate from the tilting orbit of the engagement piece 158. Meanwhile, this notch 159c is defined on the cam 159b in a positional relationship such that it may locate at a position corresponding to that of the lever 162 of the tenth switch SW_{10} when the rocking protrusion 159a is spaced from the upper horizontal portion 158a of the engagement piece 158. In other words, the motor RM is designed:

- (1) to be rotated still after changing over of the tenth switch SW_{10} for detecting completion of ice formation to the contact "b" by the pivoting of the rocking motor RM; and
 - (2) to be stopped when the notch 159c is brought to the position corresponding to the location of the lever 162 of the switch SW_{10} to change over the switch SW_{10} to the contact "a".
- Thus, the rocking protrusion 159a is deviated from the tilting orbit of the engagement piece 158 of the rocking plate 154 and thus does not interfere with the tilting motion of the rocking plate 154.

As shown in Fig. 19, a thermometal switch Th_1 for detecting completion of the ice releasing operation is disposed on the upper surface of the freezing base plate 118 in the freezing unit 115. This thermometal switch Th_1 is designed to be changed over to the contact "b" upon dropping of the temperature of the freezing base plate 118 to a predetermined level by the freezing operation, or changed back from the contact "b" to the contact "a" upon detection of the sudden temperature rise caused by dropping of the ice pieces 121 from the freezing fingers 117 by the ice releasing operation. Simultaneously, the hot gas valve HV is designed to be closed, as will be described later, and the actuator motor AM is also designed to be rotated.

(Ice discharging unit and ice fullness detection switch)

An ice discharging motor GM is disposed at the front lower position of the inner cover 127, and a screw 163 for carrying the ice pieces to be driven by the motor GM is disposed in the ice chamber 183 to extend therein. The inner end portion of the screw 163 is rotatably fitted in a recess 164 defined at the corresponding position of the ice bin 114, as shown in Fig. 17, so that the screw 163 can be rotated at a fixed position. The ice discharging motor GM is designed to be rotated only while the push button 125 provided on the front panel 123 is depressed to actuate the sixth switch SW_6 and carry the ice pieces 121 stored in the ice chamber 183 with the aid of the screw 163 to the outlet 114a.

As shown in Fig. 17, a regulating plate 165 is pivotally hanging from the rear side of the inner

cover 127 at the position corresponding to the location of the screw 163 and inner than the position of the outlet 114a. This regulating plate 165 is designed to be pushed forward by the ice pieces 121 carried by the screw 163 to open the outlet 114a and allow delivery of the ice pieces 121 to the outside of the machine, as well as, to return to the initial position when the ice discharging unit 113 is stopped to close the outlet 114a and prevent the outer air from flowing into the ice chamber 183. Meanwhile, a separator 168 is disposed to the inner cover 127 at a position adjacent to the regulating plate 165, which functions to prevent the ice pieces 121 stored in the ice bin 114 from slipping out of the outlet 114a, as well as, to return some of the ice pieces carried by the screw 163 into the ice chamber 183 and prevent clogging of the outlet 114a thereby. Incidentally, a drain pipe 169 is provided at the bottom of the ice bin 114 adjacent to the recess 164, so that the water melting from the ice pieces 121 can be discharged to the outside of the ice bin 114.

A detection plate 166 is pivotally supported on the lower surface of the water tray 116, which is normally maintained in such a state that the open end side thereof may be spaced apart downward from the bottom of the water tray 116, as shown in Fig. 22. An eighth switch SW_8 for detecting ice fullness is disposed to the front surface of the water tray 116 with its lever 167 being normally urged by the protrusion 166a formed on the front side of the proximal end portion of the detection plate 166. When the detection plate 166 is abutted against the ice pieces 121 in the process of tilting of the water tray 116 to turn clockwise relative to the water tray 116, the protrusion 166a is designed to be spaced from the lever 167 to turn on the switch SW_8 , and thus ice fullness is detected. Incidentally, the protrusion 166a of the detection plate 166 is adapted to be abutted against the lever 167 of the eighth switch SW_8 under detection of no ice piece 121, so that the ice making machine can be stopped whenever the detection plate 166 happens to drop from the water tray 116 for some reason. Accordingly, no ice piece 121 is adapted to be formed under the condition where ice fullness is not detectable. Meanwhile, the free end portion of the detection plate 166 has a comblike form, whereby the load to be applied to the detection plate 166 when it is abutted against the ice pieces 121 can be reduced.

(Example of electric control circuit)

Fig. 25 shows an electric control circuit in the ice making machine according to the second embodiment, in which a fuse F is interposed between a power supply line R and a joint D, and a power

supply indication lamp L is interposed between the joint D and a line T. Likewise, (1) the sixth switch SW_6 for ice discharging and the ice discharging motor GM; (2) the seventh switch SW_7 for the actuator motor AM, the eighth switch SW_8 for detecting ice fullness and a relay X_1 are interposed in series respectively between the joint D and the line T. Meanwhile, a normally closed contact X_1-b_1 for the relay X_1 is interposed between a joint E and a joint K locating between the seventh switch SW_7 and the eighth switch SW_8 . Between the joint K and the line T are interposed in series respectively (1) a relay X_2 ; (2) the ninth switch SW_9 for supplying water to be frozen and the water valve WV; and (3) a normally open contact X_3-a_1 for a relay X_3 and the actuator motor AM.

Meanwhile, a normally closed contact X_2-b_1 for the relay X_2 and a normally closed contact X_3-b for the relay X_3 are interposed in series between the normally closed contact X_1-b_2 of the relay X_1 connected in series to the fuse F and a joint N locating between the normally open contact X_3-a_1 of the relay X_3 and the actuator motor AM. A fan motor FM for the condenser 111 is connected to the contact "a" of the thermometal switch Th_1 for detecting completion of the ice releasing operation connected in series to the normally open contact X_2-a of the relay X_2 , while the hot gas valve HV for supplying a hot gas is connected to the contact "b" thereof. Further, between the normally closed contact X_1-b_2 of the relay X_1 and the line T, are interposed in series respectively (1) a normally open contact X_3-a_2 for the relay X_3 , the rocking motor RM and a normally closed contact X_2-b_2 for the relay X_2 ; and (2) a relay SR and the compressor CM. The tenth switch SW_{10} for detecting completion of ice formation is connected to a joint P locating between the normally open contact X_3-a_2 of the relay X_3 and the rocking motor RM, and a protective thermometal cut-off Th_2 is connected to the contact "a" of the switch SW_{10} , while the contact "b" thereof is connected to the joint D. Incidentally, the fan motor FM and the relay X_3 are connected in parallel.

Next, the actions of the ice making machine employing the cam control mechanism according to the second embodiment of the invention will be described referring to the timing chart shown in Fig. 34.

(Initial operation)

Upon actuation of a power switch (not shown) of the ice making machine, the power supply indication lamp L is lit, and the compressor CM is also started to supply the cooling medium to the evaporator 131. Meanwhile, the actuator motor AM is rotated through the normally closed contacts X_1-

b₂, X₂-b₁ and X₃-b of the relays X₁, X₂ and X₃, respectively, so that the water tray 116 assuming the horizontal posture starts tilting downward. The seventh switch SW₇ is turned on after the ninth switch SW₉ is turned off by the rotation of the motor AM, whereby the relay X₂ is actuated to close the normally open contact X₂-a which interlocks therewith and actuate the relay X₃ through the thermometal switch Th₁. Thus, the actuator motor AM is allowed to continue its rotation through the normally open contact X₃-a₁ which interlocks with the relay X₃, in turn, to reset the water tray 116 to the horizontal posture without stopping in the tilted posture. Incidentally, the relay X₃ is self-held by the normally open contact X₃-a₂ which interlocks therewith.

Upon resetting of the water tray 116 to a predetermined position, the ninth switch SW₉ is turned on to open the water valve WV, and water is supplied to the freezing chamber 129 defined in the water tray 116 through the water supply pipe 149. Since the water tray 116 is designed to be stopped in the horizontal posture after it is turned once clockwise over the horizontal posture such that the wall 116d may be higher than the wall 116e and then counterclockwise, a predetermined amount of water is designed to be carried securely in the freezing chamber 129. If water to be frozen is supplied in an excess amount to the freezing chamber 129, it is adapted to flow over the dam plate 148, as described above and to be discharged to the outside of the machine through the auxiliary chamber 146 and the water collecting section 119.

The rotation of the actuator motor AM is stopped upon turning off of the seventh switch SW₇ as the motor AM is rotated, and the water tray 116 is stopped in the horizontal posture. Meanwhile, rotation of the rocking motor RM is started upon closure of the normally closed contact X₂-b₂ which interlocks with the relay X₂. Upon turning off of the seventh switch SW₇, the water valve WV is closed to stop supply of water. However, the ninth switch SW₉ is allowed to hold the ON-state.

(Freezing operation)

A cooling medium is supplied to the evaporator 131 through a circulation pipe of the freezing system by a compressor CM powered by electricity, and cooling of the freezing fingers 117 provided on the freezing base plate 118 is started by the heat exchange action of the cooling medium. Since the freezing fingers 117 are dipped in the water to be frozen, the water starts to freeze around the freezing fingers 117 and grows gradually into inverted dome-shaped ice pieces 121. During such freezing operation, the rocking motor RM is continuously

rotated. Accordingly, the rocking protrusion 159a of the rocking member 159 rotated by the motor RM is engaged with the engagement piece 158 provided on the side wall 154c to lift the rocking plate 154, as shown in Fig. 26. Upon disengagement of the rocking protrusion 159a from the engagement piece 158, the rocking plate 154 drops by its own weight and is abutted against the bottom 116a of the freezing chamber 129. Thus, the rocking plate 154 repeats such rocking motion in the water to be frozen in the freezing chamber 129 during the freezing operation to constantly agitate the water. In addition, since through holes 155 are formed on the rocking plate 154, the water to be frozen flows through these through holes 155 as the rocking plate 154 is rocked to cause jet streams which accelerate the agitation of the water to be frozen. Since the water to be frozen is constantly maintained in a dynamic state, as described above, opacification of ice pieces 121 to be formed around the freezing fingers 117 can be prevented, and thus transparent and clear ice pieces 121 can be formed.

(Ice releasing operation)

As shown in Fig. 27, upon formation of inverted dome-like ice pieces 121 fully around the freezing fingers 117, the rocking plate 154 is brought into contact with the ice pieces 121 in its upward stroke and finally exerts a downward counterforce to the rocking motor RM through the engagement piece 158 and the rocking protrusion 159a. Accordingly, the fixture 138 having mounted thereon the rocking motor RM starts to make a counterclockwise turn on the bearing 134 to allow the cam 159b of the rocking member 159 to depress the lever 162 of the tenth switch SW₁₀ for detecting completion of ice formation to be changed over from the contact "a" to the contact "b", and thus completion of ice formation in the freezing unit 115 is detected. Whereupon the self-hold of the relay X₃ shown in Fig. 25 is released to close the normally closed contact X₃-b which interlocks therewith and start rotation of the actuator motor AM. Thus, the cam plate 136 is turned counterclockwise to tilt counterclockwise the lever 133b of the pivotal shaft 133 engaged with the connection rod 137 connected eccentrically thereto, and thus the water tray 116 starts to be tilted downward (see Fig. 29). By this tilting motion of the water tray 116, the water remaining in the freezing chamber 129 flows over the dam plate 148 into the auxiliary chamber 146 and then discharged to the water collecting section 119 therefrom. Incidentally, during the process that the water tray 116 is tilted, actuation of the ninth switch SW₉ by the second cam 151 of the cam plate 136 rotated by the actuator motor AM is re-

leased (see Fig. 34).

The rocking motor RM continues to rotate even after the tenth switch SW_{10} for detecting completion of ice formation is changed over to the contact "b" when the lever 162 thereof is depressed by the cam 159b of the rocking member 159 (because the seventh switch SW_7 is turned off to close the normally closed contact X_2-b_2 of the relay X_2). Thus, the rocking protrusion 159a provided on the rocking member 159 is spaced from the upper horizontal portion 158a to allow the fixture 138 to turn clockwise under the resilient action of the torsion spring 139, in turn, to change over the tenth switch SW_{10} from the contact "b" to the contact "a" and stop temporarily the rocking motor RM. Accordingly, the upper end of the engagement piece 133e of the lever 133b is shifted to a position lower than the upper end of the vertical member 138a formed on the fixture 138 to allow the end 139b of the torsion spring 139 to be engaged with the upper end of the vertical member 138a, where the torsion spring 139 exerts no resilient action to the fixture 138 (see Fig. 33(b)). Whereupon, the fixture 38 starts to turn counterclockwise on the bearing 134 by its own weight to allow the cam 159b to change over the tenth switch SW_{10} from the contact "a" to the contact "b" and start the rocking motor RM. The depression of the lever 162 is released when the notch 159c formed on the cam 159a comes to the position corresponding to the location of the lever 162 to change over the switch SW_{10} from the contact "b" to the contact "a" and stop rotation of the rocking motor RM (see Fig. 33 (c)). Thus, the rocking protrusion 159a provided on the rocking member 159 stops at a position deviated from the tilting orbit of the engagement piece 158 of the rocking plate 154, where it does not interfere with the tilting motion of the rocking plate 154.

Upon arrival of the first cam 150 provided on the cam plate 136 to the lever 152 of the seventh switch SW_7 , the switch SW_7 is turned on to actuate the relay X_2 and to open the normally closed contact X_2-b_1 which interlocks therewith, as well as, to close the normally open contact X_2-a . In this state, the thermometal switch Th_1 for detecting completion of the ice releasing operation is connected to the contact "b", since ice pieces 121 are formed fully around the freezing fingers 127. Accordingly, the relay X_3 is not actuated, and the rotation of the actuator motor AM is stopped to allow the water tray 116 to stop in a tilted posture at a predetermined angle, as shown in Fig. 30. In this state, while a portion of the water to be frozen remains in the freezing chamber 129 due to the presence of the dam plate 148, such residual water, fully cooled during the previous freezing operation, is mixed with another portion of water to be

supplied afresh to cool effectively the thus combined water to be frozen. Meanwhile, the ice pieces 121 formed around the freezing fingers 117 are exposed as such by tilting the water tray 116. Further, in the process that the water tray 116 is tilted and stopped in the tilted posture, the vertical member 160 of the rocking plate 154 is abutted against the freezing base plate 118, so that the rocking plate 154 is allowed to locate diagonally above the bottom 116a of the freezing chamber 129 in the water tray 116 which stops later in the tilted posture. The rocking plate 154 also functions as a chute for guiding the ice pieces 121 dropping from the freezing fingers 117 into the ice chamber 183.

Simultaneously with the stopping of the actuator motor AM, the hot gas valve HV is opened to supply a hot gas, instead of the cooling medium, to the evaporator 131, as shown in the timing chart of Fig. 34, so that the freezing fingers 117 are rapidly heated through the freezing base plate 118. Accordingly, the bondage between the freezing fingers 117 and the ice pieces 121 is released, and the ice pieces 121 drop by their own weights, slide on the upper surface of the rocking plate 154 maintained in a predetermined tilted posture by the vertical member 160 and are guided into the ice chamber 183.

The negative temperature load applied to the freezing base plate 118 is released by the dropping of the ice pieces 121, and the temperature of the freezing base plate 118 is suddenly elevated by the passage the hot gas through the evaporator 131. This temperature rise is detected by the thermometal switch Th_1 , which is immediately changed over to the contact "a" to actuate the relay X_3 , in turn, to close the normally open contact X_3-a_1 which interlocks therewith and allows the actuator motor AM to resume rotation. Meanwhile, the hot gas valve HV is also closed to resume supplying of the cooling medium to the evaporator 131.

The pivotal shaft 133 is turned clockwise under the actions of the cam plate 136, connection rod 137 and lever 133b by this rotation of the motor AM, and the water tray 116 is likewise turned clockwise to start resetting to the horizontal posture. Meanwhile, the second cam 151 of the cam plate 136 comes to the lever 153 of the ninth switch SW_9 as the motor AM resumes rotation to turn on the switch SW_9 , as shown in Fig. 31, whereby the water valve WV is opened to supply water to be frozen to the freezing chamber 129 again.

Upon disengagement of the first cam 150 of the cam plate 136 from the lever 152 of the seventh switch SW_7 , actuation of the switch SW_7 is released to close the water valve WV and stop supplying of water to be frozen as well as to stop

the actuator motor AM. This is because the relay X_3 is self-held to open the normally closed contact X_3 -b thereof. Thus, the water tray 116 is stopped in the horizontal posture.

Incidentally, in the second embodiment, resetting of the water tray 116 to the horizontal posture is designed to be carried out by turning once the water tray 116 clockwise over the horizontal posture such that the free end portion thereof (the wall 116d side) may be higher than the fixed end portion thereof and then turning counterclockwise to stop in the horizontal posture, as shown in Fig. 32. Namely, if water to be frozen is supplied in a sufficient amount to the freezing chamber 129 with the dam plate 148 provided in the water tray 116 locating at a high level to let the water to flow over the dam plate 148, a necessary amount of water to be frozen is adapted to be securely supplied to the freezing chamber 129 when the water tray 116 is reset to the horizontal posture. Thus, possible troubles to be caused by the lack of water to be frozen can be prevented.

Meanwhile, as the pivotal shaft 133 is turned clockwise, the upper end of the engagement piece 133e of the lever 133b shifts upward to a position higher than the upper end of the vertical member 138a of the fixture 138, so that the end portion 139b of the torsion spring 139 is engaged with the upper end of the engagement piece 133e (see Fig. 33(a)). Thus, the fixture 138 is turned clockwise on the pivotal shaft 133 by the resilience of the torsion spring 139, to allow the rocking protrusion 159a of the rocking member 159 to be in the operational position where it can be engaged with the engagement piece 158 of the rocking plate 154. Accordingly, upon releasing actuation of the relay X_2 by the turning off of the seventh switch SW_7 , the normally closed contact X_2 -b₂ which interlocks therewith is closed to rotate the rocking motor RM and allow the rocking plate 154 to resume and continue the rocking motion during the freezing operation.

When the water tray 116 is tilted after completion of the freezing operation with a predetermined amount of ice pieces 121 being stored in the ice chamber 183 by repeating the freezing operation and the ice releasing operation, the detection plate 166 is abutted against the group of ice pieces in the tilting process thereof, and it is prevented thereby from tilting further. Thus, the detection plate 166 is turned clockwise relative to the water tray 116 to turn on the eighth switch SW_8 for detecting ice fullness. In this state, the seventh switch SW_7 shown in Fig. 25 is turned on to actuate the relay X_1 , whereby the normally closed contacts X_1 -b₁ and X_1 -b₂ are opened to stop rotation of the actuator motor as well as to stop energization of the compressor CM.

Incidentally, in the illustrated embodiments of the invention, while the freezing fingers 36,117 extending at predetermined intervals from the lower surface of the freezing base plate 34,118 are tapered downward, the shape of the freezing fingers 36,117 may not be limited thereto, and various modifications such as round bars, pins, etc. can suitably be employed, so long as they function as, as it were, nuclear freezing members.

Claims

1. A cam control mechanism in an ice making machine having an evaporator (22,131) connected to a freezing system including a compressor (CM) and condenser (18,111); a freezing base plate (34,118) having a multiplicity of freezing fingers (36,117) formed on the lower surface thereof, with said evaporator (22,131) being disposed on the upper surface thereof; and a water tray (24,116) pivotally supported to maintain normally a horizontal posture and having defined therein a freezing chamber (32,129), for carrying water to be frozen in which said freezing fingers (36,117) are to be dipped; said water tray (24,116) being adapted to be tilted downward upon freezing of the water to form ice pieces (70,121) around the freezing fingers (36,117) and after releasing of the ice pieces (70,121), to be reset to the horizontal posture; characterized in that said mechanism consists of:

a control cam (13,136) to be rotated by an actuator motor (AM) for tilting and resetting said water tray (24,116); and

a control switch (SW_1, SW_7) disposed on the fixed side corresponding to the location of said control cam (13,136) for giving a cam action in accordance with a predetermined timing;

wherein said control cam (13,136) and said control switch (SW_1, SW_7) are adapted to control at least tilting and resetting of said water tray (24,116), as well as, stopping thereof in such postures by the actuator motor (AM).

2. A cam control mechanism in an ice making machine having an evaporator (22) connected to a freezing system including a compressor (CM) and a condenser (18); a freezing base plate (34) having a multiplicity of freezing fingers (36) formed on the lower surface thereof, with said evaporator (22) being disposed on the upper surface thereof; and a water tray (24) pivotally supported to maintain normally a horizontal posture by a supporting shaft (52) fixed to the main body of the ice making machine and having defined therein a freezing chamber

(32), for carrying water to be frozen in which said freezing fingers (36) are to be dipped; said water tray (24) being adapted to be tilted downward upon freezing of the water to form ice pieces (70) around the freezing fingers (36), and after releasing of the ice pieces (70), to be reset to the horizontal posture; characterized in that said mechanism consists of:

a first cam (13), a second cam (15) and a third cam (17) coaxially disposed at predetermined intervals to the rotary shaft of an actuator motor (AM) for tilting and resetting said water tray (24); and

a first switch (SW₁), a second switch (SW₂) and a third switch (SW₃) disposed on the fixed side corresponding to the location of said first, second and third cams (13,15,17) for giving cam actions with the rotation of said actuator motor (AM), respectively, in accordance with a predetermined timing;

wherein said first cam (13) and said first switch (SW₁) are adapted to control at least tilting and resetting of said water tray (24), as well as, stopping thereof in such postures by said actuator motor (AM); while said second cam (15) and said second switch (SW₂) are adapted to control opening and closing of a hot gas valve (HV) for supplying a hot gas to said evaporator (22) during the ice releasing operation; and said third cam (17) and said third switch (SW₃) are adapted to control opening and closing of a water valve (SW) for replenishing water to be frozen to said freezing chamber (32) during the resetting motion of said water tray (24).

3. The cam control mechanism in an ice making machine according to Claim 1 or 2, consisting of:

a rocking plate (44) disposed in said freezing chamber (32) so as to be able to be rocked therein;

a rocking motor (RM) disposed at a position outer than said water tray (24), which is slidable vertically;

a detection switch (SW₄) for detecting completion of ice formation, locating on the shifting orbit of said rocking motor (RM);

a first engagement means (62) provided on said rocking motor (RM); and

a second engagement means (61) provided on said rocking plate (44) which is engageable with said first engagement means (62);

wherein tilting of said water tray (24) is designed to be started by driving the actuator motor (AM) upon detection of completion of ice formation around said freezing fingers (36) by

actuation of said switch (SW₄) which is actuated by the shifting of said rocking motor (RM) in a predetermined direction, when said rocking plate (44) is brought into contact with the ice pieces (70) formed around said freezing fingers (36) in the rocking motion of said rocking plate (44) by said rocking motor (RM) through said first and second engagement means (62,61) to apply a counterforce to said rocking motor (RM), whereby to drive said actuator motor (AM).

4. The cam control mechanism in an ice making machine according to one of Claims 1 to 3, wherein the resetting of said water tray (24) is started upon detection by a thermometal switch (Th) for detecting completion of ice releasing operation disposed to said freezing unit (20).

5. A cam control mechanism in an ice making machine having an evaporator (131) connected to a freezing system including a compressor (CM) and a condenser (111); a freezing base plate (118) having a multiplicity of freezing fingers (117) formed on the lower surface thereof, with said evaporator (131) being disposed on the upper surface thereof; and a water tray (116) pivotally supported to maintain normally a horizontal posture and having defined therein a freezing chamber (129), for carrying water to be frozen in which said freezing fingers (117) are to be dipped; said water tray (116) being adapted to be tilted downward upon freezing of the water to form ice pieces (121) around the freezing fingers (117), and after releasing of the ice pieces (121), to be reset to the horizontal posture; characterized in that said mechanism consists of:

a cam plate (136) having formed thereon a first cam (150) and a second cam (151) disposed on the rotary shaft of an actuator motor (AM) for tilting and resetting said water tray (161); and

a switch (SW₇) and a switch (SW₉) disposed on the fixed side corresponding to the location of said first cam (150) and said second cam (151) to give cam actions respectively in accordance with a predetermined timing under rotation of said actuator motor (AM);

wherein said first cam (150) and said switch (SW₇) are adapted to control at least tilting and resetting of said water tray (24), as well as, stopping thereof in such postures by said actuator motor (AM), while said second cam (151) and said switch (SW₉) are adapted to control opening of a water valve (WV) for replenishing water to be frozen to said freezing

chamber (129) during the resetting motion of said water tray (116).

6. The cam control mechanism in an ice making machine according to one of Claims 1 to 5, having pintles (130) formed along the longitudinal side of said water tray (116) orthogonal to the tilting direction thereof and pivotally supported onto the main body of the ice making machine; a pivotal shaft (133) pivotally supported onto the main body of the ice making machine with one end thereof being fitted to the axial end of said pintle (130) so as to be able to be pivotted integrally therewith, and a lever extending radially from the other end thereof; and a connection rod (137) pivotally fitted at one end thereof loosely on a protrusion (133c) and at the other end thereof pivotally supported eccentrically on said cam plate (136);
- wherein said pivotal shaft (133) is turned clockwise or counterclockwise through said connection rod (137) by rotating said cam plate (136) by said actuator motor (AM), whereby to allow said water tray (116) to tilt downward or reset to the horizontal posture.
7. The cam control mechanism in an ice making machine according to one of Claims 1 to 6, having a duct (147) provided to protrude horizontally from said water tray (116), and a water collecting section (119) defined on the main body of the ice making machine at a position below the tilting orbit of said duct (147); wherein said duct (147) is designed to be abutted against the upper edge of said water collecting section (119), when said water tray (116) is tilted downward, whereby to maintain said water tray (116) in the tilted posture.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

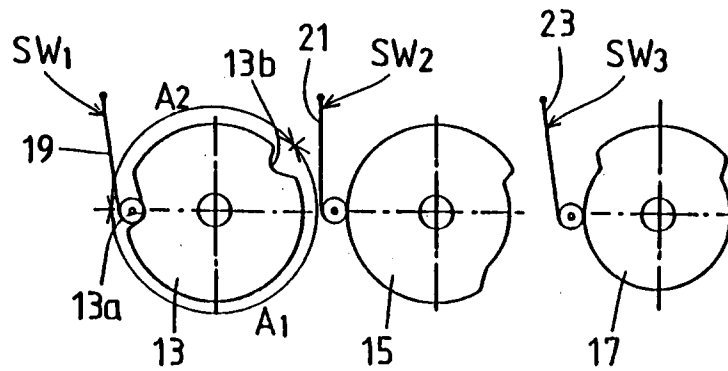
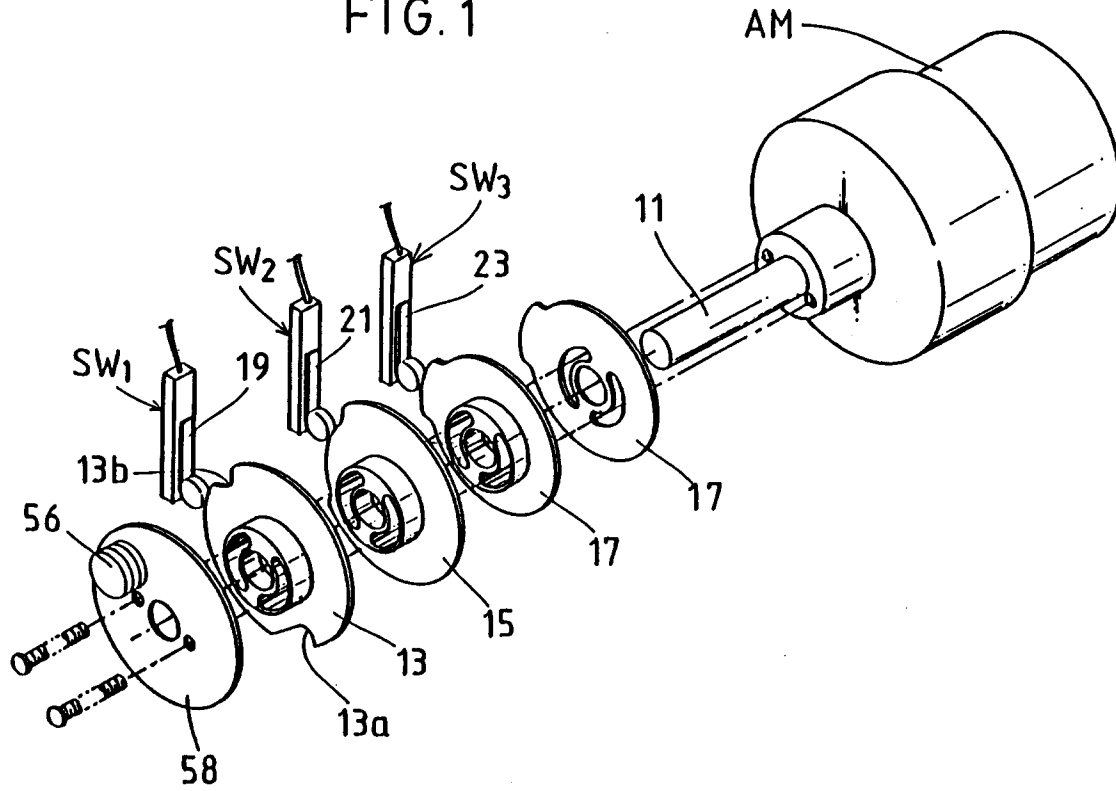


FIG. 2

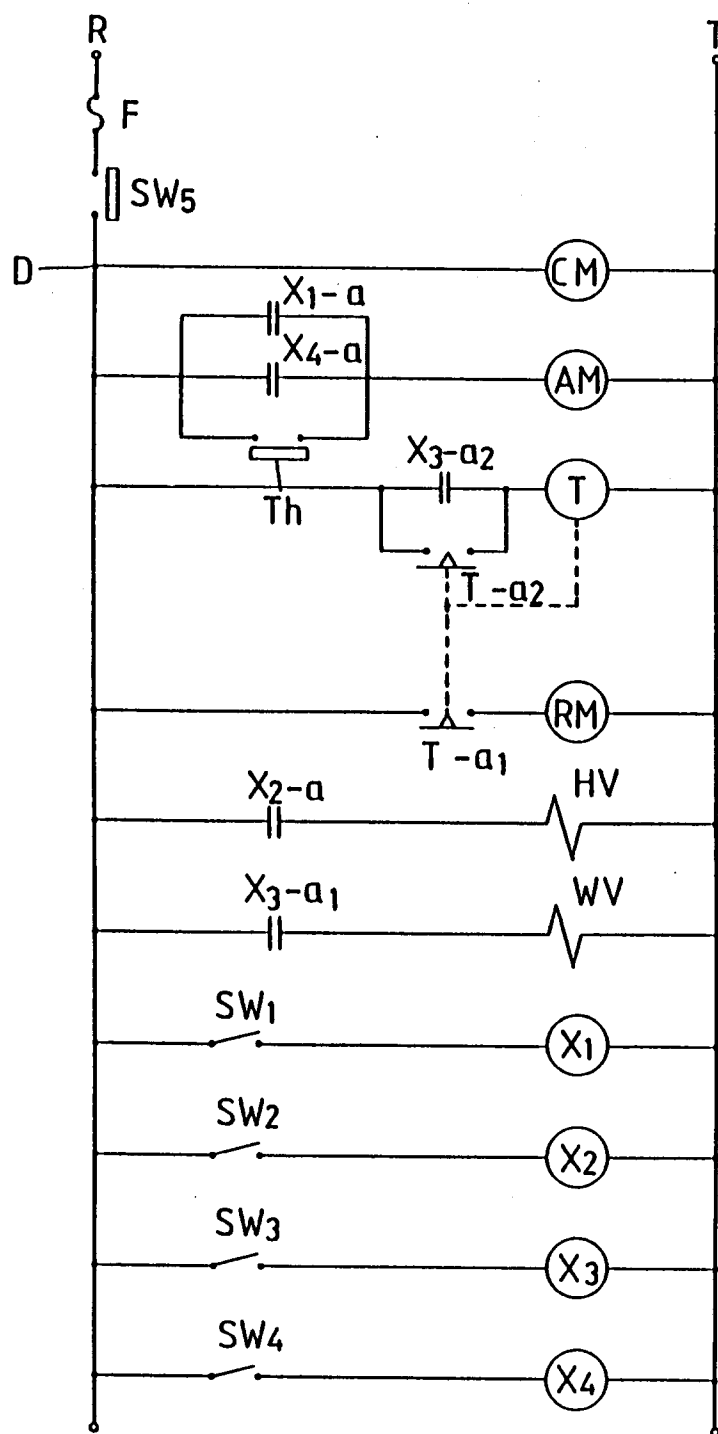
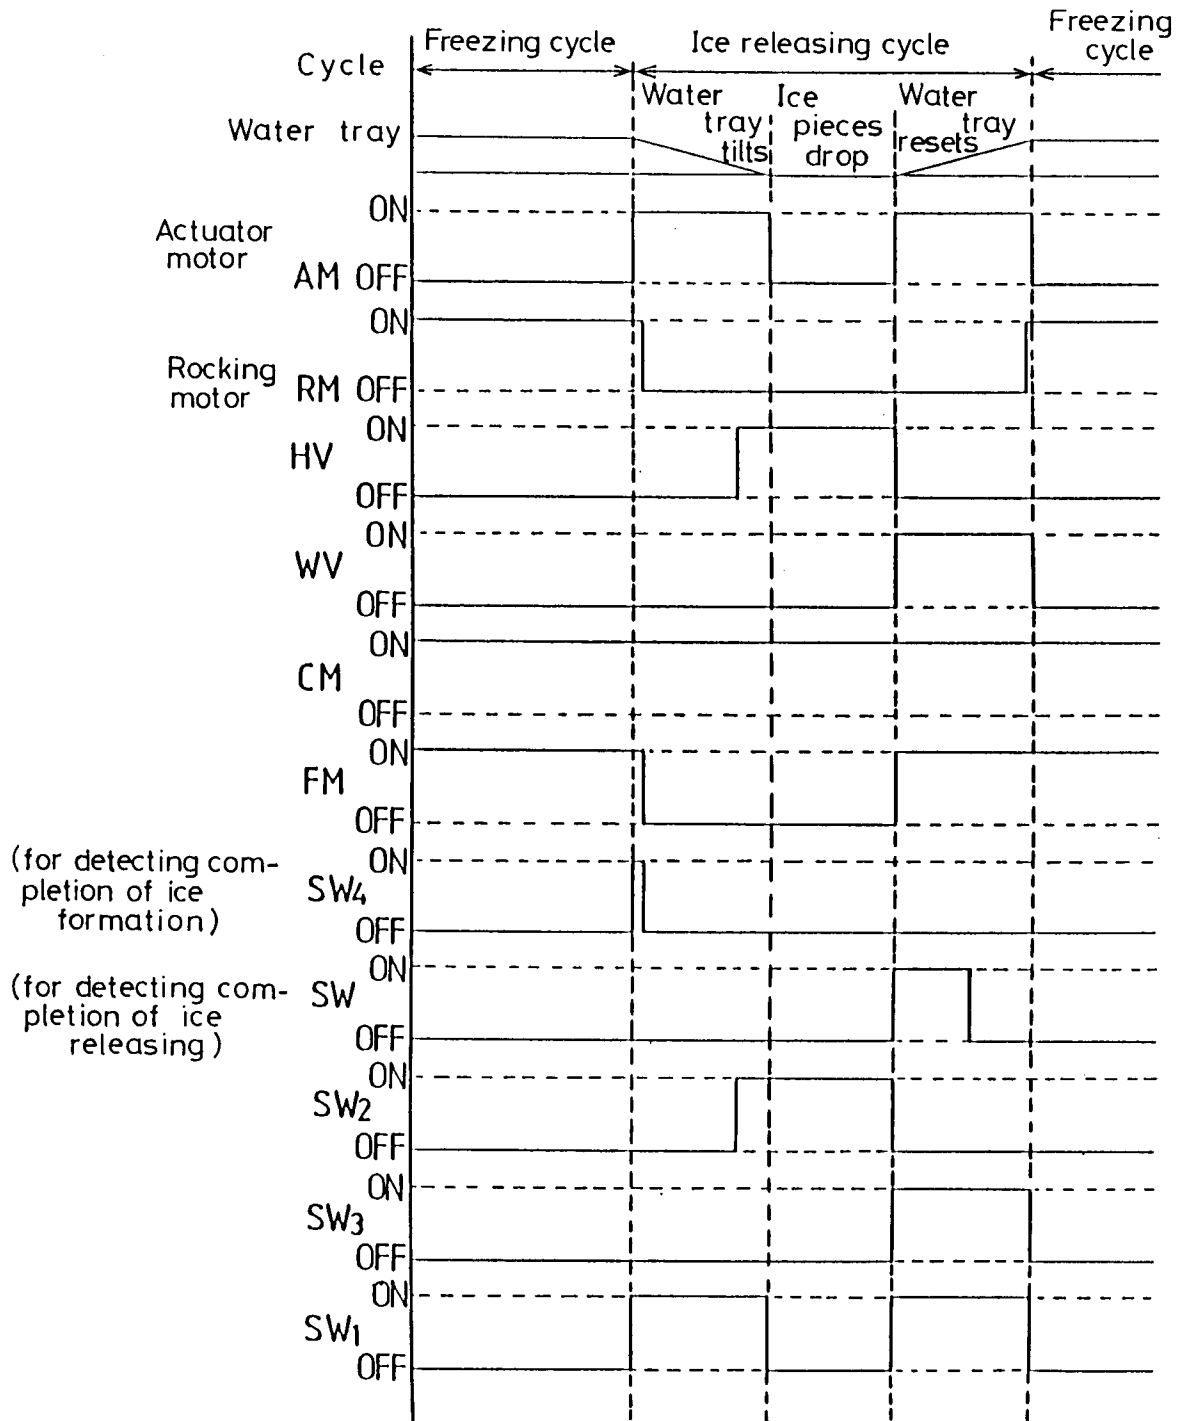


FIG. 3



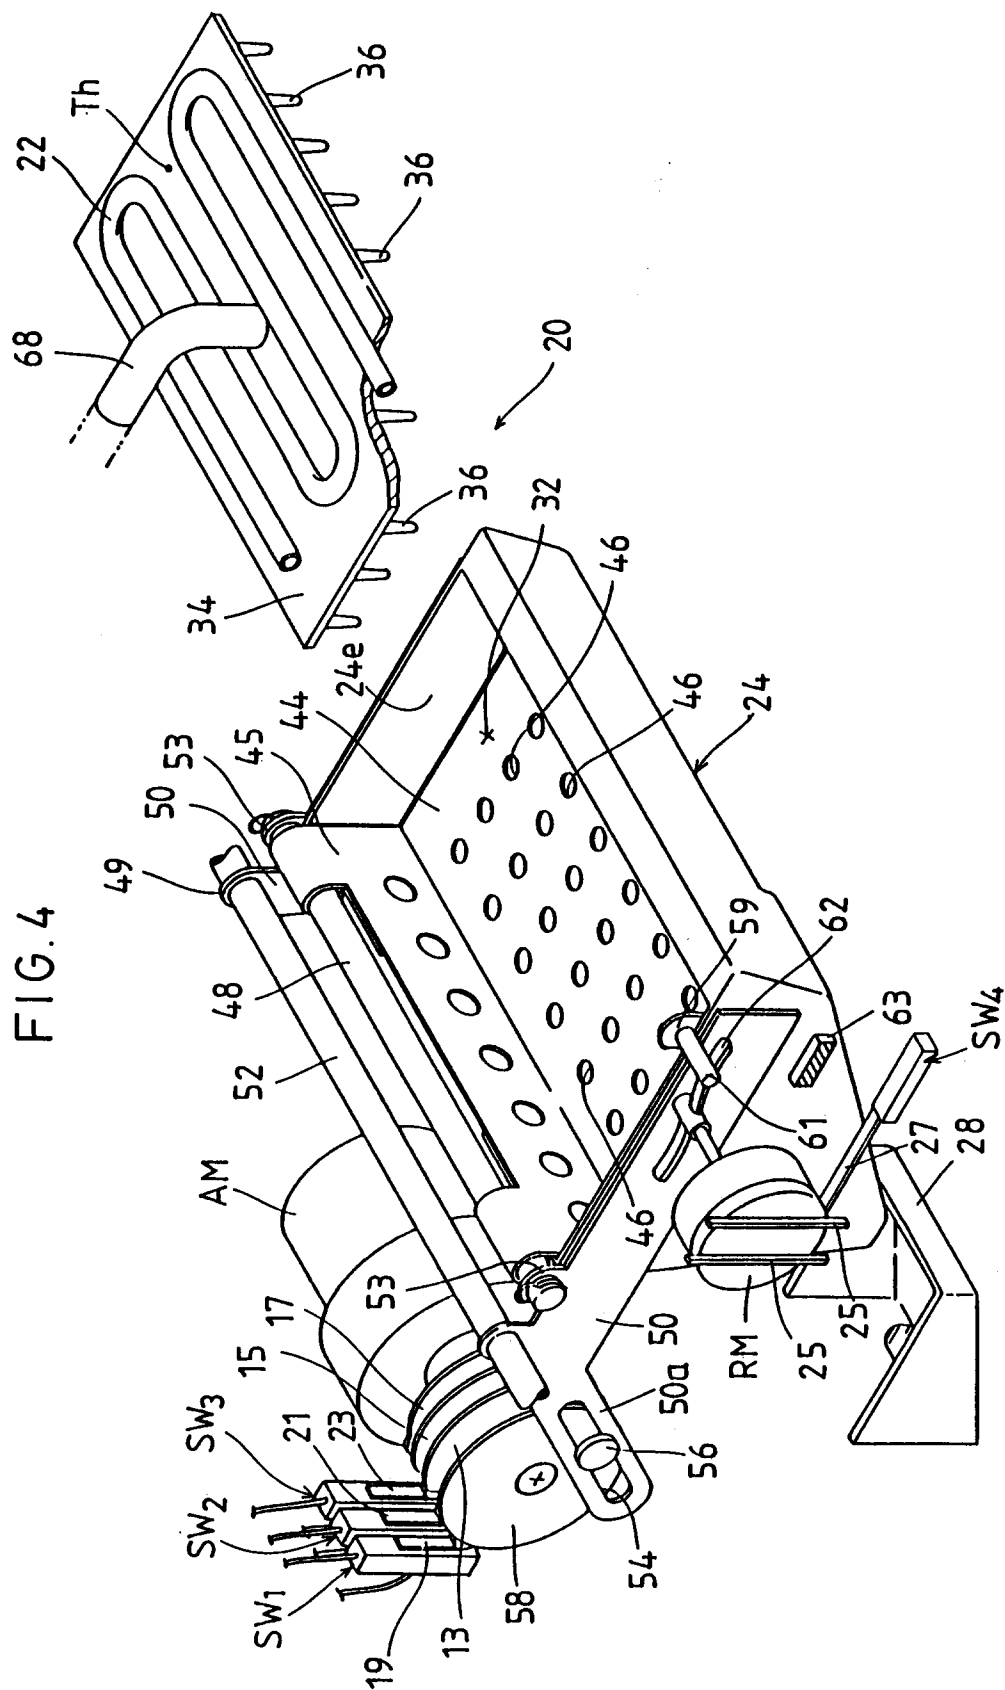


FIG. 5

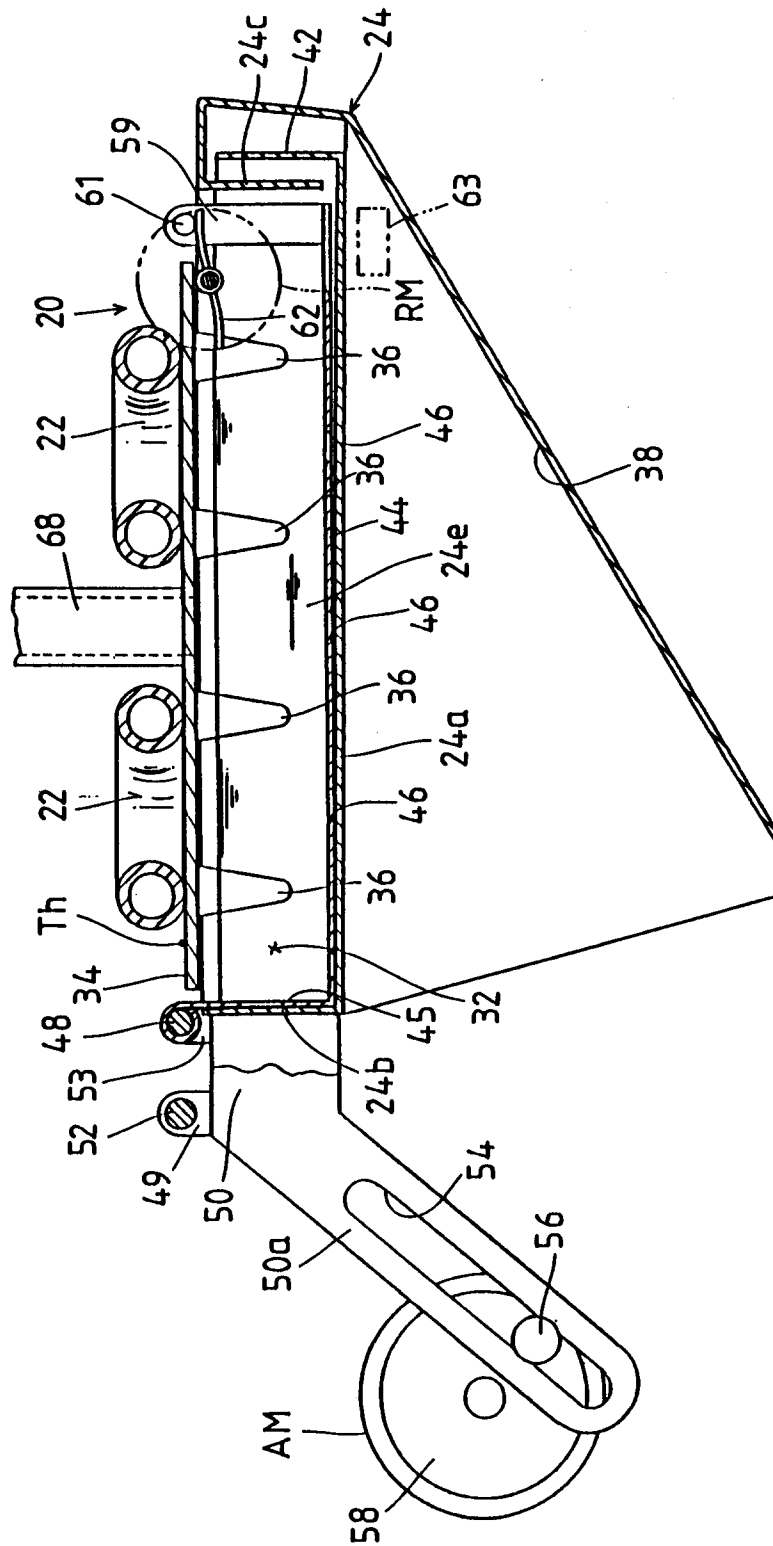


FIG. 6

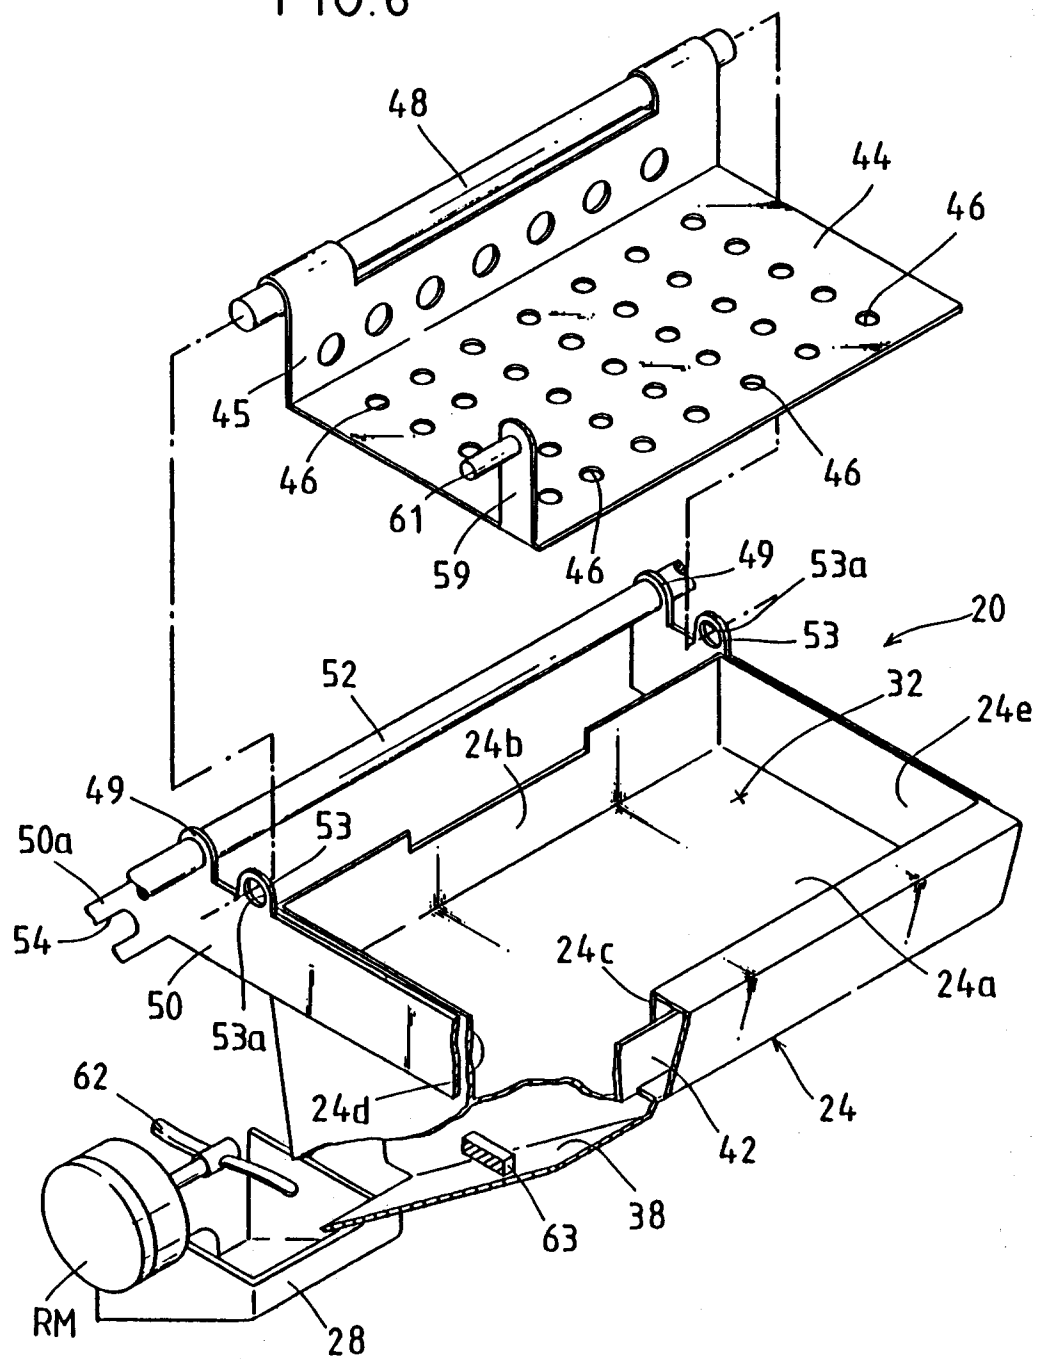


FIG. 7

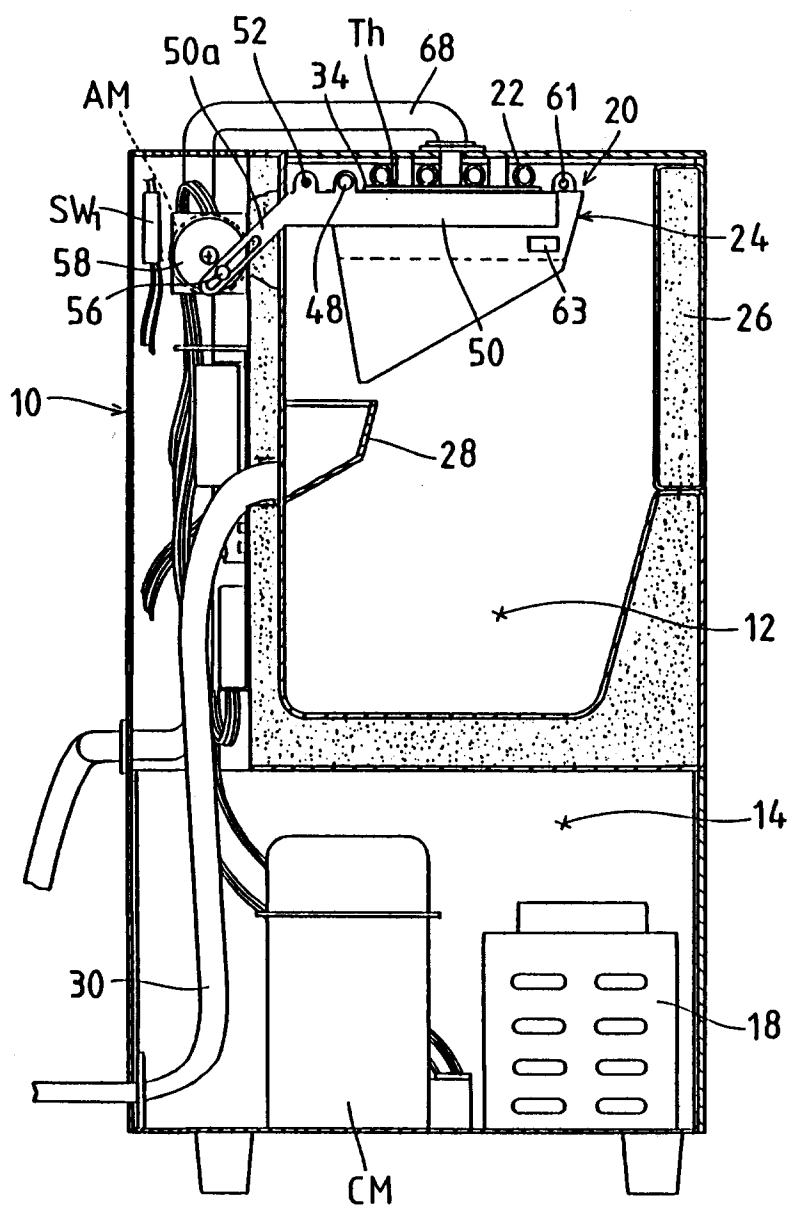


FIG. 8

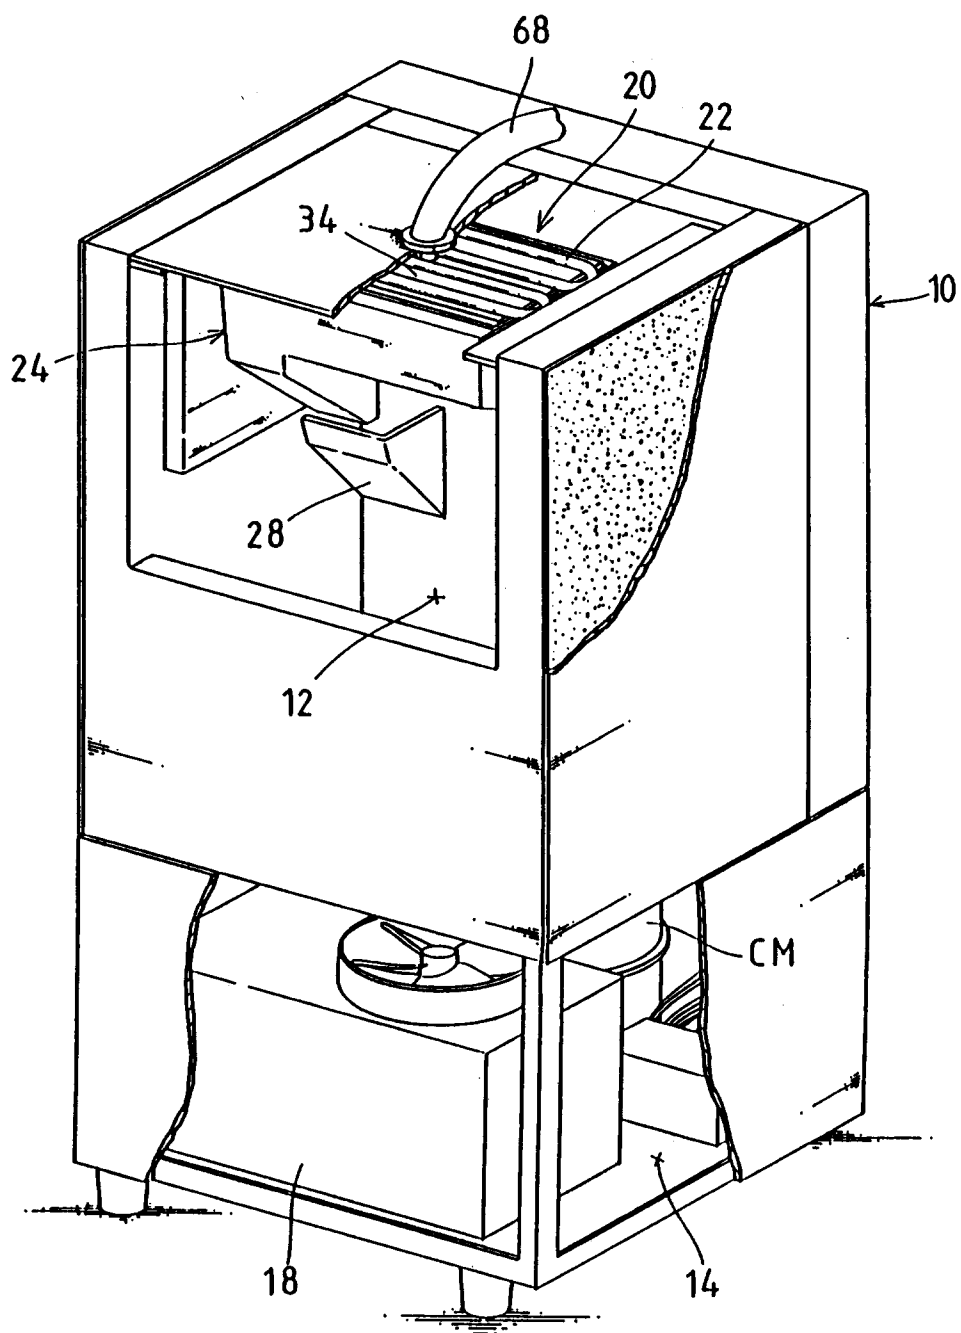


FIG.9

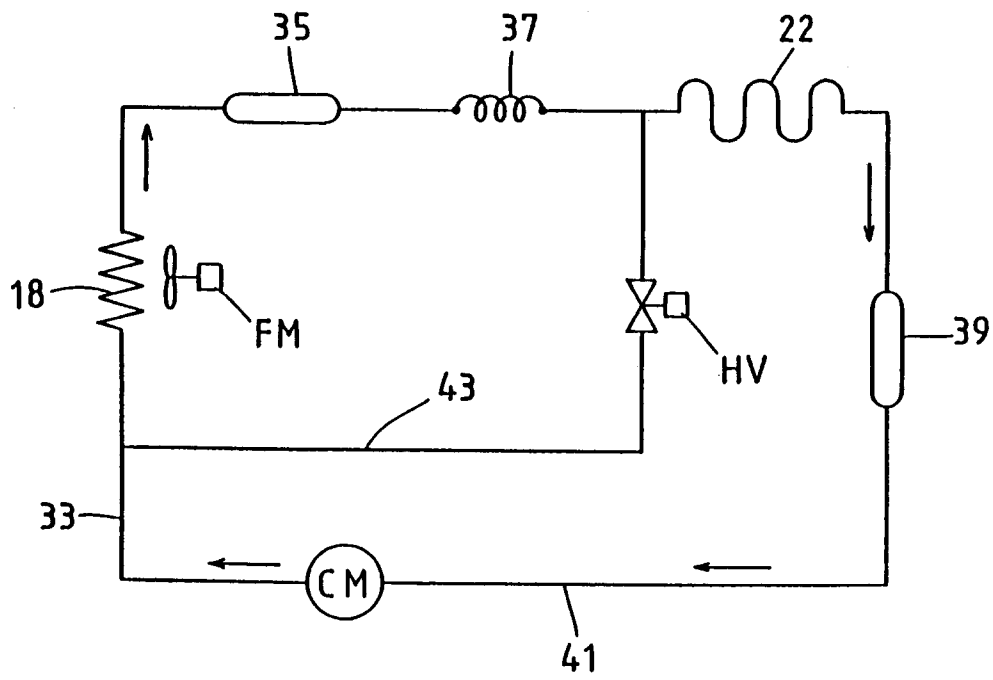


FIG.10

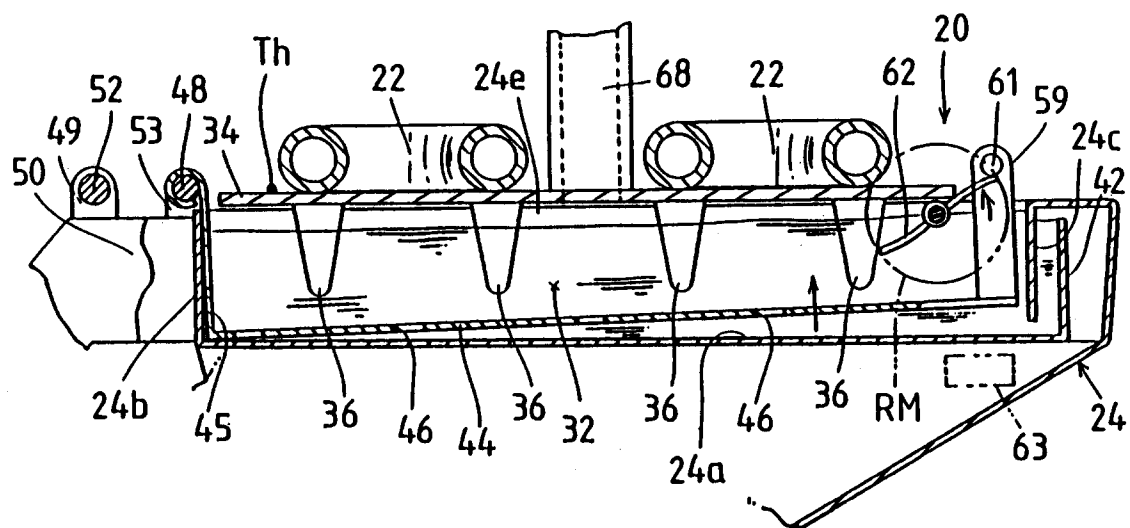


FIG.11

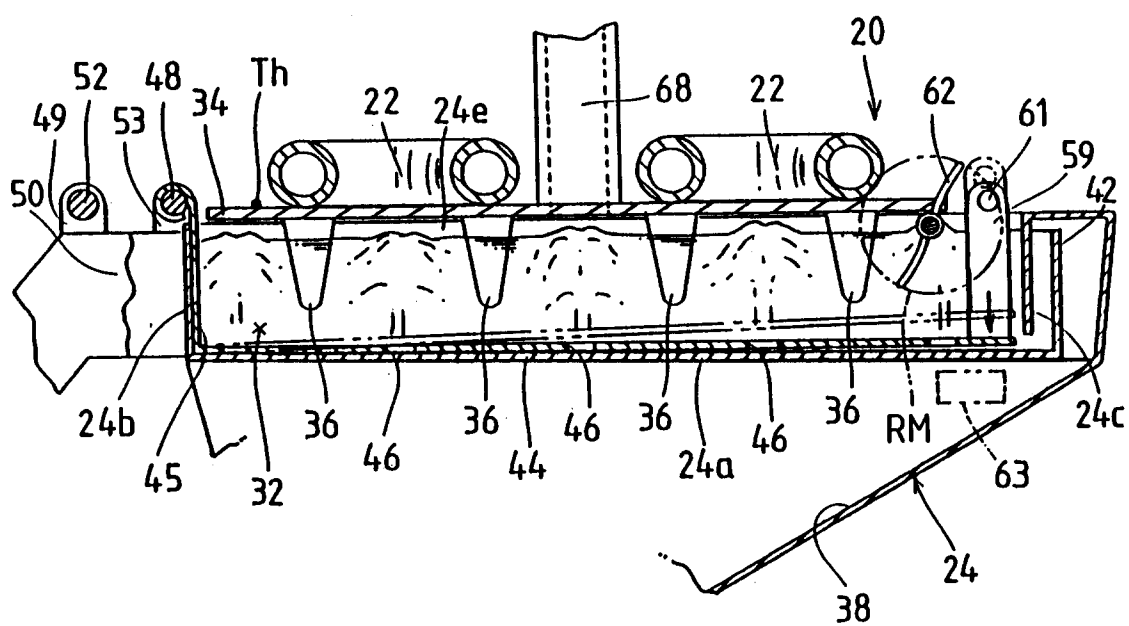


FIG.12

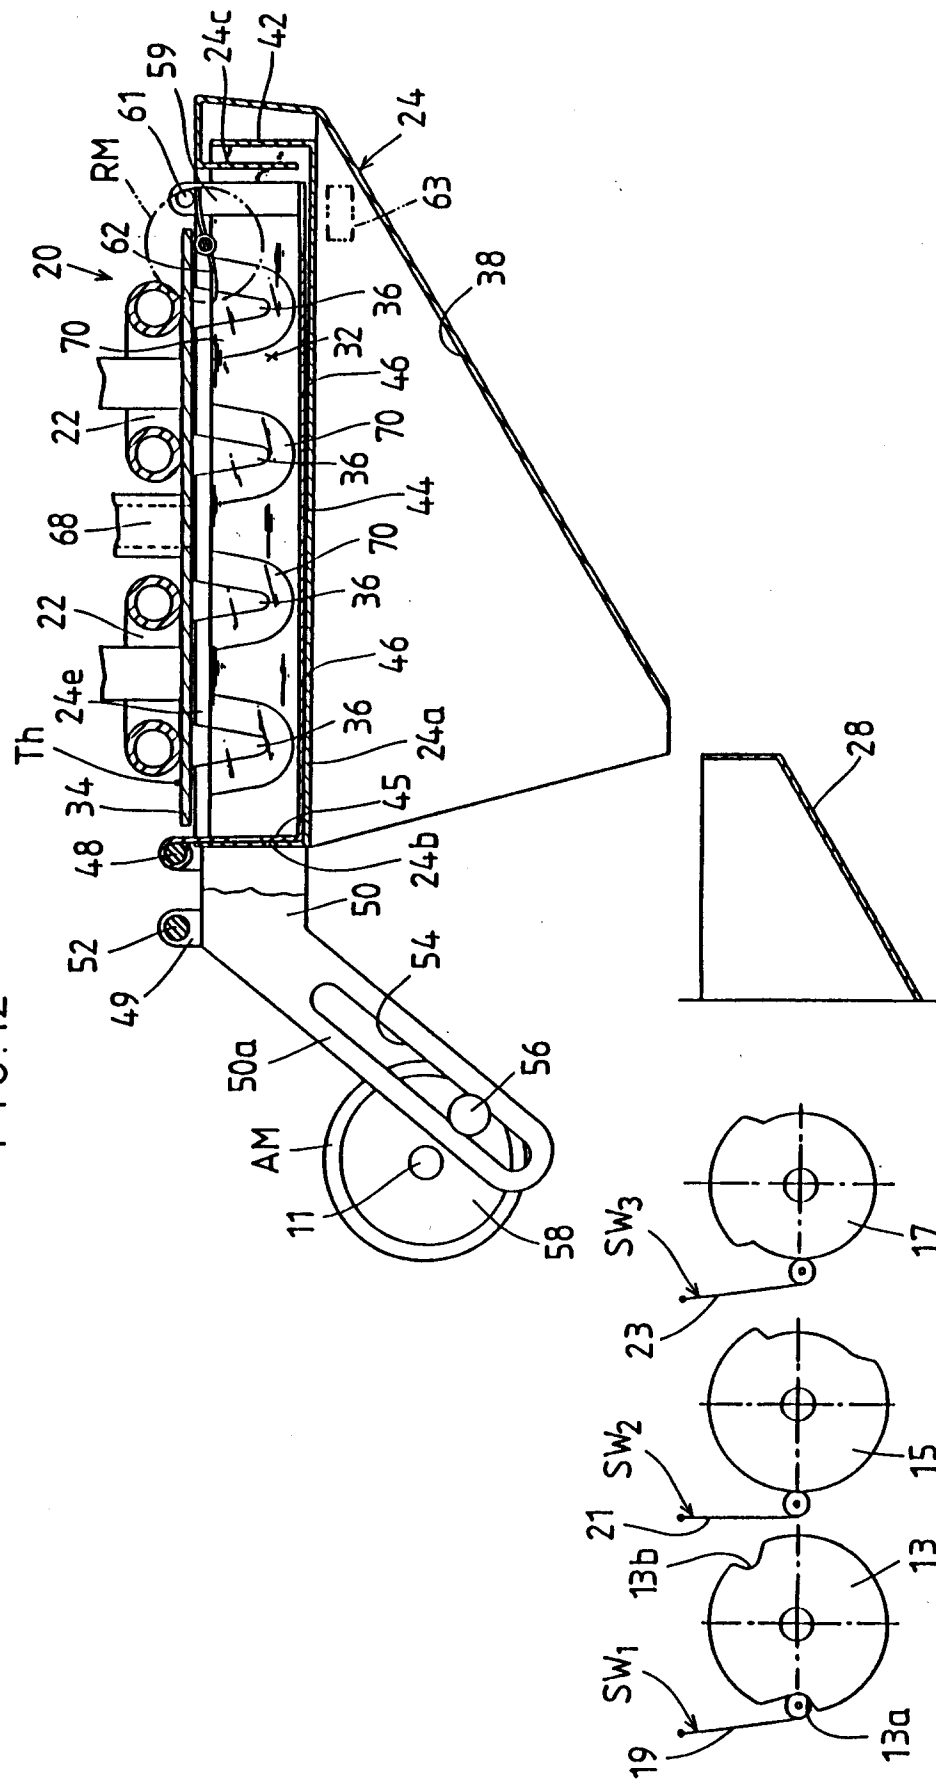
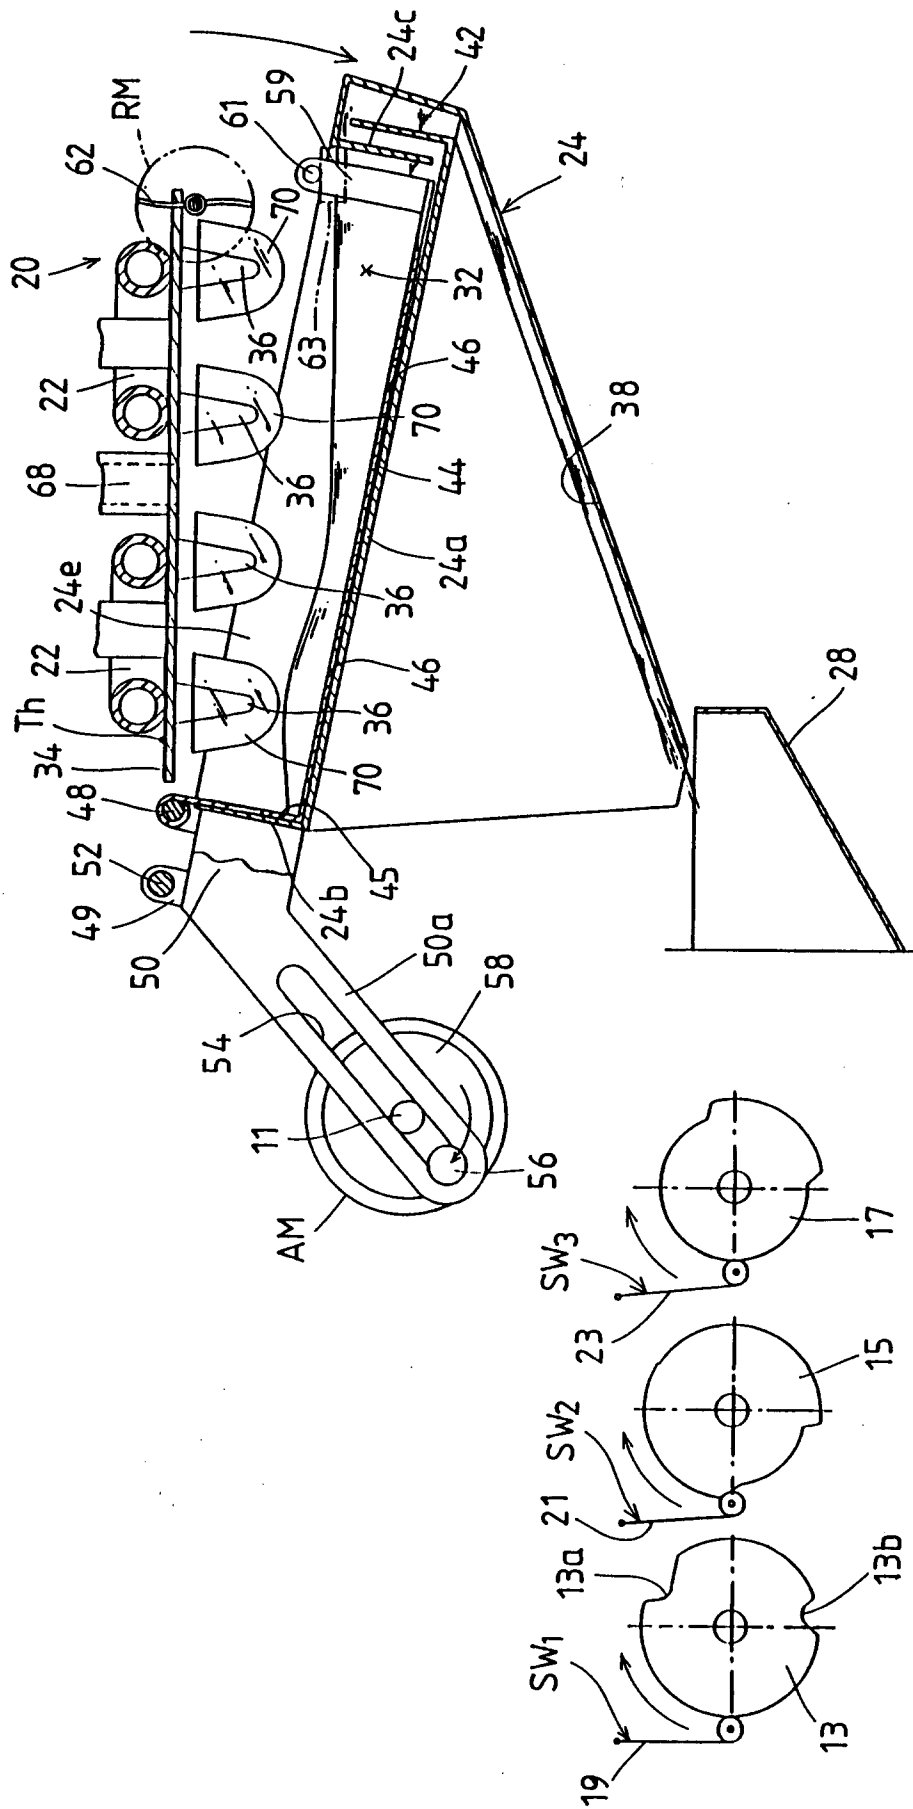
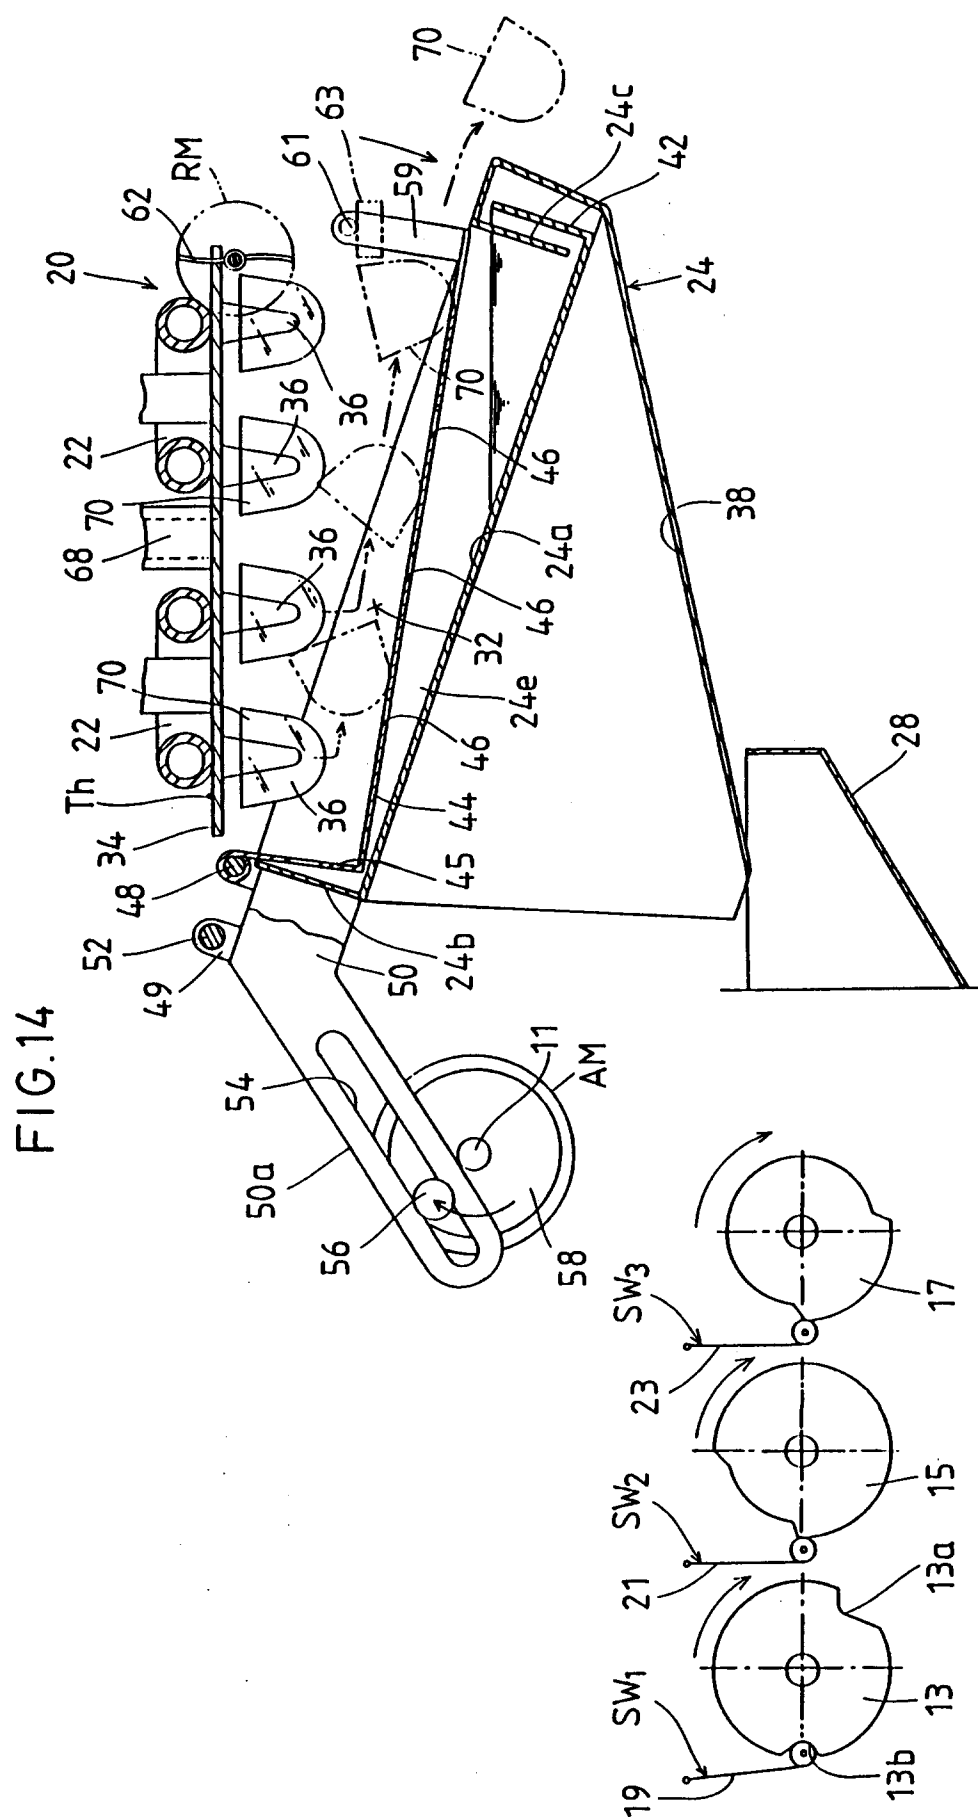
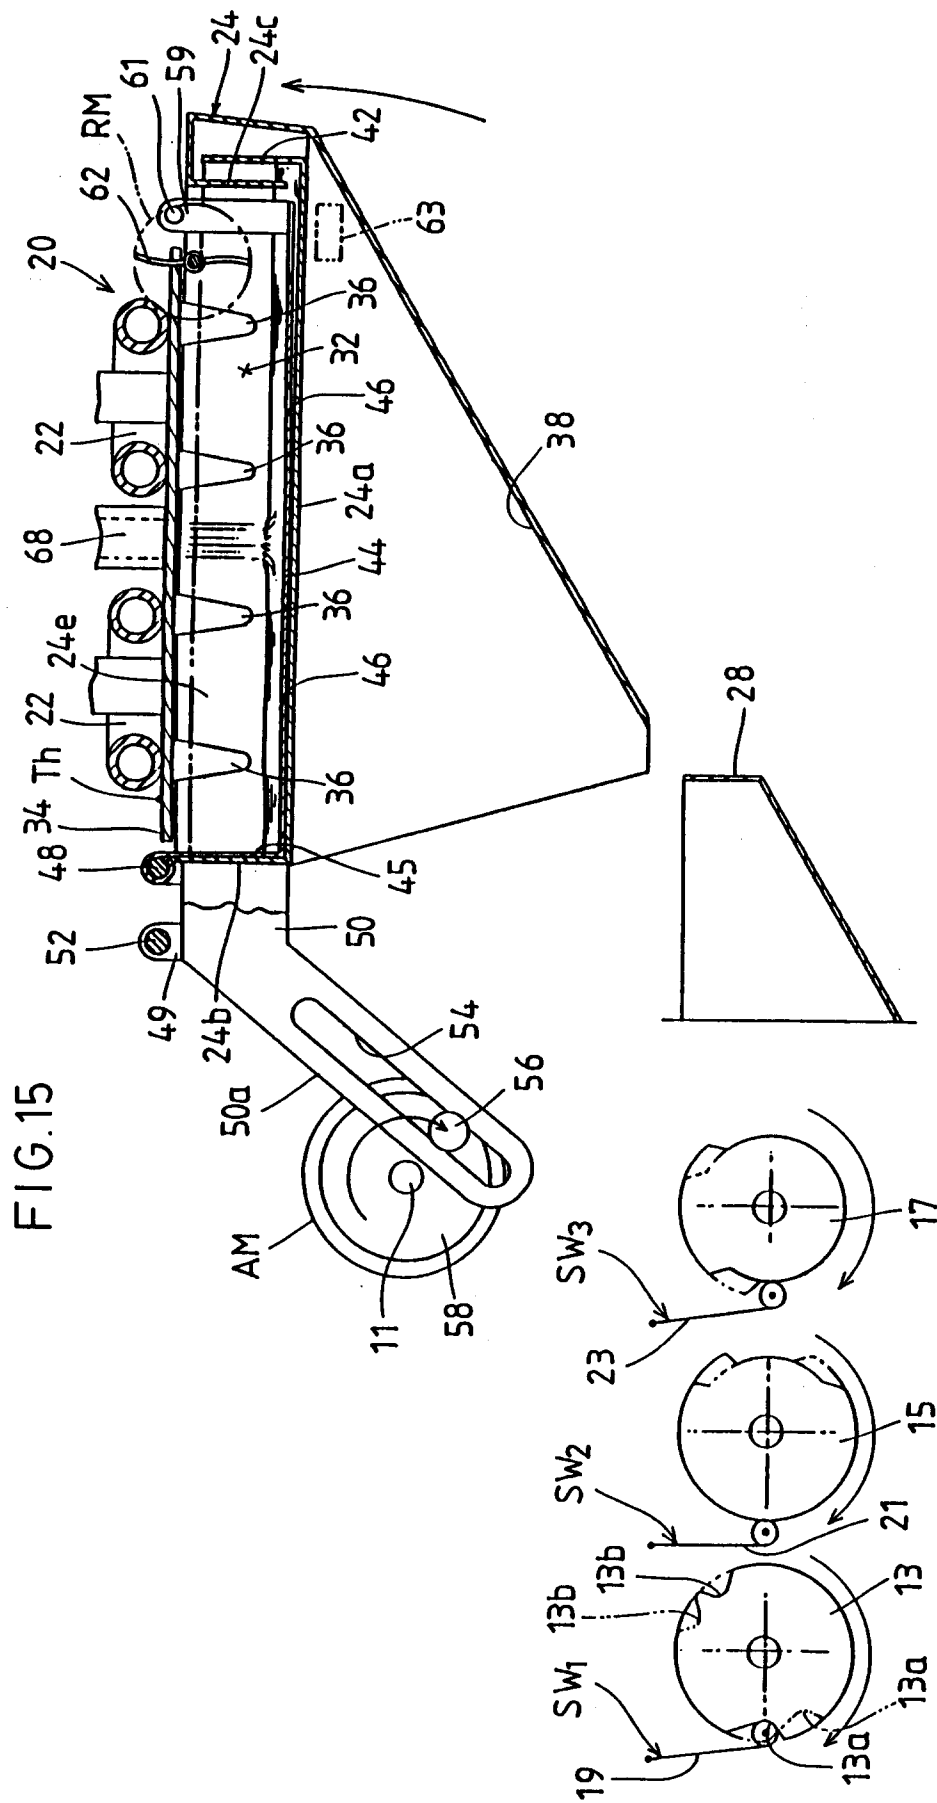


FIG.13







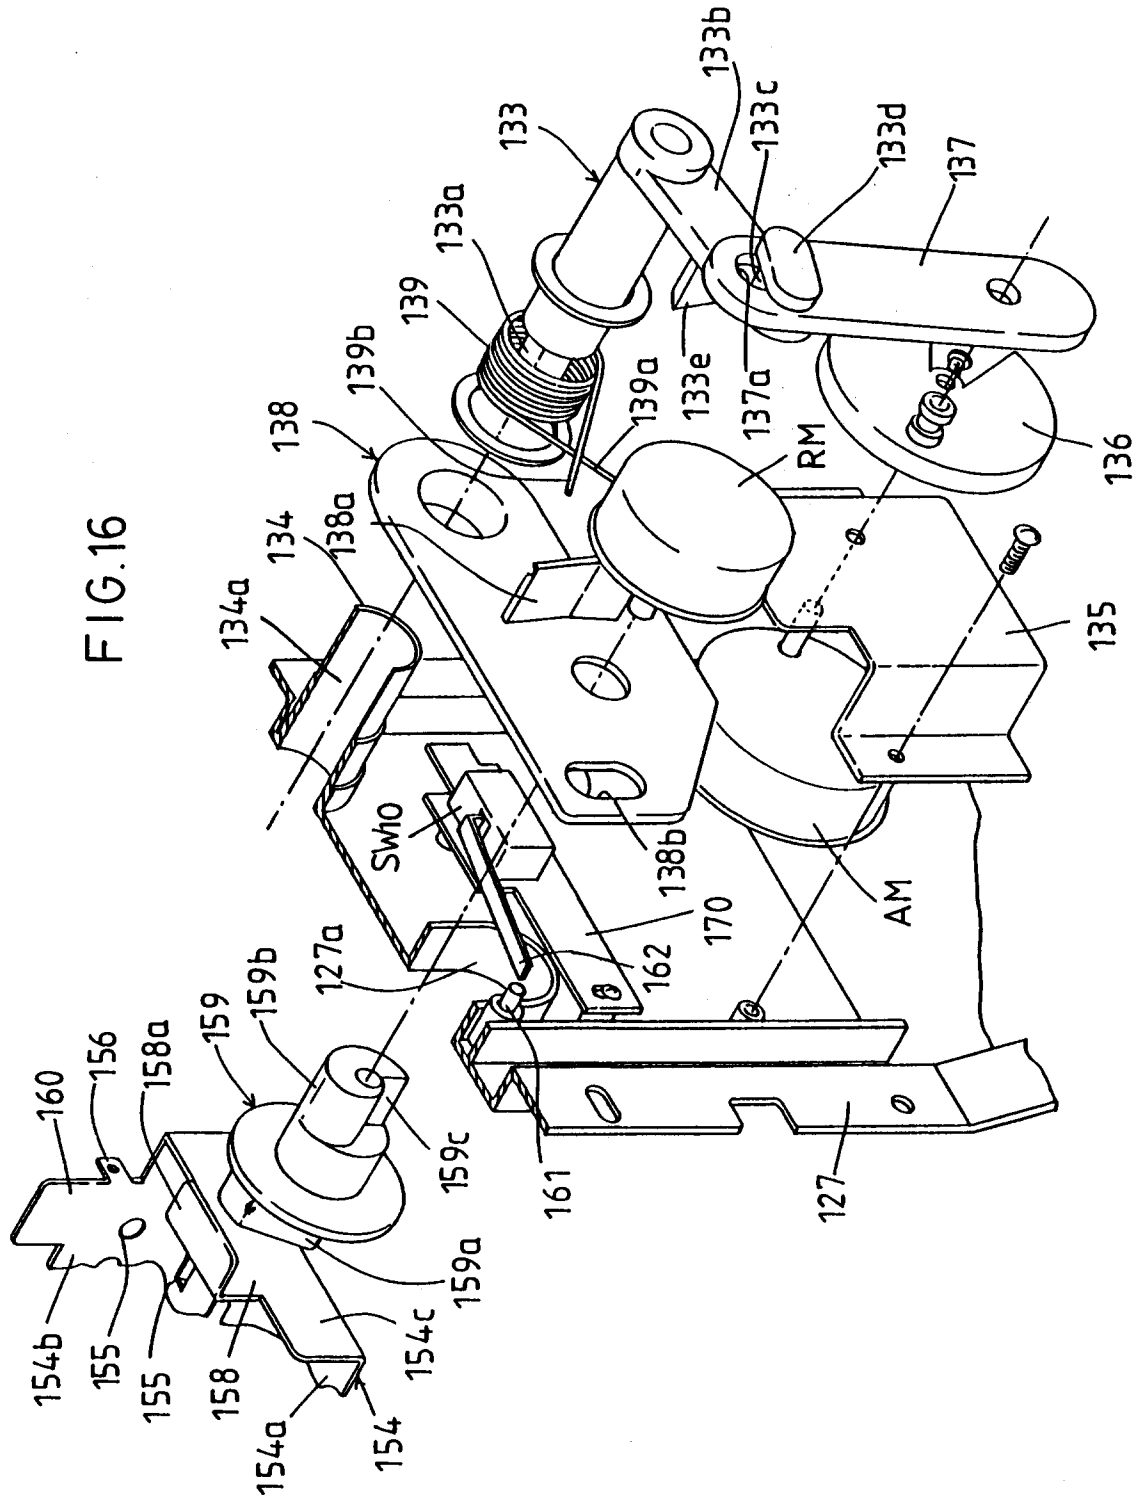
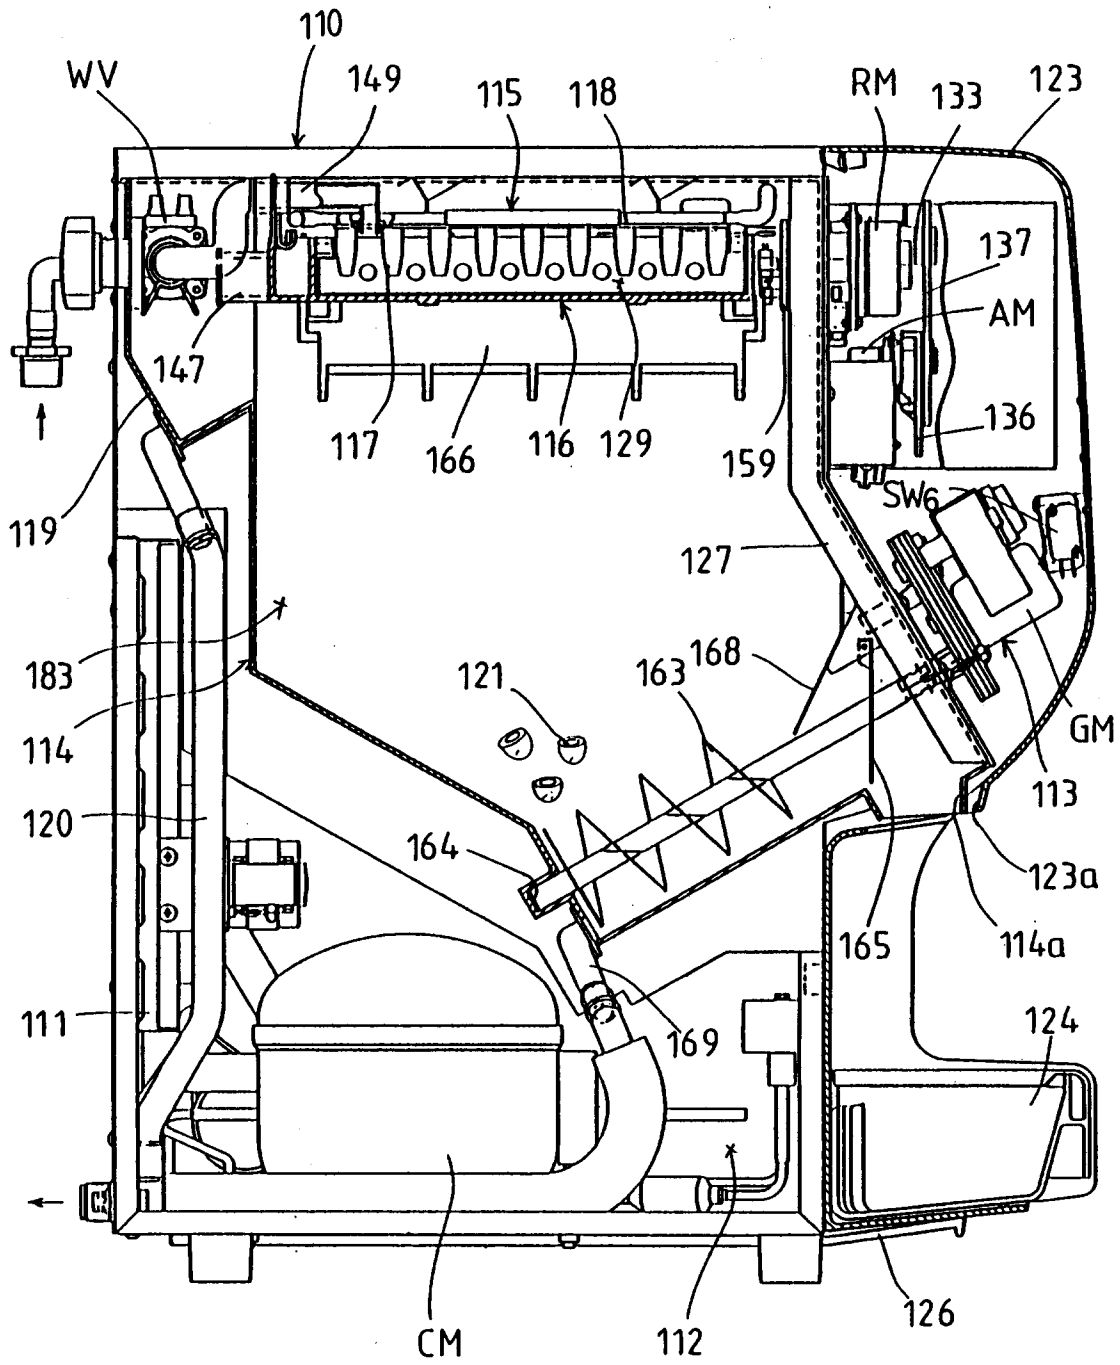


FIG.17



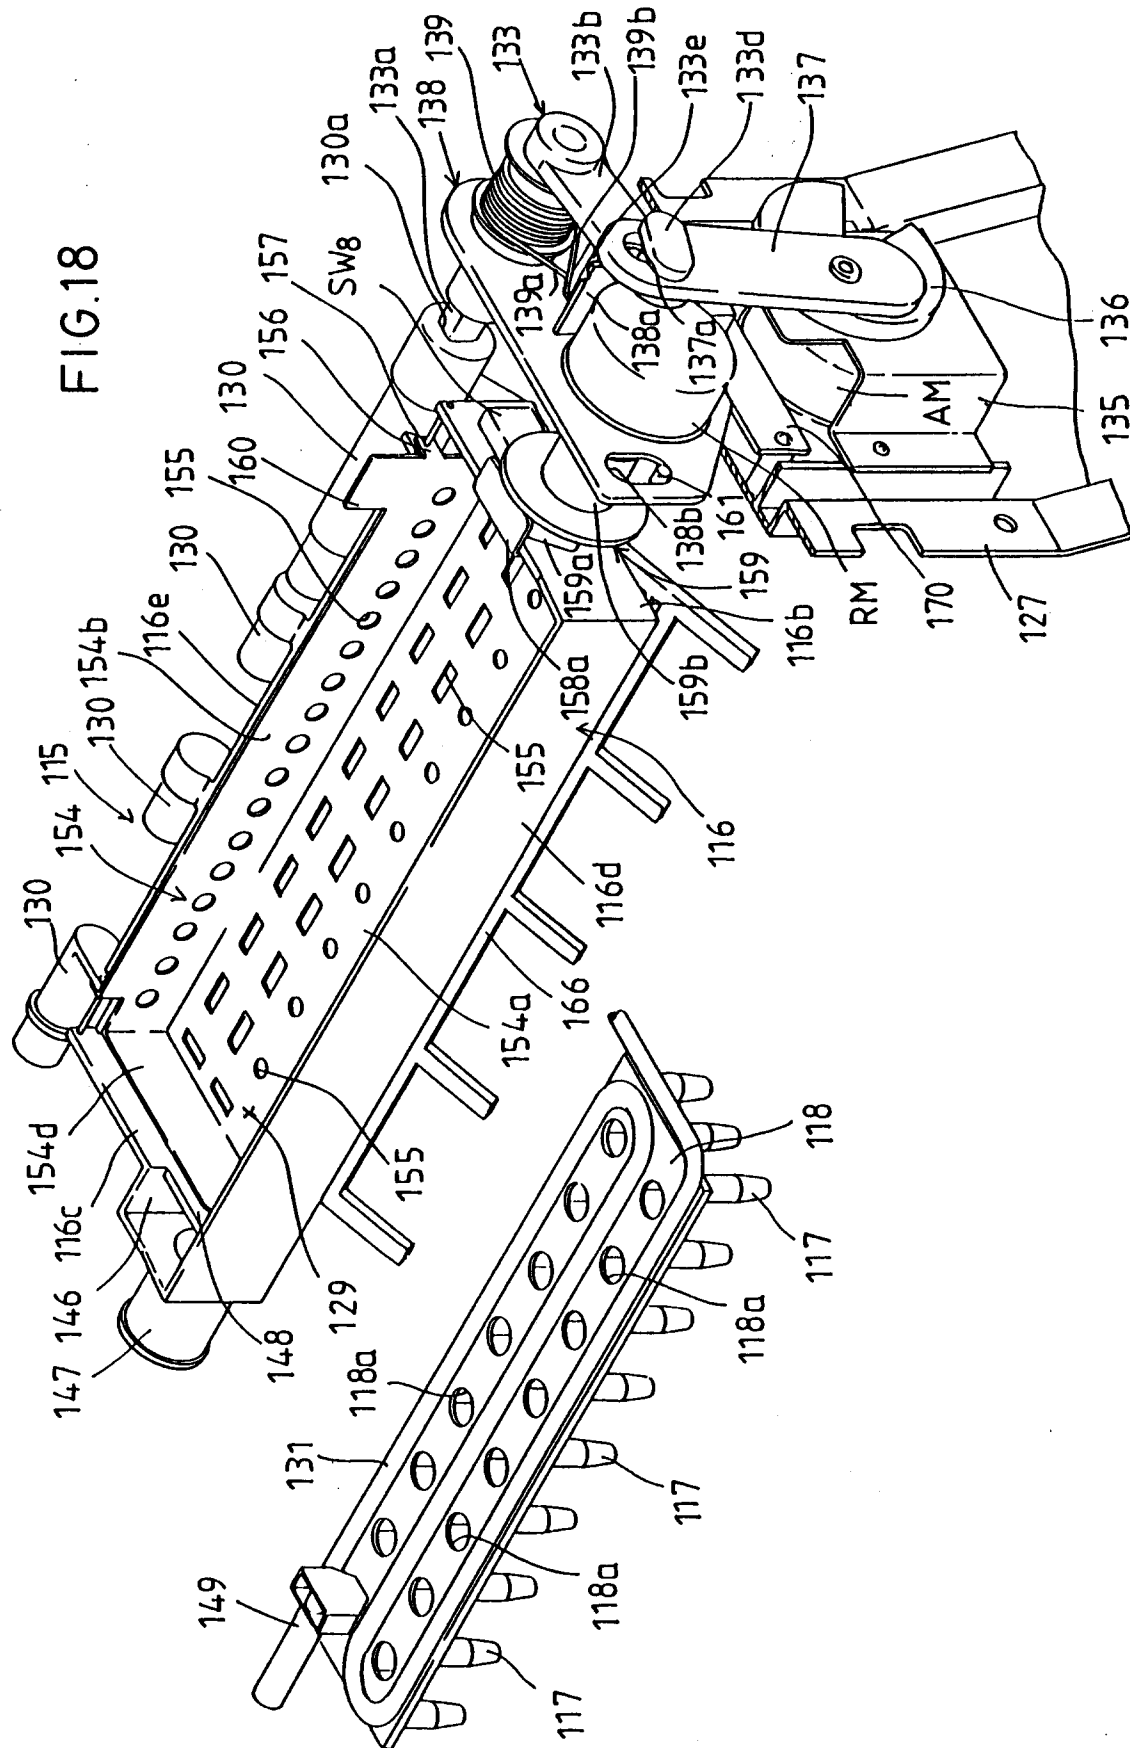


FIG. 19

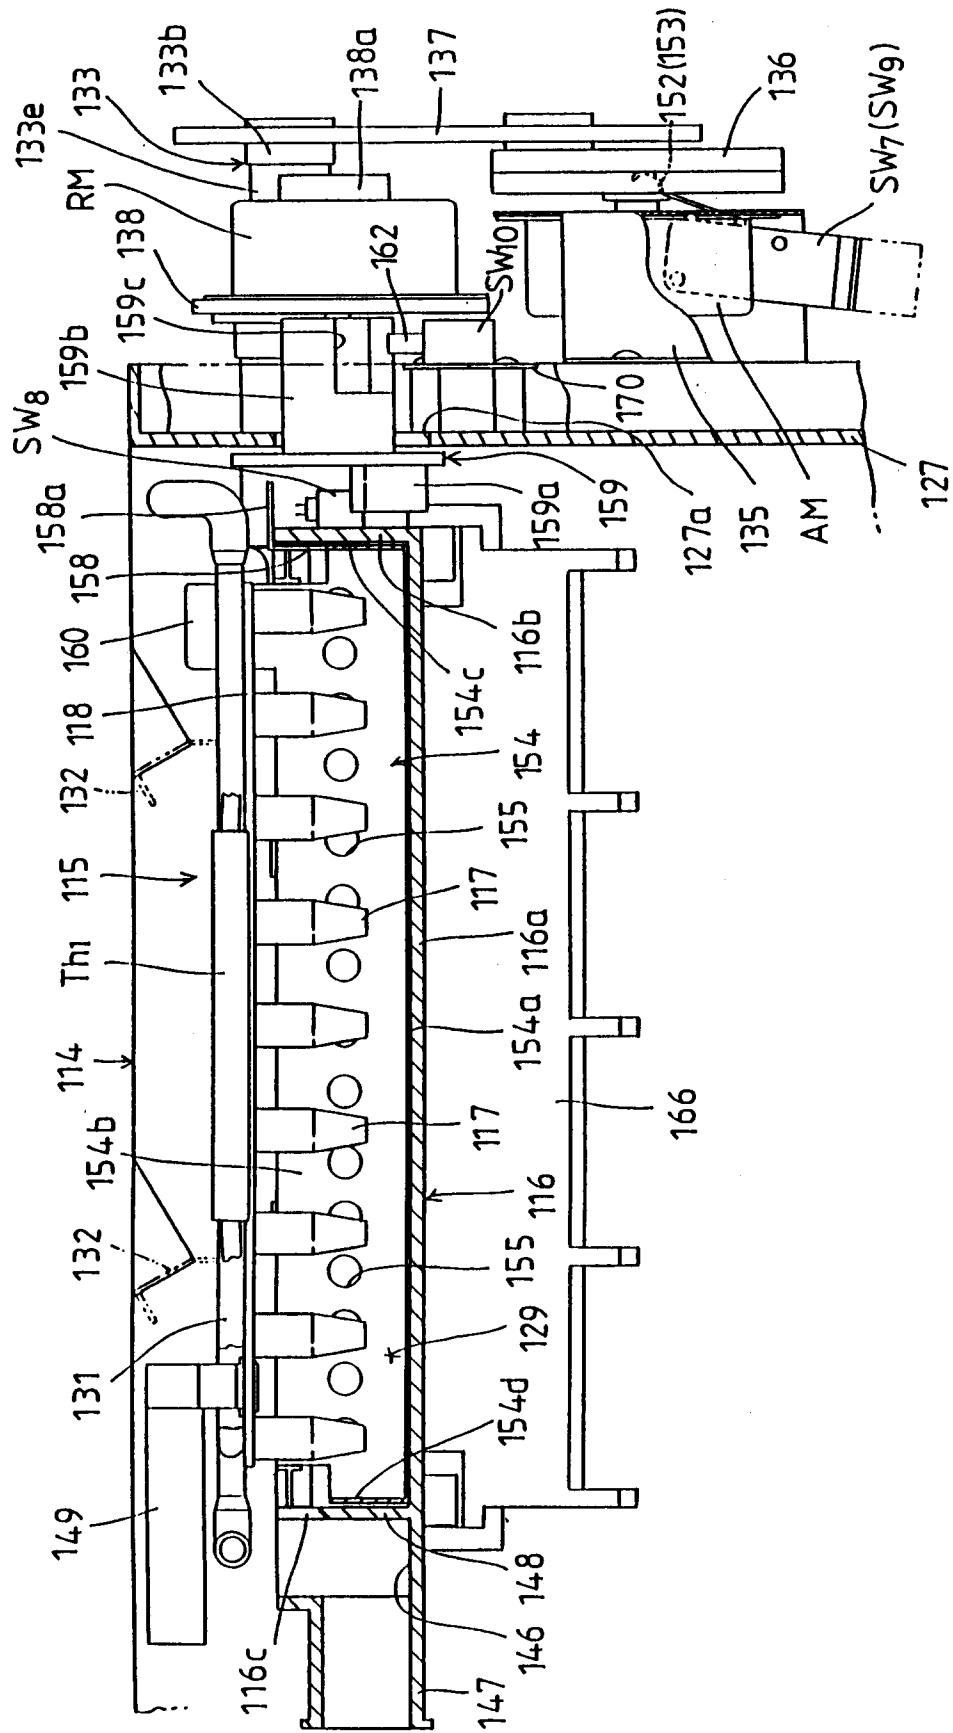
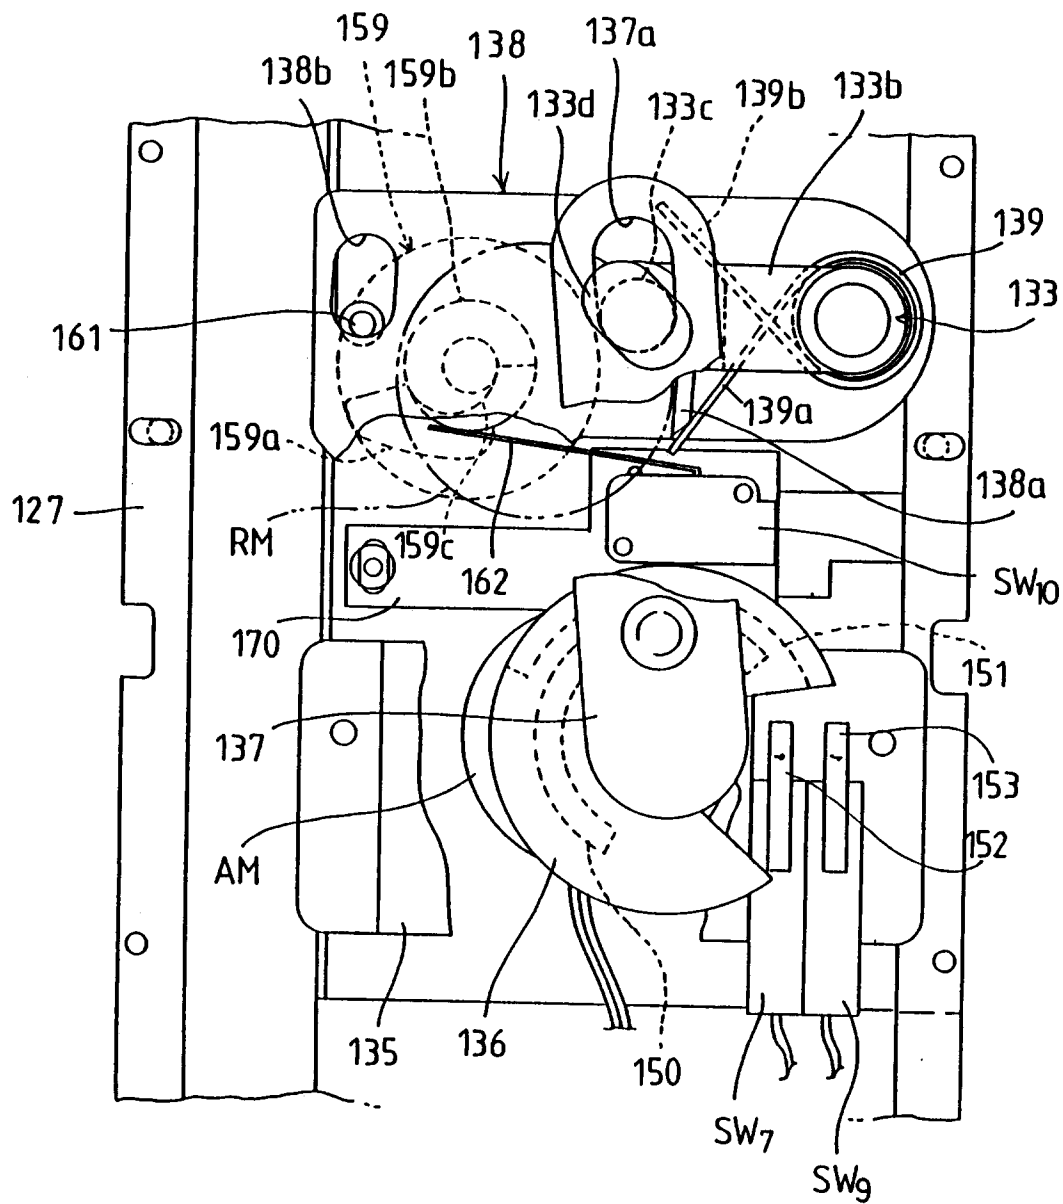


FIG. 20



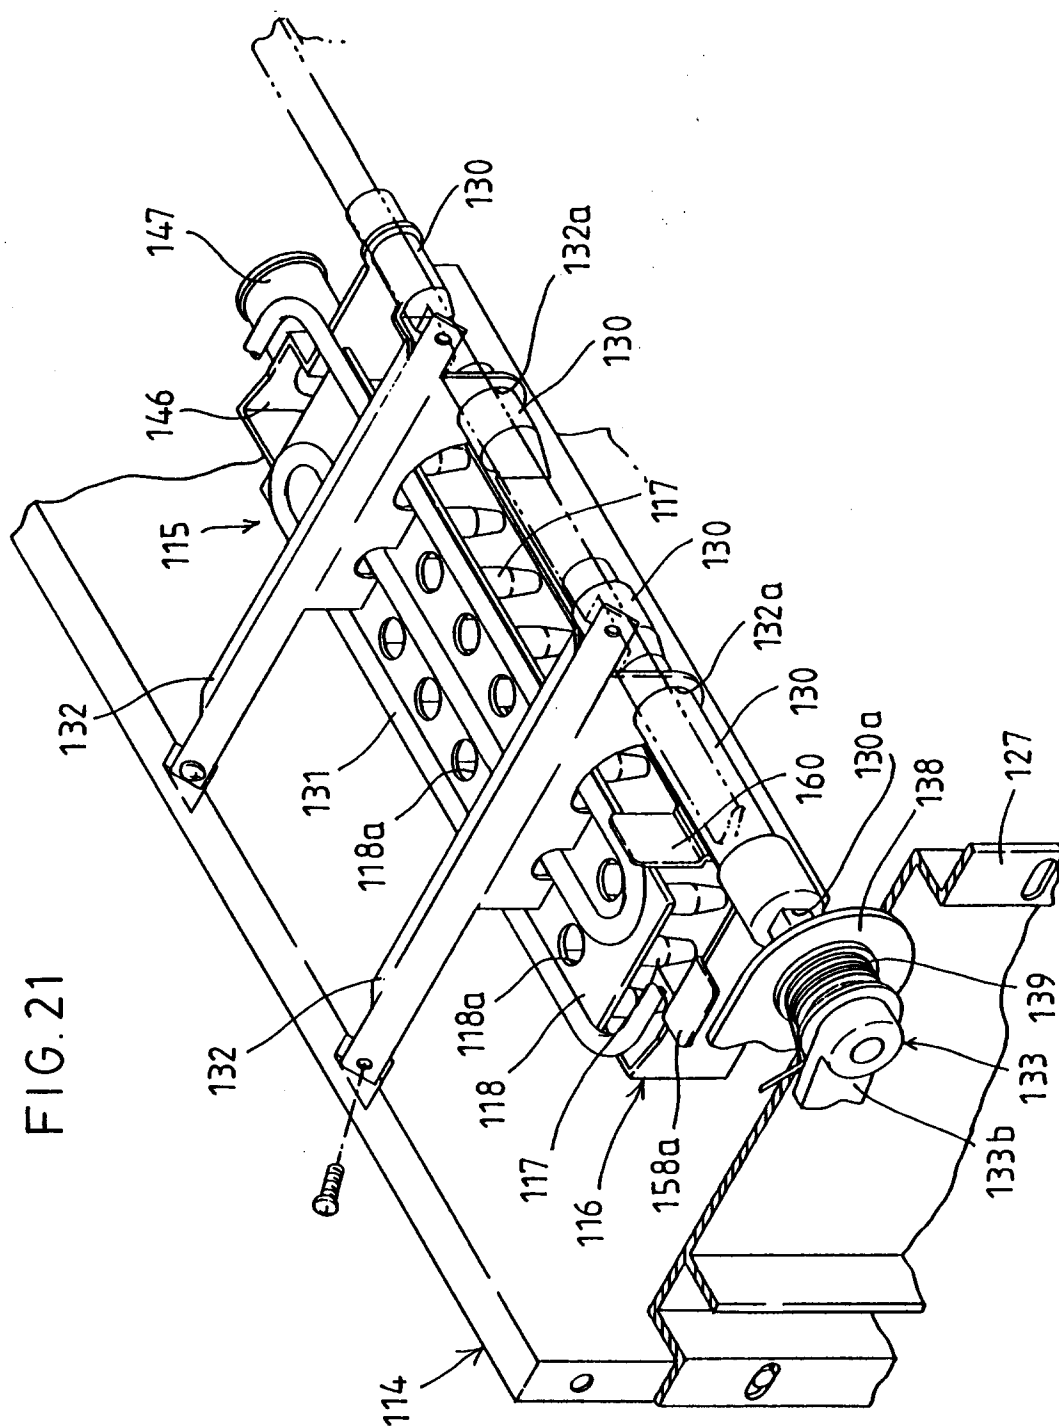


FIG. 22

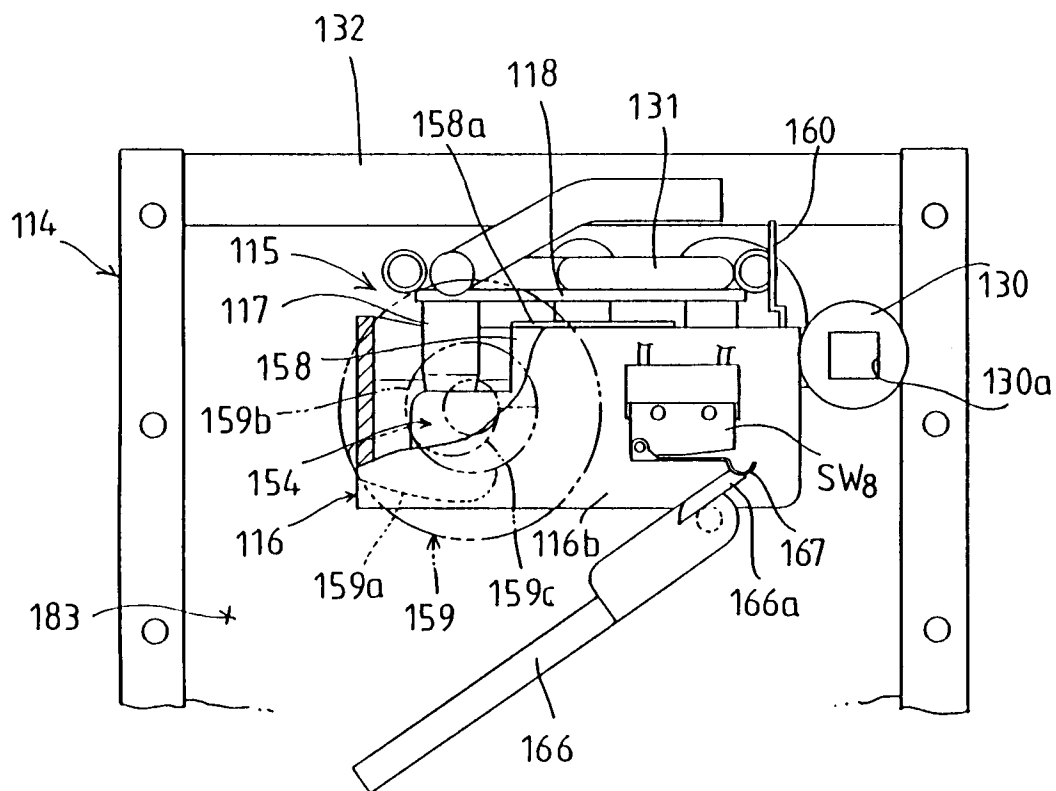


FIG. 23

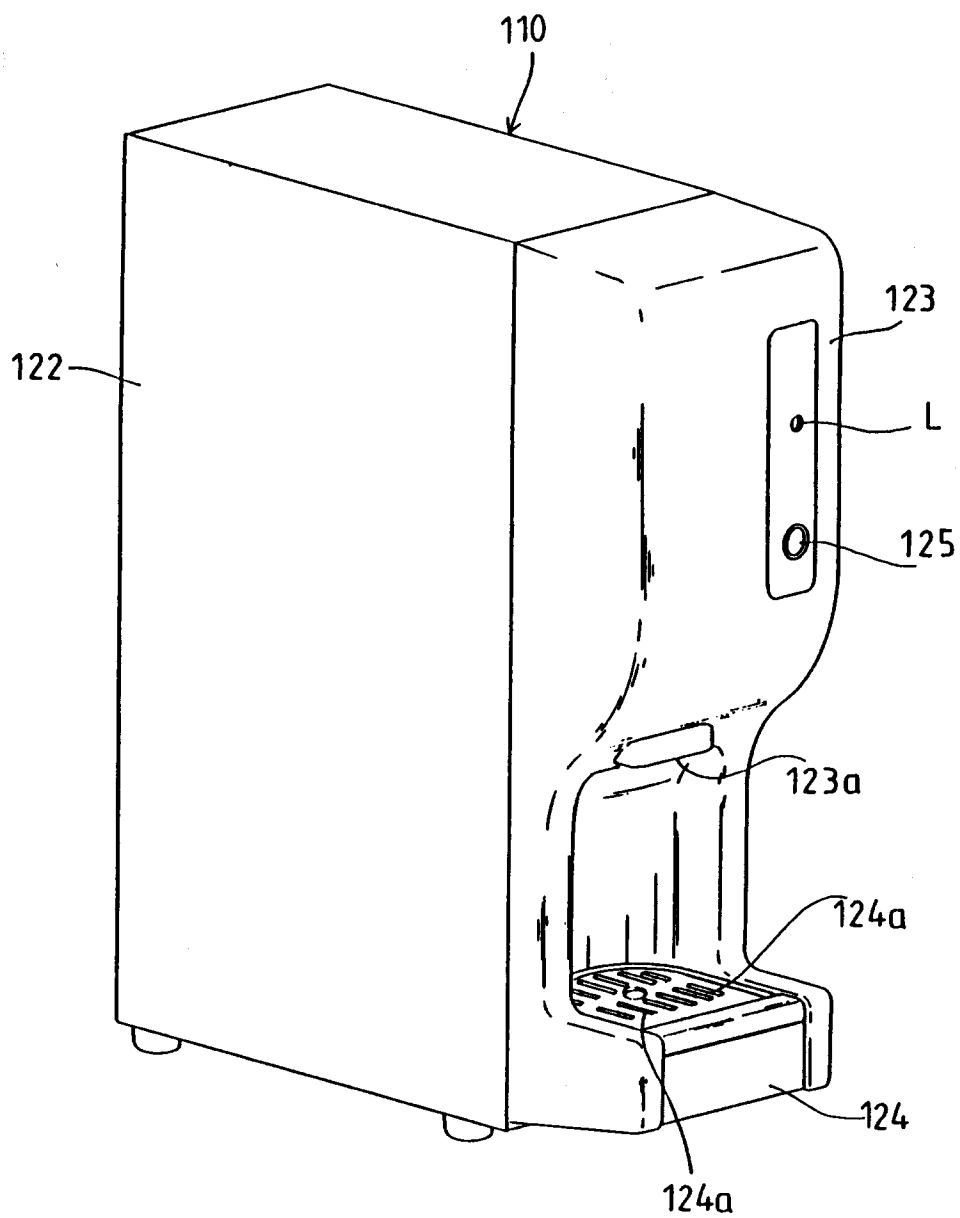
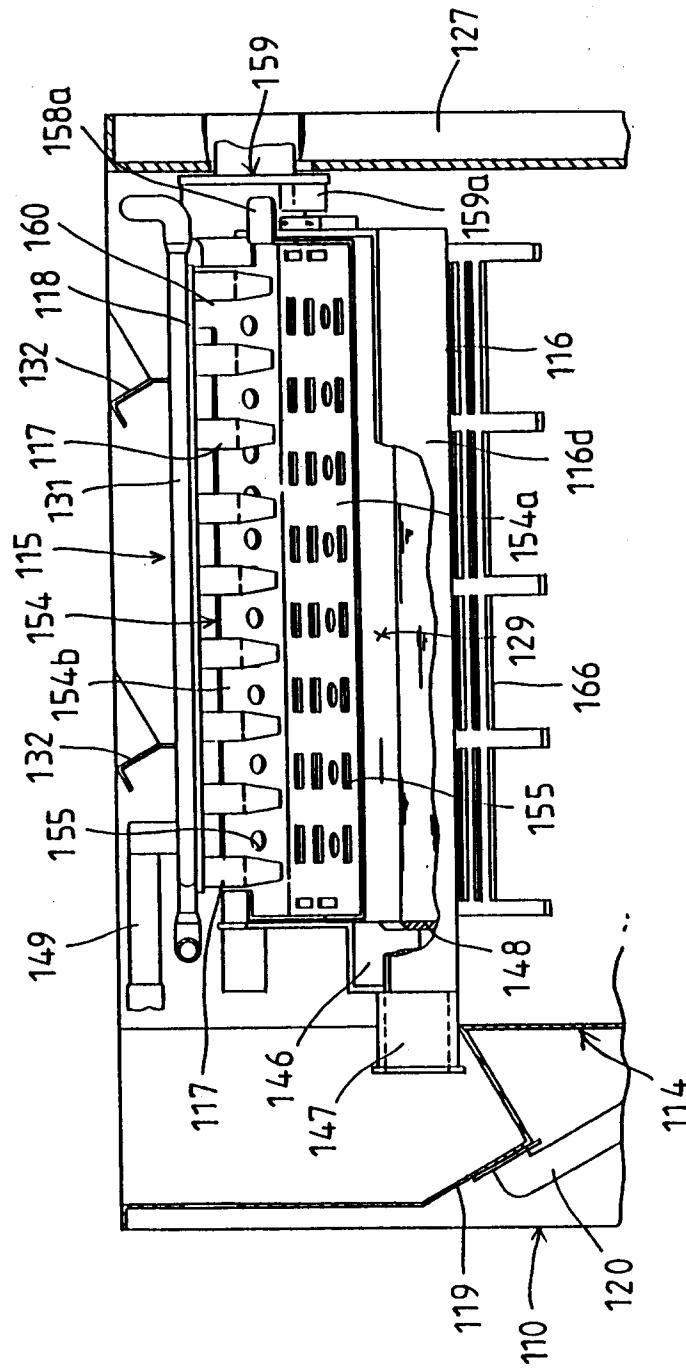


FIG. 24



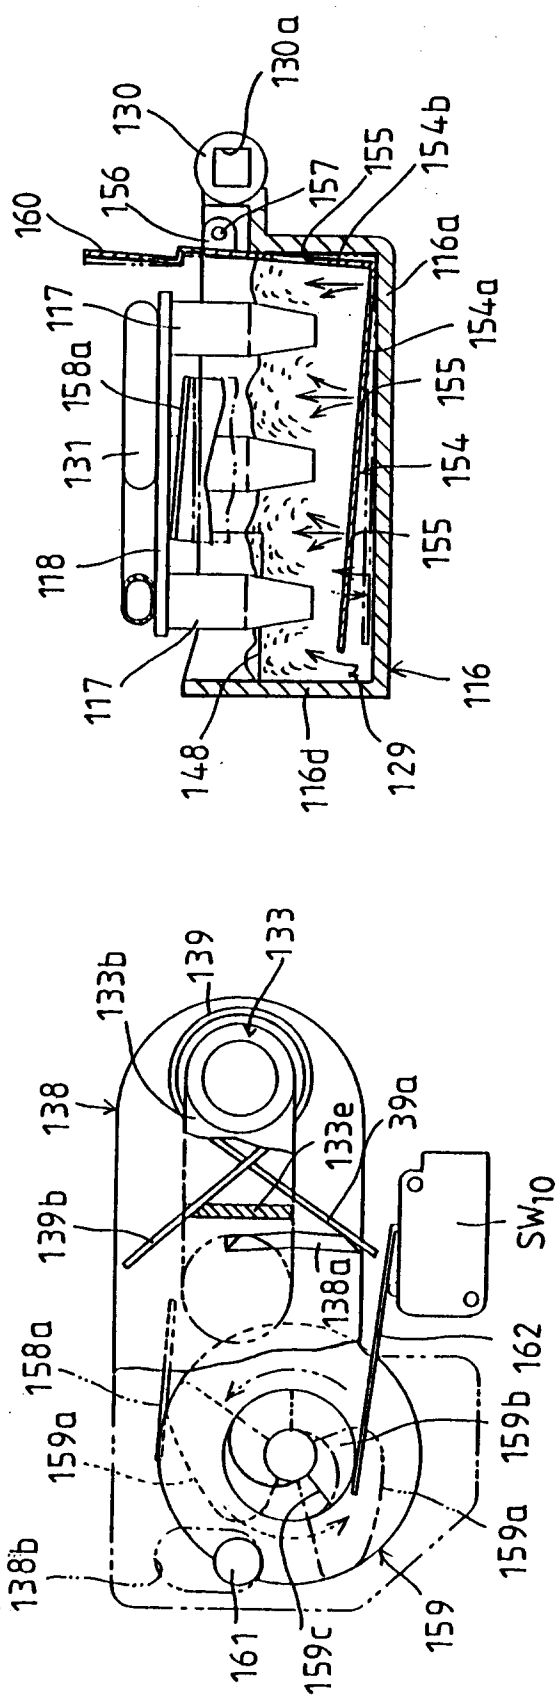


FIG. 26

FIG. 27

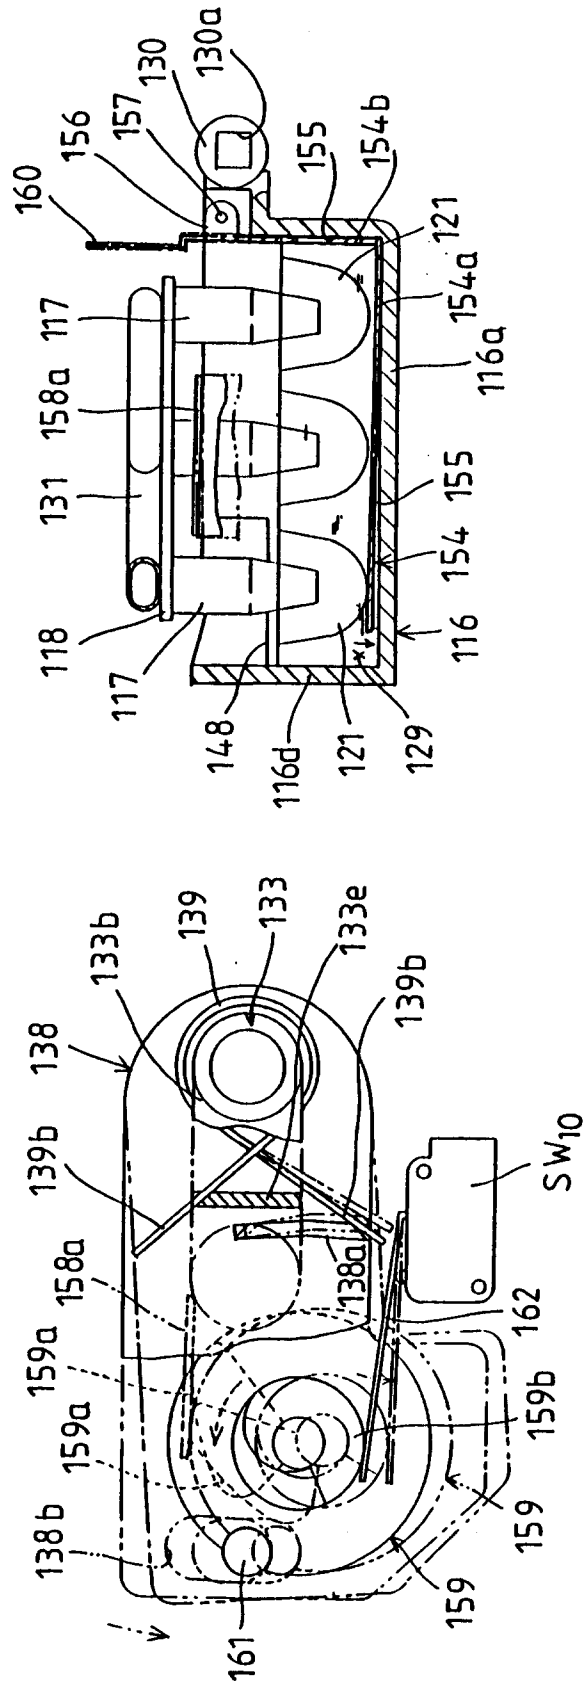


FIG. 28

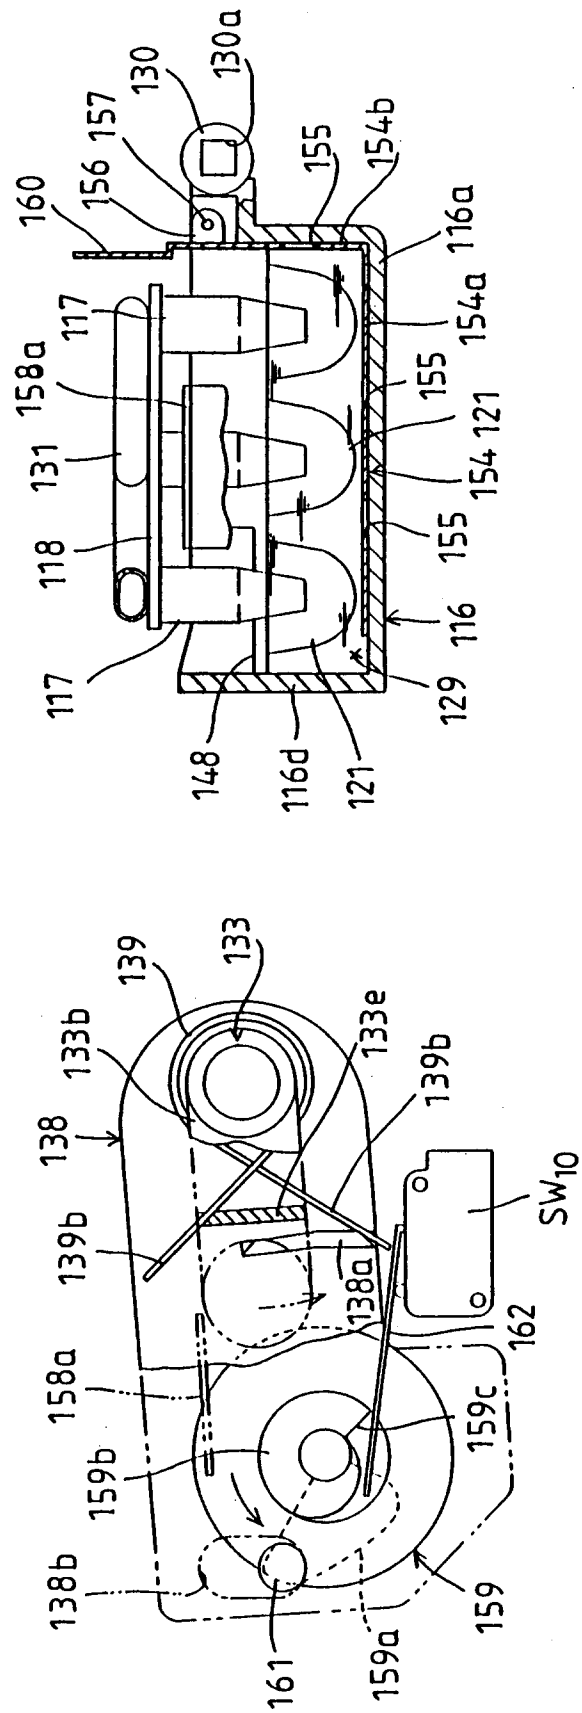


FIG.29

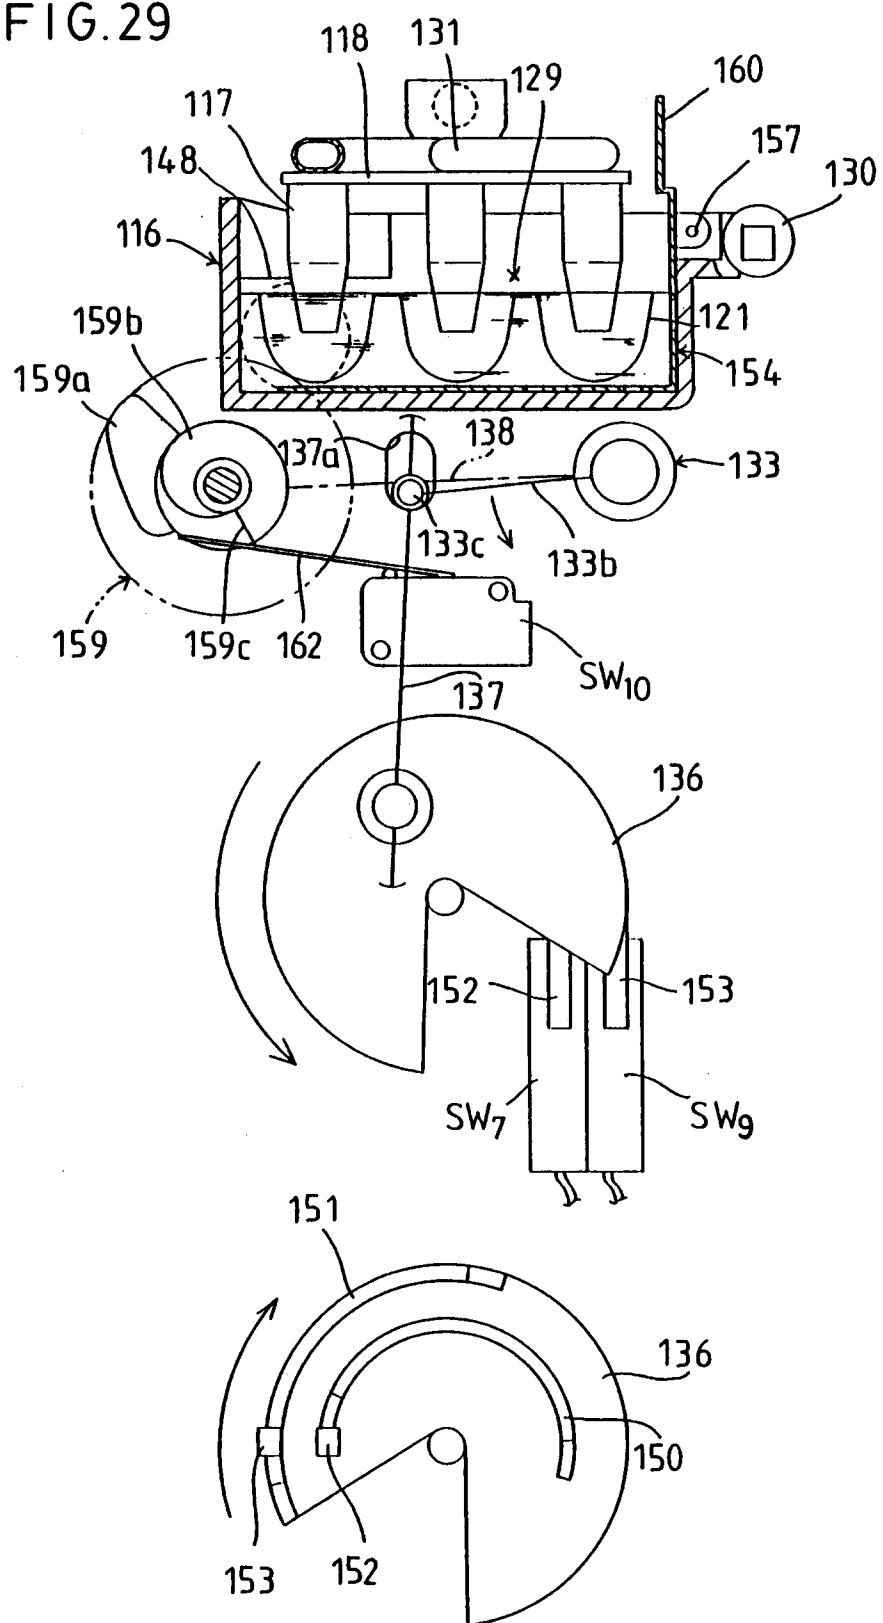


FIG.30

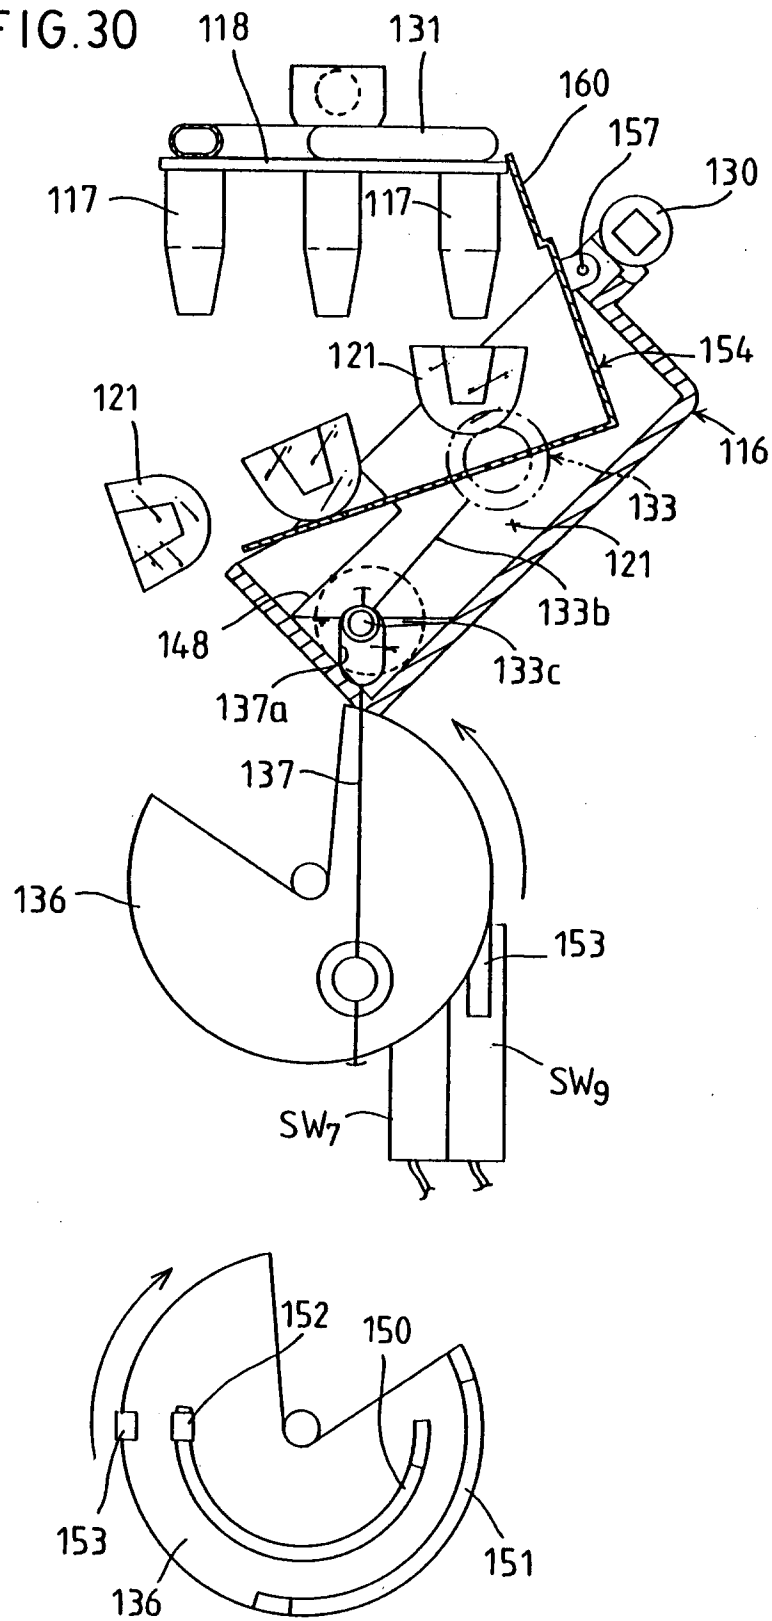


FIG.31

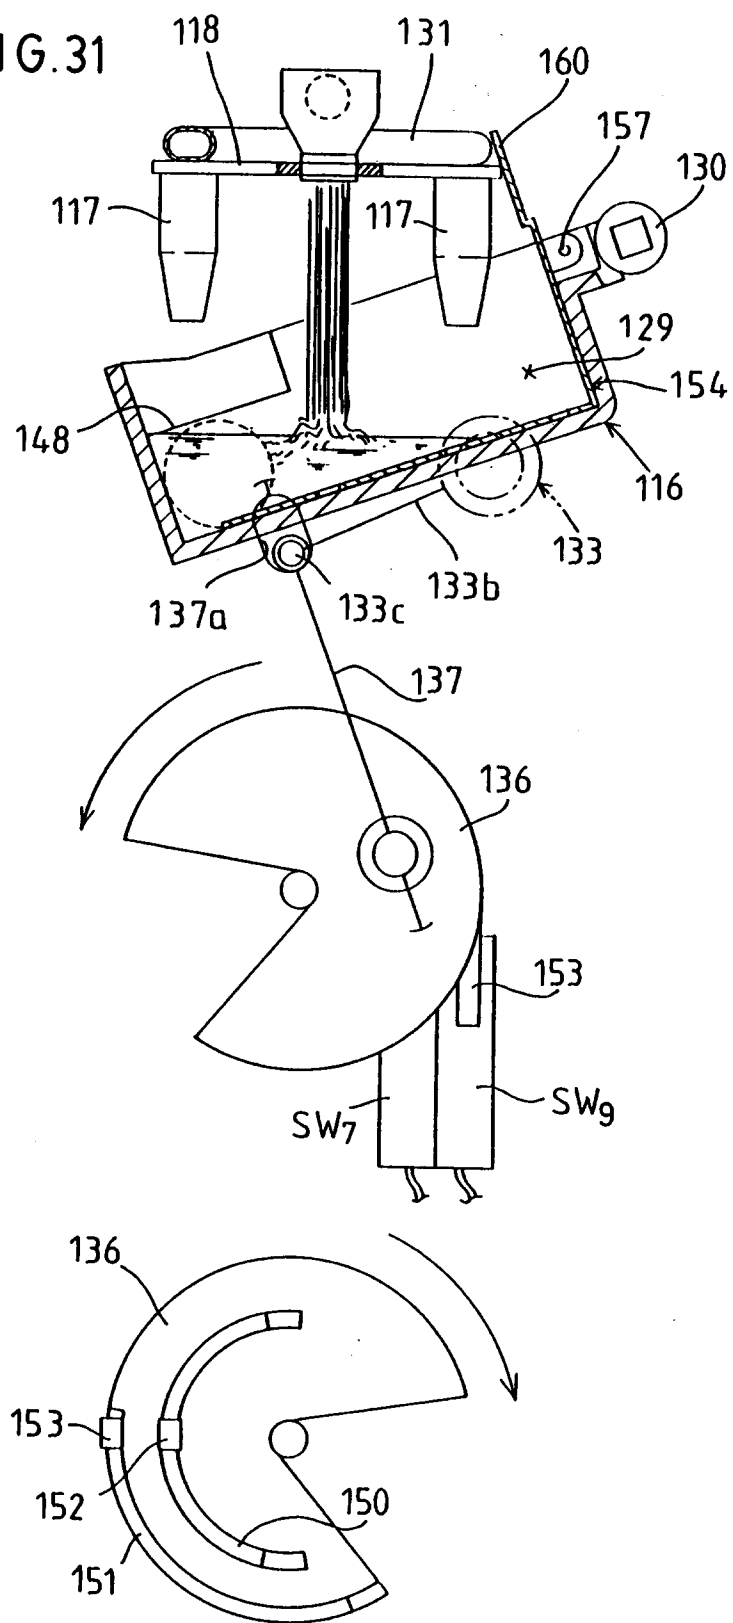
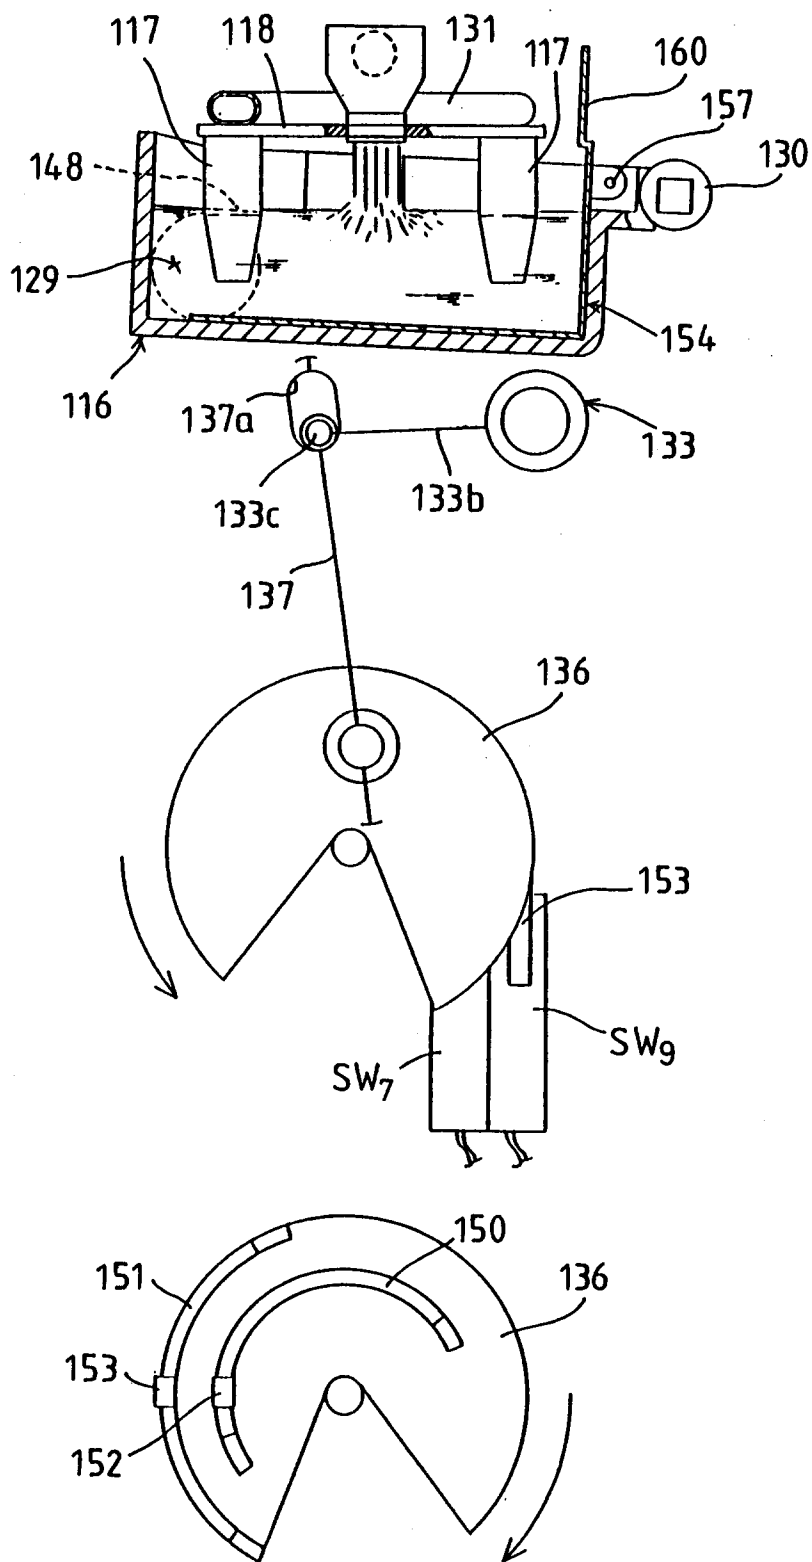


FIG.32






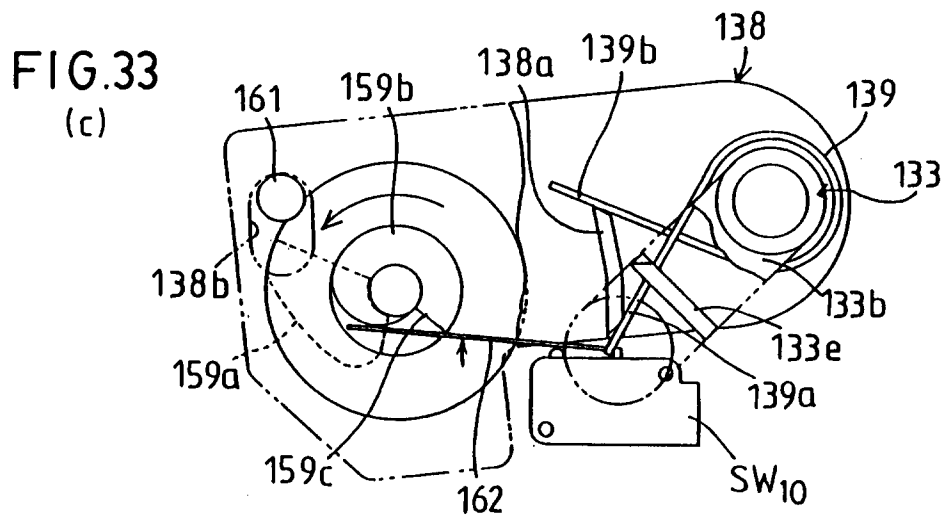


FIG.34

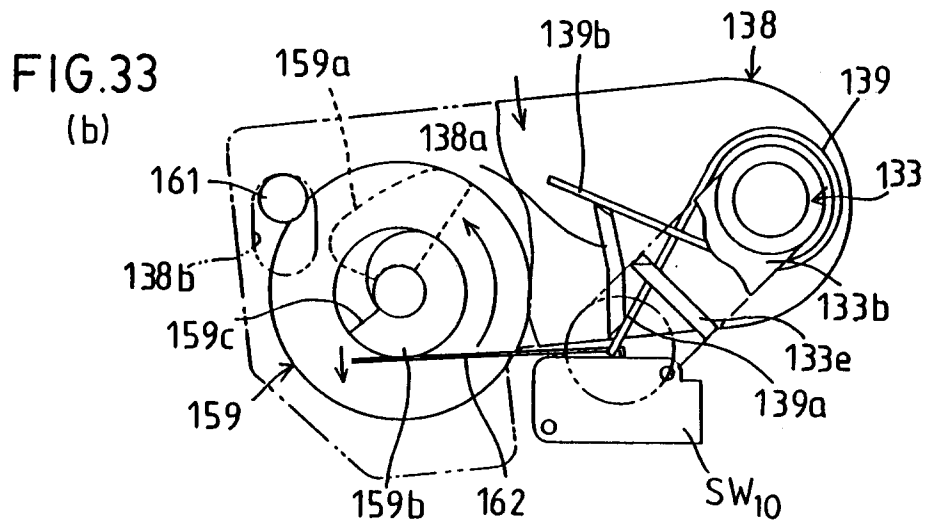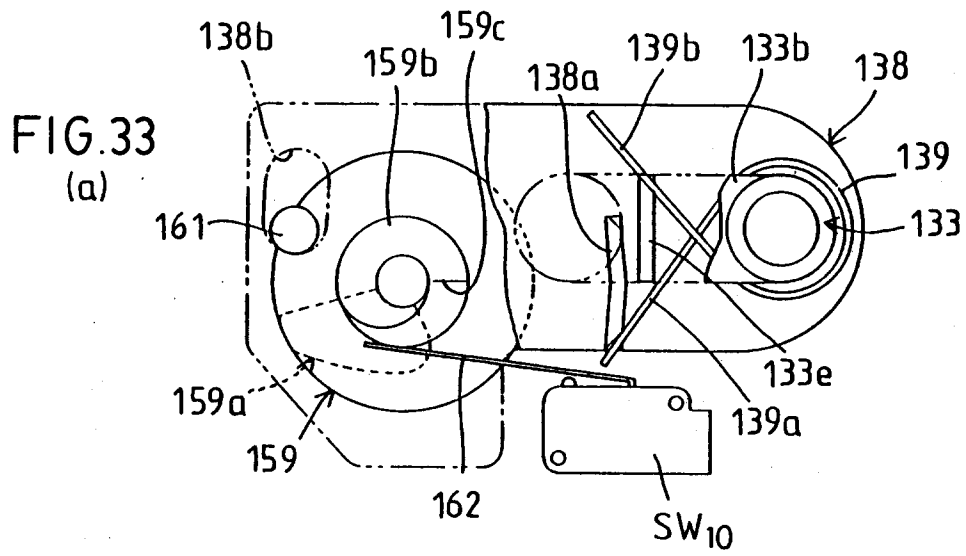

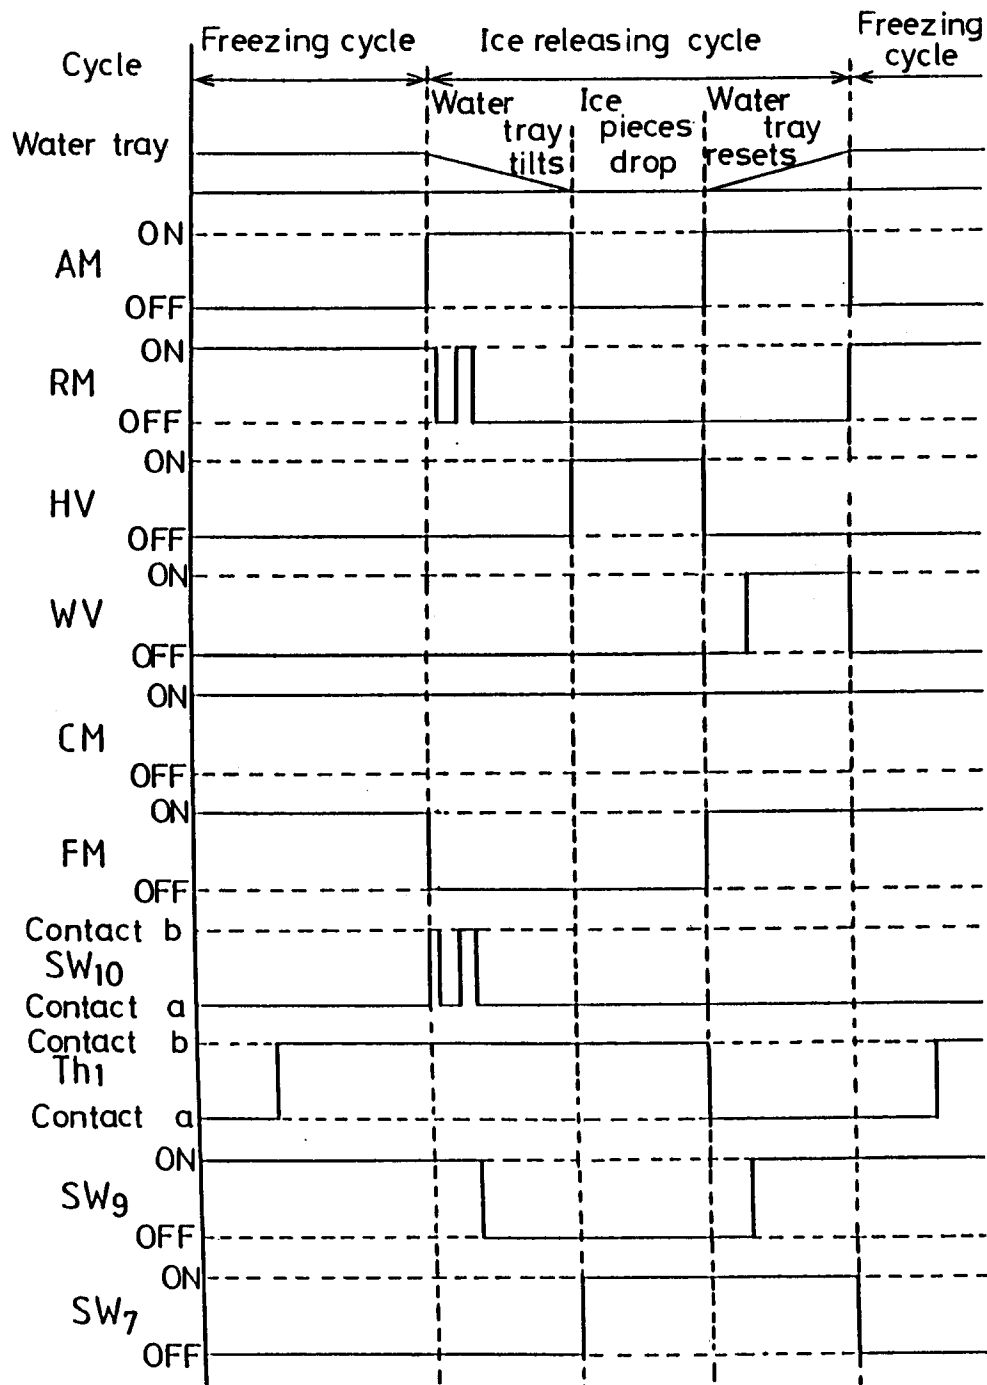

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 93 10 5187

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	AU-B-2 273 077 (BLAKELY) * the whole document * ---	1, 2	F25C1/08
X A	US-A-3 027 731 (LINDENBERG ET AL) * the whole document * ---	1 2	
X	GB-A-2 090 955 (CASTEL MAC SPA) * the whole document * ---	1	
A	US-A-2 718 125 (HORVAY) * the whole document * ---	1, 2	
P, A	US-A-5 187 948 (FROHBIETER) * the whole document * -----	1, 2, 5	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			F25C
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 OCTOBER 1993	Examiner SILVIS H.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document			