



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 586 137 B2**

(12) **NEW EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the opposition decision:
15.09.2004 Bulletin 2004/38

(51) Int Cl.7: **E03D 9/02**

(45) Mention of the grant of the patent:
07.01.1998 Bulletin 1998/02

(21) Application number: **93306499.0**

(22) Date of filing: **18.08.1993**

(54) **A method for refilling a toilet block container**

Verfahren zum Befüllen eines Toilettensteinbehälters

Procédé pour recharger une nacelle de cuvette de WC

(84) Designated Contracting States:
CH DE ES FR GB IT LI NL SE

(30) Priority: **20.08.1992 GB 9217715**

(43) Date of publication of application:
09.03.1994 Bulletin 1994/10

(73) Proprietors:

- **UNILEVER PLC**
London EC4P 4BQ (GB)
Designated Contracting States:
GB
- **UNILEVER N.V.**
3013 AL Rotterdam (NL)
Designated Contracting States:
CH DE ES FR IT LI NL SE

(72) Inventors:

- **Humfress, Brian George, Unilever Research Port**
Wirral, Merseyside, L63 3JW (GB)

- **Murphy, Martin John, Unilever Research Port**
Wirral, Merseyside, L63 3JW (GB)

(74) Representative: **Dekker, Enno E. J. et al**
Unilever N.V.,
Patent Department,
P.O. Box 137
3130 AC Vlaardingen (NL)

(56) References cited:

EP-A- 0 080 943 **EP-A- 0 166 374**
FR-A- 2 200 414 **GB-A- 1 505 808**

Remarks:

The file contains technical information submitted
after the application was filed and not included in this
specification

EP 0 586 137 B2

Description

[0001] The present invention relates to a method for refilling a toilet block container according to the preamble of claim 1.

[0002] Dispensing containers for dispensing a dissolvable chemical product from a solid block form into a toilet bowl are generally known. EP 413 373A (Unilever) discloses a dispensing container for delivering a chemical product to a discontinuous stream of water.

[0003] Such containers are positioned in a hanging position in the toilet bowl dependent from the rim. They frequently comprise a cage-like container with a hook for mounting the container such that the container is located under the rim of the toilet bowl. Such a container is disclosed in GB 1505808 (L'Oreal). Inside such containers there is generally found a solid block of a sparingly soluble or water-reactive cleansing agent which, during the flushing operation, is delivered to the flush water to infuse the water standing in the bowl.

[0004] Due to cost effectiveness and environmental concerns it is desirable to have a dispensing container which can be refilled. GB 1 471 040 (McDuffee) discloses a container with a top portion in a form of a cap, the cap may be removed to allow the chemical block to be renewed. Such containers are available in the market but suffer from the disadvantage that they have to be manually opened by handling the container and unfastening a catch to place a new chemical block into the container.

[0005] This task is often particularly unpleasant, as the old block can form a gelatinous mass at the bottom of the container and this mass has to be removed before the new block is placed into the container. The handling of a such a soiled device is considered unpleasant by many consumers who are disposed to discard the container and replace it completely, adding to costs and wastage of materials. Moreover, some hygiene agents can be hazardous if brought into contact with the skin and accidental skin contact is likely to occur during the refilling process.

[0006] The present invention overcomes the difficulty of opening the container by providing a method for refilling a toilet block container according to claim 1.

[0007] Opening in this manner facilitates replacement of a spent block without undue handling of the container and reduces soiling of the hands.

[0008] The dispensing container preferably comprises a foraminous shell-like body formed from two halves.

[0009] Typically, the body is egg-shaped or generally cylindrical when the closure element is in a 'closed' position.

[0010] Preferably the two halves are hinged such that both halves can, when opened, be placed side by side such that the body of the container appears substantially flat. Opening of the container in such a manner enables the easy removal of any residual remains of an old block of chemical product when the container is opened to

place a new block inside it.

[0011] Typically, the latch is configured such that it opens, releasing the closure element, when the container is knocked or firmly pressed against a hard surface and can be secured again thereafter.

[0012] The latch comprises an engaging member having a nose-like projection and means for receiving the engaging member which consist of an aperture with a protruding sill. The underside of the nose is ramp-like. This enables the container to be opened by rapping it on a hard surface and urging the ramp-like underside of the nose against one bound of the aperture thereby causing the engaging member to disengage from the aperture.

[0013] Preferably the latch is positioned directly opposite the hinge of the closure element. It is believed that this facilitates particularly easy opening of the container when it is rapped against a surface.

[0014] As the container is intended for use inside a toilet bowl, it preferably comprises means for mounting the container in the toilet bowl.

[0015] The preferred means for mounting the container in the toilet bowl comprises a hook-like member, typically a strip of resistant material folded into three, as is generally known in the art. The hook-like member can be hooked over the rim of the toilet bowl so as to position the container beneath the rim of the toilet bowl in the flush-water stream. It is also particularly preferable that the latch means are located adjacent the base of the hook-like member.

[0016] It is desirable that there is an aperture at the bottom of the container such that any residual liquid may drain out from the container. In one preferred embodiment of the invention, at least two hinges are provided at the bottom of the container and the drainage aperture is located between them.

[0017] The container is preferably made of a suitable plastics material, i.e. one which does not react with the chemical components of the block.

[0018] The invention will now be described in further detail, by way of example only, with reference to the accompanying drawings in which:

Figure 1 is a perspective view of a closed container.

Figure 2 is a similar view of the container with the closure element in an 'open' position.

Figure 3 is a plan view of a part of the latch means.

Figure 4 is a cross section along the line iii-iii of figure 3.

[0019] Referring now to the figures of the accompanying drawings, these show a dispensing container [1] having a shell-like body [2] and a fastening means [3] to attach the container to a toilet bowl.

[0020] Latch [4] comprises member [5] having base [6], lug [7] and nose [8]. The underside of the nose [9] forms a ramp-like surface. Member [5] is received, by aperture [10] with an internally intruding sill [11].

[0021] The body [2] is in two halves, the two halves [15a, 16a] are joined by hinges [12a and 12b], positioned opposite the latch. Between the hinges is a gap [13].

[0022] The body of the container has holes [14] to allow water to pass therethrough, both for ingress of water and egress of water mixed with a part of the contents of the container.

[0023] Around the periphery of one half of the device is a groove [15b] and around the other half of the device is a rim [16b], this arrangement enables the device to be tightly closed.

[0024] In-use, the container is generally closed as shown in figure 1 and suspended by hook-like fastening means [3] from the rim of a toilet bowl. A block of water-soluble or water-reactive material is entrapped within the container. During the flush cycle flush water enters through the holes [14] and leaves through these same holes or through gap [13], bearing a portion of the block therewith.

[0025] After the passage of some time it become necessary to replace the block. The empty container can be removed from the toilet bowl by handling fastening means [3]. By holding said fastening means and rapping the base of the body of the device on a hard surface, the force applied to the container causes the body to distort and the latch means opens. The empty device is rinsed to remove any residue and a new block, not shown, is inserted into the device. The two halves of the body of the device are then pressed together so that the rim on one half fits into the groove on the other half, the latch engages and the device is thus held shut. The device is then attached under the rim of the toilet bowl by the fastening means.

Claims

1. A method for refilling a toilet block container, said container comprising a distortable outer shell (2) to contain the chemical product, a hinged closure element and latch means (4) for releasably securing said closure element so as to retain said product within said shell, said latch means (4) comprising an engaging member (5) having a nose-like projection (8) with a ramped underside (9) receivable in an aperture (10) and engagable with protruding sill (11) at the aperture; wherein a force applied indirectly to the latch means causes the shell to distort and the underside of the nose (9) to disengage from the aperture, thereby releasing the latch means, said method **characterized by** the step of rapping the container against a surface to open the container.

Patentansprüche

1. Verfahren zum Wiederauffüllen eines Toilettenblockbehälters, wobei der besagte Behälter umfasst eine verformbare äußere Hülle (2) zur Aufnahme des Chemikalienprodukts, ein aufklappbares Verschlusselement und eine Verriegelungseinrichtung (4), um das besagte Verschlusselement lösbar zu sichern, so dass es das besagte Produkt innerhalb der besagten Hülle zurückhält, die besagte Verriegelungseinrichtung (4) ein Eingriffselement (5) umfasst, das einen nasenartigen Vorsprung (8) mit einer abgeschrägten Unterseite (9) aufweist, der in einer Öffnung (10) aufnehmbar ist und sich mit einer vorspringenden Schwelle (11) an der Öffnung in Eingriff bringen lässt; wobei eine indirekt auf die Verriegelungseinrichtung aufgebrachte Kraft bewirkt, dass sich die Hülle verformt und sich die Unterseite der Nase (9) aus der Öffnung löst, wodurch die Verriegelungseinrichtung freigegeben wird, wobei besagtes Verfahren **gekennzeichnet ist, dadurch** dass es den Schritt eines Schlagens des Behälters gegen eine Oberfläche umfasst, um den Behälter zu öffnen.

Revendications

1. Procédé de recharge d'un récipient de bloc de toilettes, ledit récipient comprenant une coque externe déformable (2) destinée à contenir le produit chimique, un élément de fermeture à charnière et un loquet (4) destiné à fixer de manière détachable ledit élément de fermeture de façon à retenir ledit produit dans ladite coque, ledit loquet (4) comprenant un élément d'accouplement (5) comprenant une saillie en forme de nez (8) ayant un dessous en forme de rampe (9) pouvant être reçu dans une ouverture (10) et pouvant s'accoupler avec un rebord en saillie (11) au niveau de l'ouverture ; dans lequel une force appliquée indirectement sur le loquet provoque la déformation de la coque et le désaccouplement du dessous du nez (9) d'avec l'ouverture, libérant ainsi le loquet, procédé **caractérisé par** l'étape consistant à frapper le récipient contre une surface pour ouvrir le récipient.

Fig. 1.

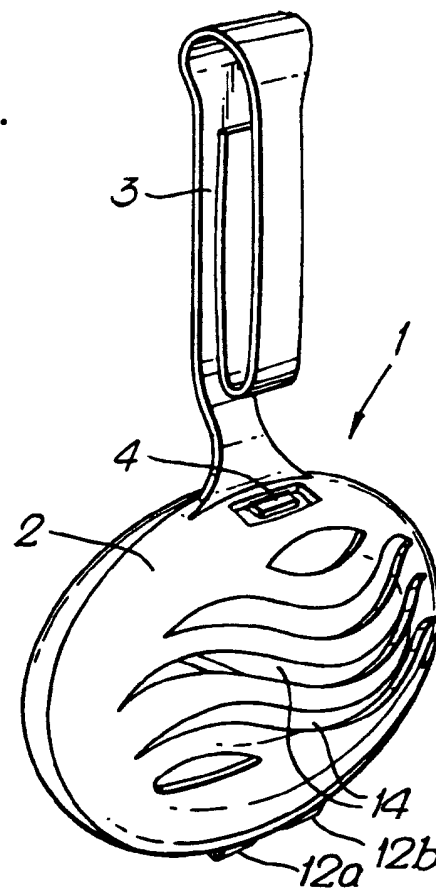


Fig. 2.

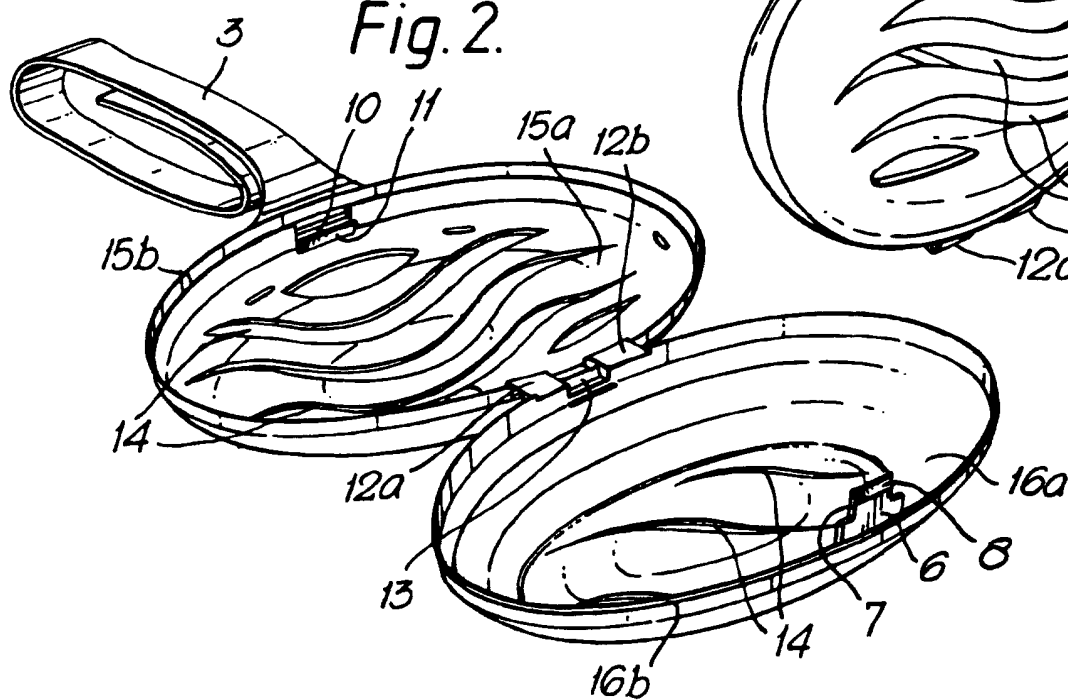


Fig. 3.

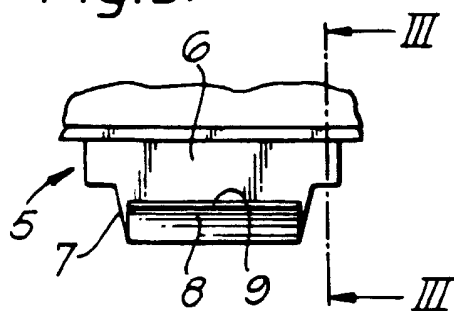


Fig. 4.

