



(11) Publication number : **0 587 303 A3**

(12) **EUROPEAN PATENT APPLICATION**

(21) Application number : **93306228.3**

(51) Int. Cl.⁵ : **H01R 13/658, H01R 23/02**

(22) Date of filing : **06.08.93**

(30) Priority : **08.09.92 US 941526**
03.11.92 GB 9222960
29.12.92 GB 9227064
22.02.93 GB 9303502

 (43) Date of publication of application :
16.03.94 Bulletin 94/11

 (84) Designated Contracting States :
AT CH DE DK ES FR GB GR IT LI NL PT SE

 (88) Date of deferred publication of search report :
23.08.95 Bulletin 95/34

 (71) Applicant : **THE WHITAKER CORPORATION**
4550 New Linden Hill Road,
Suite 450
Wilmington, Delaware 19808 (US)

(72) Inventor : **Miller, Mitchell**
5344 Leesa Drive
Clemmons, North Carolina 27012 (US)
 Inventor : **Ferry, Julian**
443 Raven Ridge Drive
Kernersville, North Carolina 27284 (US)
 Inventor : **Kilbey, Brian Eric**
9 Little Spring
Chesham, Buckinghamshire HP5 2BZ (GB)
 Inventor : **Coolbear, Bruce Sidney**
103 Woodfield Drive
East Barnet, Hertfordshire AL3 4NB (GB)
 Inventor : **Gandy, Richard Frank**
2 Rowlatt Drive
St Albans, Hertfordshire AL3 4NB (GB)

 (74) Representative : **Warren, Keith Stanley et al**
BARON & WARREN
18 South End
Kensington
London W8 5BU (GB)

(54) **Shielded data connector.**

(57) An electrical shielded data connector includes an inner terminal support housing (46) carrying a plurality of electrical terminals such as (30) wherein the terminal support housing includes shield members (130) surrounding the terminal support housing (46). The shielded sub-assembly is insertable into an outer housing and is latchably attached therein and a rear support plate (95) and cable support member (110) can be assembled around a cable after the termination of the multi-conductor cable. The cable support member (110) can be positioned in one of two orientations to provide for either a straight through or an angled cable exit. A cross talk shield (200) is positioned in a stuffer cap and is situated between adjacent terminals (30) when in the final position. Another cross talk shield (220) is positioned in a slot intermediate the terminals (30) at the lower side thereof.



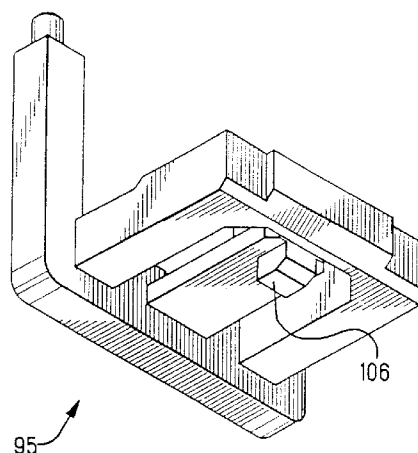


FIG. 7

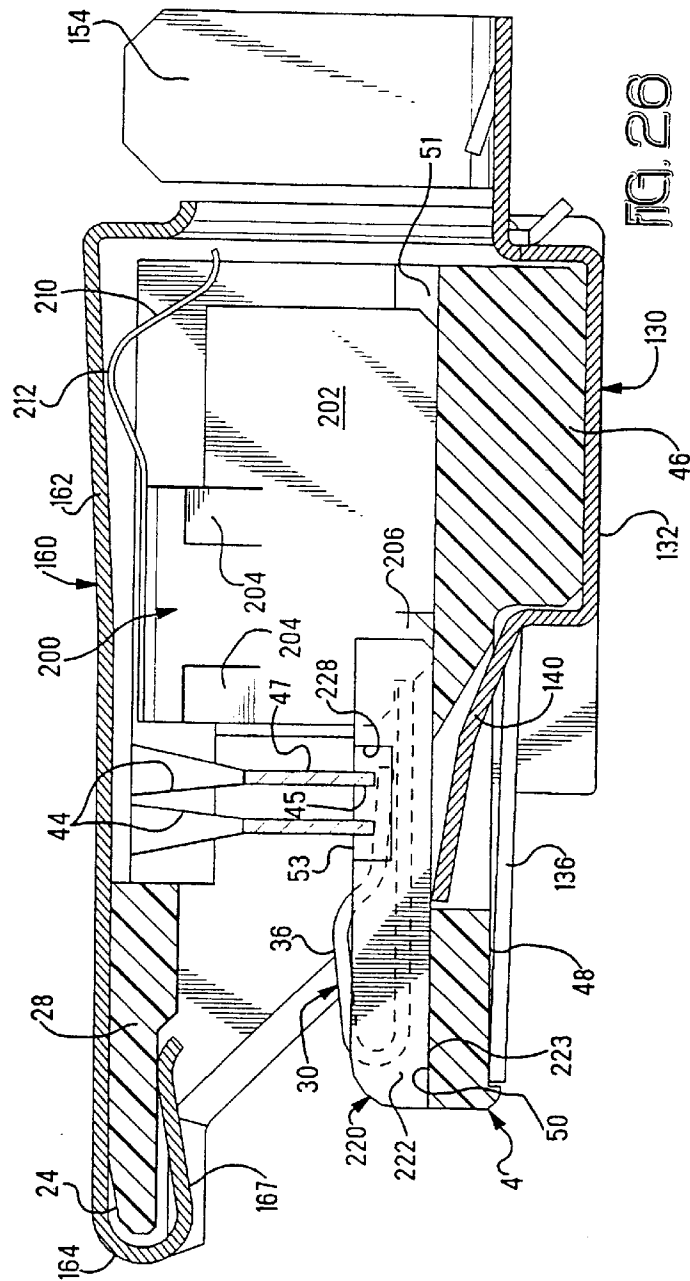

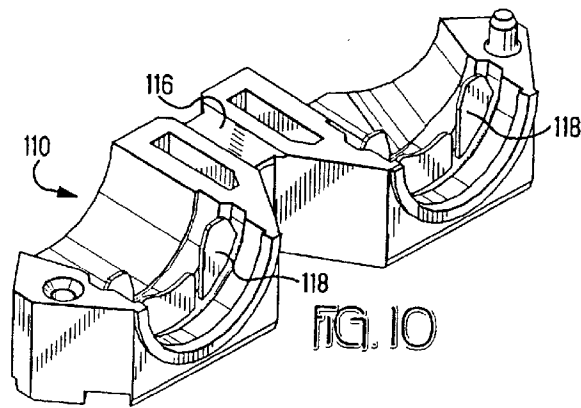

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 93 30 6228

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.5)
X Y A	EP-A-0 268 441 (E.I.DU PONT) * the whole document * ---	12 1 2-11, 13-16	H01R13/658 H01R23/02
Y,D A	EP-A-0 112 711 (AMP) * the whole document * ---	1 2-16	
X	EP-A-0 422 785 (AMP) * abstract; figures 12-15 * ---	1	
A	EP-A-0 107 288 (AMP) * the whole document * ---	1-16	
A	WO-A-86 06553 (AMP) * abstract; claims 1-10; figures * ---	1-16	
A	WO-A-86 05311 (AMP) * abstract; figures 14-21 * -----	1-6	
			TECHNICAL FIELDS SEARCHED (Int.Cl.5)
			H01R
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28 June 1995	Examiner Durand, F
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)