

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 620 064 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**01.07.1998 Bulletin 1998/27**

(51) Int. Cl.<sup>6</sup>: **B22D 17/20**, B22D 31/00

(21) Application number: **94102919.1**

(22) Date of filing: **25.02.1994**

### (54) **Workpiece manipulating and processing system**

Vorrichtung zum Manipulieren von Werkstücken

Dispositif pour manipuler des pièces

(84) Designated Contracting States:  
**DE FR IT**

(30) Priority: **25.03.1993 JP 89448/93**

(43) Date of publication of application:  
**19.10.1994 Bulletin 1994/42**

(73) Proprietor:  
**YAMAHA HATSUDOKI KABUSHIKI KAISHA**  
**Iwata-shi Shizuoka-ken, 438 (JP)**

(72) Inventors:  
• **Suzuki, Toshiiku**  
**Iwata-shi, Shizuoka-ken (JP)**  
• **Sonobe, Masao**  
**Iwata-shi, Shizuoka-ken (JP)**  
• **Naito, Noriyuki**  
**Iwata-shi, Shizuoka-ken (JP)**

(74) Representative:  
**Grünecker, Kinkeldey,**  
**Stockmair & Schwanhäusser**  
**Anwaltssozietät**  
**Maximilianstrasse 58**  
**80538 München (DE)**

(56) References cited:  
**DE-A- 3 123 651**  
• **DATABASE WPI Week 9213, Derwent**  
**Publications Ltd., London, GB; AN 92-097354 &**  
**DD-A-293 079 (VEB LEICHTMET RACKW) 22**  
**August 1991**  
• **DATABASE WPI Week 9026, Derwent**  
**Publications Ltd., London, GB; AN 90-199241**  
**26! & SU-A-932 704 (AS UKR ELECTROHYDRA)**  
**15 November 1989**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 620 064 B1**

## Description

The present invention relates to a workpiece manipulating and processing system as indicated in the preamble of claim 1.

When handling and manipulating workpieces robots are increasingly used in automated processing lines. One in the field of increasing use of robots is the handling of molded products, for example, made by injection molding of synthetic resin or aluminum or other metals. Thus, it is necessary to remove the runner and gate areas from the molded product after same has been ejected from the mold. Usually, to remove the runner the product removed from the mold cavity was struck with a hammer manually and the shocks from the blows to the gate zone where the runner is attached to the final product would cause it to break so that the runner could be removed.

In order to meet the increasing demand for automated production it has been deliberated to perform the afore-indicated removal of the runner from a molded product by machine rather than manually. In conjunction herewith the use of a robot and of a robot arm to hold either the product part or the runner part of the molded product in the condition as it is removed from the mold cavity and hammering the molding to remove the runner was considered. However, as the shocks from the hammering in such an arrangement would be transferred to the robot arm and put an unnecessary vibrating load thereupon. Moreover, the shock effect absorbing capacities of the arm would cause the removal procedure to take longer than desired.

Using a shock absorbing material between the product to be subject to shocks for removing a part of it, such as a runner, and the arm could be deliberated, but this would cause shaking between the product and the arm and would affect the accuracy of positioning the workpiece (molded product to be further processed) to its proper position.

Moreover, in view of using an automated vibrator device having the hammer means for removing the runner it might be possible to use a vibrator device driven by a pneumatic cylinder, so that air pressure is used to make the hammer means collide with the molded article in order to remove the runner, directing the hammer means to the spot where the runner connects to the molded product. In such a device the hammer would be positioned at the end of a piston rod, the associated piston being moved longitudinally by means of pressurized air alternately introduced in front and behind the piston, triggering a reciprocating movement of same so that the hammer means strikes the molded product repeatedly. In such cases a valve structure is employed to switch over the supply of pressurized air from the region in front of the piston to the region behind the piston and vice-versa, in order to trigger the reciprocating movement. Problems with such devices are encountered in that there was no way to determine the position of the

hammer means when the pressurized air valves shut off. In other words, there is a possibility that the piston is stopped in an intermediate position between its fully advanced and fully retracted position, introducing that the switching control valve is likely to remain in the neutral position with the negative effect that the resumption of pressurized air supply will not cause the vibrator device to restart operating immediately again.

While it could be deliberated to by-pass this drawback by establishing a separate pneumatic cylinder to feed air, for example, to the hammer side of the piston so that upon stopping the operation of the hammer means said separate cylinder could be used to provide the pressure to bring the hammer means into its fully retracted or advanced position for restarting operation, this would require an additional structure and would deteriorate the most efficient operation of the robot, aside from the additional costs involved.

Accordingly, it is an objective of the present invention to provide a workpiece manipulating and processing system as indicated above, which allows using a robot having a manipulating arm for supporting a workpiece which undergoes shocks or vibrations from processing such as hammering, or which, the other way around may support the tool which performs such shocks' or vibrations' triggering motions wherein the manipulating arm is protected from the transmission of shocks or vibrations to it during the processing of a workpiece, while, on the other hand, assuring precise positioning of a workpiece or a tool through said manipulating arm during the phase of positioning the workpiece or the tool.

Moreover, an advantageous development of such a workpiece manipulating and processing system as desired comprising a vibrator device should allow a reciprocable moving member of said vibrator device to be put in a predetermined rest position when the vibrator device is de-energised in order to assure immediate restarting of the vibrator device after newly energising same.

In order to perform the above identified objective the present invention improves a workpiece manipulating and processing system as indicated above, in that a shock absorbing means is disposed between the gripping support means and the manipulating arm at least during a period of workpiece processing to prevent shock or vibrations from being transmitted from the gripping support means to the manipulating arm of the robot during a workpiece processing operation of the tool.

In this way the transmission of shocks or vibrations during the processing of the workpiece to the manipulating arm could be sufficiently suppressed, while the positioning accuracy during the positioning of the manipulating arm is maintained rendering the shock absorbing means to be effective essentially only during a workpiece position period, while establishing direct attachment between the gripping support means and

the manipulating arm during a manipulating arm positioning phase of the robot.

According to a preferred embodiment of the present workpiece manipulating and processing system, said shock absorbing means is adapted to form part of a fastening means affixing the gripping support means to the manipulating arm of the robot.

According to yet another preferred embodiment of the present invention, said shock absorbing means is disposed in parallel to a workpiece positioning means also provided within the frame work of the fastening means, said workpiece positioning means rigidly connect the gripping support means directly to the manipulating arm of the robot.

According to a further preferred design of the robot the manipulating arm same comprises an arm tip at the projecting end of the manipulating arm, which is removably attached to the manipulating arm at right angles, said arm tip being adapted to rotatably support a slide supporting table which is rotatable, preferably by one turn, about the centre axis of the arm tip and which supports a sliding table along that surface which faces away from the arm tip, said sliding table being movable radially with respect to the centre axis of the arm tip.

It is preferred that the sliding table supports a box-shaped bracket via projecting support arm, with a bottom plate of said box-shaped bracket extending substantially either in parallel or perpendicularly to the centre axis of the arm tip.

Moreover, it is preferred that the workpiece positioning means which forms part of the fastening means, comprises a support plate which is disposed within said box-shaped bracket and which is connected to the bottom plate thereof through said shock absorbing means.

In order to provide a space saving shock absorbing arrangement having the capability to absorb shocks and vibrations coming from different directions, said shock absorbing means comprises a plurality of parallel shock absorbing members made of rubber, preferably a plurality of columnar rubber cylinders, the axes of which substantially extends either perpendicularly or in parallel to the centre axis depending on the position of the bottom plate of the box-shaped bracket.

Preferably said workpiece positioning means provided in parallel to the shock absorbing means and rigidly connecting the support plate to the box-shaped bracket comprises a plurality of holding working cylinders attached to the side plates of the box-shaped brackets, said working cylinders comprise piston rods which are reciprocable between an advanced engaging position under workpiece positioning conditions, engaging holes provided in the support plate, and a retracted position under workpiece processing conditions in which the piston rods remain in a non-engaged rest position.

Moreover, according to yet another preferred embodiment of the present invention the support plates supports a work chuck comprising jaws which are oper-

ated via a toggle mechanism to be oppositely movable relative to each other to clamp a clamping area of the workpiece, preferably the runner of a molded product, said jaws being provided with at least one pair of oppositely disposed outer chuck teeth adapted to clamp the clamping area of the workpiece.

According to yet another preferred embodiment of the present invention the arm tip of the manipulating arm may comprise a rotatably supported sliding table which, in turn, supports a supporting table which is disposed substantially in parallel to the centre axis of the arm tip, said supporting table being provided with holding working cylinders, the piston rods thereof are movable between first and second position while the working cylinders are movable when said piston rods assume their first or second positions, said working cylinders being provided with axially protruding cylindrical projections which are slideably received in slide holes of the supporting table, said projections being engagable with engagement holes of a mounting bracket of the gripping support means, while the shock absorbing means are disposed in parallel to the slideable projections between the supporting table and the mounting bracket.

According to yet another preferred embodiment of the present invention in terms of the vibrator device normally supporting a hammering means for processing the workpiece, but also conceivable to support the workpiece, a vibrator is provided supported by a support pillar rising from the top of a stand.

Preferably, said vibrator, which can also be used independently of the robot having a manipulating arm as described above, comprises a working cylinder unit and a vibrating piston rod supported on a piston sliding inside said cylinder unit, the protruding tip portion of said piston rod supporting a hammer unit having a tapered tip portion.

Preferably, said cylinder unit comprises a pneumatic cylinder connected to a pressurised air supply via an automatic switching device disposed at the rear of the cylinder unit.

Preferably, either an air volume in front or behind the piston is vented to atmosphere when the vibrator device ceases operation dispersing the piston either in its most advanced or most retracted rest position.

According to yet another preferred embodiment of the present invention there is an air passages-defining block provided and disposed between the automatic switching device and the rear end of the cylinder unit closing off the pneumatic cylinder.

In order to provide appropriate controlling of the vibrator device the cylinder unit comprises both piston-advancing air holes provided in the wall of the cylinder unit, said piston-advancing air holes extending from a rear end surface of the cylinder unit axially and opening on the inner surface of the pneumatic cylinder in proximity of a rearward end portion of same, and the cylinder unit comprises piston-retracting air holes provided in the wall of the cylinder unit as well and extending from the

rear end surface of the cylinder unit axially to open on the inner surface of the pneumatic cylinder in proximity to a forward end portion of the pneumatic cylinder.

According to yet another preferred design of the vibrator device of the workpiece manipulating and processing system according to the present invention, there are exhaust holes which extend in the axial direction of the pneumatic cylinder, said exhaust holes open at axially spaced distant spots on the inner surface of the pneumatic cylinder and allow air to escape.

Moreover, preferably there is a release valve provided as a control valve venting either the piston-advancing air holes or the air exhaust holes to atmosphere, said piston advancing air holes remain closed when the vibrator device is operating and are opened to atmosphere when the vibrator device is switched off. In greater detail, preferably said release valve is a three-way valve connected to both either the piston advancing air holes and the piston retracting air holes of the cylinder unit on the one hand and is connected to the exhaust air holes of the other hand, so that during vibrating operation of the vibrator device the piston advancing and retracting air holes remain closed while the exhaust air holes are opened to atmosphere while during a non operating condition of the vibrator device the piston advancing and retracting air holes are opened to atmosphere while the exhaust air holes are closed.

Thus, the present invention generally provides a robot having a manipulating robot arm which supports a support means for holding and disengaging either the runner or the product part of a molded product that has been ejected from a mold cavity and a means for attaching and disengaging (in terms of the transmission of shocks or vibrations) by shock absorbing members this support means to and from said manipulating robot arm, wherein means are provided for removably affixing the above mentioned support means to the manipulating arm of the robot, and a hammering means is provided for striking the above mentioned product zone or runner zone. Thus, when the runner zone is to be separated from the molded product first either the product or the runner is held by the gripping support means and then it is struck by the hammering means. In this way the runner can be removed from the product. As, at least under certain operating conditions, the gripping support means is attached to the manipulating arm of the robot by shock absorbing members and this affixing means allows the attachment between the gripping support means and the manipulating arm to be disengaged under other operating conditions vibrations produced by the hammer striking on the product or the runner are prevented from being transmitted to the manipulating arm.

As a result, even when striking the runner zone to remove it, the arrangement prevents an undue load from being put on the manipulating robot arm and the load is concentrated on the connection between the

product and the runner whereby speedy removal of the runner is enhanced.

On the other hand, when the manipulating robot arm is positioning the workpiece such as the molded product ejected from the mold cavity and is transporting same, the affixing means rigidely and solidely affixes the gripping support means to the manipulating arm, so that the movement of the workpiece precisely follows the movement of the manipulating arm so that it can be accurately transported and positioned in the proper position.

Moreover, it is possible to reliably set the hammering means in a most advanced or most retracted position so that restarting of the hammering means after de-energising same does not incur any difficulties.

Further preferred embodiments of the present invention are laid down in the other subclaims.

In the following the present invention is explained in greater detail by means of several embodiments thereof in conjunction with the accompanying drawings, wherein:

Figure 1 is a schematic overall side view of a first embodiment of the workpiece manipulating and processing system according to the present invention,

Figure 2 is a side elevational view, partially in cross-section, of the arm tip and workpiece gripping unit of the system shown in Figure 1,

Figure 3 is a plan view of Figure 1 partially sectioned along line 3-3 of Figure 2,

Figure 4 is an enlarged cross-sectional view of the part of the fastening means and the shock absorber arrangement according to Figures 2 and 3,

Figure 5 is a side elevational view of the arm tip and workpiece supporting structure of a second embodiment, similar to Figure 2,

Figure 6 is a plan view partially in cross-section along the line 6-6 of Figure 5,

Figure 7 is an overall side view of a third embodiment of the present workpiece manipulating and processing system, similar to Figure 1,

Figure 8 is a side elevational view partially in cross-section of the arm tip of said third embodiment, similar to Figures 2 and 5,

Figure 9 is a side elevational view partially in cross-section of the arm tip of a manipulating arm of the robot according to a fourth embodiment of the present invention corresponding to the views of Figures 2, 5 and 8,

Figure 10 is a back view of Figure 9,

Figure 11 a side view of the working unit of a vibrator device of the workpiece manipulating and processing system,

Figure 12 an enlarged cross-sectional view of back end of the vibrator device of Figure 11,

Figure 13 an enlarged cross-sectional view of the front end of the vibrator device according to Figure 11,

Figure 14 a partially sectional elevational view of the back end of the vibrator device similar to Figure 11,

Figure 15 a view along arrow A in Figure 14,

Figure 16 a cross-sectional view along the line VII-VII of Figure 12,

Figure 17 is a cross-sectional view along the line VIII-VIII of Figure 12,

Figure 18 is a cross-section along the line IX-IX of Figure 17, and

Figure 19 is a control scheme of the vibrator device according to an embodiment of the present invention wherein

Figure 19a refers to a condition of moving the piston towards a fully forward advanced position,

Figure 19b is a diagram referring the moving of the piston towards the rearward retracted position, and

Figure 19c refers to a resting position of the piston.

Firstly, the basic structure of the workpiece manipulating and processing system as shown in Figure 1 is explained followed up by the description of the preferred further embodiments of the design of the robot 50, specifically of the design of the projecting tip portion of the manipulating arm 53. The following description refers to the manipulating and processing of an aluminum casting such as an engine part for engines used in automobiles or motorcycles.

When, as shown in Figures 1 and 2, a runner 2 is to be removed from the final product 4 regarding the molded product 1 as ejected from the mold cavity preferably either the zone of the final product 4 or the runner zone 2 is held by a gripping support means 9. In the embodiments shown in Figures 1 to 6, 9 and 10 respectively the runner 2 which is held by the gripping support means 9. In the embodiment of Figures 7 and 8 it is the product area 4 which is grasped. Then, either the zone

of the finalised product 4 or the runner 2 (which ever is not being held by the afore-indicated support gripping means 9) is struck with a hammer unit 115 of a vibrator 160 of a vibrator device 101, said vibrator 160 being supported by a support pillar 103 rising from the top of a stand 102.

At that time the runner 2 and the heavier final product 4 vibrate at different frequencies and the load from the hammer unit 115 concentrate around a gate area 3, where the final product 4 connects to runner 2 and easily serves this gate 3 to brake. In other words in this way the final product 4 is released and separated from the runner 2.

Generally, as explained in detail later on with respect to the further Figures the product 1 as removed from the cavity of a mold is grasped by the gripping support means 9 which, in turn, is disposed via a fastening means 72 at a arm tip 59 of a manipulating arm 53 of a robot 50. When hammering the workpiece a shock absorbing means 65 (see Figure 2) is positioned between the gripping support means 9 and the manipulating arm 53 of the robot. Accordingly, any shocks from striking the product 4 or runner 2 is absorbed by said shock absorbing means 65 so that shocks and vibrations are substantially prevented from being transferred to the manipulating arm 53 of the robot 50.

On the other hand, when the manipulating arm 53 is used to position the workpiece 1 as ejected from a cavity mold in its processing position and has to transport the workpiece 1, as explained hereinafter in greater detail, the fastening means 72 causes the gripping support means 9 and the manipulating arm 53 of the robot 50 to be affixed together rigidly and without the shock absorbing means 65 being interposed, so that the molded product 1 held by the gripping support means 9 precisely follows the movements of the manipulating arm 53.

In the following the first embodiment according to Figure 1 to 4 is explained in greater detail.

In the Figures, the reference numeral 1 denotes an intermediate molded product made of aluminum which was taken from a metal cavity of an injection molding machine (not shown). Said intermediate molded product 1 consists of a product part 4 (final product) and a runner part 2, which is connected to the product part 4 via a gate 3 which has a small cross-sectional area.

A runner removal arrangement comprising the robot 50 and the vibrator device 101 is provided to remove the runner 2 from the final product 4. For convenience of the follow up explanations the arrow "Fr" in Figure 1 and also in any further Figures 2, 3, 5 and 9 indicates the front side direction.

A main part of this workpiece manipulating and processing system is defined through the robot 50. Said robot 50 consists of a base 7 subtending a vertical axis 51 about which a robot unit 52 is freely rotatable. A manipulating arm 53 is positioned at the top of the robot unit 52. The manipulating arm 53 is free to move up and

down as well as in the horizontal direction. A gripping support means 9 is attached to the tip end 59 of the manipulating arm 53.

As shown in Figure 1, when the afore-indicated gripping support means 9 (which is explained in greater detail hereinafter) is holding a clamping zone 14 (see Figure 2) of the workpiece 1 a runner zone 18 of the runner 2, extending from the clamping zone 14 to the afore-indicated gate area 3 is positioned to be exposed to the hammer unit 115 of the vibrator device 101. These hammer unit 115 comprises a vibrator 160 composed of a cylinder unit 111 comprising a pneumatic cylinder 106 and a vibrating piston rod 110a wherein said cylinder unit 111 is attached to the top of the support pillar 103.

The afore-indicated pneumatically operated piston rod 110a projects and can freely slide forward from the front end of the cylinder unit 111. When pressurised air is supplied to the cylinder unit 111 the piston rod 110a together with the hammer unit 115 vibrates reciprocatingly back and forth. Moreover, there is also a conveyor belt 57 positioned near and below the afore-mentioned hammer unit 115 and the workpiece 1, specifically the final product 4.

In the following the arm tip 59 of the manipulating arm 53 of the robot 50 including the fastening means 72 and gripping support means 9 will be explained in greater detail, specifically referring to Figures 2 and 3.

The arm tip 59 at the projecting end of the manipulating arm 53 of the robot 50 is removably attached at right angles to the manipulating arm 53. The arm tip 59 supports a slide supporting table 60 which can be fixed in a desired position. This slide supporting table 60 is supported rotatably so as it can rotate up to one revolution around a (vertical) centre axis 61 of the arm tip 59. Thus, the centre axis 61 is also the axis of rotation of the slide supporting table 60 which, in turn, supports a sliding table 62 along a surface facing away from the arm tip 59, said sliding table 62 is thus slideable in a radial direction with respect to the centre axis 61. Said sliding table 62 can slide up to a designated position with respect to the slide supporting table 60.

Attached to the sliding table 62 is a box-shaped bracket 63 having a bottom plate 64, which extends roughly in parallel to the centre axis 61 of the arm tip 59. Said bottom plate 64 is attached to a support plate 66 by four rubber shock absorbing members 65 (see also Figures 4 to 6). The shock absorbing members 65 are columnar and their axes extend roughly perpendicularly to the centre axis 61 of the arm tip 5.

A work chuck 67 is supported by the box-shaped bracket 63, more specifically by the support plate 66, said work chuck 67 being opened and closed by means of a toggle mechanism 69 operated by a chuck cylinder 68. The work chuck 67 is equipped with outside chuck teeth 70 and inside chuck teeth 71 with the outside chuck teeth 70 being adapted to grasp the clamping zone 14 of the runner 2 of the "intermediate" molded

product 1 when the work chuck 67 is closed. Said work chuck 67 comprises jaws 67a, 67b which are operated via the toggle mechanism 69. By the way the inside chuck teeth 71 can support another insertion work chuck or a sprayer to spray mold parting agents or the like.

In the embodiment shown in Figures 2, 3 and 4, the gripping support means 9 and the box-shaped bracket 63 have been releasably affixed by a fastening means 72, so as to allow attachment and removal. Said fastening means 72 comprises two or four holding working cylinders 74 attached to the outside side plates 73 of the box-shaped bracket 63. These holding working cylinders 74 are equally distantly disposed around the above mentioned support plate 66. Each of the piston rods 75 of the holding working cylinders 74 fit through corresponding engaging holes 76 in the support plate 66.

As shown in solid lines in Figure 4, if the piston rod 75 of the holding working cylinders 74 are retracted, the piston rods 75 are withdrawn from the engaging hole 76 of the support plate 66 and the attachment of the gripping support means 9 to the box-shaped bracket 63 on the arm side is disengaged.

On the other hand, as shown by the dashed lines in Figure 4, when the piston rods 75 of the working cylinders 74 are in their extending position, said piston rods 75 pass through said engaging holes 76 and the tips of the piston rods 75 come into contact against the bottom surfaces of the engaging holes 76 of the support plate 66 and this keeps the gripping support means 9 rigidly and directly affixed to the box-shaped bracket 63 and, accordingly, to the manipulating arm 53.

In the retracted condition of the piston rods 75 the gripping support means 9 is connected to the box-shaped bracket 63 and, accordingly, to the manipulating arm 53 of the robot 50 exclusively via the shock absorbing rubber cylinders 65.

When the runner part 2 of the molded product 1 is to be removed from the final product 4, the operation of the robot 50 positions the runner 2 opposite to the vibrating piston rod 110a and the hammer unit 115 of the vibrator 160.

While the robot 50 is operating, ie. under workpiece positioning, as shown by the solid lines in Figures 2 and 3 and by the dash lines in Figure 4, the piston rods 75 of the holding working cylinders 74 are advanced and engage the engaging holes 76 so that the piston rods 75 are pressing against the bottom surfaces of the engaging holes 76 to affix the support plate 66 directly and rigidly to the box-shaped bracket 63. As a result, during the operation of the robot 50, the support plate 66, the work chuck 67 and the "intermediate" molded 1 being held by them are supported at the arm tip 59 by the holding working cylinders 74 rigidly and directly. Therefore, during the positioning operation of the robot 50, the support plate 66, the work chuck 67 and the product 1 are supported firmly without any shaking with respect to the arm tip 59, so that the robot 50 and

manipulating arm 53 can accurately transport and position the workpiece 1 in the desired operating position.

Then, when the runner 2 of the product 1 is positioned opposite to the vibrating piston 110a supporting the hammer unit 115 the movement of the robot 50 is stopped. As shown by the solid lines in Figure 4, the piston rods 74 of the holding working cylinders 74 are retracted and disengaged from the support plate 66 which, accordingly, is no longer rigidly and directly connected to the arm tip 59 of the manipulating arm 53, but is now supported only by the shock absorbing rubber cylinders 65. Therefore, the support plate 66, the work chuck 67 and the product 1 are held on the end of the manipulating arm 53 only by the shock absorbing members 65. In this condition, the vibration of the piston rod 110a and the hammer unit 115 causes blows to be struck near the gate zone 3 of the runner body 18 of the runner 2 accordingly, the runner 2 is separated from the product 4, or vice-versa.

The runner 2 which has been separated from the final product 4 as described above drops into a return bucket (not shown) and is returned for recasting. The final product 4 is then transported by the conveyor 57 to the next processing station.

In the described case the vibrations transmitted from the molded product 1 to arm tip 59 are absorbed by the shock absorbing means 65. In other words, the transmission of vibrations to the arm tip 59 is prevented. Thus, the vibrations which would otherwise have been transmitted undesirably have their load effectively concentrated on the gate area 3, so that the runner 2 can be easily removed. Since the shocks and vibrations are not transmitted to the arm tip 59 of the manipulating arm 53 and the robot 50 protected from them.

In this embodiment the shock absorbing means 65 are made of rubber and columnar and are positioned such that their axes are roughly in line with the hammer unit 115 or the vibrating piston rod 110a. Thus, they absorb vibrations and shocks by elastic deformations substantially in their axial direction and prevent them from being transmitted from the molded product 1 to the arm tip 59.

In case where the hammer unit 115 applies vibrations and shocks to the runner 2 of the workpiece 1 supported by the manipulating arm 53 of the robot 50 the vibrations may also be applied from the left or right side. Also when the workpiece 1 is held in its clamping zone 14 as shown by the dashed lines in Figures 2 and 3, vibrations may be applied by the hammer unit 115 in the left-right direction as shown by the dashed lines in said Figure. In this, the vibrations from the product would be effectively absorbed by the shock absorbing members 65 through elastic deformation in the shearing direction thereby preventing said shocks and vibrations from being transmitted to the manipulating arm 53.

In the following a second embodiment of the present invention is described referring to Figures 5 and 6. In this second embodiment the same elements hav-

ing the same functions as in the first embodiment are denoted with the reference numerals and description is so far omitted as this embodiment complies with the preceding one. Focussing on the differences between the first and second embodiments it should be noted that in the second embodiment, different from the first embodiment, the bottom plate 64 of the box-shaped bracket 63 extends in a direction perpendicular to the axis of the arm tip 59.

Accordingly, the axes of the shock absorbing rubber cylinders 65 are roughly parallel to the centre axis 61.

The work chuck 67 again holds the clamping zone 14 of the "intermediate" molded product 1 and strikes from the vibrating rod 110a and the hammer unit 115 hit the runner 2 of the workpiece 1. At this time, since the hammer unit 115 is vibrating back and forth while the axes of the shock absorbing members 65 extend vertically so that vibrations which would have been transmitted to the arm tip 59 are effectively absorbed by elastic deformation of the shock absorbing member 65 in the shearing direction.

In other words the difference between the two embodiments of Figures 2 and 3 and that of 5 and 6, with respect to the supporting of the gripping support means 9 only refers to the positioning of the holding box-shaped bracket with respect to the centre axis 61 of the manipulating arm 53 of the robot 50. In view of the differences of the clamping structure itself (work chuck 67 and jaws 67a, 67b) the respective explanation is provided with respect to another embodiment hereinafter referring to Figure 10.

Figure 7 and 8 refer to a third embodiment of the invention.

In this embodiment the outside chuck teeth 70 project outwardly from the work chuck 67 and the operation of the work chuck 67 causes the outside chuck teeth 70 to press against an inside circumferential surface of a hole 4a in the product 4, so that the product 4 is supported by the work chuck 67.

In addition there is provided a return material bucket 77 for the removed runners 2. Moreover, there is a further product bucket 78 provided into which the final product 4 is placed. Accordingly, after having removed the runner 2 the robot unit 52 swivels about its vertical axis 51 to position the final product 4 above of the product bucket 78 to drop it into said bucket 78.

As the other structure and operational details are similar to those of the afore-indicated embodiments further explanation is not considered to be required.

Further the descriptions continues with the fourth embodiment according to Figures 9 and 10, disclosing a fourth embodiment of the present invention.

A fourth embodiment is shown in Figures 9 and 10. In this embodiment the fastening means 72 comprises a support table 80 mounted on a sliding table 62 and this support table 80 is fitted with holding working cylinders 81, which extend substantially perpendicularly to the support table 80 and, accordingly, to the centre axis 61.

Said holding working cylinders 81 comprise a cylinder tube 82 accommodating a slideable piston 84, which is freely slideable in the axial direction thus defining a pressure chamber 83 while at the back of the piston 84 a piston rod 85 is respectfully provided which projects backwards through the rear end of the cylinder tube 82. The projecting ends of these piston rods 85 pass through holes 86 in the support table 80 and conical retainers 87 are provided at the projecting ends of the piston rods 85.

Moreover, there are cylindrical projections 88 which extend rearwardly from the top and bottom as well as from the left and right rear end surfaces of the cylinder tubes 82, said cylindrical projections 88 being affixed to the respective cylinder tubes 82 by bolts 89.

The afore-indicated cylindrical projections 88 are of circular cross-section and they are supported such that they are free to slide back and forth in slide holes 90 front in the support table 80. This allows the support table 80 to be held in place by the holding cylinders 81. At their front and back the outside circumferential surfaces of the cylindrical projections 88 comprise a front stop 91 and a back stop 92 respectfully, projecting radially outwards to abut from both sides against the support table 80. On the other hand, the support table 80 is attached to a mounting bracket 66 which, in turn, supports the gripping support means by shock absorbing means 65. When viewed from the front, there are four of these shock absorbing members, preferably rubber cylinders 65 surrounding the holding working cylinders 81.

The mounting bracket 66 comprises engagement depressions 94 with a conical surface for the insertion of the retainers 87 and, moreover, engagement holes 95 are provided at the mounting bracket 66 opposite to the cylindrical projections, so that the projecting ends of the cylindrical projections 88 can engage or disengage the engagement holes 95.

As shown above the horizontal centre line in Figure 9, when compressed air is supplied to the space in front of the piston 84 in the pressure chamber 83 of the holding working cylinder 81 then the holding cylinder 81 expands and the engagement projection 87 presses against the bottom surface of the engagement depression 94 and the cylinder tube 82 moves in the forward direction of arrow "Fr". As this happens, there is a corresponding forward movement of the cylindrical projection 88 and its projecting end is disengaged from the engagement hole 95. This disengages the rigid and direct attachment between the gripping support means 9 and the manipulating arm 53. At this time, the forward movement of the cylinder tube 82 causes the rear stop 92 to abut against the support table 80. On the other hand, as shown below the centre line in Figure 9, when compressed air supplied to the area behind the piston 84 inside the pressure chamber 83 of the holding working cylinder 81, then the holding cylinder 81 contracts (this refers of course to the distance between the engagement projection 87 and the front side end of the

cylinder housing). At this time the engagement projection 87 abuts against the inside circumferential surface of the engagement depression 94 and the front stop 92 moves rearward by the contraction of the cylinder tube arrangement 82 with respect to the engagement member 87 until said front stop 92 abuts against the support table 80. At this time the projecting end of the engagement projection 87 is inserted into the engagement hole 95 and, additionally, is in contact with the perimeter of the opening of engagement hole 95 whereby the gripping support means 9 is rigidly and directly affixed to the manipulating arm 53 by-passing the shock absorbing means 65.

The other structural and operational details are similar to those of the above indicated embodiments and the corresponding parts are denoted with the same reference numerals, as in the preceding Figures so that further explanation will be omitted here.

With respect to Figure 10 (and the embodiment of preceding Figs 5 and 6) in this case the work chuck 67 clamps the workpiece 1 at a substantially circular clamping area thereof and, accordingly the jaws 67a, 67b are pivotably supported with respective inner and outer teeth 70, 71 being designed and provided with clamping pieces 67c to grasp the workpiece 1 at four spots, two of them being substantially opposite to each other and arranged diagonally with respect to the workpiece 1.

Summarising the afore-indicated embodiment, they are characteristic in that either the product 4 or the runner 2 is grasped and disengaged from the rest of the workpiece and that there are shock absorbing means 65 between the gripping support means 9 and the robot manipulating arm 53 whereby vibrations from the hammer unit 115 are not transmitted to the robot 50.

Moreover, the robot 50 is used for the removal of the runner 2 and there is much latitude in setting the hammering position which can be changed for each product.

When the product zone 4 is clamped into the work chuck 67, the runner part 2 can fall into a return bucket 77 while the final product 4 can be placed into a product bucket 78 for further processing.

When the runner 2 is clamped into the work chuck 67, the final product 4 can be dropped onto the conveyor 57 and can be carried to the next processing station. The runner 2, on the other hand, can then be put in the return bucket 77.

By controlling the operational position of the robot 50 it is possible to optimise the direction of effectiveness of the vibrations having same applied perpendicularly or angularly without need to adjust the position of the shock absorbing members 65.

In the afore-indicated embodiments substantially two or four holding working cylinders 74 were described to affix or disengage the gripping support means 9 to and from the manipulating arm 53, but it would also be possible to use just one of more than two cylinders.

Moreover, modifications might be made as follows:

1. By changing the length of the support pillar 103 or making it variable, it would be possible to move the vibrator 160 to up or down as desired. In fact, in order to prevent strike marks to appear on the final product 4 this would be an effective way to minimise the separation between the product 4 and the conveyor belt 57 below it.

2. If two products were connected by one runner with a divided flow path the runner 2 could be clamped into the work chuck 67 and two vibrators 160 could be positioned to a strike at the points where the runners 2 connect to the final product 4 to effectively remove the runners 2.

3. It would also be possible not to vibrate the striking hammer unit 115 but to move the robot arm 53 such that air vent zones and the overflow zone on the product would be made to impact the stationary hammer unit 115 to remove same from the product.

4. The clamping zone 14 on the final product 4 could be held by a separate clamping device and the hammer unit 115 could be held in the work chuck 67 so that it would strike the gate zone 3, overflow zone and air vents to remove same from the final product 4.

5. A vibration sensor could be mounted on the work chuck 67 or the bracket 63 or the support plate (mounting bracket) 66 to measure the vibrations and to detect the change in vibration whenever the air vent zone or other protrusions broke off and to stop the operation of the hammering means 115 at that time.

6. The hammering device, i.e. the vibrator 160 could be disposed perpendicularly and strike the product horizontally. In such a case the products could be aligned on conveyor 57 below and this could reduce any impact marks from dropping the product on the conveyor 57.

In the following the vibrator 160 is explained in greater detail referring to several embodiments as shown in the further figures 11 to 19.

It should be noted that such a vibrator 160 could also be designed and used separately of the robot 50 and the design and use of its manipulating arm.

The vibrator device 101 used in the framework of the workpiece manipulating and processing system according to these embodiments in its essential operating portion is shown in figure 11.

As is apparent from figures 1 and 7 the vibrator device 101 comprising the vibrator 160 is supported upon the fixture support pillar 103 at the top of the stand 2 in the vicinity of the robot 50.

The vibrator device 101 comprises a pneumatic cylinder 106 and pressurised air supply 107 from an attached compressor etc. communicating with the rear of the pneumatic cylinder 106 so that the pressurised air is supplied via an automatic switching valve 108. When this happens the pneumatic cylinder 106 which is part of a cylinder unit 111 operates a piston 110 which is free to slide inside said pneumatic cylinder 106. At the rear end of the cylinder unit 111 there is a passages-defining block 112 that closes off the cylinder unit 111. At the front end of the cylinder unit 111 there is a pressure-sealing plug 114 which is threaded onto the front of the cylinder unit 111 with a cushion 113 between them to plug the front end of the cylinder unit 111 and, accordingly, the pneumatic cylinder 106.

Affixed to the front end of the aforementioned piston 110 is a piston rod 110a which projects through a hole in the above mentioned plug 114 to the outside of the pneumatic cylinder 106. The hammer unit 115 is attached to the outwardly projecting part of the piston rod 110a. As shown in figure 12 the cylinder unit 111 has a support flange 116 threaded onto it at the rear end near its outside circumference so that said support flange 116 is joined to the passages-defining block 112.

As shown in figures 13 and 14 this junction with the passages-defining block 112 is implemented by four bolts 117. These bolts 117 also affix the automatic switching valve device 108 to the passages-defining block 112 as described hereinafter in greater detail. The support flange 116 is attached to the passages-defining block 112 and the automatic switching device 108 by means of the bolts 117. The respective materials have airtight seals therebetween along the adjoining surfaces and between them and the cylinder unit 111.

There are four connecting rods 118 which extend toward the front end of the cylinder unit 111 from the support flange 116 and which are parallel to the cylinder unit 111.

As shown in figure 13, these connecting rods are attached to a front-side flange 119 which is attached to the front end of the cylinder unit 111. Moreover the support flange 116 and front-side flange 119 are attached to the support pillar 103 by means of the bracket (not shown).

There are piston-advancing holes 121 provided in the wall of the cylinder unit 111 through which compressed air passes to advance the piston 110. Retraction air holes 122 are similarly provided passing compressed air to retract the piston 110. Inside the pneumatic cylinder 106 there are also exhaust holes 123 positioned in axial direction of the pneumatic cylinder 106 which allow air to escape. In this embodiment advancing of the piston 110 describes a piston movement to the right in figure 11 while the piston 110 moves to the left when it retracts.

The afore-indicated piston advancing air holes 121 are provided at four places in the cylinder wall of the cylinder unit 111. The upstream ends open to the rear end surface of the cylinder unit 111, while the downstream

ends, as shown in Figure 12, open into port 121a on the rear end of the inside surface of the pneumatic cylinder 106. The piston-retracting air holes 122 are provided at two spots, at the top and bottom of the cylinder unit 111 between the afore-indicated advancing air holes 121 as shown in Figure 16. Their upstream ends open to the rear end surface of the cylinder unit 111 and their downstream ends, as shown in Figure 13, open into ports 122a provided on the inner surface of the pneumatic cylinder 106 at the front and side thereof.

The air exhaust holes 123 are located between the afore-indicated piston-advancing air holes 121 and, as shown in Figure 16, are provided at two spots on the left and right hand sides of the cylinder unit 111. The respective downstream ends of these air exhaust holes 123 open into the rear end surface of the cylinder unit 111 and the other ends, as shown in Figures 12, 13 and 18 have ports 123a, 123b and 123c opening into the inside circumferential surface of the pneumatic cylinder 106. These ports 121a to 123c are present spaced at intervals as shown in Figure 11. Port 123a, which is the farthest rearward, is positioned in the area of the rear end of the cylinder unit 111.

The passages-defining block 112 comprises piston-advancing air holes 124, piston-retracting air holes 125 and exhaust air holes 126 placed in positions respectively corresponding to the air holes 121, 122 and 123 in the cylinder unit 111. The advancing air hole 124 and the retracting air hole 125 pass through the passages-defining block 112 in parallel to the axial direction of the pneumatic cylinder 106. As described hereinafter, they connect to the automatic switching valve 108. Moreover, also the piston-advancing air holes 124, as shown in Figure 17, all are interlinked by a interconnecting bore arrangement 127 which, as shown in Figure 17, is "X"-shaped. This interconnecting bore arrangement 127 opens on the top of the passages-defining block 112 at separate spots and nipples 128 are threaded into it. The broken line B shown in Figure 11 shows the connection by an air tube with a three way valve 109 described hereinafter.

The exhaust holes 126, as shown in Figures 17 and 18 are constituted by grooves 126a which extend in the circumferential direction of the cylinder unit 111 to a position opposite to the opening of the exhaust holes 123 in the cylinder unit 111, further by axial projections 126b, which extend in the axial direction of the cylinder unit 111, and radial extensions 126c which extend in the radial direction of the cylinder unit 111. As shown in Figure 17, they open on the left and right hand sides of the tube end of the passages-defining block 112. These exhaust holes 126 are also connected to the three way valve 109 described hereinafter via nipples 129 threaded into it on the side of the passages-defining block 112 and through the air tube represented by the broken line C in Figure 11.

As shown in Figure 12 the automatic switching valve 8 is attached to the passages-defining block 112

by means of bolts 117, said automatic switching valve 108 comprising a valve case 131 and a valve body 132 accommodated in a front side recess 131a of the valve case 131 and covered by the air passage-defining block 112. The upper opening of the pressurised air passage 133 is attached to an air tube represented by the broken line D in Figure 11 communicated to the pressurised air supply 107.

The valve body 132 consists of a stack of three sheets or sheet-like disks 132a, 132b, 132c defining air connecting passage-ways 133a, 133b, 135, 136 and a switching valve member 134 which is disposed freely movable axially in response to a pressure difference at both sides thereof. The valve body 132 defines the advancing air holes 135 and retracting air holes 136 which connect respectively to the advancing air holes 124 and the retracting air holes 125 in the passages-defining block 112. Automatically switching the valve member 134 in response to the pressure difference at both sides thereof causes these air passages to be selectively connected to the pressurised air supply passage 133.

In fact, the space occupied by the valve member 134 is configured such that even when the position of the valve member 134 is either left or right of that shown in Figure 12, the air passage 133 remains connected through the connecting paths 133a or 133b and the upstream opening of the advancing air holes 135 on the cylinder-sided wall of this space (sheet 132c) as well as the upstream openings of the retracting air holes 136 on the opposite wall of the cylinder (sheet 132a) are open.

Thereby, as shown in Figure 12, when the valve member 134 is positioned on the left side (the side of the sheet 132a), the piston advancing air holes 135 are connected via a path 133a to air path 133 and, additionally, the piston-retracting air holes 136 are closed by the valve member 134.

Conversely, when the valve member 134 is in the opposite position on the right hand side, the piston retracting air holes 136 are connected to air path 133 by means of connecting path 133b, while the piston-advancing air holes 135 are closed by the valve member 134. In the following the principles of the switching operation of the automatic switching valve 108 are explained in greater detail as well as the total operation of the pneumatic cylinder 106.

As described above, when the piston advancing air holes 135 are connected with the air path 133 and if the bore arrangement 127, which connect to the air tubes B, are in a closed condition, the air supply 107 for supplying pressurised provides compressed air through air path 133 to the piston advancing air holes 135, 124, 121 to the rear side of the piston 110 inside of the cylinder unit 111. The compressed air at the rear end of the piston 110 propels the piston 110 forward. At this time the hammer unit 115 advances and, if the workpiece 1 is in place, it strikes the workpiece 1.

Also, when in course of advancing the piston 110 it

reaches the end of its advancing course, the piston 110 causes the pressure inside the front end of the cylinder unit 111 to rise. Since this pressure is transmitted via the piston retracting air holes 122, 125 and 136 to the space occupied by the valve body 132 and the valve member 134, when the advancing of the piston 110 has been completed, the afore-mentioned pressure causes the valve member 134 to move to the opposite side, ie. to right side in Figure 12.

When the position of the valve member 134 changes in this way, then the piston-retracting air holes 136 are connected to the air path 133 via a connecting path 133b and the compressed air supplied through the air path 133 passes through the piston retracting air holes 136, 125 and 122 to the area in front of the piston 110. This means that the air pressure in front of the piston 110 causes the piston 110 to be driven rearward. In other words, then the piston 110 is retracted by air pressure delivered in front of it. When the piston 110 reaches its final stage of retraction, the compressed air inside the pneumatic cylinder 106 passes through the piston advancing air holes 121, 124 and 135 and is applied to the space occupied by the valve member 134 driving the valve member 134 to the left side.

Also, when pressurised air is delivered to the inside of the pneumatic cylinder 106 through the above mentioned piston-advancing air holes or the piston retracting air holes, when the air tube C is connected with the exhaust holes 126, the amount of increase in cylinder volume caused by the movement of the piston 110 is compensated by venting air to the atmosphere via the exhaust holes 123, 126 and the air tube C.

Accordingly, the valve member 134 moves left and right as shown in Figure 13 and pressurised air from the air supply path 133 is alternately supplied to the piston advancing air holes 121, 124, 135 and the piston retracting air holes 122, 125 and 136. As long as pressurised air is continuously supplied to the air path 133, the piston 110 and the hammer unit 115 continue to move in a reciprocating motion.

It has already been indicated that there is a three-way control valve 109 in order to additionally control the pressurisation of the piston 110 under certain conditions. Said three way valve 109 is a manual valve which selectively connects the air tube B or the air tube C to atmosphere and there is also a muffler 109a attached at the opening to the outside atmosphere. In fact, as shown in Figure 11, when the air tube C is opened to atmosphere, air tube B is closed. Conversely, when the air tube B is opened to the atmosphere, air tube C is closed.

In the following the operation of the vibrator device 101 with the afore-indicated structure will now be described with reference to Figures 19a to 19c. In Figure 19 the piston-advancing air path comprising the piston-advancing air holes 135, 124 and 121 is indicated by the reference numeral 141. The piston-retracting air path comprising piston-retracting air holes 136, 125 and

122 as indicated by the reference numeral 142 and the exhaust air path comprising the exhaust holes 123 and 126 is indicated by the reference numeral 143.

Firstly, the workpiece 1 is positioned in front of the vibrator device 101 as shown in Figures 107 and the workpiece is positioned such as to set it into a strike position at gate area 3. This strike position is slightly short of a full stroke position of the pneumatic cylinder 106, corresponding to the full forward position of the hammer unit 115. In Figure 19a the hammer unit 115 is shown in its retracted position. Also as shown in said Figure 19a the three way valve 109 has been set to vent the air tube C to the atmosphere and close the air tube B. In this condition pressurised air is supplied to the automatic switching valve 108.

At this time pressurised air flows through the piston advancing air path 141 due to the operation of the automatic switching valve 108 and piston 110 advances from the position shown in Figure 19a. At the final stage of this advancing movement the hammer unit 115 strikes the workpiece. Part of the pressurised air supply to the cylinder unit 111, namely, that portion corresponding to the increase in the volume of the cylinder, moves through the exhaust passage 143 and the air tube C to the three way valve 109 and muffler 109a where it is vented to atmosphere.

On the other hand, when the piston 110 has advanced fully forward, the automatic switching valve 108 changes the flow path of the pressurised air so that after the striking of the hammer unit 115 the air flows through the piston-retracting air path 142.

The post hammer strike condition is shown in Figure 19b. After striking the workpiece by the hammer unit 115 the pressure of the pressurised air begins to drive the piston 110 rearward. It retracts until it reaches the fully retracted position and, then the automatic switching valve 108 once again causes the pressurised air to flow through the piston-advancing air path 141. Piston 110 advances again and hammer 115 once again strikes the workpiece 1. This repeated striking of the workpiece 1 causes the final product 4 just below the gate part 3 to vibrate and to separate the product 4 from the runner 2. After the runner 2 has been separated, the product is dropped onto the conveyor belt (in the example of Figure 1) and is taken to a next processing station, for example, a finishing station.

After the product 4 has been released, the operation of the three way valve 109 causes the vibrator device 101 to stop further operation. When further operation is stopped, with the pressurised air supply 107 supplying pressurised air to the automatic switching valve 108, then, by switching the three-way valve 109, as shown in Figure 19c, the air tube B is vented to the atmosphere while the air tube C is closed. By switching the three valve 109 in this manner the piston-advancing air path 141 is vented to atmosphere while the exhaust air path is closed.

When the afore-mentioned action for stopping fur-

ther operation takes place during the piston-advancing process, piston 110 decelerates while moving to the front of the cylinder unit 111. Since the position of the valve member 134 of the automatic switching valve 108 switches from the position shown in Figure 19a to that shown in Figure 19b, the piston-retracting air path 142 is connected to the source of pressurised air and the piston 110 retracts. At this time the compressed air inside the pneumatic cylinder 106 is vented from the piston-advanced air path 141 through the air tube B to atmosphere. As a result there is no pressure supplied from the piston-advancing air path 141 to the automatic switching valve 108 so that, when the piston 110 reaches its fully retracted position, there is no switching of the valve member 134 back to the position shown in Figure 19a. In other words, the piston 110 retracts and stops at the rear end of the cylinder unit 111. When the stopping procedure takes place while the piston is retracting, the piston 110 stops at the back of the cylinder unit 111 as well.

Thus, after the piston 110 has been stopped in the manner described above, since the exhaust air path 143 is closed, the pressure remains inside the pneumatic cylinder 106 and the piston 110 is held in this position by the air pressure.

Accordingly, when the workpiece striking operation has been completed, the pressure in front of the piston 110 causes the piston 110 to retract bringing the hammer unit 115 to its fully rearward position and it will not stop midway in a neutral position.

By carefully managing the flow of pressurised air in this embodiment to retract the hammer unit 115 fully the weight of the pneumatic cylinder 106 can be decreased over conventional arrangements there is no need to have an auxiliary cylinder to retract the hammer unit 115. Consequently, the supporting stand 102 and the pillar 103 for the pneumatic cylinder 106 can be made smaller and lighter and need not to be engineered as extremely strong. In particular, in conventional assemblies having a hammer-retracting cylinder positioned at the front of a vibrator device the weight of the cylinder became a problem, so that it was necessary to have a massive support for the hammering pneumatic cylinder in order to allow hammering in the horizontal direction. These difficulties are completely eliminated through the embodiment explained above.

Although an embodiment was described above where the hammering unit was pushed to its fully retracted position upon cease of operation the hammering unit 115 can also be stopped in its fully forward position by connecting the three-way valve 109 to the piston-retracting air path 142 instead of the piston-advancing air path 141 as shown in Figure 19.

Moreover, although it has been described to connect the exhaust path 143 to the three way valve 109 for selectively venting to atmosphere, it is not absolutely necessary to open and close the exhaust path 143. Even when always venting to atmosphere one can

obtain the same effects as described above, that is, either the piston-advancing air path 141 or the piston-retracting air path 142 may be vented to atmosphere by a valve (not shown). In this example, the exhaust air path 143 was closed when the striking operation was stopped and the air pressure kept the piston 110 in a stationary position. Therefore, the hammer unit 115 is always in a constant position when the operations are stopped.

Accordingly, the vibrator device 101 is structured such that when either the piston-advancing air path, which supplies air to behind the piston driving the hammer, or the piston-retracting path which supplies air to the front of the piston, are vented to atmosphere in a manner such that the venting valve is closed during vibrating operations and is open when the operations are stopped, then the piston and the hammer unit can be set either in the fully forward or fully rearward position by the action of the pressurised air either to the back or the front of the piston when the operation of the vibrator device is stopped.

Accordingly, when hammering is completed, the hammering unit will not remain in a neutral position between the fully forward or fully backward position. This assures stability in the resumption of operations. Hence, stopping the hammering operation takes place smoothly and with a high degree of efficiency. Moreover, this structure, including the automatic switching control valve, which controls the flow of pressurised air, renders unnecessary the auxiliary pneumatic cylinder required in the conventional systems to retract the hammer to its fully rearward position or to advance it completely forwardly.

According to a second embodiment of the present invention a three-way valve was added to the vibrator device 101 of the first embodiment, which closes either the piston advancing air path or the piston retracting air path when the vibrator is operating while the exhaust path is vented to atmosphere but which vents the afore-indicated piston advancing or piston retracting air paths to atmosphere when the vibrator operations are stopped closing the exhaust path so that the hammer can be brought to rest in either fully retracted or fully advanced positions and be held there by pressurised air acting from one side upon the piston. Thus, there is the same assurance of smooth resumption of operation as in the embodiment 1 and a definite control of the position of the hammering unit when the operations are stopped.

## Claims

1. Workpiece manipulating and processing system, in particular device for removing runners from molded products, comprising a robot (50) having a moveable manipulating arm (53) terminating at a gripping support means (9) for holding the workpiece or a processing tool, a shock absorbing means (65),

- which is disposed between the gripping support means (9) and the manipulating arm (53) to prevent shocks or vibrations from being transmitted from the gripping support means (9) to the manipulating arm (53) during a workpiece processing operation tool, **characterised by** a vibrator device for holding the tool or the workpiece, respectively, said shock absorbing means (65) at least during a first period of workpiece processing indirectly connecting the gripping support means (9) to the manipulating arm (53) of the robot (50) and said shock absorbing means (65) is disposed adjacent to a workpiece positioning means (74,75,76) of the fastening means (72), said workpiece positioning means (74,75,76) during a second period of workpiece processing by-passes said shock absorbing means and being adapted to rigidly connect the gripping support means (9) directly to the manipulating arm (53) of the robot (50).
2. Workpiece manipulating and processing system as claimed in claim 1, **characterised in that** said shock absorbing means (65) forming part of a fastening means (72) affixing the gripping support means (9) to the manipulating arm (53) of the robot (50).
  3. Workpiece manipulating and processing system as claimed in at least one of the preceding claims 1 to 2, **characterised in that**, the manipulating arm (53) of the robot (50) comprises an arm tip (59) at the projecting end of the manipulating arm (53), which is removably attached to the manipulating arm (53) at right angles, said arm tip (59) rotatably supporting a slide supporting table (60) which is rotatable about the centre axis (61) of the arm tip (59) and which supports a sliding table (62) along its surface facing away from the arm tip (59), said sliding table (62) is moveable radially with respect to the centre axis (61).
  4. Workpiece manipulating and processing system as claimed in claim 3, **characterised in that**, said sliding table (62) supports via a projecting support arm (62a) a box-shaped bracket (63), a bottom plate (64) thereof extends substantially in parallel or perpendicularly to the centre axis (61) of the arm tip (59).
  5. Workpiece manipulating and processing system as claimed in at least one of the preceding claims 2 to 4, **characterised in that**, said workpiece positioning means (74,75,76) forming part of the fastening means (72) comprising a support plate (66) which is disposed within said box-shaped bracket (63) and which is connected to the bottom plate (64) through said shock absorbing means (65).
  6. Workpiece manipulating and processing system as claimed in at least one of the preceding claims 1 to 5, **characterised in that**, said shock absorbing means, comprising a plurality of parallel shock absorbing members (65) made of rubber, preferably of columnar rubber cylinders (65), the axes of which substantially extend perpendicularly or in parallel to the centre axis (61).
  7. Workpiece manipulating and processing system as claimed in claim 5, **characterised in that**, said workpiece positioning means (74,75,76) rigidly connecting the support plate (66) to the box-shaped bracket (63) comprising a plurality of holding working cylinders (74) attached to side plates (73) of the box-shaped bracket (63), said working cylinders (74) comprise piston rods (75) which are reciprocable between advanced engaging position under workpiece positioning, engaging holes (76) in the support plate (66), and a retracted position under workpiece processing in which the piston rods (75) remain in a non-engaged rest position.
  8. Workpiece manipulating and processing system as claimed in at least one of the preceding claims 3 to 7, **characterised in that**, the support plate (66) supports a work chuck (67) comprising jaws (67a,67b) operated via a toggle mechanism to be oppositely moveable relative to each other to clamp a clamping area of the workpiece, preferably the runner of a molded product, said jaws (67a,67b) being provided with at least one pair of oppositely disposed outer chuck teeth (70) adapted to clamp the clamping area of the workpiece.
  9. Workpiece manipulating and processing system as claimed in claim 8, **characterised in that**, the clamping jaws (67a,67b) either are moveable linearly or pivotably about a pivoting axis, respectively.
  10. Workpiece manipulating and processing system as claimed in claim 8, **characterised in that**, the outer chuck teeth (70) are disposed at the outside of the jaws (67a,67b) to engage an inside circumferential surface of a hole (4a) of the product (4).
  11. Workpiece manipulating and processing system as claimed in claim 3, **characterised in that**, a support table (80) which is disposed substantially in parallel to the centre axis (61) is mounted to the sliding table (62), said supporting table (80) being provided with holding working cylinders (81), the piston rods (85) thereof are moveable between first and second positions and the working cylinders (81) are moveable between their first or second positions, said working cylinders (81) being provided with axially protruding cylindrical projections (88) which are slideably received in slide holes (90)

of the supporting table (80), said projections (88) being engagable with engagement holes (95) of a mounting bracket (66) of the gripping support means (9) while the shock absorbing means (65) are disposed in parallel to the slideable projections (88) between the supporting table (80) and the mounting bracket (66).

12. Workpiece manipulating and processing system as claimed in at least one of the preceding claims 1 to 11, **characterised in that**, the vibrator device (101) comprises a vibrator (160) supported by a support pillar (103) rising from the top of a stand (102).
13. Workpiece manipulating and processing system as claimed in claim 12, **characterised in that**, the vibrator (160) comprises a working cylinder unit (111) and a vibrating piston rod (110a) supported by a piston (110) sliding inside said cylinder unit (111), the protruding tip portion of said piston rod (110a) supporting a hammer unit (115) having a tapered tip portion.
14. Workpiece manipulating and processing system as claimed in claim 12 or 13, **characterised in that**, the cylinder unit (111) comprises a pneumatic cylinder (106) connected to a pressurised supply (107) via an automatic switching device (108) disposed at the rear of the cylinder unit (111).
15. Workpiece manipulating device and processing system as claimed in claim 14, **characterised in that** a pressurised air passages-defining block (112) is disposed between the automatic switching device (108) and the rear end of the cylinder unit (111) closing off the pneumatic cylinder (106).
16. Workpiece manipulating and processing system as claimed in at least one of the preceding claims 12 to 15, **characterised in that**, the cylinder unit (111) comprises both piston-advancing air holes (121) provided in the wall of the cylinder unit (111) extending from a rear end surface of the cylinder unit (111) axially and opening on the inner surface of the pneumatic cylinder (106) in proximity of a rearward end portion of the pneumatic cylinder (106), and piston-retracting air holes (122) provided in the wall of the cylinder unit (111) extending from the rear end surface of the cylinder unit (111) axially and opening on the inner surface of the pneumatic cylinder (106) in the proximity of a forward end portion of the pneumatic cylinder (106).
17. Workpiece manipulating and processing system as claimed in at least one of the preceding claims 12 to 16, **characterised in that**, exhaust holes (123) extend in the axial direction of the pneumatic cylinder (106) which open at axially spaced distant spots

on the inner surface of the pneumatic cylinder (106) and allow air to escape through to the rear end of the pneumatic cylinder (106).

18. Workpiece manipulating and processing system as claimed in at least one of the preceding claims 12 to 17, **characterised in that**, a release valve (109) venting either the piston-advancing air holes (121) or the air exhaust holes (123) to atmosphere is provided which remains closed when the vibrator device is operating and which opens to atmosphere when the vibrator device is switched off.
19. Workpiece manipulating and processing system as claimed in claim 18, **characterised in that**, said release valve is a three-way valve (109) connected to both either the piston-advancing air holes (121) or the piston-retracting holes (122) of the cylinder unit (111), on the one hand, and connected to the exhaust air holes (123), on the other hand, so that during vibrating operation of the vibrator device the piston-advancing and retracting air holes (121,122) are closed while the exhaust air holes (123) are opened to the atmosphere while in the non-operating condition of the vibrator device the piston-advancing and retracting air holes (121,122) are opened to atmosphere while the exhaust air holes (123) are closed, so that said release valve is adapted to vent either an air volume in front or behind the piston (110) to atmosphere and said piston (110) rests in its most advanced or most retracted position.
20. Workpiece manipulating and processing system as claimed in at least one of the preceding claims 15 to 19, **characterised in that**, the air passages-defining block (112) comprises piston-advancing air holes (124), piston-retracting air holes (125) and exhaust air holes (126), all in register with the associated air holes (121,122,123) opening to the air passages defining block (112) at the back of the cylinder unit (111) wherein the piston the piston-advancing air holes (124) and the piston-retracting air holes (125) pass through the air passages defining block (112) in parallel to the axial direction of the cylinder unit (111) thereby connecting to the automatic switching valve (108).
21. Workpiece manipulating and processing system as claimed in claim 20, **characterised in that**, the piston-advancing air holes (124) of the air passages-defining block (112) are all connected to each other by a X-shaped interconnecting bore arrangement (127) which opens circumferentially spaced on the top of the air passages-defining block (112) into nipples (128) adapted to be connected to a pressurised air supply means, specifically air control means such as a three-way valve (109).

22. Workpiece manipulating and processing system as claimed in claims 20 to 21, **characterised in that**, the venting air exhaust holes (126) provided in the air passages-defining block (112) comprise grooves (126a) which extend into the circumferential direction of the pneumatic cylinder (106) to positions opposite to the rearward opening of the air exhaust holes (123) of the cylinder unit (111) to connect thereto, and a radial extension (126c) opening radially on the left and right side surfaces of the air passages-defining block (112). 5
23. Workpiece manipulating and processing system as claimed in claim 22, **characterised in that** the air exhaust holes (126) open into nipples (129) adapted to be connected to an air flow controlling means, in particular the three-way valve (109). 10
24. Workpiece manipulating and processing system as claimed in at least one of the preceding claims 14 to 23, **characterised in that**, said automatic switching device comprising an automatic switching valve (108) attached to the air passages-defining block (112) by bolts (117), said automatic switching valve (108) having a valve case (131) and valve body (132) accommodated in a front-sided recess (131a) of the valve case (131) covered by the air passages-defining block (112). 20
25. Workpiece manipulating and processing system as claimed in claim 24, **characterised in that** the valve case (131) comprises an air passage (133) opening at a top portion of the valve case (131) and extending to a bottom area of the valve body accommodating recess (131a) to connect to a plurality of air connecting passageways (133a, 133b) provided in the valve body (132) said opening at the top portion of the valve case (131) being adapted to be connected to a source of pressurised air (107). 25
26. Workpiece manipulating and processing system as claimed in claim 25, **characterised in that**, said valve body (132) comprises a stack of three sheets of discs (132a, 132b, 132c) defining air connecting passageways (133a, 133b, 135, 136), and a switching valve member (134) surrounded by said connecting passages defining discs (132a, 132b, 132c) said switching valve member (134) being freely moveable axially in response to a pressure difference of the air pressure acting upon the axially facing end faces of the switching valve member (134). 30
27. Workpiece manipulating and processing system as claimed in claim 26, **characterised in that**, said valve body (132) having a piston-advancing air hole (135) and piston-retracting air holes (136) which connect to the corresponding piston advancing air holes (124) and piston-retracting air holes (125) 35

defined in the air passages-defined block (112), and that the automatically switching valve member (134) causes these air holes (124, 125) to be selectively connected to the pressurised air supply air passages (133).

#### Patentansprüche

1. Werkstückmanipulations- und -verarbeitungssystem, insbesondere Vorrichtung zur Entfernung von Angußverteilern ausgeformter Produkte, mit einem Roboter (50), der einen bewegbaren Manipulierarm (53) aufweist, welcher bei einer Greifwerkzeughalteeinrichtung (9) endet zum Halten eines Werkstückes oder eines Verarbeitungswerkzeuges, einer Stoßdämpfereinrichtung (65), die zwischen der Greifwerkzeughalteeinrichtung (9) und dem Manipulierarm (53) angeordnet ist, um zu verhindern, daß Stöße oder Vibrationen von der Greifwerkzeughalteeinrichtung (9) während einer Werkstückbearbeitungsoperation mit einem Werkzeug auf den Manipulierarm (53) übertragen wird, **gekennzeichnet durch** eine Vibrationseinrichtung zum Halten des Werkzeugs bzw. des Werkstückes, wobei diese Stoßdämpfereinrichtung (65) zumindest während einer ersten Periode der Werkstückverarbeitung indirekt die Greifwerkzeughalteeinrichtung (9) mit dem Manipulierarm (53) des Roboters (50) verbindet und diese Stoßdämpfereinrichtung (65) angrenzend an einer Werkstückpositioniereinrichtung (74, 75, 76) der Befestigungseinrichtung (62) angeordnet ist, wobei die Werkstückpositioniereinrichtung (74, 75, 76) während einer zweiten Periode der Werkstückverarbeitung diese Stoßdämpfereinrichtung umgeht und dazu ausgelegt ist, die Greifwerkzeughalteeinrichtung (9) direkt an den Manipulierarm (53) des Roboters (50) fest anzuschließen. 40
2. Werkstückmanipulations- und -verarbeitungssystem nach Anspruch 1, **dadurch gekennzeichnet**, daß die Stoßdämpfereinrichtung (65) einen Teil einer Befestigungseinrichtung (72) bildet und die Greifwerkzeughalteeinrichtung (9) an den Manipulierarm (53) des Roboters (50) befestigt. 45
3. Werkstückmanipulations- und -verarbeitungssystem nach zumindest einem der vorstehenden Ansprüche 1 bis 2, **dadurch gekennzeichnet**, daß der Manipulierarm (53) des Roboters (50) eine Armspitze (59) an dem vorspringenden Ende des Manipulierarmes (53) enthält, die entferntbar an dem Manipulierarm (53) in rechten Winkeln angeschlossen ist, wobei diese Armspitze (59) drehbar einen Schlittenhaltetisch (60) abstützt, der drehbar um die Mittelachse (61) der Armspitze (59) ist und einen Gleittisch (62) entlang seiner Oberfläche abstützt, die von der Armspitze (59) wegweist, 50

wobei dieser Gleittisch (62) bezüglich der Mittelachse (61) radial bewegbar ist.

4. Werkstückmanipulations- und -verarbeitungssystem nach Anspruch 3, **dadurch gekennzeichnet**, daß der Gleittisch (62) über einen vorspringen Haltearm (62a) einen kastenförmigen Träger (63) hält, wobei eine Bodenplatte (64) davon sich im wesentlichen parallel oder senkrecht zu der Mittelachse (61) der Armspitze (59) erstreckt. 5
5. Werkstückmanipulations- und -verarbeitungssystem nach einem der vorstehenden Ansprüche 2 bis 4, **dadurch gekennzeichnet**, daß die Werkstückpositioniereinrichtung (74, 75, 76) einen Teil der Befestigungseinrichtung (72) bildet, die eine Halteplatte (66) enthält, welche innerhalb dieses kastenförmigen Trägers (63) angeordnet ist und welche an der Bodenplatte (64) über diese Stoßdämpfereinrichtung (65) angeschlossen ist. 10 15 20
6. Werkstückmanipulations- und -verarbeitungssystem nach zumindest einem der vorstehenden Ansprüche 1 bis 5, **dadurch gekennzeichnet**, daß diese Stoßdämpfereinrichtung eine Vielzahl von parallel ausgerichteter Stoßdämpferelemente (65) aufweist, die aus Gummi hergestellt sind, bevorzugt aus säulenförmigen Gummizylindern (65), deren Achsen sich im wesentlichen senkrecht oder parallel zu der Mittelachse (61) erstrecken. 25 30
7. Werkstückmanipulations- und -verarbeitungssystem nach Anspruch 5, **dadurch gekennzeichnet**, daß die Werkstückpositioniereinrichtung (74, 75, 76), die die Halteplatte (66) an den kastenförmigen Träger (63) fest anschließt, eine Vielzahl von Arbeitszylindern (74) zum Halten aufweist, die an Seitenplatten (73) des kastenförmigen Trägers (63) angeschlossen sind, wobei diese Arbeitszylinder (74) Kolbenstangen (75) aufweisen, die hin- und herbewegbar sind zwischen einer vorgeschobenen Eingreifposition unter Werkstückausrichtung mittels Eingreifen in Eingreiflöcher (76), die in der Halteplatte (66) vorhanden sind, und einer zurückgezogenen Position unter Werkstückverarbeitung, in welcher die Kolbenstangen (75) in ihrer nicht eingreifenden Ruheposition verbleiben. 35 40 45
8. Werkstückmanipulations- und -verarbeitungssystem nach mindestens einem der vorstehenden Ansprüche 3 bis 7, **dadurch gekennzeichnet**, daß die Halteplatte (66) eine Spannvorrichtung (67) abstützt, die Klemmbacken (67a, 67b) aufweist, welche betätigbar sind über einen Kniehebelmechanismus, um bezüglich zueinander entgegengesetzt bewegbar zu sein zum Festklemmen eines Klemmbereiches des Werkstückes, bevorzugt den Angußverteiler des ausgeformten Produktes, wobei 50 55

diese Klemmbacken (67a, 67b) mit zumindest einem Paar entgegengesetzt angeordneter äußerer Spannzähne (70) versehen sind, die dazu ausgelegt sind, den Klemmbereich des Werkstückes festzuklemmen.

9. Werkstückmanipulations und -verarbeitungssystem nach Anspruch 8, **dadurch gekennzeichnet**, daß die Klemmbacken (67a, 67b) beide linear bzw. um eine Schwenkachse verschwenkbar beweglich sind.
10. Werkstückmanipulations und -verarbeitungssystem nach Anspruch 8, **dadurch gekennzeichnet**, daß die äußeren Spannzähne (70) an der Außenseite der Klemmbacken (67a, 67b) angeordnet sind, um eine innere Umfangsoberfläche eines Loches (4a) des Produkts (4) zu ergreifen.
11. Werkstückmanipulations und -verarbeitungssystem nach Anspruch 3, **dadurch gekennzeichnet**, daß ein Haltetisch (80), der im wesentlichen parallel zur Mittelachse (61) angeordnet ist, an dem Gleittisch (62) montiert ist, wobei dieser Haltetisch (80) mit Arbeitszylindern (81) zum Halten versehen ist, wobei deren Kolbenstangen (85) zwischen ersten und zweiten Positionen bewegbar sind und die Arbeitszylinder (81) zwischen ihren ersten und zweiten Positionen bewegbar sind, wobei diese Arbeitszylinder (81) mit axial vorspringenden zylinderförmigen Vorsprüngen (88) versehen sind, welche gleitend in Gleitlöchern (90) des Haltetisches (80) aufgenommen sind, wobei diese Vorsprünge (88) mit Eingriffslöchern (95) eines Montierträgers (66) der Greifwerkzeughaltereinrichtung (9) in Eingriff bringbar sind, während die Stoßdämpfereinrichtungen (65) parallel zu den gleitenden Vorsprüngen (88) zwischen dem Haltetisch (80) und dem Montageträger (66) angeordnet sind.
12. Werkstückmanipulations- und -verarbeitungssystem nach zumindest einem der vorstehenden Ansprüche 1 bis 11, **dadurch gekennzeichnet**, daß die Vibrationseinrichtung (101) einen Vibrator (160) aufweist, der von einem Stützstab (103) gehalten wird, der sich von dem oberen Bereich eines Ständers (102) nach oben erstreckt.
13. Werkstückmanipulations- und -verarbeitungssystem nach Anspruch 12, **dadurch gekennzeichnet**, daß der Vibrator (160) eine Arbeitszylindereinheit (111) und eine vibrierende Kolbenstange (110a) aufweist, die von einem Kolben (110) gehalten wird, der innerhalb dieser Zylindereinheit (111) gleitet, wobei der vorspringende Spitzenabschnitt der Kolbenstange (110a) eine Hammereinheit (115) hält, die einen konisch zulauenden spitzen Abschnitt aufweist.

14. Werkstückmanipulations- und -verarbeitungssystem nach Anspruch 12 oder 13, **dadurch gekennzeichnet**, daß die Zylindereinheit (111) einen Pneumatikzylinder (106) enthält, der an einer Druckquelle (107) über eine automatische Schalteinrichtung (108) angeschlossen ist, die im rückwärtigen Bereich der Zylindereinheit (111) angeordnet ist. 5
15. Werkstückmanipulations- und -verarbeitungssystem nach Anspruch 14, **dadurch gekennzeichnet**, daß ein Block (112), der einen Durchlaß für druckbeaufschlagte Luft festlegt, zwischen der automatischen Schalteinrichtung (108) und dem rückwärtigen Ende der Zylindereinheit (111) angeordnet ist und den pneumatischen Zylinder (106) abschaltet. 10 15
16. Werkstückmanipulations- und -verarbeitungssystem nach zumindest einem der vorstehenden Ansprüche 12 bis 15, **dadurch gekennzeichnet**, daß die Zylindereinheit (111) sowohl Luftlöcher (121) für die Kolbenannäherung, die in der Wandung der Zylindereinheit (111) vorgesehen sind und sich von einer rückwärtigen Endoberfläche der Zylindereinheit (111) axial erstrecken und sich in einer inneren Oberfläche des pneumatischen Zylinders (106) in der Nähe eines rückwärtigen Endabschnittes des pneumatischen Zylinders (106) öffnen, als auch den Kolben zurückführende Luftlöcher (112) aufweist, die in der Wandung der Zylindereinheit (111) sich von der rückwärtigen Endoberfläche der Zylindereinheit (111) axial erstrecken und in der inneren Oberfläche des pneumatischen Zylinders (106) in der Nähe eines vorderen Endabschnittes des pneumatischen Zylinders (106) öffnen. 20 25 30 35
17. Werkstückmanipulations- und -verarbeitungssystem nach zumindest einem der vorstehenden Ansprüche 12 bis 16, **dadurch gekennzeichnet**, daß sich Auslaßlöcher (123) in axialer Richtung des pneumatischen Zylinders (106) erstrecken, die sich bei axial weit voneinander entfernten Punkten auf der inneren Oberfläche des pneumatischen Zylinders (106) öffnen und es ermöglichen, daß Luft durch das rückwärtige Ende des pneumatischen Zylinders (106) entweichen kann. 40 45
18. Werkstückmanipulations- und -verarbeitungssystem nach zumindest einem der vorstehenden Ansprüche 12 bis 17, **dadurch gekennzeichnet**, daß ein Freigabeventil (109) vorhanden ist, das entweder die Luftlöcher (121) für die Kolbenannäherung oder die Luftauslaßlöcher (123) in die Atmosphäre entlüftet, wobei dieses geschlossen bleibt, wenn die Vibrationseinrichtung sich im Betrieb befindet, und welches sich zur Atmosphäre hin öffnet, wenn die Vibrationseinrichtung ausgeschaltet ist. 50
19. Werkstückmanipulations- und -verarbeitungssystem nach Anspruch 18, **dadurch gekennzeichnet**, daß das Freigabeventil ein Dreiwegeventil (109) ist, das sowohl entweder mit den Luftlöchern (121) für die Kolbenannäherung oder mit den Löchern (122) für die Kolbenrückführung der Zylindereinheit (111) einerseits verbunden ist, und sowohl andererseits an den Auslaßluftlöchern (123) angeschlossen ist, so daß während der Vibrations-Operation der Vibrationseinrichtung die Luftlöcher (121, 122) für die Kolbenannäherung und -rückführung geschlossen sind, während die Auslaßluftlöcher (123) zur Atmosphäre hin geöffnet sind, während bei dem Ruhezustand der Vibrationseinrichtung die Luftlöcher (121, 122) für die Kolbenannäherung und -rückführung zur Atmosphäre geöffnet sind, während die Auslaßluftlöcher (123) geschlossen sind, so daß dieses Freigabeventil dazu ausgelegt ist, entweder ein Luftvolumen vor oder hinter dem Kolben (110) zur Atmosphäre zu entlüften und dieser Kolben (110) in seiner am weitesten angenäherten oder in seiner weitestens zurückgezogenen Position ruht. 55
20. Werkstückmanipulations- und -verarbeitungssystem nach mindestens einem der vorstehenden Ansprüche 15 bis 19, **dadurch gekennzeichnet**, daß der Block (112) zur Festlegung eines Luftdurchlasses Luftlöcher (124) für die Kolbenannäherung, Luftlöcher (125) für die Kolbenrückführung und Auslaßluftlöcher (126) enthält, die alle mit zugeordneten Luftlöchern (121, 122, 123) passend ausgerichtet sind und in den Block (112) zur Festlegung eines Luftdurchlasses bei dem rückwärtigen Bereich der Zylindereinheit (111) hinein öffnen, in welcher der Kolben, die Luftlöcher (124) für die Kolbenannäherung und die Luftlöcher (125) für die Kolbenrückführung durch diesen Block (112) für die Festlegung eines Luftflusses parallel zur axialen Richtung der Zylindereinheit (111) hindurchtreten, wodurch das automatische Schaltventil (108) angeschlossen wird.
21. Werkstückmanipulations- und -verarbeitungssystem nach Anspruch 20, **dadurch gekennzeichnet**, daß die Luftlöcher (124) für die Kolbenannäherung des Blockes (112) für die Festlegung des Luftdurchlasses alle miteinander verbunden sind mittels einer X-förmigen Verbindungsrohranordnung (127), welche in Umfangsrichtung voneinander beabstandet auf der Spitze des Blockes (112) für die Festlegung des Luftdurchlasses in Nippel (120) hinein öffnet, die dazu ausgelegt sind, mit einer Luftdruckquelle verbunden zu werden, insbesondere Luftsteuerein-

richtungen, wie z.B. ein Dreiwegeventil (109).

22. Werkstückmanipulations- und -verarbeitungssystem nach Anspruch 20 bis 21, **dadurch gekennzeichnet**, daß die entlüftenden Luftauslaßlöcher (126), die in dem Block (112) zur Festlegung eines Luftdurchflusses vorhanden sind, Rinnen (126a) enthalten, die sich in der Umfangsrichtung des pneumatischen Zylinders (106) zu Positionen hin erstrecken, die der rückwärtigen Öffnung der Luftauslaßlöcher (123) der Zylindereinheit (111) entgegengesetzt sind, um daran angeschlossen zu werden, sowie mit einer radialen Verlängerung (126c) versehen ist, die in radialer Richtung auf den linken und rechten Seitenoberflächen des Blockes (112) zur Festlegung eines Luftdurchflusses sich öffnen.
23. Werkstückmanipulations und -verarbeitungssystem nach Anspruch 22, **dadurch gekennzeichnet**, daß die Luftauslaßlöcher (126) in Nippel (129) hinein öffnen, die dazu ausgelegt sind, um mit einer Luftflußsteuereinrichtung, insbesondere dem Dreiwegeventil (109), verbunden zu werden.
24. Werkstückmanipulations und -verarbeitungssystem nach zumindest einem der vorstehenden Ansprüche 14 bis 23, **dadurch gekennzeichnet**, daß die automatische Schalteinrichtung ein automatisches Schaltventil (108) enthält, das mittels Bolzen (117) an dem Block (112) zur Festlegung eines Luftdurchflusses befestigt ist, wobei dieses automatische Schaltventil (108) ein Ventilgehäuse (131) und einen Ventilkörper (132) aufweist, der in einer an der Vorderseite des Ventilgehäuses (131) vorhandene Aussparung (131a) aufgenommen ist, und daß es von dem Block (112) zur Festlegung eines Luftdurchlasses abgedeckt ist.
25. Werkstückmanipulations und -verarbeitungssystem nach Anspruch 24, **dadurch gekennzeichnet**, daß das Ventilgehäuse (131) einen Luftkanal (133) aufweist, der in einem Spitzenabschnitt des Ventilgehäuses (131) sich öffnet und sich zu einem Bodenbereich des Ventilkörpers erstreckt, der die Aussparung (131) aufnimmt, um eine Vielzahl von Luftverbindungskanälen (133a, 133b) anzuschließen, die in dem Ventilkörper (132) angeordnet sind, wobei dieses Öffnen an dem Spitzenabschnitt des Ventilgehäuses (131) dazu ausgelegt ist, um an eine Quelle mit druckbeaufschlagter Luft (107) angeschlossen zu werden.
26. Werkstückmanipulations- und -verarbeitungssystem nach Anspruch 25, **dadurch gekennzeichnet**, daß der Ventilkörper (132) einen Stapel von drei Plattenscheiben (132a, 132b, 132c) aufweist, die Luftverbindungskanäle (133a, 133b, 135,

136) festlegen, und ein Schaltventilelement (134) enthält, das von diesen verbindenden Kanälen umgeben ist, die diese Scheiben (132a, 132b, 132c) festlegen, wobei dieses Schaltventilelement (134) axial frei bewegbar ist in Abhängigkeit von einer Druckdifferenz des Luftdruckes, der auf die in axialer Richtung weisenden Endflächen des Schaltventilelements (134) wirkt.

27. Werkstückmanipulations und -verarbeitungssystem nach Anspruch 26, **dadurch gekennzeichnet**, daß dieser Ventilkörper (132) ein Luftloch (135) für die Kolbenannäherung und ein Luftloch (136) für die Kolbenrückführung aufweist, welche jeweils an die entsprechenden Luftlöcher (124) für die Kolbenannäherung und Luftlöcher (125) für die Kolbenrückführung angeschlossen sind, die in dem Block (112) zur Festlegung des Luftdurchlasses vorhanden sind, und daß das automatisch schaltende Ventilelement (134) bewirkt, daß diese Luftlöcher (124, 125) selektiv an die druckbeaufschlagte Luft führenden Luftzuführungskanäle (133) anschließbar sind.

## 25 Revendications

1. Système de manipulation et de traitement de pièces, en particulier dispositif destiné à éliminer des barbes de produits moulés, comprenant un robot (50) comportant un bras manipulateur mobile (53) se terminant par des moyens de support de prise (9) destinés à maintenir la pièce ou un outil de traitement, des moyens d'amortissement des chocs (65), qui sont disposés entre les moyens de support de prise (9) et le bras manipulateur (53) afin d'empêcher la transmission de chocs ou de vibrations des moyens de support de prise (9) vers le bras manipulateur (53) au cours d'une opération de traitement de pièce ou d'outil, caractérisé par un dispositif vibratoire destiné à maintenir respectivement l'outil ou la pièce, lesdits moyens d'amortissement des chocs (65) au moins au cours d'une première période de traitement de pièce reliant indirectement les moyens de support de prise (9) au bras manipulateur (53) du robot (50) et lesdits moyens d'amortissement des chocs (65) sont positionnés de manière adjacente à des moyens de positionnement de pièce (74, 75, 76) des moyens d'assujettissement (72), lesdits moyens de positionnement de pièce (74, 75, 76) au cours d'une seconde période de traitement de pièce contournent lesdits moyens d'amortissement des chocs tout en étant adaptés pour relier fermement les moyens de support de prise directement au bras manipulateur (53) du robot (50).
2. Système de manipulation et de traitement de pié-

ces selon la revendication 1, caractérisé en ce que lesdits moyens d'amortissement des chocs (65) font partie intégrante des moyens d'assujettissement (72) fixant les moyens de support de prise (9) au bras manipulateur (53) du robot (50).

3. Système de manipulation et de traitement de pièces selon au moins l'une des revendications précédentes 1 ou 2, caractérisé en ce que, le bras manipulateur (53) du robot (50) comprend une extrémité de bras (59) à l'extrémité en saillie de l'arbre manipulateur (53), qui est fixée de manière amovible à l'arbre manipulateur (53) à angle droit, ladite extrémité de bras (59) supportant en rotation un plateau de support coulissant (60) qui peut tourner autour de l'axe central (61) de l'extrémité de bras (59), ledit plateau coulissant (62) est mobile de manière radiale par rapport à l'axe central (61).

4. Système de manipulation et de traitement de pièces selon la revendication 3, caractérisé en ce que ledit plateau coulissant (62) supporte par l'intermédiaire d'un bras de support en saillie (62a) un support en forme de boîtier (63), dont une plaque d'embase (64) s'étend essentiellement de manière parallèle ou perpendiculaire à l'axe central (61) de l'extrémité de bras (59).

5. Système de manipulation et de traitement de pièces selon au moins l'une des revendications précédentes 2 à 4, caractérisé en ce que lesdits moyens de positionnement de pièce (74, 75, 76) font partie des moyens d'assujettissement (72) comprenant une plaque de support (66) qui est positionnée à l'intérieur du dit support en forme de boîtier (63) et qui est reliée à la plaque d'embase (64) par l'intermédiaire des dits moyens d'amortissement des chocs (65).

6. Système de manipulation et de traitement de pièces selon au moins l'une des revendications précédentes 1 à 5, caractérisé en ce que lesdits moyens d'amortissement comprennent une pluralité d'éléments amortisseurs (65) se composant de caoutchouc, de préférence des cylindres en caoutchouc en forme de colonne (65), dont les axes s'étendent essentiellement de manière perpendiculaire ou parallèle à l'axe central (61).

7. Système de manipulation et de traitement de pièces selon la revendication 5, caractérisé en ce que, lesdits moyens de positionnement de pièce (74, 75, 76) reliant de manière rigide la plaque de support (66) au support en forme de boîtier (63) comprend une pluralité de vérins actifs de maintien (74) fixés à des plaques latérales (73) du support en forme de boîtier (63), lesdits vérins actifs (74) comprennent des tiges de piston (75) qui peuvent avoir un mou-

vement alternatif entre une position d'engagement avancée lors du positionnement des pièces, en s'engageant dans des orifices de la plaque de support (66), et une position rétractée lors du traitement des pièces dans laquelle les tiges de piston (75) restent dans une position de repos et de non engagement.

8. Système de manipulation et de traitement de pièces selon au moins l'une des revendications précédentes 3 à 7, caractérisé en ce que ladite plaque de support (66) supporte un mandrin de travail (67) comprenant des mâchoires (67a, 67b) actionnées par l'intermédiaire d'un mécanisme à articulation pour être mobile de manière opposée l'une par rapport à l'autre afin de serrer une zone de serrage de la pièce, de préférence les barbes d'un produit moulé, lesdites mâchoires (67a, 67b) comportant au moins une paire de dents de maintien extérieures (70) disposées en opposition l'une par rapport à l'autre adaptée pour serrer la zone de serrage de la pièce.

9. Système de manipulation et de traitement de pièces selon la revendication 8, caractérisé en ce que les mâchoires de serrage (67a, 67b) sont mobiles respectivement soit de manière linéaire soit en pivotement autour d'un axe de pivotement.

10. Système de manipulation et de traitement de pièces selon la revendication 8, caractérisé en ce que les dents de maintien extérieures (70) sont disposées sur le côté extérieur des mâchoires (67a, 67b) afin de s'engager sur une surface de circonférence intérieure d'un orifice (4a) d'un produit (4).

11. Système de manipulation et de traitement de pièces selon la revendication 3, caractérisé en ce qu'un plateau de support (80) qui est disposé essentiellement de manière parallèle à l'axe central (61) est monté sur le plateau coulissant (62), ledit plateau de support (80) comportant des vérins de maintien actifs (81) dont les tiges de piston (85) sont mobiles entre leurs première et seconde positions, lesdits vérins actifs (81) comportant des saillies cylindriques (88) en saillie axiale qui sont reçues en coulissement dans des orifices de coulissement (90) du plateau de support (80), lesdites saillies (88) pouvant s'engager dans des orifices d'engagement (95) d'un support de montage (66) des moyens de support de prise (9) alors que les moyens d'amortissement des chocs (65) sont disposés de manière parallèle aux saillies coulissantes (88) entre le plateau de support (80) et le support de montage (66).

12. Système de manipulation et de traitement de pièces selon au moins l'une des revendications précé-

dentes 1 à 11, caractérisé en ce que le dispositif vibratoire (101) comprend un vibreur (160) supporté par une colonne de support (103) s'élevant à partir du sommet d'un socle (102).

13. Système de manipulation et de traitement de pièces selon la revendication 12, caractérisé en ce que le vibreur (160) comprend un ensemble de vérin actif (111) et une tige de piston vibrante (110a) supportée par un piston (110) coulissant à l'intérieur du dit ensemble de vérin (111), la partie d'extrémité en saillie de ladite tige de piston (110a) supportant un ensemble de marteau (115) comportant une partie d'extrémité conique.

14. Système de manipulation et de traitement de pièces selon la revendication 12 ou la revendication 13, caractérisé en ce que l'ensemble de vérin (111) comprend un vérin pneumatique (106) relié à une alimentation sous pression (107) par l'intermédiaire d'un dispositif de commutation automatique (108) disposé à l'arrière de l'ensemble de vérin (111).

15. Système de manipulation et de traitement de pièces selon la revendication 14, caractérisé en ce qu'un bloc définissant des passages d'air sous pression (112) est disposé entre le dispositif de commutation automatique (108) et l'extrémité arrière de l'ensemble de vérin (111) et met hors circuit le vérin pneumatique (106).

16. Système de manipulation et de traitement de pièces selon au moins l'une des revendications précédentes 12 à 15, caractérisé en ce que l'ensemble de vérin (111) comprend à la fois des orifices d'air destinés à l'avancement du piston (121) aménagés dans la paroi de l'ensemble de vérin (111) qui s'étendent de manière axiale à partir d'une surface d'extrémité arrière de l'ensemble de vérin (111) et qui s'ouvrent sur la surface intérieure du vérin pneumatique (106) à proximité d'une partie d'extrémité dirigée vers l'arrière du vérin pneumatique (106), et des orifices d'air destinés à la rétraction du piston (122) aménagés dans la paroi de l'ensemble de vérin (111) qui s'étendent de manière axiale à partir de la surface d'extrémité arrière de l'ensemble de vérin (111) et qui s'ouvrent sur la surface intérieure du vérin pneumatique (106) à proximité d'une partie d'extrémité avant du vérin pneumatique (106).

17. Système de manipulation et de traitement de pièces selon au moins l'une des revendications précédentes 12 à 16, caractérisé en ce que des orifices d'échappement (123) s'étendent dans le sens axial du vérin pneumatique (106) et s'ouvrent en des points espacés axialement sur la surface intérieure du vérin pneumatique (106), ce qui permet à l'air de

s'échapper par l'extrémité arrière du vérin pneumatique (106).

18. Système de manipulation et de traitement de pièces selon au moins l'une des revendications précédentes 12 à 17, caractérisé en ce qu'il est fourni une soupape de sûreté (109) déchargeant soit les orifices d'air destinés à l'avancement du piston (121), soit les orifices d'échappement d'air (123) vers le milieu ambiant qui restent fermés lorsque le dispositif vibratoire est en fonctionnement et qui s'ouvrent sur le milieu ambiant lorsque le dispositif vibratoire est arrêté.

19. Système de manipulation et de traitement de pièces selon la revendication 18, caractérisé en ce que la soupape de sûreté est une soupape à trois voies (109) reliée à la fois soit aux orifices d'air destinés à l'avancement du piston (121) soit aux orifices de rétraction de piston (122) de l'ensemble de vérin (111), d'une part, et reliée aux orifices d'échappement d'air (123), d'autre part, de sorte qu'au cours de l'opération de vibration du dispositif vibratoire les orifices d'air destinés à l'avancement et à la rétraction du piston (121, 122) sont fermés alors que les orifices d'échappement d'air (123) sont ouverts vers le milieu ambiant, tandis qu'en condition de non fonctionnement du dispositif vibratoire, les orifices d'air destinés à l'avancement et à la rétraction du piston (121, 122) sont ouverts vers le milieu ambiant alors que les orifices d'échappement d'air (123) sont fermés, de sorte que ladite soupape de sûreté est adaptée pour décharger un volume d'air soit à l'avant soit à l'arrière du piston (110) vers le milieu ambiant et ledit piston repose dans sa position la plus avancée ou dans sa position la plus rétractée.

20. Système de manipulation et de traitement de pièces selon au moins l'une des revendications précédentes 15 à 19, caractérisé en ce que le bloc définissant des passages d'air (112) comprend des orifices d'air destinés à l'avancement du piston (124), des orifices d'air destinés à la rétraction du piston (125) et des orifices d'échappement d'air (126), tous en correspondance exacte avec les orifices d'air associés (121, 122, 123) ouvrant sur le bloc définissant des passages d'air (112) à l'arrière de l'ensemble de vérin (111) dans lequel les orifices d'air destinés à l'avancement du piston (124) et les orifices d'air destinés à la rétraction du piston (125) passent au travers du bloc définissant des passages d'air (112) de manière parallèle au sens axial de l'ensemble de vérin (111), reliant ainsi la soupape de commutation automatique (108).

21. Système de manipulation et de traitement de pièces selon la revendication 20, caractérisé en ce que

les orifices d'air destinés à l'avancement du piston (124) du bloc définissant des passages d'air (112) sont tous reliés les uns aux autres au moyen d'un aménagement d'alésage d'interconnexion en forme de croix (127) et s'ouvrent en circonférence et de manière espacée au sommet du bloc définissant des passages d'air (112) dans des embouts (128) adaptés pour être reliés à des moyens d'alimentation en air sous pression, en particulier des moyens de commande d'air comme une soupape à trois voies (109).

22. Système de manipulation et de traitement de pièces selon les revendications 20 à 21, caractérisé en ce que les orifices d'échappement d'air (126) aménagés dans le bloc définissant des passages d'air (112) comprennent des gorges (126a) qui s'étendent dans le sens de la circonférence du vérin pneumatique (106) à des positions opposées à l'ouverture arrière des orifices d'échappement d'air (123) de l'ensemble de vérin (111) pour relier celui-ci, et une extension radiale (126c) s'ouvrant de manière radiale sur les surfaces latérales gauche et droite du bloc définissant des passages d'air (112).

23. Système de manipulation et de traitement de pièces selon la revendication 22, caractérisé en ce que les orifices d'échappement d'air (126) s'ouvrent dans des embouts (129) adaptés pour être reliés à des moyens de commande de débit d'air, en particulier la soupape à trois voies (109).

24. Système de manipulation et de traitement de pièces selon au moins l'une des revendications précédentes 14 à 23, caractérisé en ce que ledit dispositif de commutation automatique comprend une soupape de commutation automatique (108) fixée au bloc définissant des passages d'air (112) par des boulons (117), ladite soupape de commutation automatique (108) comportant un carter de soupape (131) et un corps de soupape (132) logé dans un retrait (131a) situé du côté avant du carter de soupape (131) recouvert par le bloc définissant des passages d'air (112).

25. Système de manipulation et de traitement de pièces selon la revendication 24, caractérisé en ce que le carter de soupape (131) comprend un passage d'air (133) s'ouvrant en une partie supérieure du carter de soupape (131) et s'étendant vers une zone inférieure du corps de soupape recevant le retrait (131a) afin de relier une pluralité des passages de connexion d'air (133a, 133b) aménagés dans le corps de soupape (132), ladite ouverture située dans la partie supérieure du carter de soupape (131) étant adaptée pour être reliée à une source d'air sous pression (107).

26. Système de manipulation et de traitement de pièces selon la revendication 25, caractérisé en ce que ledit corps de soupape (132) comprend un empilement de trois plaques de disques (132a, 132b, 132c) définissant des passages de connexion d'air (133a, 133b, 135, 136), et un élément de soupape de commutation (134) entouré par lesdits disques définissant des passages de connexion (132a, 132b, 132c), ledit élément de soupape de commutation (134) étant librement mobile de manière axiale en réponse à une différence de pression de la pression d'air agissant sur les faces d'extrémité en opposition axiale de l'élément de soupape de commutation (134).

27. Système de manipulation et de traitement de pièces selon la revendication 26, caractérisé en ce que ledit corps de soupape (132) comporte un orifice d'air destiné à l'avancement du piston (135) et des orifices d'air destinés à la rétraction du piston (136) qui relient les orifices d'air destinés à l'avancement du piston (124) et les orifices d'air destinés à la rétraction du piston (125) correspondants définis dans le bloc définissant des passages d'air (112), et en ce que l'élément de soupape de commutation automatique (134) provoque la connexion sélective de ces orifices d'air (124, 125) avec les passages d'alimentation en air sous pression (133).

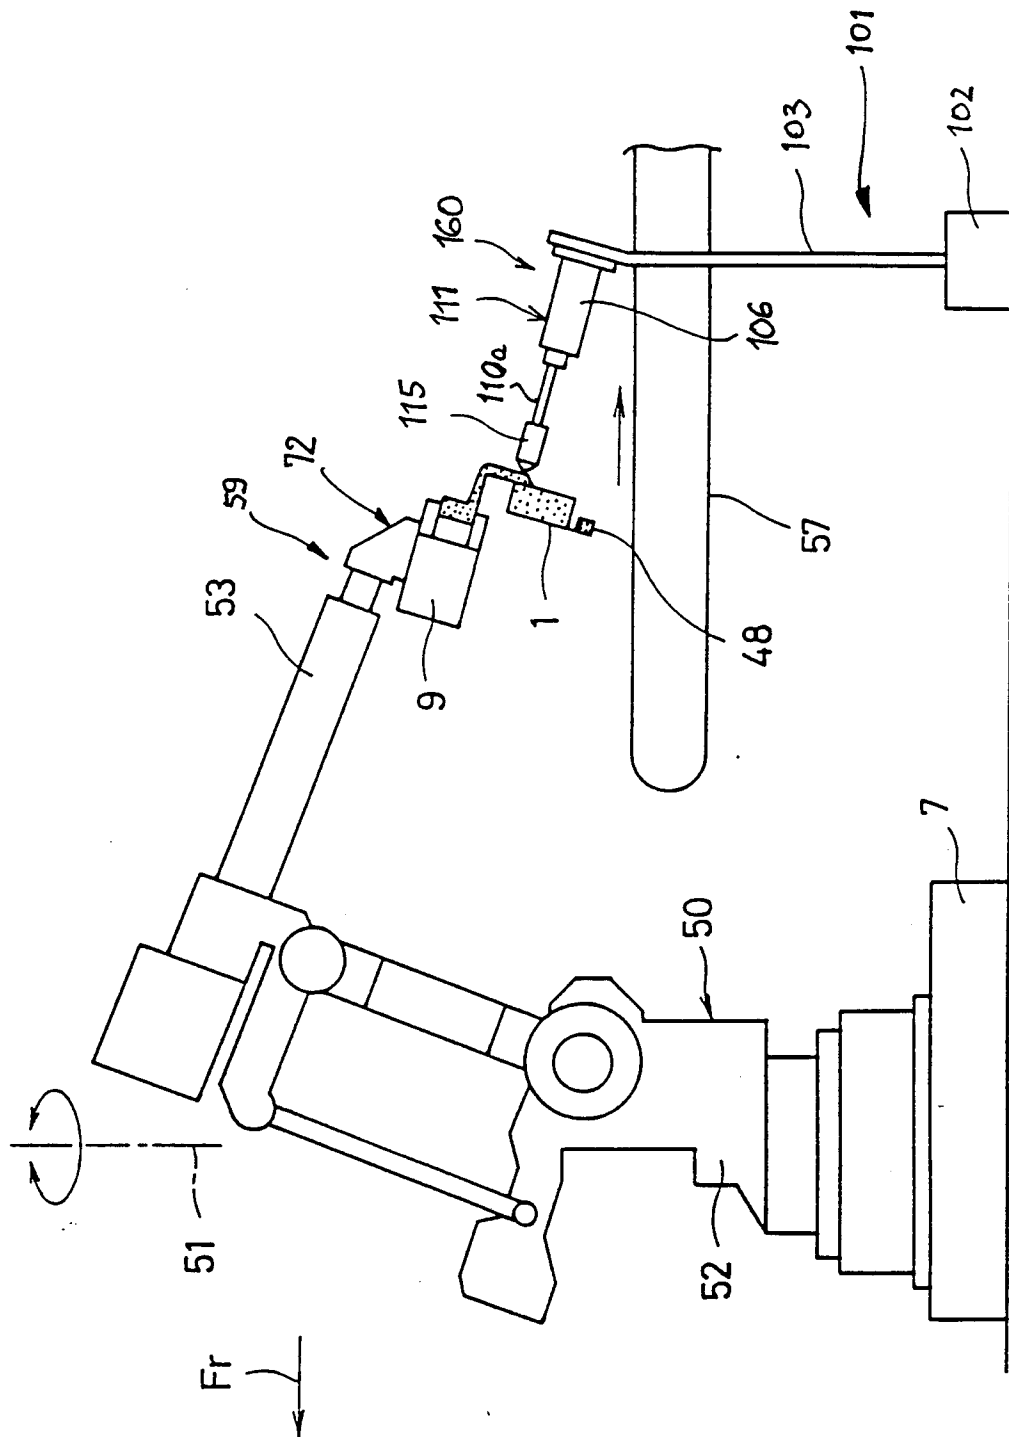


Fig. 1

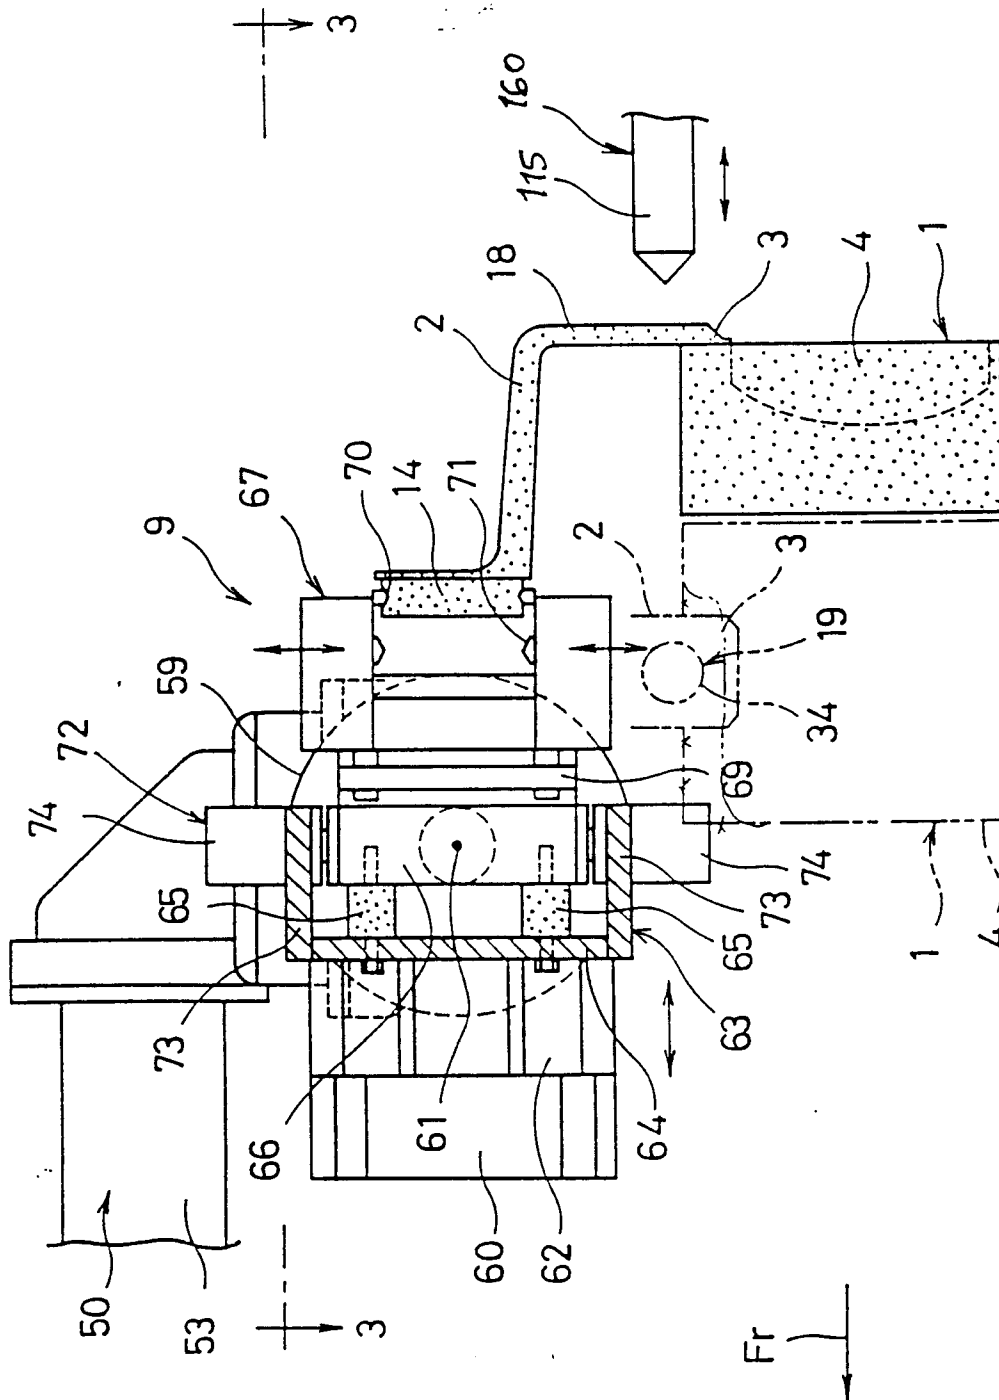
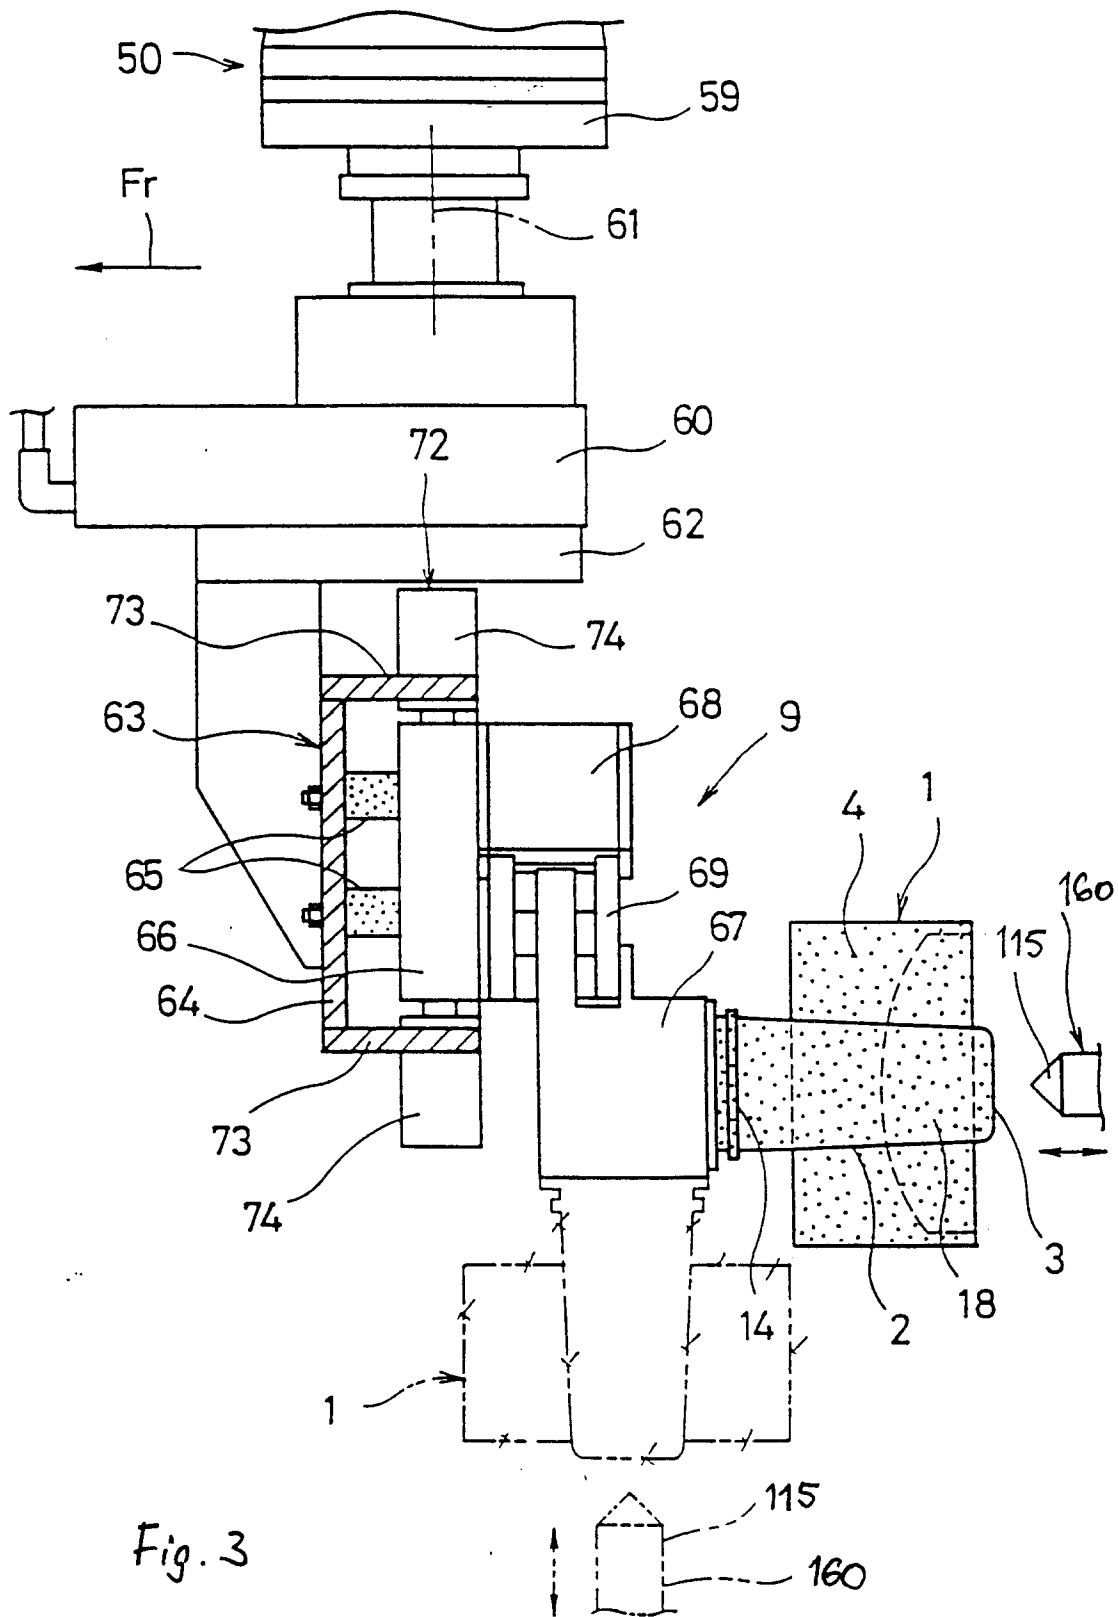


Fig. 2



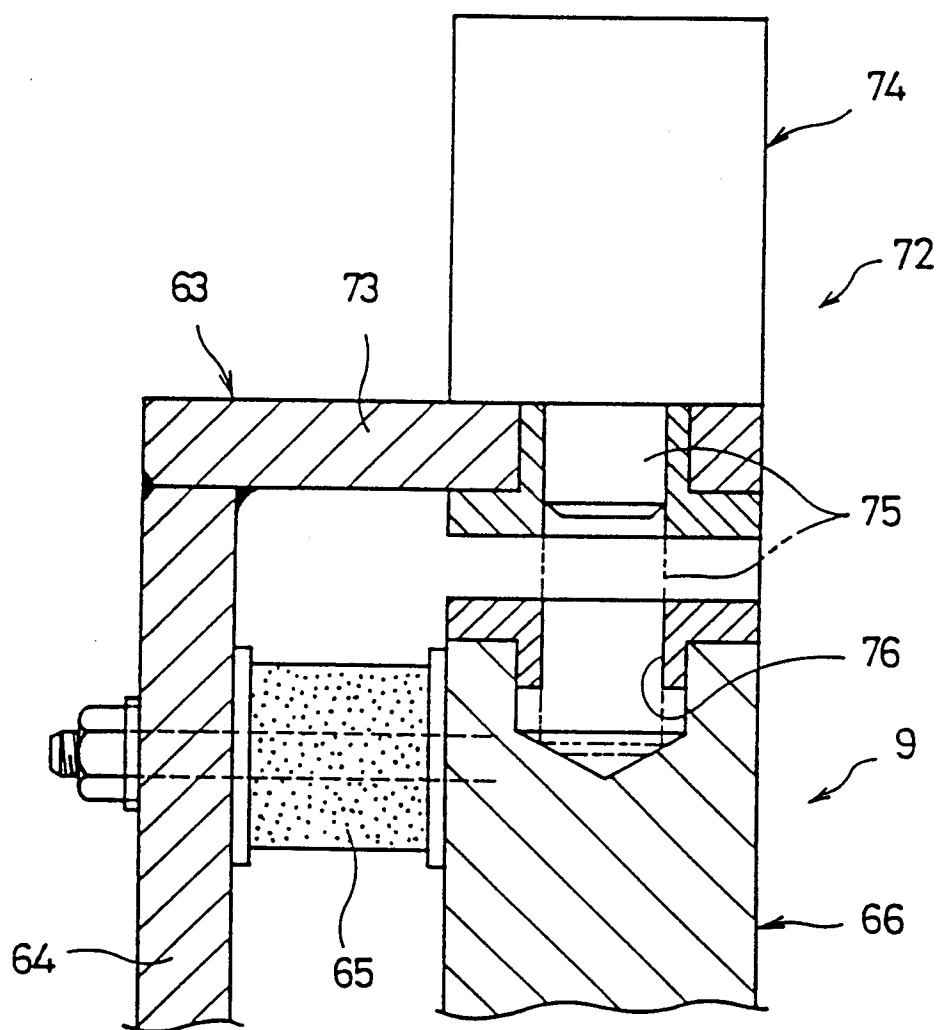


Fig. 4

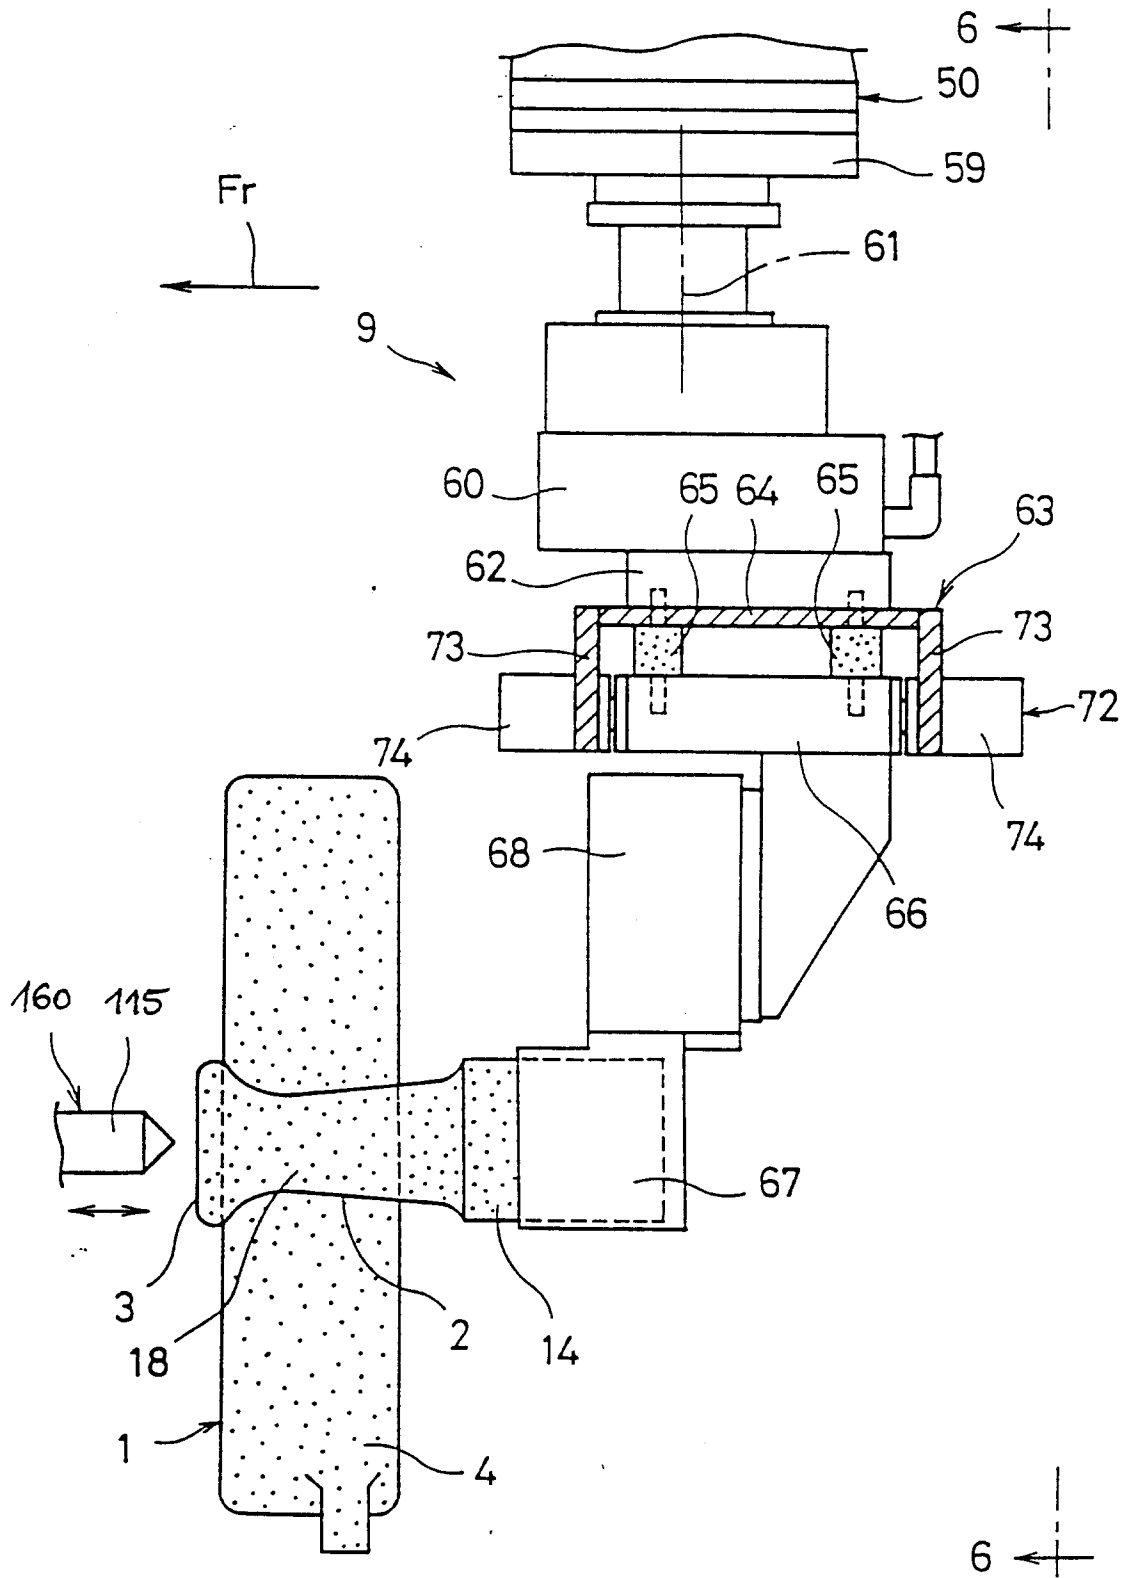
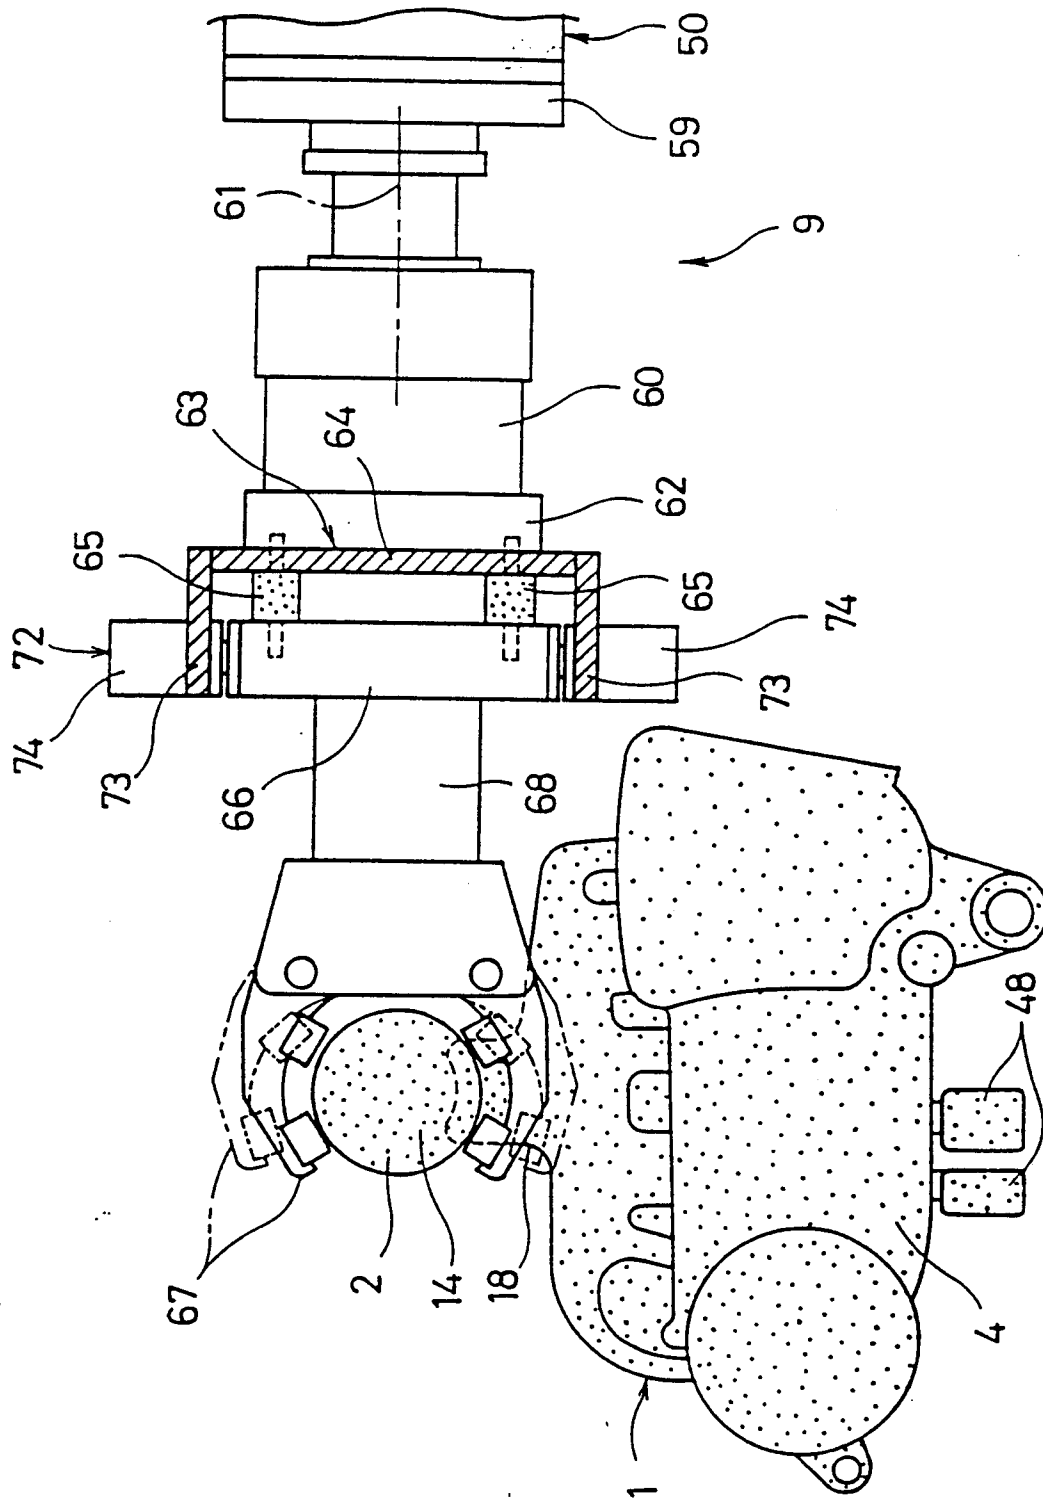


Fig. 5



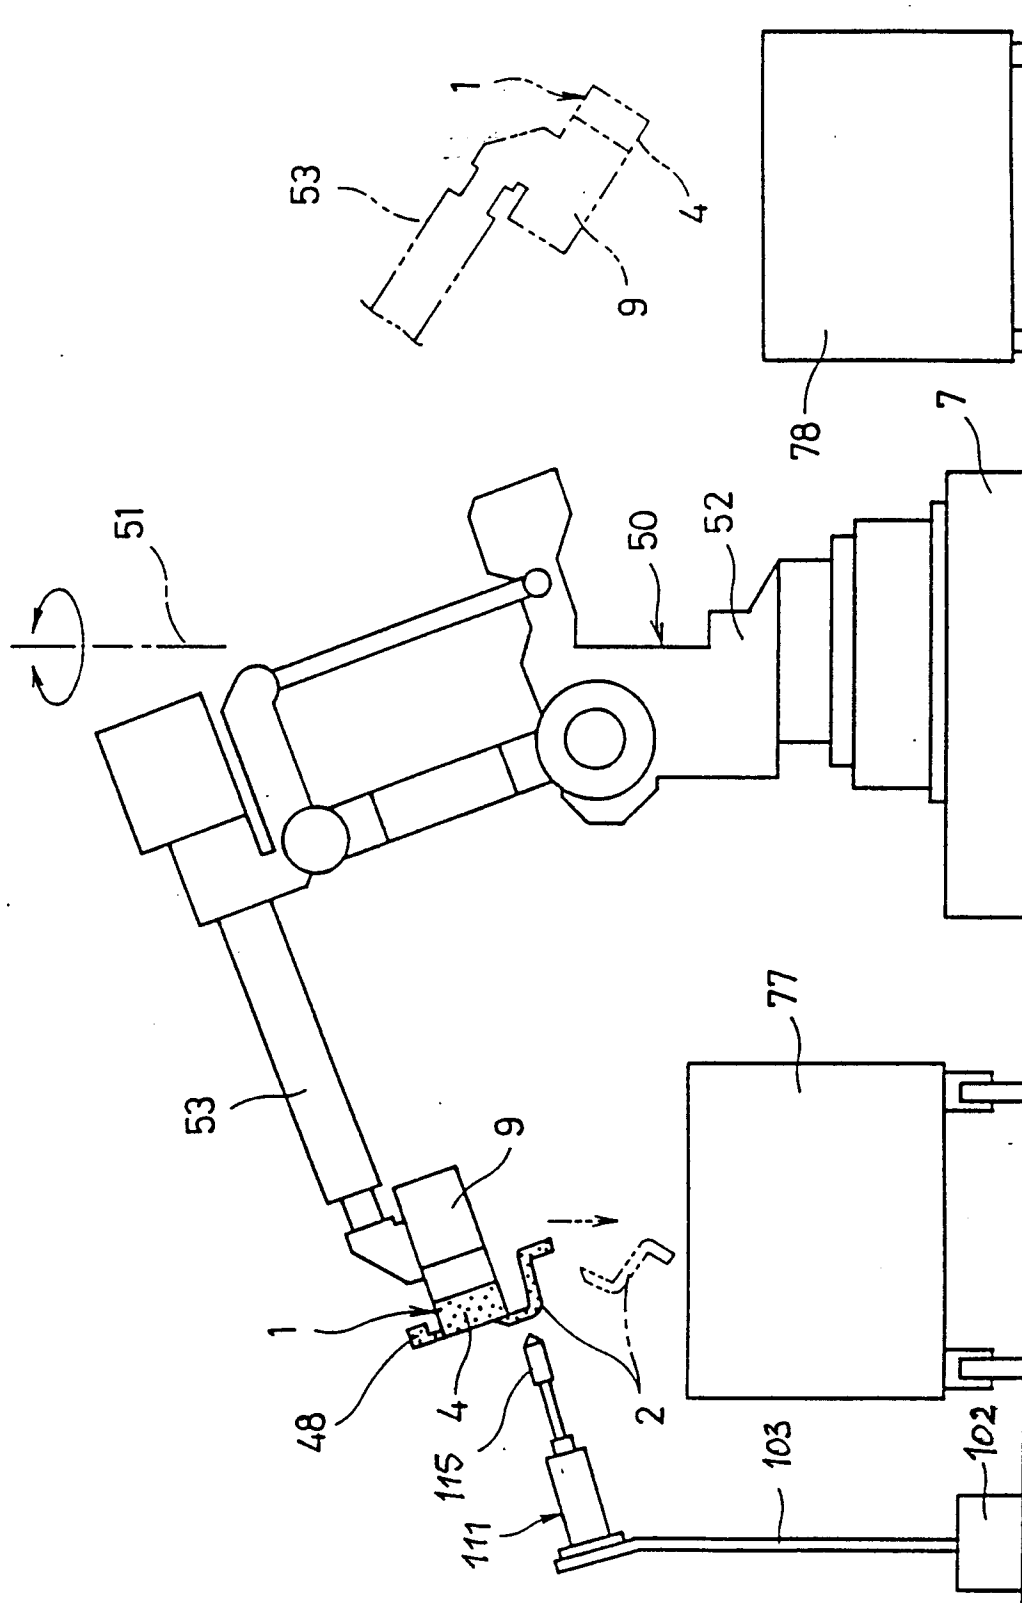
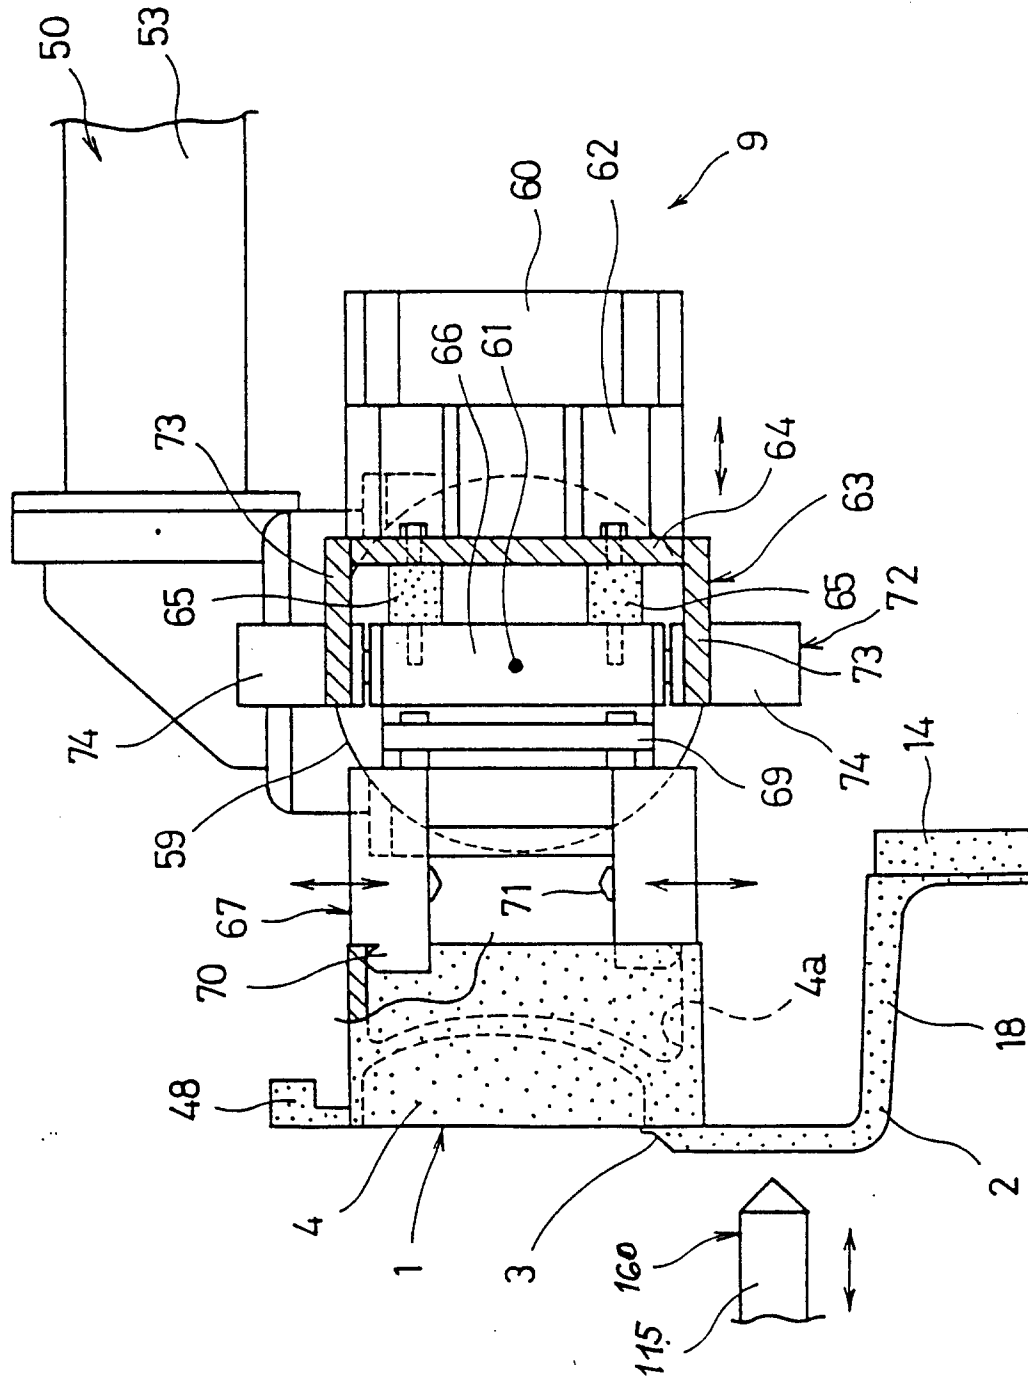


Fig. 7



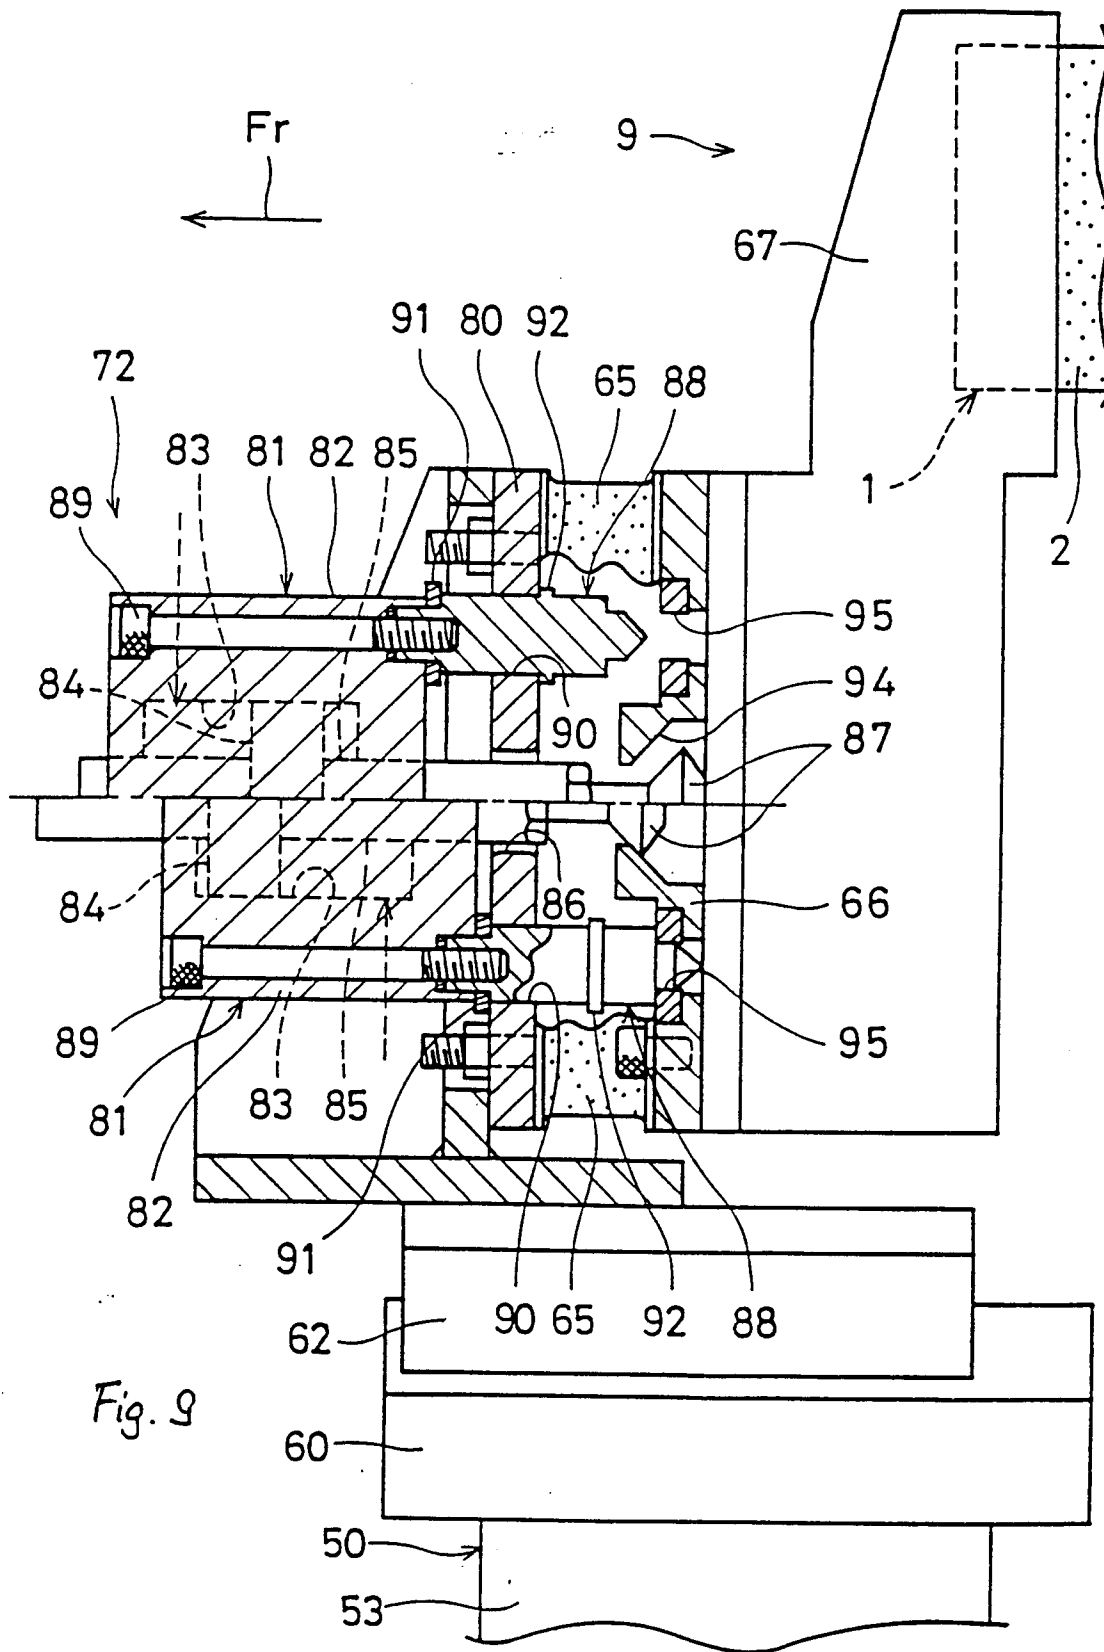
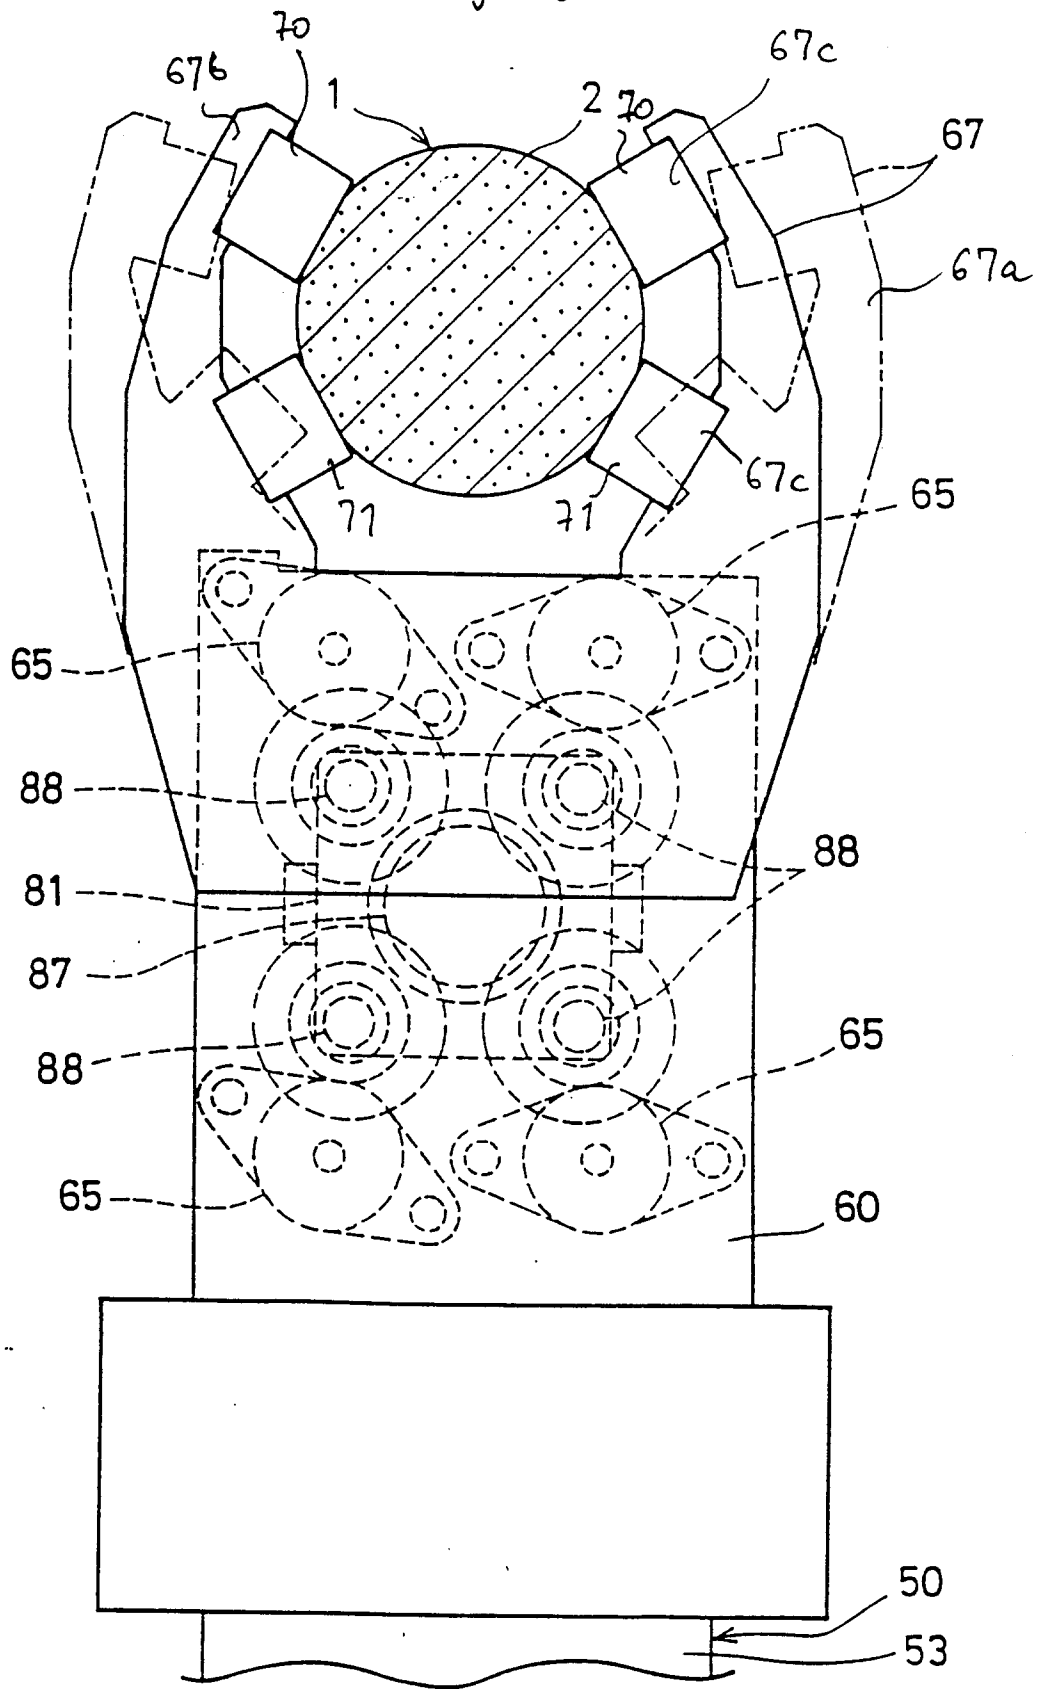


Fig. 9

Fig. 10



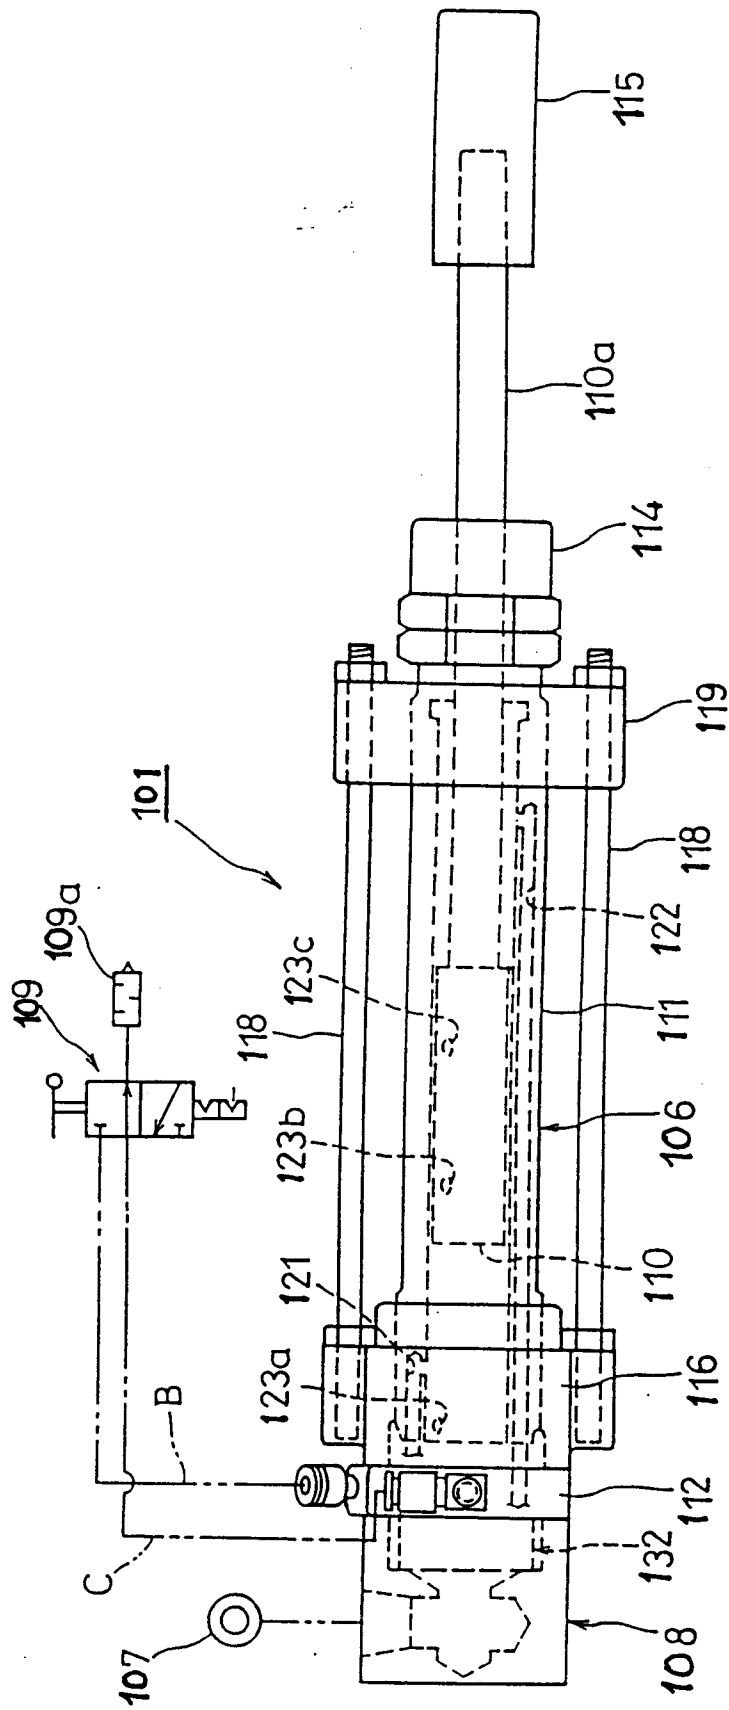


Fig. 11

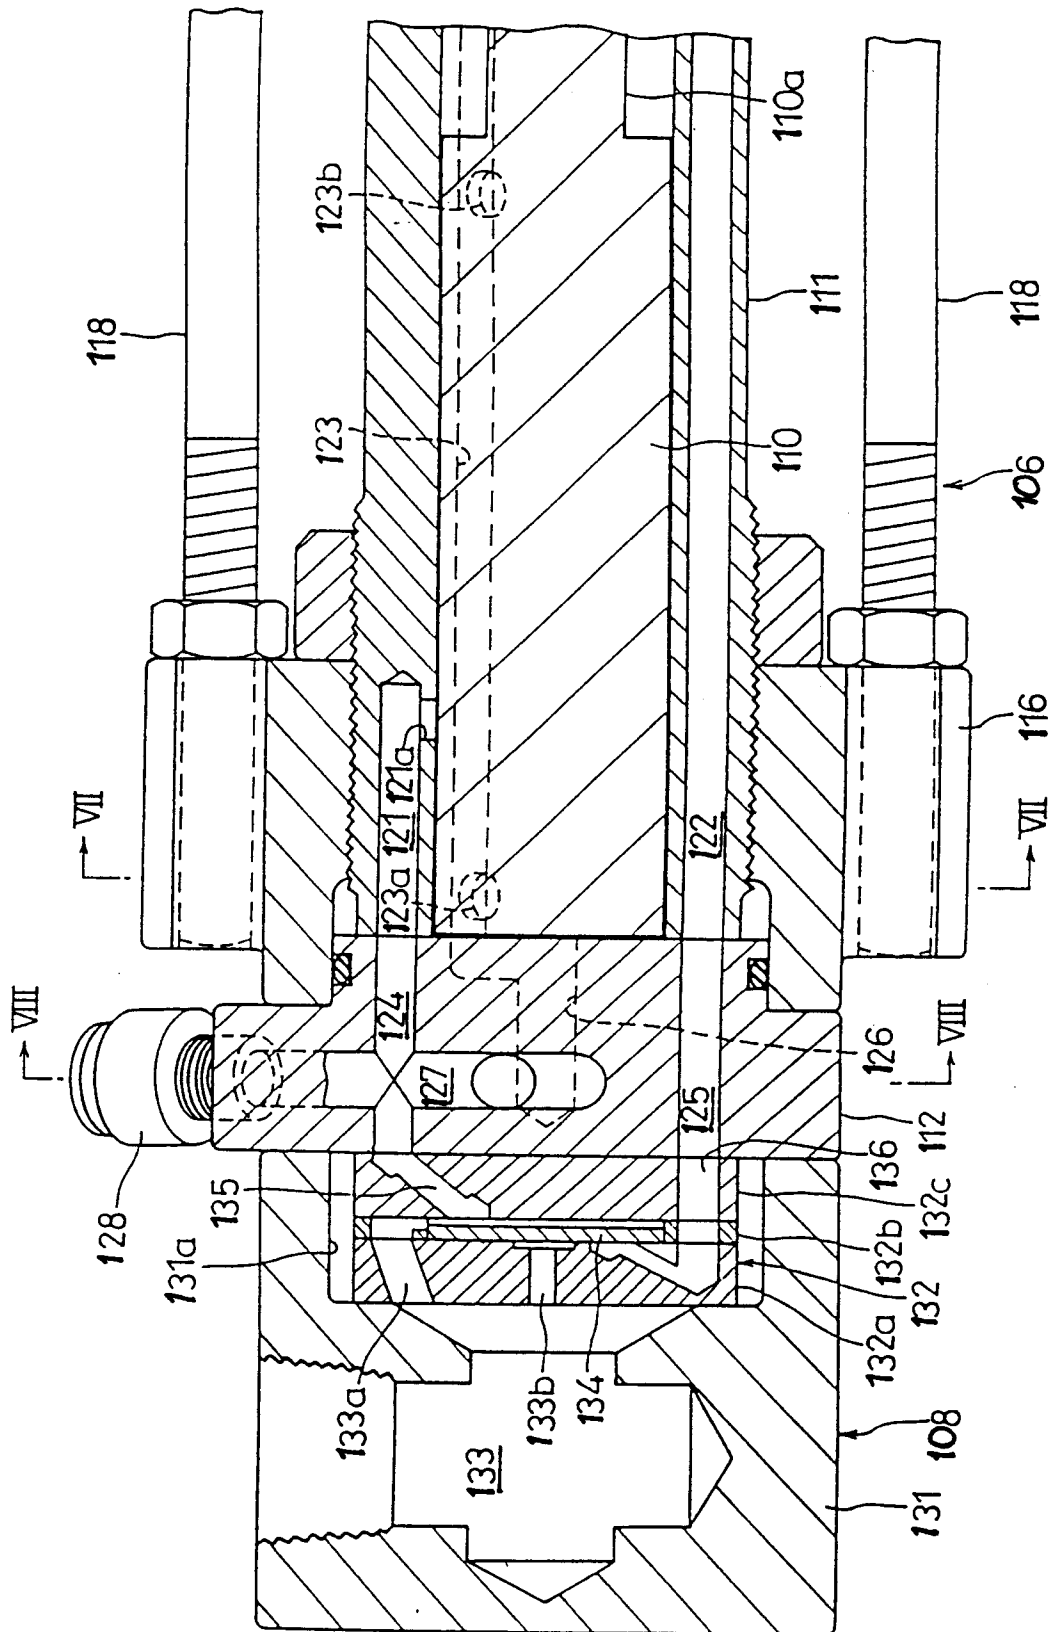


Fig. 12

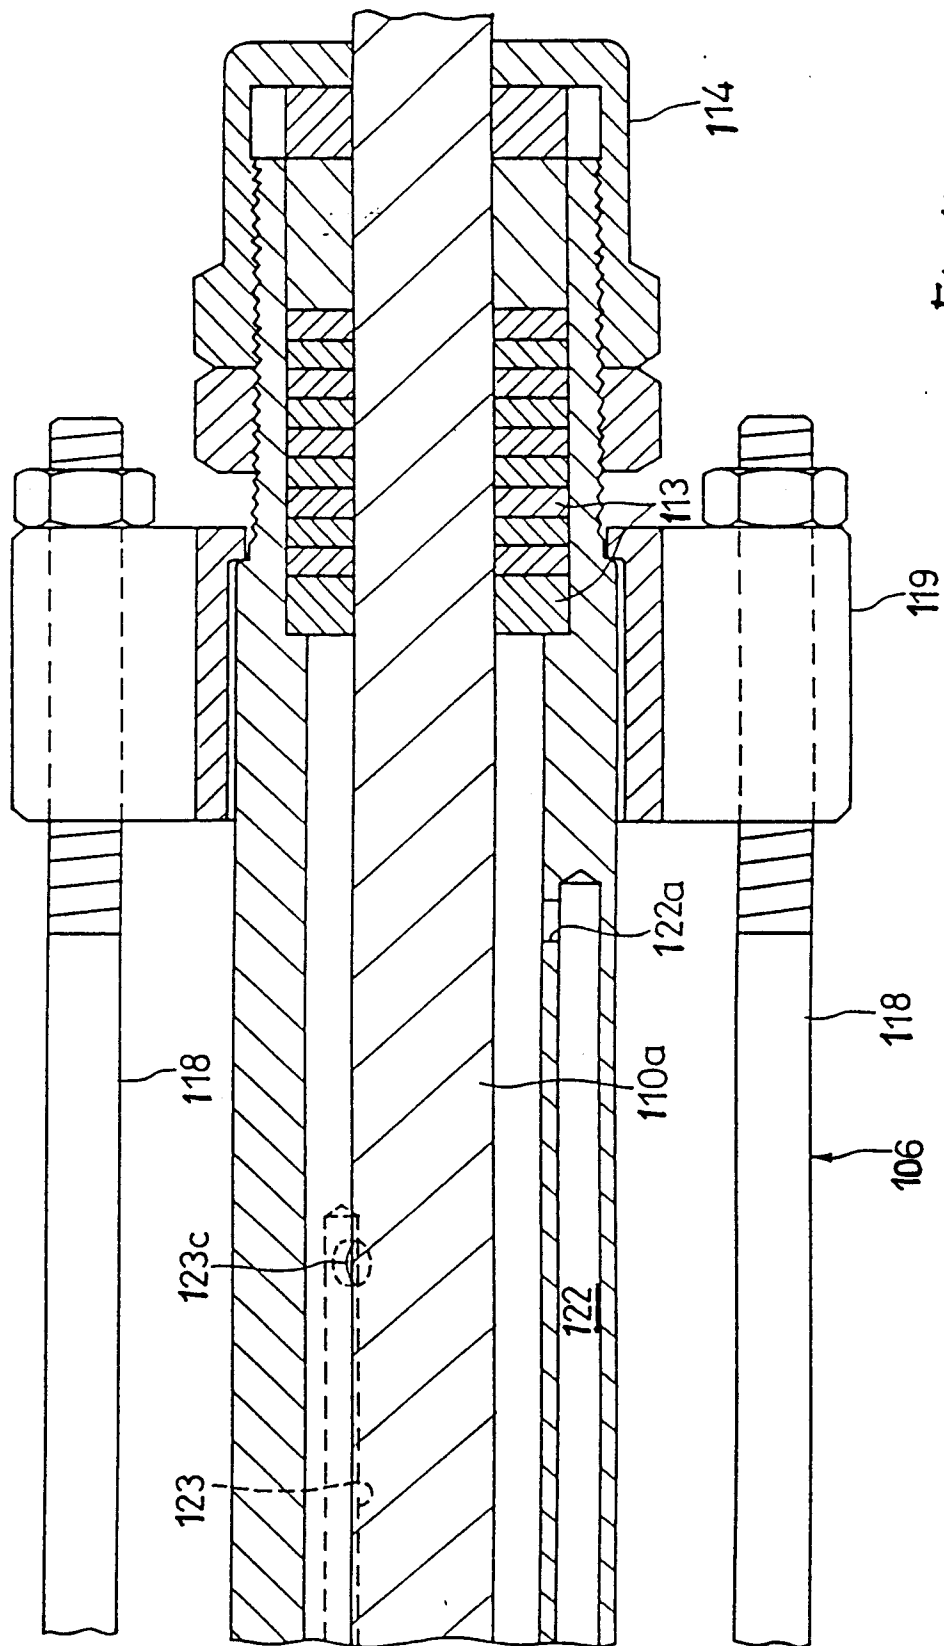
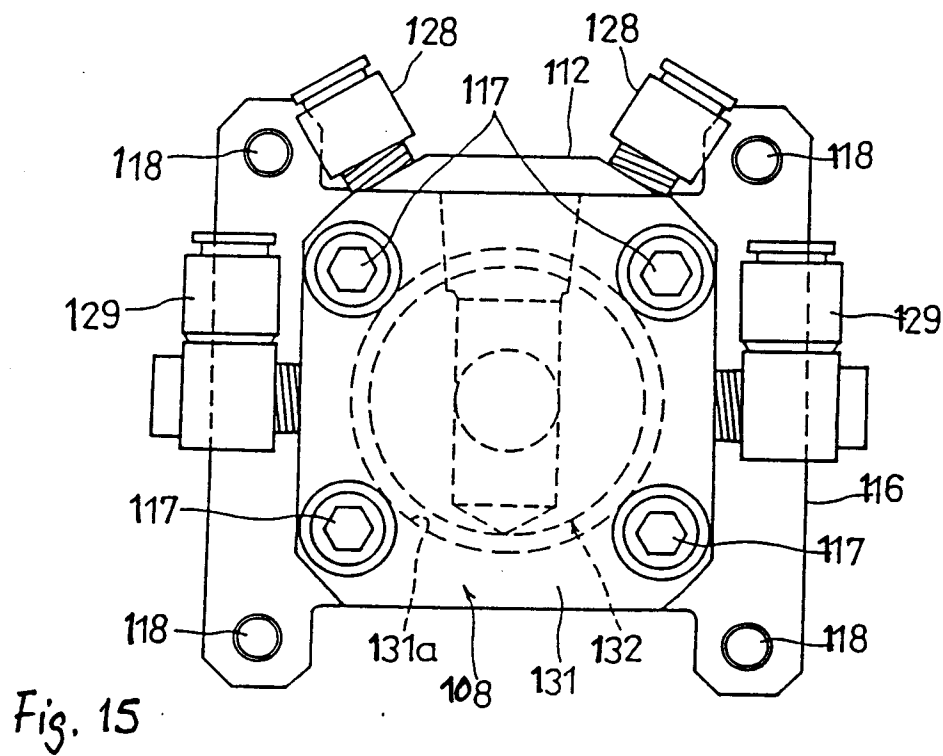
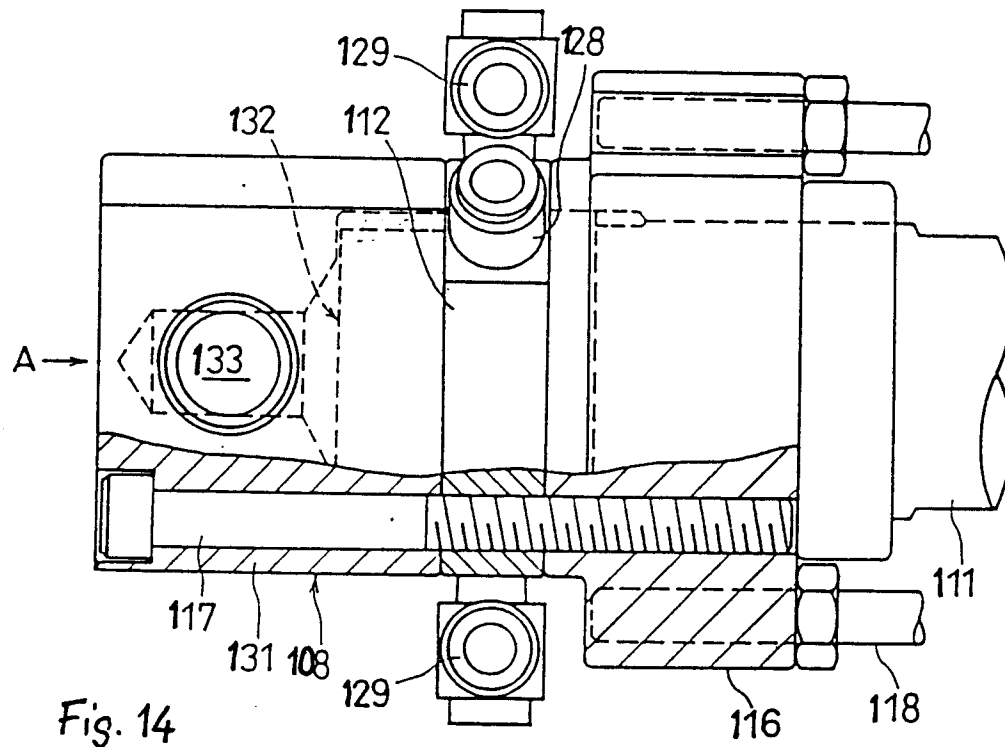


Fig. 13



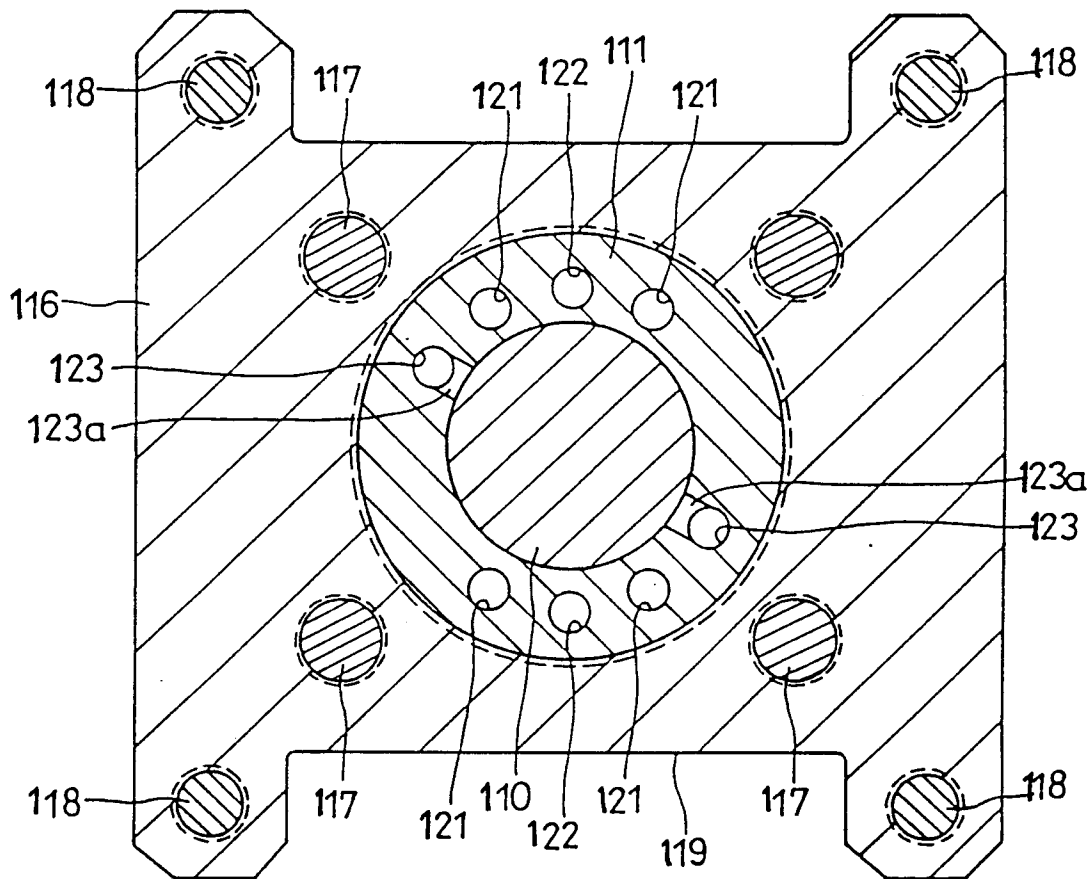


Fig. 16

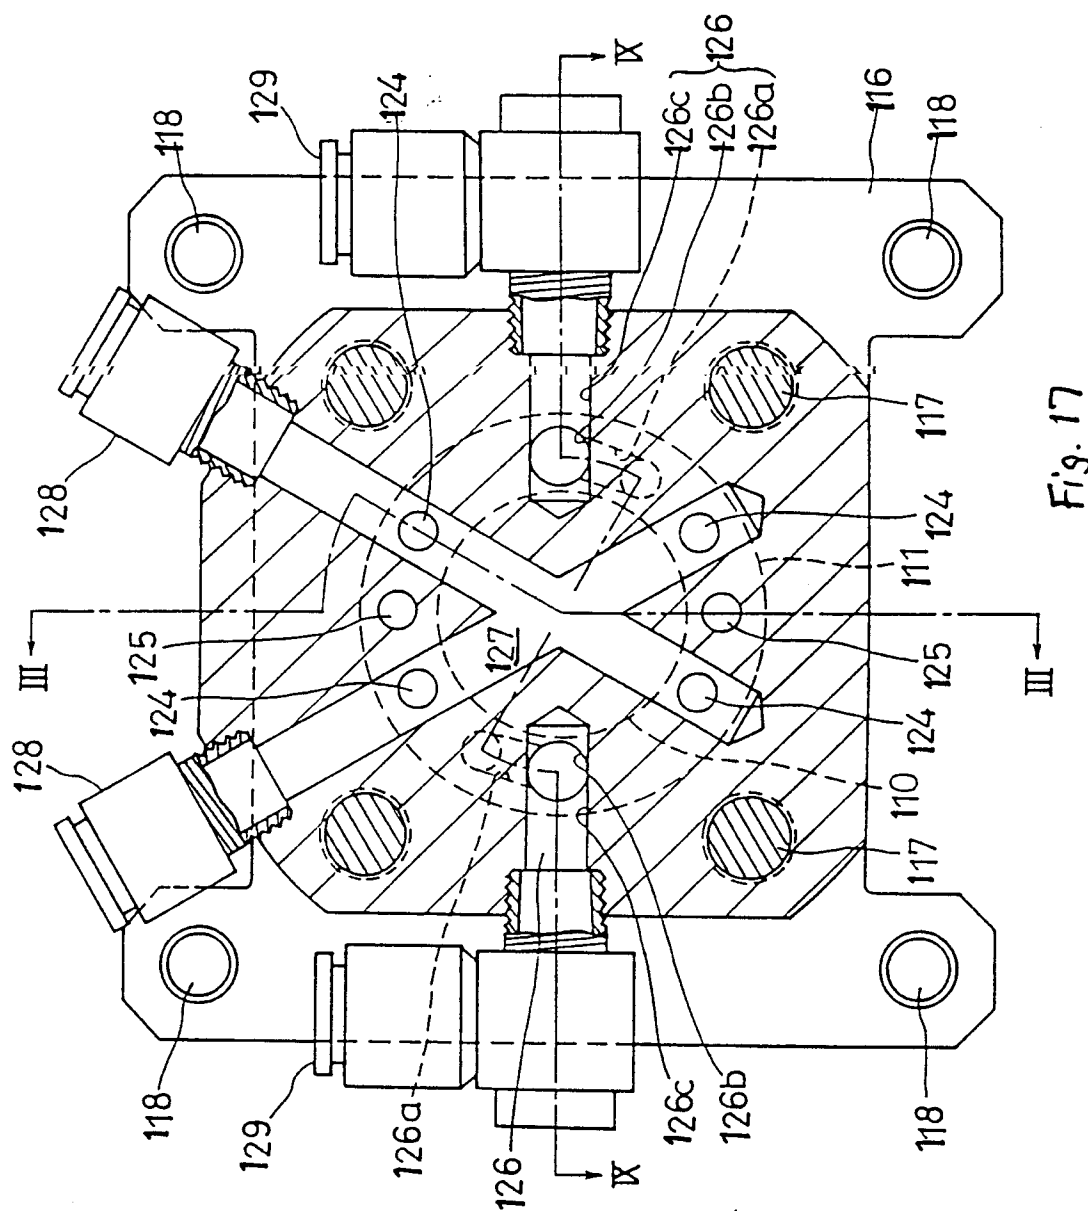


Fig. 17

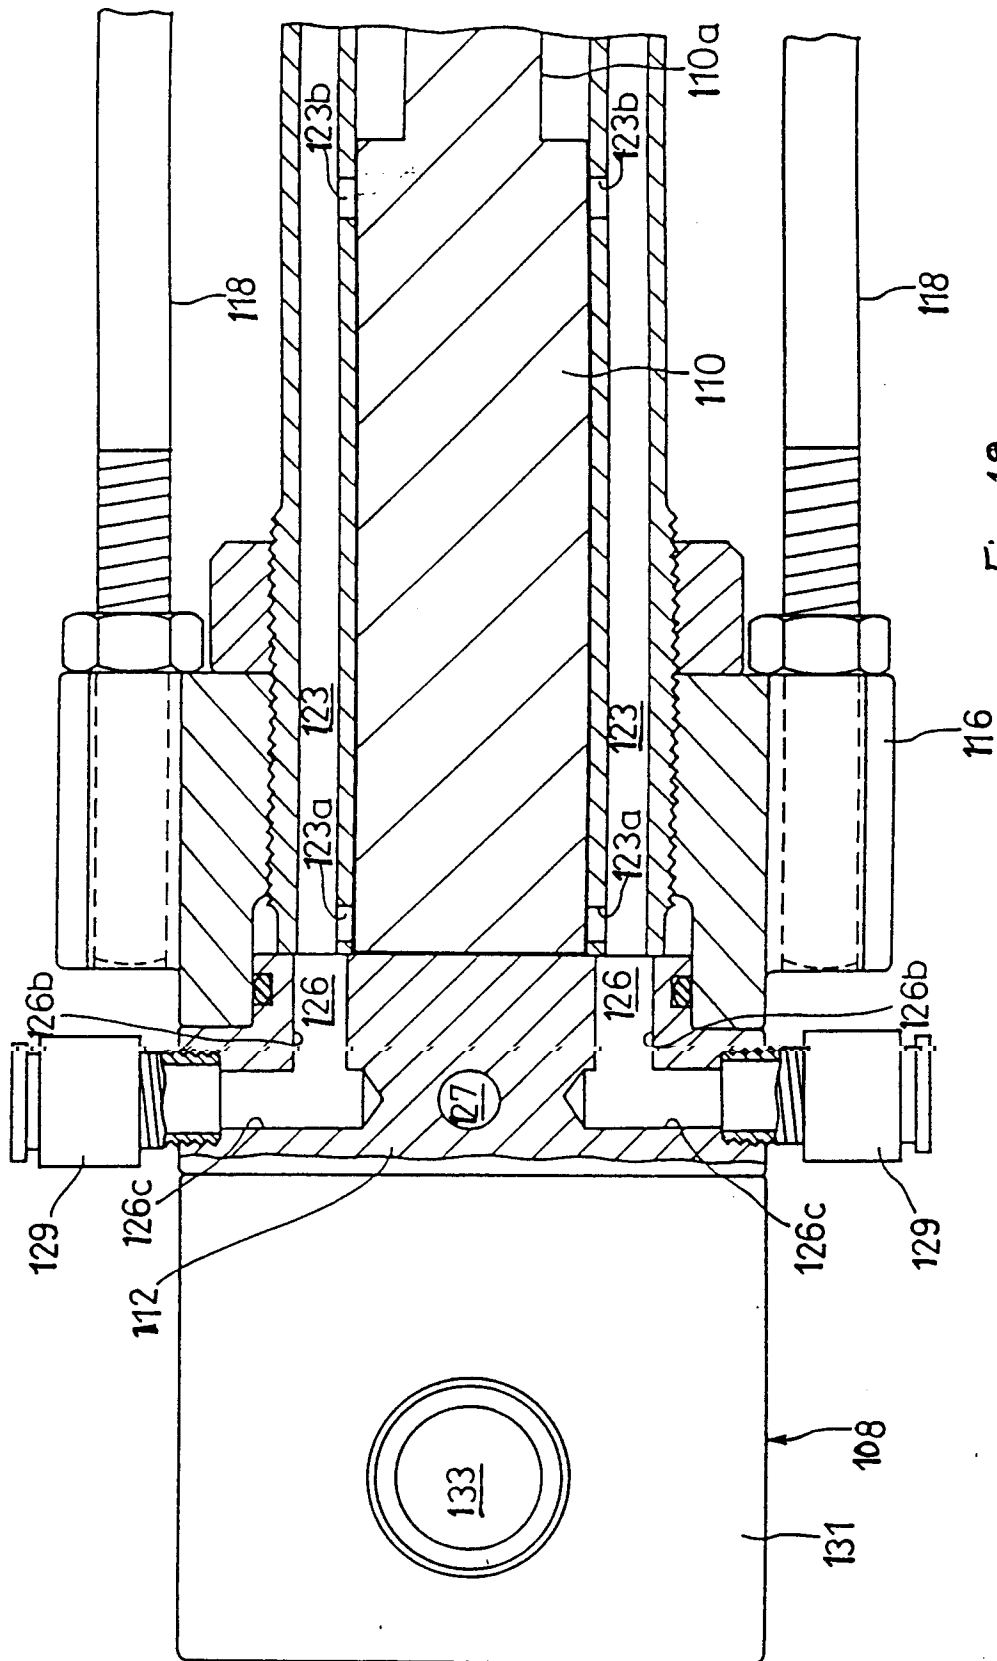


Fig. 18

Fig. 19

