



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 628 366 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art.
158(3) EPC

(21) Application number: **94903069.6**

(51) Int. Cl.⁵: **B22C 3/00**

(22) Date of filing: **27.12.93**

(86) International application number:
PCT/JP93/01892

(87) International publication number:
WO 94/14556 (07.07.94 94/15)

(30) Priority: **28.12.92 JP 348185/92**
12.04.93 JP 84715/93

(43) Date of publication of application:
14.12.94 Bulletin 94/50

(84) Designated Contracting States:
DE FR GB

(71) Applicant: **TETRA CO., LTD.**
147, Hosoki-cho 2-chome
Kasigai-shi, Aichi 486 (JP)

(72) Inventor: **KONDO, Kazumitsu**
9-17, Aza-Nishimukaihata,

Oaza-Haguro
Inuyama-shi, Aichi 484 (JP)
Inventor: **ITO, Keiichi**
67-3, Higashimaruta,
Rokkenya-cho
Kasugai-shi, Aichi 486 (JP)


(74) Representative: **Bannerman, David Gardner et**
al
Withers & Rogers
4 Dyer's Buildings
Holborn
London, EC1N 2JT (GB)

(54) **STOCK SOLUTION OF PARTING COMPOUND FOR GREEN SAND MOLDING.**

(57) A parting compound for green sand molding, which contains hydrocarbon oil as the principal agent and other essential components including a surfactant as a dispersant and an anionic surfactant and/or strongly basic amine as a wettability improver. This compound is used in the form of oil-in-water emulsion by diluting with water. Because of the dilutability with water, this compound can be readily stored and transported in a non-bulky state. Furthermore, the proportion of water can be increased as compared with that of the hydrocarbon oil in the step of applying the compound, thus contributing to resource saving and improvement in the resistance to fire hazard.

EP 0 628 366 A1

Fig. 1

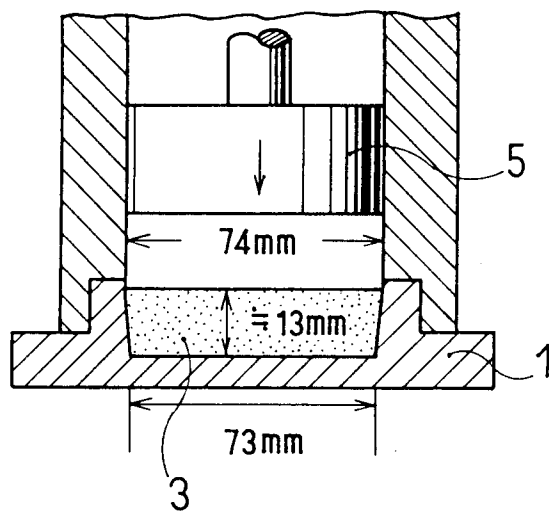

Background of the Invention

This invention relates to a stock solution of a release agent for green sand mold forming containing a hydrocarbon oil as the main component for lubrication and to a release agent for green sand mold forming.

5 A green sand mold which is the most based type of mold stays in the main stream of molds because its advantages are a good forming productivity, inexpensive materials for mold, and applicability for repeated use compared with other molds such as thermosetting mold, self-hardening mold, and gas-hardening mold.

The applicant of this invention provided a release agent for green sand mold forming which is an water-in-oil (W/O) emulsion, or a system of oil phase of hydrocarbon containing dispersed water phase, (refer to 10 the Examined Japanese Patent Publication No. 63-29625).

This type of release agent has, however, the following disadvantages.

(1) Since the emulsion system used is the water-in-oil (W/O) type, the system can not diluted with water. Accordingly, the system needs to be prepared from the production stage to have a composition of 15 application. This requirement causes problems with regard to shipment and storage.

(2) The water content is limited to approximately 60% at the highest from the standpoint of stability of the prepared liquid and releasability of the product. This percentage of water content is not sufficiently high in terms of resource saving and safety against fire.

To cope with these concerns, the release agent may be prepared in the oil-in-water (O/W) emulsion. 20 However, a uniform lubricant film is considered difficult to form on the surface of a mold after being used for forming. The reason of the difficulty is that, since the main component for lubrication is a hydrocarbon oil, the surface of a mold once used for forming by applying a releasing agent, particularly a metallic mold, leaves the oil component on the surface thereof, which remained oil repels a release agent of water-based O/W emulsion when it is applied onto the surface of the metallic mold.

25 An object of this invention is to provide a stock solution of release agent for green sand mold forming, which stock solution is applicable in a form of O/W emulsion and is diluted at the point of application.

Another object of this invention is to provide a stock solution of a release agent for green sand mold forming, which stock solution is applicable in a form of an aqueous solution and does not require the use of hydrocarbon oil.

30

Disclosure of the Invention

(1) A preferable mode of the stock solution of a release agent for green sand mold forming of this invention is a stock solution of a release agent for green sand mold forming containing a hydrocarbon oil 35 as the main component for lubrication, wherein the stock solution contains 1) a surface active agent as the dispersant and 2) an anion surface active agent and/or strong basic amine as the wettability improving agent as essential components besides the hydrocarbon oil, and wherein the stock solution is used upon diluting it with water to prepare an oil-in-water emulsion. That type of composition achieves the first object of this invention and has the advantages and effect described below.

40 As clarified in the Examples given later, an improvement of wettability to the mold under an application of the stock solution of this invention as the release agent prevents the applied release agent from being repelled when it is applied onto the surface of mold even when an oil component is left on the surface of the mold (particularly a metallic mold) which was used for forming in the application of a release agent. Accordingly, a uniform lubricant film is formed on the surface of the mold, and it is 45 possible to apply the release agent in the form of O/W emulsion.

As a result, the stock solution of the release agent of this invention can be diluted with water, which means that the stock solution occupies a smaller capacity during storage and transportation and that the stock solution is easily handled during storage and transportation.

50 In addition, it is possible to increase, to 60% or more, the ratio of water to hydrocarbon oil in the stock solution of the release agent of this invention. This contributes to improvements in resource saving and safety against fire.

(2) Another preferable mode of this invention is a stock solution of a release agent for green sand mold forming containing a strong basic amine and a higher fatty acid and/or ethylene glycol group as the essential components, wherein the stock solution is diluted with water to an adequate viscosity to use in 55 the form of an aqueous solution. This type of composition achieves the second object of this invention and has the advantages and effect described below.

As clarified in the Examples given later, even when an oil component is left on the surface of a mold (particularly a metallic mold) which was used for forming upon application of a release agent, the release

agent as successively applied onto the mold surface is not repelled from the surface. Accordingly, a uniform lubricant film is formed on the surface of the mold, and the release agent is capable of being applied in the form of an aqueous solution. That is presumably caused by improved wettability of the solution of this invention against the mold surface when the solution is used as a release agent.

Therefore, similar to the former case, since it is possible to dilute with water the stock solution of this invention which is used for lubrication and which has the composition described above, the stock solution has the advantages that it requires less space for storage and transportation and is easy to handle for storage and transportation purposes. Furthermore, since the solution of this invention does not contain any hydrocarbon oil at the point of application, the solution of this invention contributes to improvements in resource saving and safety against fire.

Brief Description of the Drawing

Fig. 1 is a schematic drawing illustrating a squeeze forming process which is employed to test the releasability.

The Most Preferable Mode of the Invention

In the following description, the unit of mixing is weight based unless otherwise specified. Thus, "parts" means parts by weight.

A. Stock solution of a release agent for the first invention

(a) The stock solution of a release agent for green sand mold forming of this invention has a basic requirement of containing a hydrocarbon oil as the main component for lubrication. From the point of view of handling, it is preferable that the hydrocarbon oil be one in the petroleum group having a flash point of 55 °C or above. Examples of that type of hydrocarbon oil are lubricant oils such as gear oil, machine oil, bearing oil, or turbine oil, and kerosene and light oil. These oils may be used separately or as a mixture of some of them.

(b) The stock solution of a release agent for green sand mold forming of this invention has a specific requirement of containing a surface active agent as the dispersant and an anionic surface-active agent and/or strong basic amine as the wettability improving agent as essential components besides the hydrocarbon oil.

(1) The surface-active agent as the above-described dispersant may be nonion, anion, cation, or amphi-ion. However, from the viewpoint of stability of oil-in-water (O/W) emulsion during use the nonions listed below are preferable.

(i) Nonion surface-active agent: alkylpolyoxyethylene ether, alkylcarbonyl polyoxyethylene, p-alkylphenyl polyoxyethylene ether, N,N-di(polyoxyethylene)alkane amide, fatty acid polyhydric alcohol ester, fatty acid polyhydric alcohol polyoxyethylene, fatty acid saccharose ester, castor oil ethylene oxide additive.

The composition ratio of the surface-active agent used as the dispersant is in a range of from 1 to 50 parts (more preferably in a range of from 2 to 30 parts) to 100 parts of the hydrocarbon oil. An amount of less than 1 part is hardly sufficient to prepare an O/W emulsion, and an amount of above 50 parts does not increase the effect corresponding to the added amount.

(2) The anion surface-active agent and the strong basic amine used as the wettability improving agent described above may be the following.

(i) Anion surface-active agent: higher fatty acid alkali salt (soap), sodium alkylsulfate, sodium secondary alkylsulfate, sodium alkylbenzene sulfonate, sodium alpha-olefin sulfonate, sodium N-acylamino acid, sodium alkylnaphthalene, sodium N-(2-sulfo)ethyl-N-methyl alkane amide, 2-sulfone diarylamide succinate.

(ii) Strong basic amine: morpholine, piperidine, piperazine, pyrrolidine, pyrrole, imidazole, diethylamine, benzylamine, etc. The composition ratio of the anion surfactant and/or strong basic amine used as the wettability improving agent is in a range of from 1 to 100 parts (more preferably in a range of from 2 to 80 parts) to 100 parts of the hydrocarbon oil. An amount of less than 1 part is hardly sufficient to improve the wettability of release agent against a metallic mold, and the ratio of above 100 parts does not increase the effect corresponding to the added amount.

When an anion surface-active agent is used as the wettability improving agent, the sum of the anion surface active agent as the wettability improving agent and the surface-active agent as the dispersant is in a range of from 2 to 80 parts. When a nonion surface active agent is used as the

above-described surface-active agent as an additional component, the ratio (anion)/(nonion) is in a range of from 1/9 to 9/1 (more preferably in a range of from 4/6 to 8/2).

(3) It is more preferable to add a higher fatty acid and its derivative as an assistant to the release agent listed below, or to add a small amount of water as the emulsion nuclei-forming agent.

5 (i) Examples of the higher fatty acid are stearic acid, palmitic acid, oleic acid, etc. having 8 to 20 carbon atoms. Derivatives may be the ester amide derivatives of these. The mixing ratio of the assistant to the release agent is in a range of from 2 to 40 parts to 100 parts of hydrocarbon oil.

(2) The addition of water is a common practice used to enhance natural emulsification. By adding water to the system, the O/W emulsion nuclei are formed in the release agent
10 composition in advance, which facilitates the emulsification in a succeeding step of water dilution. The amount of water added to the system is in a range of from 1/10 to 1/5 to the total amount of hydrocarbon oil and surface-active agent.

B. Stock solution of a release agent for green sand mold forming for the second invention

(1) The stock solution of a release agent for green sand mold forming of this invention contains a
15 strong basic amine and a higher fatty acid and/or ethylene glycol group as the essential components.

(i) The strong basic amine may be the ones listed in the description of the first invention.

(ii) Examples of the higher fatty acid are oleic acid, linoleic acid, lauric acid, palmitic acid, stearic acid, etc. having 8 to 20 carbon atoms. Derivatives may be ester amide derivative of these.

The mixing ratio of the higher fatty acid to the basic amine of 100 parts is in a range of from
20 10 to 50 parts, and more preferably in a range of from 20 to 40 parts. The higher fatty acid acts as a barrier agent which prevents the contact between the sand and the mold.

(iii) Examples of the ethylene glycol group are ethylene glycol, diethylene glycol, and triethylene glycol.

The mixing ratio of the ethylene glycol group to the basic amine of 100 parts is in a range of from
25 20 to 80 parts, and more preferably in a range of from 30 to 60 parts. The ethylene glycol group provides an effect of lubrication when it is used as aqueous solution.

(2) The stock solution of a release agent preferably contains a surface-active agent at 30% or less of the quantity of higher fatty acid, more preferably at 15% or less, to assist the dispersibility of the higher fatty acid, though the addition of the surface-active agent for this purpose is not essential. The
30 adding surface-active agent may be nonion, anion, cation, or amphi-ion. Particularly, a surface-active agent of the anion group is most preferable in view of improvements in the wettability of an aqueous solution.

(i) Anion surface-active agent may be those listed in the example of the first invention.

(3) Apart from the above-described essential components, when the stock solution is prepared in an
35 aqueous solution, it is preferable to add water to the system as the dissolution-enhancing agent, generally, at a rate of half or less than half of the quantity of the essential components to improve the safety of the stock solution against fire.

C. The above-described components are mixed at a time, and they are agitated in a mixer to prepare the stock solution of the release agent. The storage and shipment of the stock solution are carried out at the
40 as-mixed composition. When the stock solution is applied to a mold surface, the stock solution is diluted with water to a viscosity (normally to a range of from 1 to 30 cp) that is adequate for use.

The capability of the stock solution of the release agent of this invention to be diluted with water allows it to occupy less volume during storage and transportation and allows for easy handling of the solution during storage and transportation.

45 In addition, it is possible to increase, to 60% or more, the ratio of water to hydrocarbon oil in the stock solution of the release agent of this invention at the point of application. Furthermore, the stock solution of the release agent of this invention does not contain any hydrocarbon oil so that the solution contributes to improvements in resource saving and safety against fire.

D. A release agent which was prepared by diluting a stock solution of a release agent according to the
50 procedure described above is applied to a model or the like for the forming of a green mold. The model to which it can be applied is not limited to metallic model (cast iron, copper alloy, aluminum alloy, steel, etc.) and is the one made of arbitrary material such as plastic (epoxy resin, etc.), gypsum, and wood. The method used for applying it is usually that of spraying, while, however, brushing, dipping, and other methods are also applicable.

55 The normal volume of at which the release agent is applied is in the range of from 20 to 400 ml/m².

The forming is successively conducted on the prepared model using various forming methods such as squeezing, jolting, blowing, or by using sand slinger.

⟨Embodiment⟩

The following examples and comparative examples serve to confirm the effect of the invention.

5 A. Preparation of the release agent

(1) Group 1 for the first invention

10 In Examples 1 through 10 and Comparative Example 1, each of the mixtures having the composition listed in Table 1 was manually agitated in a beaker using a glass rod to prepare the stock solution of the release agent.

Then, the dilution water was added to each stock solution of the release agent to make the amount of the composition as listed in Table 1 under manual agitation with a glass rod to prepare the release agent.

15 The Comparative Example 2 was a commercial release agent for a shell mold, which agent had the composition given below.

Composition	
dimethylsilicon 500	30 parts
secondary straight-chained alcohol ethoxylate (HLB 13.5)	8 parts
sodium dodecylbenzene sulfonate (50% conc.)	1 part
water	61 parts

25 (2) Group 2 for the second invention

In Examples A through H and Comparative Examples 3 and 4, each of the mixtures having the composition listed in Table 2 was manually agitated in a beaker using a glass rod to prepare the stock solution of the release agent.

30 Then, the dilution water was added to each stock solution of the release agent to make the amount of the composition as listed in Table 2 under manual agitation with a glass rod to prepare the release agent.

B. Test method

35 Referring to Fig. 1, a metallic model 1 made of cast iron being coated with chromium and having the cross section shown in the figure was employed for each test. A prepared release agent was sprayed onto the inside surface of the model 1 from a distance of 40 cm (for every forming cycle). The spray unit used was one manufactured by Meiji Sha Co. Ltd.; and the operating conditions were: a nozzle opening of 0.13 mm, an air pressure of 392 kPa, and an application time of 1 sec.

40 Immediately after the spraying, a material for green sand mold 3 containing 3.5% of water was charged into the metallic model 1, and squeeze-forming was conducted using a squeeze head 5. The forming conditions were: a green sand charge of 80 g, a squeeze pressure of 980 kPa, and a forming height of approximately 13 mm. The following items were tested for each of the prepared form samples.

45 (1) Releasability (degree of stain)

After the completion of the forming, the metallic model was reversed and was dropped down vertically from a height of 10 cm above the table top to separate the formed green mold from the metallic model 1. The degree of stain of the green sand on the metallic model 1 was visually evaluated. Then, the same metallic model 1 was used for repeated formings, and the sustained releasability (the releasability after the sixth forming) was evaluated along with that after the first forming.

The judging criteria applied in the evaluation were the following.

◎ : very good, ○ : good, △ : some sand particles remained, X : stained with sand

55 (2) Liquid stability

After preparing a release agent for application, it was allowed to stand in a room for 24 hours, and the state of the liquid was observed for the purpose of evaluation.

The applied criteria for evaluation were the following.

⊙ : emulsion did not show any separation for 24 hours and maintained a good dispersion.

○ : no separation was observed after 24 hours.

△ : separation was observed after 24 hours.

5

C. Test result and evaluation

Tables 3 and 4 show the test results of groups 1 and 2, respectively.

10 <Group 1>

(1) Regarding the releasability, each of the Examples in group 1 was superior to the Comparative Example 1 (not containing the wettability improving agent) and to the Comparative Example 2 (commercial release agent for a shell mold), and showed a good sustained releasability as well as initial releasability.

15

The release agent of Example 1 was applied to a commercial casting plant machine for green sand mold forming. The forming of a differential case and other shapes was successfully performed for 30 to 40 shots without the occurrence of defects such as a collapsed mold.

(2) Also in terms of liquid stability, each of the Examples in group 1 showed better performance than Comparative Example 1 as a whole.

20

<Group 2>

(1) As for the releasability, each of the Examples in group 2 was superior to Comparative Examples 2 and 3, and showed a good sustained releasability as well as initial releasability.

25

(2) Also in terms of liquid stability, each of the Examples in group 2 showed performed similarly to Comparative Examples 3 and 4.

30

35

40

45

50

55

TABLE 1

	EXAMPLE										COMPARATIVE EXAMPLE
	1	2	3	4	5	6	7	8	9	10	1
<u>Assistant to release agent</u>											
<u>Oleic acid</u>	1	1	1	0.67	1	1		1	1	1	1
<u>Nonion surface-active agent</u>											
Sorbitan mono-oleate	0.5	0.5	0.5	0.33	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Polyoxyethylene nonylphenol ether : 10 mol	0.5	0.5	0.5	0.33	0.5	0.5	0.5	0.5	0.5	0.5	0.5
<u>Wettability improving agent</u>											
Morpholine	1.5	1.5	1.5	1.0		1	1.5	1.5			
Piperidine											
Pyrrolidine									1.5		
Benzylamine										1.5	
Sodium dodecylbenzene sulfonate : 60%	1.5	1.5	1.5	1.0	2		1.5				
<u>Emulsion nuclei-forming agent</u>											
Water	5	5	5	3.33	5	5	5	5	5	5	
<u>Hydrocarbon oil</u>											
Spindle oil # 60			5					5	5	5	
Fog solvent	25	5	15	13.3	26	27	25	2.15	2.15	2.15	28
Dilution water	65	85	70	80	65	65	65	65	65	65	70

TABLE 2

		EXAMPLE								Comparative EXAMPLE	
		A	B	C	D	E	F	G	H	3	4
5	Oleic acid	2	2	2	2	2	2	2			1.8
	Piperidine			6.8							
10	Pyrrolidine				6.8						
	Morpholine	6.8	8					8	10		
	Benzylamine					8	6.8				
	Sodium doecylbenzene sulfonate : 60%	0.2		0.2	0.2		0.2				
15	Ethylene glycol							3	5		
	Sodium nitrite									20	
	Sodium metasilicate-9-hydrate										4.8
20	Water	5		5	5		5				10
	Water (for dilution)	86	90	86	86	90	85	87	85	80	83.4

25

TABLE 3

		EXAMPLE										COMPARATIVE EXAMPLE	
		1	2	3	4	5	6	7	8	9	10	1	2
30	Liquid stability	⊙	⊙	⊙	⊙	⊙	○	○	△	△	△	○	⊙
	Initial releasability	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	X
35	Sustained releasability	⊙	○	⊙	○	⊙	⊙	○	⊙	⊙	○	X	X

TABLE 4

		EXAMPLE								COMPARATIVE EXAMPLE	
		A	B	C	D	E	F	G	H	1	2
40	Liquid stability	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
45	Initial releasability	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	X	X
	Sustained releasability	⊙	○	⊙	⊙	⊙	⊙	⊙	○	X	X


50 Claims

1. A stock solution of a release agent for green sand mold forming comprising a hydrocarbon oil as a main lubrication component, wherein the stock solution contains a surface-active agent as a dispersant and an anion surface active agent and/or a strong basic amine as a wettability improving agent as essential components other than the hydrocarbon oil, and wherein the stock solution is used in the form of an oil-in-water emulsion by diluting the stock solution with water.

2. A stock solution of a release agent for green sand mold forming of Claim 1, wherein the surface-active agent as the dispersant is a nonion surface-active agent.
- 5 3. A stock solution of a release agent for green sand mold forming of Claim 1, wherein the composition ratio of the surface-active agent as the dispersant is in a range of from 1 to 50 weight parts to 100 weight parts of the hydrocarbon oil.
- 10 4. A stock solution of a release agent for green sand mold forming of Claim 1, wherein the composition ratio of the anion surface-active agent and/or strong basic amine to be used as the wettability improving agent is in a range of from 1 to 100 weight parts to 100 weight parts of the hydrocarbon oil.
- 15 5. A stock solution of a release agent for green sand mold forming of Claim 4, wherein a nonion surface active agent is used as the dispersant, and an anion surface-active agent is used as the wettability improving agent and wherein the sum of the quantity of those surface active-agents is in a range of from 2 to 80 weight parts to 100 weight parts of the hydrocarbon oil and wherein the weight ratio of the anion to the nonion is in a range of from 1/9 to 9/1.
- 20 6. A stock solution of a release agent for green sand mold forming of Claim 1, wherein a higher fatty acid and its derivative as a release agent assistant are added at a total quantity ranging from 2 to 40 weight parts to 100 weight parts of the hydrocarbon oil.
- 25 7. A stock solution of a release agent for green sand mold forming of Claim 1, wherein water as an emulsion nuclei forming agent is added at a weight ratio ranging from 1/10 to 1/5 to the sum of the hydrocarbon oil and the surface active agent.
- 30 8. A release agent for green sand mold forming comprising an oil-in-water emulsion containing a hydrocarbon oil as the main lubrication component, wherein the release agent contains a surface-active agent as a dispersant and an anion surface-active agent and/or a strong basic amine as a wettability improving agent as essential components besides the hydrocarbon oil.
- 35 9. A release agent for green sand mold forming in Claim 8, wherein the surface-active agent as the dispersant is a nonion surface-active agent.
- 40 10. A release agent for green sand mold forming in Claim 8, wherein the composition ratio of the surface-active agent as the dispersant is in a range of from 1 to 50 weight parts to 100 weight parts of the hydrocarbon oil.
- 45 11. A release agent for green sand mold forming in Claim 8, wherein the composition ratio of the anion surface active agent and/or strong basic amine as the wettability improving agent is in a range of from 1 to 100 weight parts to 100 weight parts of the hydrocarbon oil.
- 50 12. A release agent for green sand mold forming in Claim 11, wherein a nonion surface-active agent is used as the dispersant, and an anion surface-active agent is used as the wettability improving agent and wherein the sum of the quantity of those surface-active agents is in a range of from 2 to 80 weight parts to 100 weight parts of the hydrocarbon oil and wherein the weight ratio of the anion to the nonion is in a range of from 1/9 to 9/1.
- 55 13. A release agent for green sand mold forming in Claim 8, wherein a higher fatty acid and its derivative as the release agent assistant are added at a total quantity ranging from 2 to 40 weight parts to 100 weight parts of the hydrocarbon oil.
14. A stock solution of a release agent for green sand mold forming comprising a strong basic amine and a higher fatty acid and/or ethylene glycol group as essential components, wherein the stock solution is used in a form of aqueous solution by diluting with water to an adequate viscosity.
15. A stock solution of a release agent for green sand mold forming in Claim 14, wherein the mixed quantity of the higher fatty acid is in a range of from 10 to 50 weight parts to 100 weight parts of the strong basic amine.

16. A stock solution of a release agent for green sand mold forming in Claim 14, wherein the mixed quantity of the ethylene glycol is in a range of from 20 to 80 weight parts to 100 weight parts of the strong basic amine.
- 5 17. A stock solution of a release agent for green sand mold forming in claim 14, wherein an anion surface-active agent to assist the dispersibility of the higher fatty acid is added at a rate of 30 weight percent or less to the mixed quantity of the higher fatty acid.
- 10 18. A stock solution of a release agent for green sand mold forming in Claim 14, wherein water as the dissolution enhancing agent is added at a rate of half or less than half of the quantity of the essential components.
- 15 19. A release agent for green sand mold forming in a form of aqueous solution containing a strong basic amine and a higher fatty acid and/or ethylene glycol group as essential components.
- 20 20. A release agent for green sand mold forming in Claim 19, wherein the mixed quantity of the higher fatty acid is in a range of from 10 to 50 weight parts to 100 weight parts of the strong basic amine.
21. A release agent for green sand mold forming in Claim 19, wherein the mixed quantity of the ethylene glycol group is in a range of from 20 to 80 weight parts to 100 weight parts of the strong basic amine.
22. A release agent for green sand mold forming in Claim 19, wherein the anion surface-active agent to assist in the dispersibility of the higher fatty acid is added at a rate of 30 weight percent or less to the mixed quantity of the higher fatty acid.

Fig. 1

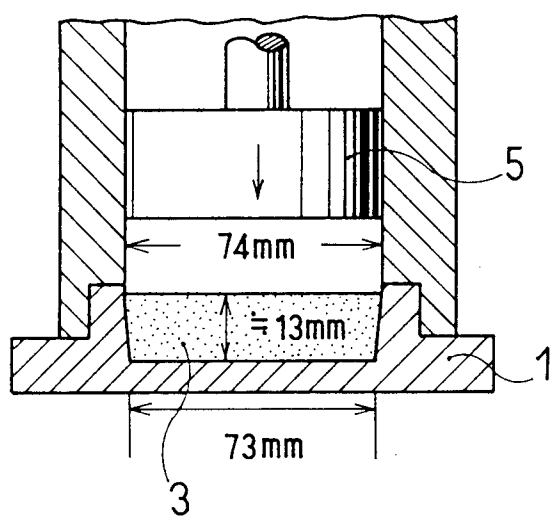

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP93/01892

A. CLASSIFICATION OF SUBJECT MATTER Int. Cl ⁵ B22C3/00 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) Int. Cl ⁵ B22C3/00 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1926 - 1993 Kokai Jitsuyo Shinan Koho 1971 - 1993 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, B, 63-29625 (Tetora K.K.), June 14, 1988 (14. 06. 88), Lines 2 to 9, column 1, (Family: none)	1-22
A	JP, A, 2-235544 (Yushiro Chemical Industry Co., Ltd.), September 18, 1990 (18. 09. 90), Lines 5 to 12, left column, page 1, (Family: none)	1-22
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search March 8, 1994 (08. 03. 94)		Date of mailing of the international search report March 29, 1994 (29. 03. 94)
Name and mailing address of the ISA/ Japanese Patent Office Facsimile No.		Authorized officer Telephone No.