

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 639 458 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.11.1997 Bulletin 1997/46

(51) Int. Cl.⁶: **B41J 2/025**

(21) Application number: **94305467.6**

(22) Date of filing: **25.07.1994**

(54) Improved mounting arrangement for resonator

Montage Anordnung für Resonatoren

Dispositif de montage pour résonateur

(84) Designated Contracting States:
DE FR GB

(30) Priority: **17.08.1993 US 107935**

(43) Date of publication of application:
22.02.1995 Bulletin 1995/08

(73) Proprietor:
Scitex Digital Printing, Inc.
Dayton, Ohio 45420-4099 (US)

(72) Inventors:
• **Vandagriff, Randy D.**
Dayton, Ohio 45424 (US)

• **Katerberg, James A.**
Kettering, Ohio 45429 (US)

(74) Representative:
Hillier, Peter et al
Reginald W. Barker & Co.,
Chancery House,
53-64, Chancery Lane
London, WC2A 1QU (GB)

(56) References cited:
EP-A- 0 097 413 **EP-A- 0 116 786**
US-A- 4 188 635 **US-A- 4 999 647**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 639 458 B1

Description

The present invention relates to continuous ink jet printing systems and, more particularly, to an improved means for constructing a resonant body to provide a synchronous break up of jets in an array in such printing systems.

In continuous ink jet printing, ink is supplied under pressure to a manifold region that distributes the ink to a plurality of orifices, typically arranged in a linear array(s). The ink discharges from the orifices in filaments which break into droplet streams. The approach for printing with these droplet streams is to selectively charge and deflect certain drops from their normal trajectories.

In such continuous ink jet printing systems, graphic reproduction is accomplished by selectively charging and deflecting drops from the drop streams and depositing at least some of the drops on a print receiving medium while other of the drops strike a drop catcher device. In order to provide precise charging and deflecting of the drops, it is important that the drop break-up process produce uniformly sized and timed drops. Drop generators for such printers produce the required drop formation by vibrating the orifices from which the ink emerges.

In the field of ink jet printers, it is desirable from the standpoint of throughput to utilize long arrays of ink jets. For example, U.S. Patent No. 4,999,647 discloses a system for achieving synchronous stimulation across a long array at a low frequency, approximately 50 KHz. The system of that patent uses a rectangular solid print-head body of high acoustic Q material, stainless steel, with vertical slots perpendicular to the array to provide a plurality of approximately identical resonant bodies. The slots are spaced equidistant from each other to provide for uniform vibrational amplitude across the major surface. The slots divide the drop generator into segments so that segment height, in the predominant vibration direction, is greater than the other dimensions of each segment.

As described in the '647 patent, an ink manifold and orifice plate are located at one of the longitudinal ends parallel to the overall greatest length of the resonant body. The orifice plate provides for a continuous stream of jets to form drops at a frequency equivalent to the resonance of the body. The resonant body is excited by piezoelectric strip pairs mechanically attached to the sides so as to expand and contract in the desired direction. The resonator is mounted at the nodal plane by means of solid pins that are pressed into holes in the resonator body.

It has been found that this mounting system works well for a drop generator having a 114.3 mm (4½ inch) array with a resonant frequency near 50 KHz. However, for higher frequencies, on the order of 100 KHz, it is seen that the solid pins induce undesirable resonant modes. These resonant modes can produce unacceptably large variations in break-off phase across the array.

Additionally, the holes in which the pins are mounted can further adversely affect the resonance.

It is seen then that there is a need for an improved mounting arrangement for the resonator, which overcomes the problems associated with the prior art.

This need is met by the resonator mounting arrangement of the present invention, wherein hollow tubes are mounted in slots, eliminating the adverse resonant effects of solid pins and pin retaining holes.

The invention provides a mounting arrangement for a drop generator of an ink jet printing device, the generator having a resonator body and an orifice array having a common longitudinal axis with said body, the generator capable of producing continuous streams of ink drops from at least one said orifice, the mounting arrangement comprising, slots located in the resonant body perpendicular to the longitudinal axis of the array and body; and characterised by, a retaining portion, associated with a nodal plane of the resonator body, located in at least one of the slots; and

at least one mounting member insertable into the retaining portion and said mounting member is at least partially hollow.

Other objects and advantages of the invention will be apparent from the following description, the accompanying drawing and the appended claims.

The invention will now be described by way of example only with reference to the accompanying drawing, in which:

Fig. 1 is a perspective view of a droplet generator assembly illustrating the mounting arrangement of the present invention.

Referring to the drawing, Fig. 1 illustrates a droplet generator 10 which is used to create streams of ink, thus producing droplets used for printing in a continuous ink jet printer. Devices used for controlling these drops in a printer (not shown) are aligned with the droplet generator 10 in a print head device to cooperate for printing purposes.

The droplet generator 10 is typically constructed of a high acoustic Q material, such as stainless steel, in predetermined dimensions for length, height, and width. A through bore means 12 provides an inlet and an outlet for fluid flow into the drop generator 10. Piezoelectric strips 14 are affixed to the drop generator 10 with the longest length of the strips being perpendicular to the longitudinal axis of the drop generator, to encourage vibration, i.e., expansion and contraction, in the vertical direction.

The droplet generator 10 is designed to provide a synchronous array of droplets for printers. The droplet generator includes a resonator/manifold body 16, the plurality of piezoelectric strips 14, an orifice plate (not shown), and a mounting arrangement means including mounting tubes 18. The mounting tubes 18 are used to mount the resonator 16 on a frame (not shown), to provide a means for mechanically aligning the resonator or

drop generator to charge electrodes, and also to rigidly maintain that alignment.

Consequently, the mounting arrangement of the present invention not only provides for isolating the drop generator from the frame to allow the drop generator to resonate properly, but also allows for a rigid mount to provide secure alignment.

In accordance with the present invention, the mounting tubes 18, typically constructed of a steel material, have a diameter of 1.65 to 1.98 mm (0.065 to 0.078 inches), and are hollow. The hollow tubes 18 typically have a wall thickness of 0.25 to 0.38 mm (0.010 inches to 0.015 inches). If the diameter of the mounting tubes is too small, there is less contact area between the tubes and the resonator, so the tubes are more likely to slide. Larger mounting tubes with a diameter of 2.29 mm (0.090 inches) or greater, were found to adversely affect stimulation uniformity. Consequently, the tubes preferably have a diameter of 1.98 mm (0.078 inches) to give sufficient contact area for reasonable resistance to sliding.

The tubes are mounted in a tube receiving means, such as slots already existing in the resonator body, or additional apertures located along the resonator body added for the tube receiving purpose. In a preferred embodiment, the tubes 18 are insertable into vertical slots 20, located perpendicular to the longitudinal axis of the array and body. The width of each slot 20 is typically 1.57 mm (0.062 inches). One or more of the slots 20 may include a widened retaining portion 22, as illustrated at end slots 20a and 20b. The widened retaining portion 22 is located along or near the nodal plane of the resonator, for receiving the tubes 18. The diameter of the retaining portion 22 is typically 1.98 mm (0.078 inches) to provide for a tight press fit between the tubes 18 and the retaining portion 22 of the slots 20. The vertical slots 20, with retaining portions 22, provide a radius, then, for the mounting tubes 18.

In the present invention, interior segments 24a, 24b, and 24c, located between each adjacent pair of slots 20, actually have a larger width dimension than a height dimension. End segments 26a and 26b, located between end slot 20a and one end of the resonator body 16 and end slot 20b and the other end of the resonator body 16, are narrower than the centrally situated interior segments 24a, 24b, and 24c, in order to improve vibrational uniformity across the array. The width of each slot 20 is typically 1.57 mm (0.062 inches). With the narrower slots of the present invention, as compared to slots of the prior art, vibrational uniformity and separation from undesirable resonant modes is improved by increasing the width of the interior segments beyond that of their height. This clearly counters the teachings of the prior art, which required that the width of each segment be less than the height of each segment.

The tubes 18 should be tightly press fit into the retaining portion 22 of the slot 20. The tight fit of the tubing provides electrical contact between the droplet gen-

erator 10 and the tubes 18. The droplet generator 10 may therefore be grounded by means of a grounding point on the frame. Additional rigidity may be achieved by also using a bonding agent such as cyanoacrylate.

Providing hollow mounting tubes eliminates the undesirable high frequency resonances introduced by solid tubes. Additionally, mounting the tubes in the slots 20 results in only negligible changes in the resonant characteristics of the droplet generator 10, as opposed to the more noticeable and less desirable effects resulting from the use of separate holes for receiving mounting tubes 18. Of course, it will be obvious to those skilled in the art that the concept of the hollow tubes can reduce adverse effects, even when the hollow tubes are mounted in additional holes, rather than in the slots.

Although the tubes 18 have been described as being hollow, it is occasionally desirable to secure the tubes into the frame by means of a clamp. With the hollow tubes of the present invention, the clamping force may distort the tube, which, unfortunately, relieves the clamping force. To prevent this, the end portion of the tube at the clamp point may be filled with a solid material, such as a dowel pin, to avoid the tube distortion while allowing for sufficient clamping force, without adverse effects.

The present invention is useful in the field of ink jet printing, and has the advantage of improving the mounting of a resonator by eliminating adverse resonant characteristics.

The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that modifications and variations can be effected within the scope of the appended claims.

Claims

1. A mounting arrangement for a drop generator (10) of an ink jet printing device, the generator having a resonator body (16) and an orifice array having a common longitudinal axis with said body, the generator capable of producing continuous streams of ink drops from at least one said orifice, the mounting arrangement comprising:

slots (20) located in the resonant body perpendicular to the longitudinal axis of the array and body; and characterised by,
a retaining portion (22), associated with a nodal plane of the resonator body, located in at least one of the slots (20); and
at least one mounting member (18) insertable into the retaining portion and said mounting member is at least partially hollow.

2. A mounting arrangement as claimed in claim 1, wherein the at least one mounting member (18) comprises a mounting tube, and a solid material is provided in an end portion of the at least one

mounting tube at a clamp point to prevent distortion of the tube during clamping.

3. A mounting arrangement as claimed in any one preceding claim, wherein the resonator body (16) has at least one interior segment (24a, b, c) defined by adjacent pairs of slots (20), and end segments (26a, b) between each end slot (20a, b) and each end of the resonator body, each interior segment having a greater width, measured parallel to the longitudinal axis of the resonator body, dimension than a height dimension, and each end segment being narrower in width than each interior segment.

Patentansprüche

1. Montageanordnung für einen Tropfengenerator (10) einer Tintenstrahl-Druckvorrichtung, wobei der Generator einen Resonanzkörper (16) und eine Öffnungs-Matrix mit einer gemeinsamen Längsachse mit dem Körper aufweist, wobei der Generator in der Lage ist, kontinuierliche Tintentropfen-Ströme aus wenigstens einer der Öffnungen zu erzeugen, wobei die Montageanordnung umfaßt:
- Schlitze (20), welche in dem Resonanzkörper senkrecht zu der Längsachse der Matrix und des Körpers angeordnet sind; und gekennzeichnet durch einen Halteabschnitt (22), welcher einer Knotenebene des Resonanzkörpers zugeordnet ist, angeordnet in wenigstens einem der Schlitze (20); und wenigstens einem Montageelement (18), welches in den Halteabschnitt einsetzbar ist, und wobei das Montageelement wenigstens teilweise hohl ist.
2. Montageanordnung nach Anspruch 1, bei welcher wenigstens ein Montageelement (18) eine Montageröhre umfaßt, und wobei ein massives Material in einem Endabschnitt der wenigstens einen Montageröhre an einem Klemmpunkt vorgesehen ist, um die Verformung der Röhre während des Klemmens zu verhindern.
3. Montageanordnung nach einem der vorstehenden Ansprüche, bei welcher der Resonatorkörper (16) wenigstens ein inneres Segment (24a, b, c) aufweist, welches durch zwei benachbarte Schlitze (20) definiert ist, und Endsegmente (26a, b) zwischen jedem Endschlitz (20a, b) und jedem Ende des Resonatorkörpers, wobei jedes innere Segment, gemessen parallel zu der Längsachse des Resonatorkörpers, eine größere Breite als eine Höhe aufweist und jedes Endsegment in der Breite schmaler als jedes innere Segment ist.

Revendications

1. Dispositif de montage pour un générateur (10) de gouttelettes d'un dispositif d'impression à jet d'encre, ledit générateur possédant un corps formant résonateur (16) et un ensemble d'orifices présentant un axe longitudinal commun avec ledit corps, le générateur étant capable de produire des jets continus de gouttelettes d'encre à partir d'au moins un orifice, le dispositif de montage comprenant:

des fentes (20) situées dans le corps résonant perpendiculairement à l'axe longitudinal de l'ensemble et du corps; et caractérisé par une partie de retenue (22), associée à un plan nodal du corps formant résonateur, situé dans au moins une des fentes (20); et au moins un élément de montage (18) susceptible d'être inséré dans la partie de retenue et ledit élément de montage étant au moins en partie creux.

2. Dispositif de montage selon la revendication 1, dans lequel au moins un élément de montage (18) comprend un tube de montage, un matériau plein étant prévu dans une partie d'extrémité d'au moins un tube de montage à un point de serrage pour éviter toute distorsion du tube pendant le serrage.
3. Dispositif de montage selon l'une quelconque des revendications précédentes, dans lequel le corps formant résonateur (16) possède au moins un segment interne (24a, b, c) défini par des paires adjacentes de fentes (20), et des segments d'extrémité (26a, b) entre chaque fente d'extrémité (20a, b) et chaque extrémité du corps formant résonateur, chaque segment interne présentant une largeur supérieure, mesurée dans le sens parallèle à l'axe longitudinal du corps formant résonateur, à la hauteur, et chaque segment d'extrémité étant plus étroit en largeur que chaque segment interne.

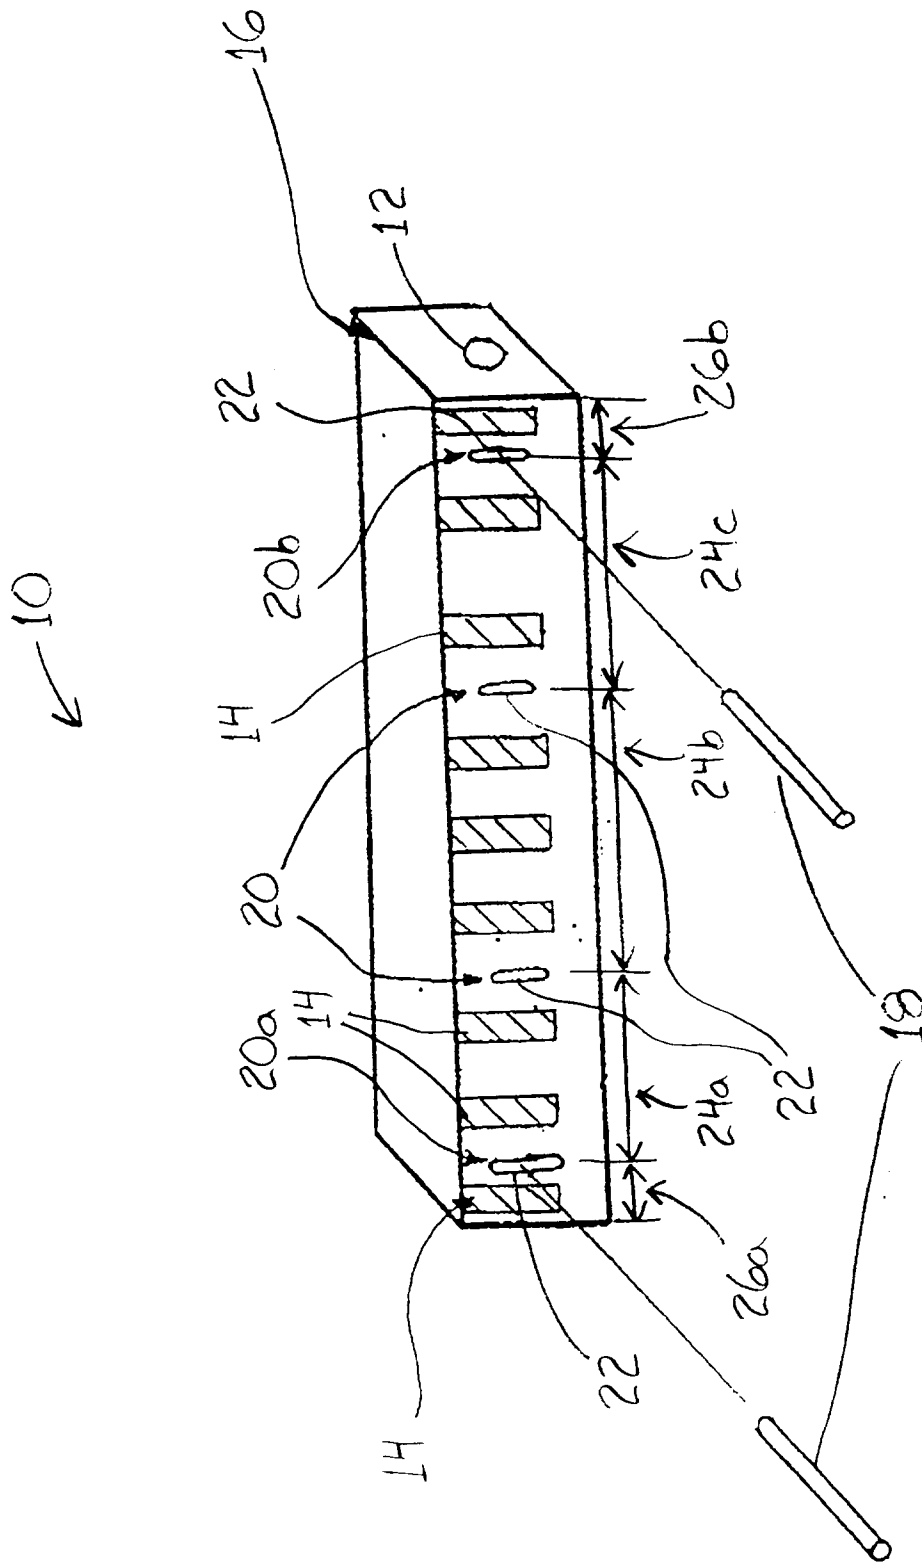


Fig. 1