



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 647 114 B2**

(12) **NEW EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the opposition decision:

14.11.2001 Bulletin 2001/46

(45) Mention of the grant of the patent:

26.03.1997 Bulletin 1997/13

(21) Application number: **93913422.7**

(22) Date of filing: **24.06.1993**

(51) Int Cl.7: **A47L 9/16**

(86) International application number:
PCT/GB93/01325

(87) International publication number:
WO 94/00046 (06.01.1994 Gazette 1994/02)

(54) **CYCLONIC VACUUM CLEANER**

ZYKLONSTAUBSAUGER

ASPIRATEUR A CYCLONE

(84) Designated Contracting States:
**AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL
PT SE**

(30) Priority: **24.06.1992 US 975446**
08.12.1992 GB 9225599

(43) Date of publication of application:
12.04.1995 Bulletin 1995/15

(73) Proprietor: **NOTETRY LIMITED**
Little Somerford, Wiltshire SN15 5JN (GB)

(72) Inventors:
• **DYSON, James**
Chippenham, Wiltshire SN14 6LH (GB)

• **MILLMAN, Allan David**
Toronto, Ontario M4N 1X8 (CA)
• **TSUI, Tat-Chi Anthony**
St. Catherines, Ontario L2N 7R3 (CA)

(74) Representative: **Smith, Gillian Ruth et al**
Dyson Research Limited,
Intellectual Property Department
P.O. Box 2080
Malmesbury, Wiltshire SN16 0SW (GB)

(56) References cited:
EP-A- 0 042 723 **EP-A- 0 134 654**
EP-A- 0 489 565 **DE-A- 1 407 995**

• **PATENT ABSTRACTS OF JAPAN vol. 17, no. 225**
(C-1055)10 May 1993

EP 0 647 114 B2

Description

[0001] The invention relates to a vacuum cleaner, particularly but not exclusively to a dual cyclonic vacuum cleaner.

[0002] A dual cyclonic vacuum cleaner comprises a dirty air inlet communicating with a clean air outlet by means of an airflow path, two cyclones being sequentially arranged in the airflow path. In use, air flowing along the airflow path from the dirty air inlet to the clean air outlet passes through a first of the two cyclones and subsequently through a second of the two cyclones. The first cyclone is a "low efficiency" cyclone designed to remove relatively large particles from the airflow, whilst the second, "high efficiency" cyclone is designed to remove fine dust particles from the airflow. A vacuum cleaner having these features expels air which is dirt- and dust-free to a higher degree than other known vacuum cleaners. Examples of such vacuum cleaners are known from published European application No. 0489565 and European patents Nos. 0042723 and 0134654.

[0003] Another advantage of the dual cyclonic vacuum cleaner is that the dirt-collecting chambers are highly unlikely to become blocked because of the size and rigidity of the chambers. However, it is inevitable that the dirty air inlet, either in the form of a cleaner head or a tool attached to a hose or wand, can become blocked to a greater or lesser extent. Naturally, this reduces the airflow along the airflow path. A single cyclonic vacuum cleaner operates in the same manner but utilises only one cyclone which can become inefficient if the airflow rate through the cyclone is reduced.

[0004] Vacuum cleaner airflow rates are measured at various orifice sizes. The flow rates start at an effective orifice size of 50mm diameter and are reduced to zero at zero diameter. Any flow rate in any given machine therefore has an equivalent "effective orifice" size. In practice, a vacuum cleaner being used through a hose or wand typically has an effective orifice size of 32mm diameter if it is fully open. A vacuum cleaner operating on a carpet through a cleaner head has an effective orifice of about 19mm diameter. A crevice tool being used on the end of a wand handle may have an effective orifice of about 15mm diameter. Thus it can be seen that, in its normal range of use, a vacuum cleaner has to deal with airflows equivalent to those obtained through orifices of from 15mm to 32mm diameter.

[0005] At all of these flow rates achieved in normal use, the second cyclone of a dual cyclonic vacuum cleaner maintains a good level of fine dust separation. However, it has been found that the separation efficiency of the second cyclone is reduced if the airflow rate through the second cyclone is reduced to below that of an effective orifice size of 13mm. This can be caused by a number of things; for example, a blockage occurring at any point along the airflow path, or by the user putting a hand or other object over the air inlet. Furthermore, the efficiency of the second cyclone is reduced if

the flow is interrupted in a pulsing manner or if the suction through the cleaner head causes the cleaner head to seal itself partially or completely against the surface to be cleaned. A similar problem arises when the airflow through the cyclone of a single cyclonic vacuum cleaner is reduced.

[0006] Depending upon the specific design of the cyclonic vacuum cleaner, the air discharged from a cyclonic vacuum cleaner may be substantially dust free and may in fact be cleaner than the air which is emitted from a vacuum cleaner which utilises a bag or other filter media. However, under certain operating conditions, cyclonic vacuum cleaners may emit larger than desired quantities of fine particulate matter. For example, if the vacuum cleaner picks up a particularly heavy concentration of fine particulate matter, part of the fine particulate matter may pass through the two cyclones and be exhausted from the second cyclone. This may result in the deposition in a room of a layer of fine dust particles. Further, the filtered exhaust air may be passed by the motor housing to cool the motor. If the exhaust air occasionally includes more than desired quantities of fine particulate matter, the motor may experience a build up of fine particulate matter which could decrease the life expectancy of the motor.

[0007] Document DE-A-1 503 601 discloses a cyclonic vacuum cleaner having valves for admitting additional air directly into the cyclone in the event that an excessive amount of entrained material is contained within the incoming air.

[0008] It is therefore an object of the invention to maintain a high standard of dust separation in the second cyclone even when the airflow in the vacuum cleaner falls to a rate below that of an effective orifice size of 13mm. It is a further object of the present invention to provide a cyclonic vacuum cleaner which maintains good separation standards at all airflow rates through the dirty air inlet.

[0009] The invention provides a vacuum cleaner according to claim 1. The bleed valve operates so as to maintain the airflow rate in the cyclone and thus retain efficient dust separation therein.

[0010] Advantageously, the at least one bleed valve is arranged in the wall of the air flow path upstream of the cyclone.

[0011] Preferably, two cyclones are arranged sequentially in the airflow path, the bleed valve or valves being arranged between the two cyclones. This arrangement means that the efficiency of the second cyclone is maintained.

[0012] Advantageously, a plurality of bleed valves are provided; preferably three. This arrangement allows the bled air to be introduced to the airflow in the vacuum cleaner in increments so that the airflow from the dirty air inlet is not substantially reduced in a single step. Any reduction that occurs is made in increments with the incremental introduction of bled air.

[0013] It is preferred that all the bleed valves are sub-

stantially identical to one another; i.e. they have the same effective area and are designed to open at the same pressure conditions. This gives a satisfactory gradual transfer from the state of no bled air being introduced to the cyclone to the state of all of the air introduced to the cyclone being bled. It is important that this transfer be gradual to allow cleaning to be maintained either, through a tool at the end of the wand or through the cleaning head, even to the point at which the last valve is actuated, which is a very blocked condition.

[0014] It is preferred that the or each bleed valve is designed to open when the pressure in the airflow path is that produced by an airflow equivalent to an effective orifice of between 10mm and 15mm diameter or less. More preferably, the or each bleed valve is designed to open when the pressure in the airflow path is that produced by an airflow equivalent to an effective orifice of 13mm diameter or less. This ensures that an airflow equivalent to an effective orifice of 13mm diameter is maintained in the cyclone and thus that the separation efficiency is maintained.

[0015] It is advantageous if the or each bleed valve is spring-loaded and if the effective area, or total effective area, of the or each bleed valve is between 120mm² and 150mm², preferably substantially 132mm², i.e. the area of an effective orifice of 13mm diameter.

[0016] It should be noted that, by maintaining an airflow of at least an effective orifice diameter of 13mm diameter, an airflow sufficient to cool the motor of the cleaner is ensured. This means that the risk of the motor overheating is minimised. Furthermore, the maintenance of the airflow to achieve satisfactory separation means that there is no substantial risk of damage to the motor.

[0017] In an alternative embodiment, the vacuum cleaner may also include adjustment means for varying the size of a single bleed valve for controlling the flow of bled air into the second cyclone, so that an increased flow of bled air can be admitted when the vacuum cleaner is used, for example, to vacuum a large concentration of fine particulates. The adjustment means may advantageously comprise a movably mounted door. The door may be moveable between a first position in which it restricts the flow of bled air through the bleed valve and a second position in which the door restricts the flow of bled air through the bleed valve to a lesser extent than when the door is in the first position. Means mounting the door for a decrease in pressure in the cyclone to move the door from the said first position towards the second position may also be provided. Furthermore, means biasing the door into the first position, whereby the door will move towards the second position as the pressure in the cyclone decreases thereby admitting an increased flow of bled air into the cyclone may also be provided.

[0018] In a further alternative embodiment, the vacuum cleaner may include sensing means coupled to the outlet for sensing the amount of particulates in the ex-

hausted air and for producing an output indicative thereof. The vacuum cleaner may also have control means coupled between the sensing means and the door, the control means being responsive to the output signal for operating the door to permit an increased flow of bled air into the cyclone when an increased amount of particulates is detected in the exhaust.

[0019] In accordance with this invention, a method according to claim 17 is also provided.

[0020] It has been found that the provision of bled air to the second cyclone reduces the particulate emission in the exhaust from the second cyclone. Without being limited by theory, it is believed that the bled air probably reduces the disturbance to the cyclone action caused by heavy concentrations of fine particulates, or by disturbing pulsations which occur when sealed or partially sealed suction begins and ends, or other disturbances. Accordingly, even when the vacuum cleaner is used to vacuum a large concentration of particulates, or engages the surface to be cleaned, causing a partial or fully sealed suction condition, the particulate emission from the vacuum cleaner may be greatly reduced.

[0021] An embodiment of the invention will now be described with reference to the accompanying drawings, wherein:

Figure 1a is a side view of a first embodiment of a dual cyclonic vacuum cleaner incorporating the invention in a first position;

Figure 1b is a side view of the cleaner of Figure 1a shown in an alternative position;

Figure 2 is a perspective view of the upper portion of the cyclone assembly forming part of the cleaner shown in Figures 1a and 1b;

Figure 3 is an enlarged sectional view through a bleed valve forming part of the invention;

Figure 4 is a perspective view of the housing of a second embodiment of a dual cyclonic vacuum cleaner incorporating the invention;

Figure 5 is a cross sectional view through a third embodiment; and

Figure 6 is a schematic diagram relating to a fourth embodiment.

[0022] A typical dual cyclonic vacuum cleaner is shown in Figure 1a in its non-operational position. The vacuum cleaner comprises a main body 10 incorporating a cleaning head 12 and a handle 14 which can be released for use in the manner of a wand. Various tools and attachments for the wand may be provided but are not shown. The means by which the handle 14 is released and the means by which the airflow is directed from either the handle 14 or the cleaning head 12 do not form part of the present invention and are described in other patents and applications. They will not be described further here.

[0023] The main body 10 incorporates a first cyclone 16 and a second cyclone 18. The first cyclone is a "low

efficiency" cyclone designed to remove relatively large particles from the air flowing therethrough. The second cyclone 18 is designed as a "high efficiency" cyclone for removing fine dust particles from the airflow. In use, when the vacuum cleaner is in the position shown in Figure 1a, the "cylinder" mode, the dirty air inlet is formed by the nozzle in the handle 14 which is removed and used in the manner of a wand. The airflow is directed from this dirty air inlet to the first, low efficiency cyclone, subsequently to the second, high efficiency cyclone and then expelled to atmosphere via an exit (not shown). Normally, the airflow would be directed past the motor to give a cooling effect before being expelled. When the cleaner is to be used in the "upright" mode as shown in Figure 1b, the dirty air inlet is formed by the cleaning head 12 and the airflow is directed from there to the first cyclone and then to the clean air exit via the second cyclone.

[0024] As mentioned in the introduction, it has been found that, when a blockage occurs in the dirty air inlet 12, 14 to such an extent that the airflow through the second cyclone 18 falls to an effective orifice of 13mm diameter or less, then the dust separation efficiency of the second cyclone decreases. Bleed valves 20 are therefore positioned in the wall of the airflow passage between the exit from the first cyclone and the entry to the second cyclone. The location of the bleed valves 20 is shown in Figure 2. The airflow enters the first cyclone 16 via the entry port 22 and exits the first cyclone via the mesh screen 24. The air passes upward to the entry port 26 to the second cyclone 18 and it is immediately before this entry port 26 that the bleed valves 20 are located.

[0025] Three bleed valves 20 are located in the wall of the airflow path. Each bleed valve 20 is shown in greatly enlarged cross-section in Figure 3. Each valve 20 comprises a valve body 30 to which is attached a rubber washer 32 by means of a fixing disk 34. The fixing disk 34 passes through an aperture in the rubber washer 32 and engages with an aperture 36 in the valve body. Alternative fixing means can, of course, be used. Acting between the airflow passage wall 38 and a flange 40 located on the valve body 30, is an air bleed valve spring 42. The spring 42 presses the flange 40 away from the airflow passage wall 38 so that the rubber washer 32 is maintained in sealing contact with the edges of an aperture in the airflow passage wall 38. This situation prevails whilst the pressure inside the airflow passage (i.e. to the right of the airflow passage wall as viewed in Figure 3) combined with the action of the spring 42 is sufficient to maintain the valve body in the position shown in Figure 3. However, if the pressure in the airflow passage falls sufficiently, then the pressure acting on the valve body outside the airflow passage becomes sufficient to open the valve 20 by moving the valve body against the action of the spring 42 towards the right as shown in Figure 3 and thereby opening the valve 20. Air from outside the airflow passage (i.e. the atmosphere) is

thus bled into the airflow passage

[0026] It has been found that the provision of three substantially identical bleed valves 20 in the airflow passage wall 38 immediately before the second cyclone 18 allows a gradual bleeding of atmospheric air into the airflow passage. When the pressure in the airflow passage drops below the threshold pressure, a first bleed valve 20 opens and the pressure in the airflow passage is thereby increased, although it will be appreciated that the increased pressure will still be less than the ambient pressure due to the suction action of the motor. If the airflow from the dirty air inlet continues to fall, then a second bleed valve will open when the combined pressure of the airflow from the dirty air inlet and the bled air from the first open valve reaches the threshold pressure of the remaining valves. Again, the combined pressure is then increased and the third valve will only be actuated when the combined pressure of the airflow from the dirty air inlet and the two open valves falls to the threshold pressure thus allowing the third valve to open. In this way, an incremental increase in the bled air is achieved. This ensures that the cleaning effect at the dirty air inlet is maintained even though air is bled into the second cyclone. Furthermore, the airflow is maintained in the second cyclone and the air passing therethrough will be efficiently separated from dust particles. The air from the second cyclone can also be passed across the motor surface to provide a cooling effect

[0027] It has been found advantageous if each of the three bleed valves has the same effective area. Ideally, the combined effective area of the three valves should be equivalent to the area of the effective orifice of the airflow at which the bleed valves are to be actuated. Thus, if the bleed valves are to be actuated at an airflow of an effective orifice of 13mm diameter, then the combined total effective area of the valves should total 132mm². If, however, the valves are to be actuated at an airflow equivalent to an effective orifice of 14mm, then the bleed valves should have an effective combined area of 154mm². This effective area should be equally divided between the number of bleed valves present; if three bleed valves are present then each should have an effective area of 51mm² but if four bleed valves are present, then each should have an effective area of 38mm². It should be noted that the effective and actual areas of each bleed valve are not the same. The actual area of the bleed valve is restricted by the presence of the valve body near the valve aperture. Thus the effective area of the bleed valve can be considerably less than the actual area of the aperture.

[0028] It is within this scope of this invention for any number of bleed valves to be positioned in the wall of the airflow path immediately before the inlet to the second cyclone. Clearly, the greater the number of bleed valves present, the smaller, the incremental steps are in which the bled air is introduced into the airflow path. This provides for an ever increasingly gradual introduction of bled air, but also an ever increasing cost and

maintenance burden. The preferred number of bleed valves is therefore three. Also, the risk of the bleed valves themselves becoming blocked by the dirt and fluff particles introduced into the vacuum cleaner via the dirty air inlet is very small because the air passing the bleed valves has already passed through the first cyclone and all of the larger particles entrained with the dirty air have been removed.

[0029] As will be appreciated, varying amounts of bled air may be required depending upon the particular conditions in which the vacuum cleaner is being operated. For example, if the vacuum cleaner is being operated in an area where there is a small concentration of particulates to be picked up, or on a surface or in an area where partial or full sealed suction will not occur, then less bled air, or alternatively no bled air, may be required. To this end, as shown in Figs. 4, 5 and 6, the vacuum cleaner may also include means for varying the size of the bleed valve 76 and, accordingly, to control the volume of bled air passing into the second cyclone.

[0030] In the embodiment shown in Fig. 4, outer cyclone casing 70 is provided with a door 78. Door 78 is provided with a handle 80 at one end thereof. Door 78 is movably mounted on the outer cyclone casing 70 by means of a pivot 82 and is moveable between a closed position and an open position. Door 78 is sized so that when in the closed position, it completely covers bleed valve 76 and therefore prevents any bled air from entering through the bleed valve 76 into the second cyclone 18.

[0031] As shown in Fig. 4, door 78 is in a partially open position. During vacuuming, the operator may manually adjust the door 78 from a fully closed position to a partially opened position or from a partially opened position to a fully opened position so that an increased flow of bleed air can be admitted when the vacuum cleaner is used to vacuum a large concentration of fine particulates. Alternatively, the operator may elect to leave door 78 in the fully open position for most vacuuming purposes.

[0032] The bleed valve 76 may also be provided with automatic means for opening door 78 as the pressure in second cyclone 18 decreases. Such a decrease in pressure could occur when a condition of full or partially sealed suction occurs. An example of such an automatic means is shown in the alternative preferred embodiment which is shown in Fig. 5. Once again, bleed valve 76 is provided with a door 78 which, when in the closed position, fully covers bleed valve 76 thus preventing the entry of bled air into the second cyclone 18 during normal vacuuming conditions. Means biasing the door 78 into the closed position are also provided. Accordingly, the door will move towards the open position as the pressure in second cyclone 18 decreases thereby admitting an increased flow of bled air into the second cyclone as required.

[0033] As shown in Fig. 5, member 86 having a first end 88, a second end 90 and an arm 92 extending be-

tween first end 88 and second end 90 may be provided. First end 88 is fixedly attached to the inner surface 68 of outer cyclone casing 70. Second end 90 is fixedly attached to rear surface 84 of door 78. Arm 92 may be made from any material which will bias door 78 into the closed position which is shown in Fig. 5. For example, arm 92 may be made from a resilient material or may incorporate spring means, such as a leaf spring.

[0034] In operation, as the pressure inside second cyclone 18 decreases, the vacuum pressure within the air flow passage 62 will decrease to such a point that the inward force on the door 78 will become greater than the outward force on door 78 which is exerted by member 86 thus causing door 78 to deflect inwards away from the dosed position and thus permitting bled air into the second cyclone. As the pressure inside the second cyclone increases (whilst remaining below the ambient pressure), at one point the vacuum pressure will increase sufficiently such that the outward force from member 86 will become greater than the vacuum pressure thus causing door 78 to move to the closed position.

[0035] In a further alternative embodiment, door 78 may be automatically controlled to allow bled air into second cyclone 18 in response to the amount of particulates which are exhausted from the air exit port of the second cyclone. As shown in Fig. 6, a sensor 94 may be provided on air exit shaft 54. Sensor 94 senses the amount of particulates in the exhaust from the second cyclone. To this end, sensor 94 may be provided with a light source 96 (e.g. a light emitting diode) and a detector 98 which can be a photodiode. As the amount of particulates in shaft 54 increases, part of the light originating from light source 96 is reflected back by the particulates and picked up by the photodiode 98. The signal from photodiode 98 is processed and amplified to produce an output signal 100 which is indicative of the amount of particulates in the exhaust from the second cyclone. Output signal 100 is transmitted to door actuator 102. Door actuator 102 may be any suitable means which can accept output signal 100 and move door 78 a predetermined amount in response to the specific output signal 100 which is received. Door actuator 102 may be connected to a 100-volt electrical source or to any other conveniently available power supply. Shaft 104 is provided so as to connect the door actuator to door 78. As shown in Fig. 6, shaft 104 is connected at one end to door actuator 102, and at the other end, to the rear surface 84 of door 78.

[0036] In operation, as the level of particulate emissions from the second cyclone increases, the level of particulates in shaft 54 also increases. This results in the increased reflection of light from light source 96 which is picked up by detector 98 and results in a specific output signal 100. Output signal 100 is indicative of the level of particulates in the exhaust air. This signal is transmitted to door actuator 102 which, in response to the output signal, causes door 78 to move from a first

position in which the door restricts the flow of bled air through bleed valve 76 to a second position in which the door restricts the flow of bled air through bleed valve 76 to a lesser extent thus permitting an increased flow of bled air into the second cyclone in response to the increased amount of particulates detected in the exhaust air.

[0037] If a more simplistic system is utilised, then sensor 94 may produce only one output signal. In response to this output signal, door actuator 102 will cause door 78 to move from the dosed position to a fully opened position when a level of particulate emission, above a predetermined limit, is detected in shaft 54. Alternatively, in a more complex system, sensor 94 may provide an output signal which varies linearly or in a different desired relationship with the level of particulates in shaft 54. As the level of particulates in shaft 54 increases above a predetermined level, a variable output signal is produced. In response to the signal, door actuator 102 causes door 78 to move from the closed position to a partially open position or from a partially open position to a more fully open position in response to the level of particulates in shaft 54. Thus as an increased or decreased amount of particulate emission is detected in shaft 54, door 78 may be opened or closed a predetermined amount to adjust the actual amount of bled air entering the second cyclone.

[0038] The invention can be applied to any type of vacuum cleaner including upright, cylinder, tank, backpack and hand-held types. The invention, although described specifically in relation to a dual cyclonic vacuum cleaner, is equally applicable to a single cyclonic vacuum cleaner or to a cyclonic vacuum cleaner having more than two cyclones as will be apparent to one skilled in the art. Where more than one cyclone is used, bleed valves can be used to maintain the airflow in any one or more of the cyclones as necessary or desired.

Claims

1. A vacuum cleaner comprising a dirty air inlet (12,14) communicating with a clean air outlet by means of an airflow path, a cyclone (18) being arranged in the airflow path such that, in use, dust-laden air flowing along the airflow path from the dirty air inlet (12,14) to the clean air outlet passes through the cyclone (18), **characterised in that** at least one bleed valve (20) is provided, downstream of the dirty air inlet (12,14) and upstream of the cyclone (18), which is adapted to introduce bled air into the airflow path to combine with the dust-laden air and to maintain the flow rate of the dust-laden air within the cyclone (18), the or each bleed valve (20) being operable when, in use, either the pressure of the air flowing along the airflow path falls to or below a predetermined level or the amount of particulates in the air at or adjacent the clean air outlet exceeds a predetermined level.
2. A vacuum cleaner as claimed in Claim 1, wherein the at least one bleed valve (20) is arranged in the wall of the airflow path upstream of the cyclone (18).
3. A vacuum cleaner as claimed in Claim 2, wherein two cyclones (16,18) are arranged sequentially in the airflow path, the bleed valve or valves (20) being arranged between the two cyclones (16,18).
4. A vacuum cleaner as claimed in any one of Claims 1 to 3, wherein a plurality of bleed valves (20) are provided adjacent one another.
5. A vacuum cleaner as claimed in Claim 4, wherein the bleed valves (20) are substantially identical to one another.
6. A vacuum cleaner as claimed in Claim 4 or 5, wherein three bleed valves (20) are provided adjacent one another.
7. A vacuum cleaner as claimed in any one of the preceding claims, wherein the or each bleed valve (20) is spring loaded.
8. A vacuum cleaner as claimed in any one of the preceding claims, wherein the effective area of the bleed valve (20), or the total effective area of the bleed valves (20), is between 120mm² and 150mm².
9. A vacuum cleaner as claimed in Claim 8, wherein the effective area of the bleed valve (20), or the total effective area of the bleed valves (20), is substantially 132mm².
10. A vacuum cleaner as claimed in any one of the preceding claims, wherein the or each bleed valve (20) comprises a door (78) movable between a first position in which, in use, the flow of bled air through the bleed valve (20) is restricted and a second position in which, in use, the flow of bled air through the bleed valve (20) is restricted to a lesser extent than when the door (78) is in the first position.
11. A vacuum cleaner as claimed in Claim 10, wherein the position of the door (78) is controlled by means responsive to the pressure of the air flow in the cyclone (18).
12. A vacuum cleaner as claimed in Claim 10, wherein the position of the door (78) is controlled by means (94) responsive to the concentration of particulates in the air exhausted from the cyclone (18).
13. A vacuum cleaner as claimed in any one of the pre-

ceding claims, wherein the or each bleed valve (20) is designed to open when the pressure in the airflow path is that produced by an airflow equivalent to an effective orifice of between 10mm and 15mm diameter, or less.

14. A vacuum cleaner as claimed in Claim 13, wherein the or each bleed valve (20) is designed to open when the pressure in the airflow path is that produced by an airflow equivalent to an effective orifice of 13mm diameter, or less.

15. A vacuum cleaner as claimed in any one of Claims 1 to 12, wherein the amount of particulates in the air at or adjacent the clean air outlet is determined by means of a sensor (94) provided downstream of the cyclone (18).

16. A vacuum cleaner as claimed in Claim 15, wherein the sensor (94) is provided with a light source (96) and a detector (98).

17. A method of operating a cyclonic vacuum cleaner having first and second cyclones (16,18) arranged in series, comprising the steps of:-

a) admitting dirty air into the first cyclone (16);

b) partially cleaning the dirty air in the first cyclone (16) to produce partially filtered air;

c) conducting the partially filtered air from the first cyclone (16) to the second cyclone (18);

d) further cleaning the partially filtered air in the second cyclone (18) to produce further cleaned air; and

e) exhausting the further cleaned air from the second cyclone (18),

characterised in that, bled air is introduced to and combined with the partially filtered air before the entry thereof into the second cyclone (18) in order to maintain the rate of the airflow within the second cyclone (18) and for reducing particulates in the further cleaned air.

Patentansprüche

1. Staubsauger, der einen Schmutzluft-Einlaß (12, 14) aufweist, der mit einem Auslaß für saubere Luft durch eine Luftstrombahn verbunden ist, wobei in der Luftstrombahn ein Zyklon (18) derartig angeordnet ist, daß bei der Benutzung staubbeladene Luft, die längs der Luftstrombahn vom Schmutzluft-Einlaß (12, 14) zum Auslaß für saubere Luft strömt,

durch den Zyklon (18) geführt wird, **dadurch gekennzeichnet, daß** unterhalb des Schmutzluft-Einlasses (12, 14) und oberhalb des Zyklons (18) wenigstens ein Ablassventil (20) vorhanden ist, das dafür geeignet ist, abgelassene Luft in die Luftstrombahn einzuführen, um diese mit der staubbeladenen Luft zu kombinieren und um die Strömungsgeschwindigkeit der staubbeladenen Luft innerhalb des Zyklons (18) zu erhalten, wobei das oder jedes der Ablassventile (20) wirksam werden, wenn bei der Benutzung entweder der Druck der längs der Luftstrombahn strömenden Luft auf oder unter einen festgelegten Wert fällt oder die Menge des Partikulatmaterials in der Luft am Auslaß für saubere Luft oder in dessen Nähe einen festgelegten Wert übersteigt.

2. Staubsauger nach Anspruch 1, bei dem wenigstens ein Ablassventil (20) in der Wand der Luftstrombahn oberhalb des Zyklons (18) angeordnet ist.

3. Staubsauger nach Anspruch 2, bei dem zwei Zyklone (16, 18) hintereinander in der Luftstrombahn angeordnet sind, wobei sich das Ablassventil oder die Ablassventile (20) zwischen den beiden Zyklonen (16, 18) befinden.

4. Staubsauger nach einem der Ansprüche 1 bis 3, bei dem eine Vielzahl von Ablassventilen (20) nebeneinanderliegend vorhanden sind.

5. Staubsauger nach Anspruch 4, bei dem die Ablassventile (20) im wesentlichen identisch sind.

6. Staubsauger nach Anspruch 4 oder 5, bei dem drei Ablassventile (20) nebeneinanderliegend vorhanden sind.

7. Staubsauger nach einem der vorhergehenden Ansprüche, bei dem das oder jedes Ablassventil (20) federbelastet ist.

8. Staubsauger nach einem der vorhergehenden Ansprüche, bei dem die wirksame Fläche des Ablassventils (20) oder die wirksame Gesamtfläche der Ablassventile (20) zwischen 120 mm² und 150 mm² liegt.

9. Staubsauger nach Anspruch 8, bei dem die wirksame Fläche des Ablassventils (20) oder die wirksame Gesamtfläche der Ablassventile (20) im wesentlichen 132 mm² beträgt.

10. Staubsauger nach einem der vorhergehenden Ansprüche, bei dem das oder jedes Ablassventil (20) eine Klappe (78) aufweist, die bewegt werden kann zwischen einer ersten Position, in der bei der Benutzung der Strom der abgelassenen Luft durch

das Ablassventil (20) beschränkt ist, und einer zweiten Position, in der bei der Benutzung der Strom der abgelassenen Luft durch das Ablassventil (20) in einem geringeren Umfang beschränkt ist, als das der Fall ist, wenn sich die Klappe (78) in der ersten Position befindet.

11. Staubsauger nach Anspruch 10, bei dem die Position der Klappe (78) durch ein Mittel reguliert wird, das auf den Druck des Luftstroms im Zyklon (18) anspricht.

12. Staubsauger nach Anspruch 10, bei dem die Position der Klappe (78) durch ein Mittel (94) reguliert wird, das auf die Konzentration von Partikulatstoffen in der aus dem Zyklon (18) abgegebenen Luft anspricht.

13. Staubsauger nach einem der vorhergehenden Ansprüche, bei dem das oder jedes Ablassventil (20) so konstruiert ist, daß es sich öffnet, wenn der Druck in der Luftstrombahn gleich dem ist, der durch einen Luftstrom erzeugt wird, der einer effektiven Öffnung zwischen 10 mm und 15 mm Durchmesser oder weniger äquivalent ist.

14. Staubsauger nach Anspruch 13, bei dem das oder jedes Ablassventil (20) so konstruiert ist, daß es sich öffnet, wenn der Druck in der Luftstrombahn gleich dem ist, der durch einen Luftstrom erzeugt wird, der einer effektiven Öffnung von 13 mm Durchmesser oder weniger äquivalent ist.

15. Staubsauger nach einem der Ansprüche 1 bis 12, bei dem die Menge der Partikulatstoffe in der Luft am Auslaß für saubere Luft oder in dessen Nähe durch einen Sensor (94) bestimmt wird, der unterhalb des Zyklons (18) angeordnet ist.

16. Staubsauger nach Anspruch 15, bei dem der Sensor (94) mit einer Lichtquelle (96) und einem Detektor (98) versehen ist.

17. Verfahren zum Betreiben eines Zyklon-Staubsaugers, der einen ersten und zweiten Zyklon (16, 18) hat, die in Reihe angeordnet sind, welches die folgenden Schritte umfaßt:

a) Einlassen von schmutziger Luft in den ersten Zyklon (16);

b) teilweises Reinigen der schmutzigen Luft im ersten Zyklon (16), um teilweise gefilterte Luft zu erzeugen;

c) Weiterleiten der teilweise gefilterten Luft aus dem ersten Zyklon (16) in den zweiten Zyklon (18);

d) weiteres Reinigen der teilweise gefilterten Luft im zweiten Zyklon (18), um weiter gereinigte Luft zu erzeugen, und

e) Abgeben der weiter gereinigten Luft aus dem zweiten Zyklon (18),

dadurch gekennzeichnet, daß abgelassene Luft eingeführt und mit der teilweise gefilterten Luft kombiniert wird, bevor sie in den zweiten Zyklon (18) eintritt, um die Geschwindigkeit des Luftstroms innerhalb des zweiten Zyklons (18) aufrechtzuerhalten und um die Partikulatstoffe in der weiter gereinigten Luft zu verringern.

Revendications

1. Aspirateur comprenant un orifice d'entrée d'air sale (12, 14), communiquant avec un orifice de sortie d'air propre par l'intermédiaire d'un passage d'écoulement d'air, un cyclone (18) agencé dans le passage d'écoulement d'air, de sorte que l'air chargé de poussières s'écoulant en service le long du passage d'écoulement d'air, de l'orifice d'entrée d'air sale (12, 14) vers l'orifice de sortie d'air propre, traverse le cyclone (18), **caractérisé en ce qu'**au moins une soupape de purge (20) est agencée en aval de l'orifice d'entrée d'air sale (12, 14) et en amont du cyclone (18), destiné à introduire de l'air purgé dans le passage d'écoulement d'air en vue d'une combinaison avec l'air chargé de poussières et de maintenir le débit d'écoulement de l'air chargé de poussières dans le cyclone (18), la ou chaque soupape de purge (20) pouvant être actionnée lorsque, pendant le fonctionnement, la pression de l'air s'écoulant le long du passage d'écoulement d'air tombe à un niveau prédéterminé ou à une valeur inférieure, ou si la quantité de matières particulaires dans l'air au niveau de l'orifice de sortie d'air propre ou près de celui-ci dépasse un niveau prédéterminé.

2. Aspirateur selon la revendication 1, dans lequel la ou la au moins une soupape de purge (20) est agencée dans la paroi du passage d'écoulement d'air en amont du cyclone (18).

3. Aspirateur selon la revendication 2, dans lequel deux cyclones (16, 18) sont agencés séquentiellement dans le passage d'écoulement d'air, la ou les soupape(s) de purge (20) étant agencée(s) entre les deux cyclones (16, 18).

4. Aspirateur selon l'une quelconque des revendications 1 à 3, dans lequel plusieurs soupapes de purge (20) sont agencées les unes près des autres.

5. Aspirateur selon la revendication 4, dans lequel les soupapes de purge (20) sont pratiquement identiques les unes aux autres.
6. Aspirateur selon les revendications 4 ou 5, dans lequel trois soupapes de purge (20) sont agencées les unes près des autres.
7. Aspirateur selon l'une quelconque des revendications précédentes, dans lequel la ou chaque soupape de purge (20) est chargée par ressort.
8. Aspirateur selon l'une quelconque des revendications précédentes, dans lequel la surface utile de la soupape de purge (20) ou la surface utile totale des soupapes de purge (20) est comprise entre 120 mm² et 150 mm².
9. Aspirateur selon la revendication 8, dans lequel la surface utile de la soupape de purge (20) ou la surface utile totale des soupapes de purge (20) correspond pratiquement à 132 mm².
10. Aspirateur selon l'une quelconque des revendications précédentes, dans lequel la ou chaque soupape de purge (20) comprend une porte (78) pouvant être déplacée entre une première position, dans laquelle l'écoulement d'air purgé traversant la soupape de purge (20) est limité pendant le fonctionnement, et une deuxième position, dans laquelle l'écoulement d'air purgé traversant la soupape de purge (20) est limité d'une façon moindre pendant le fonctionnement que lorsque la porte (78) se trouve dans la première position.
11. Aspirateur selon la revendication 10, dans lequel la position de la porte (78) est réglée par un moyen répondant à la pression de l'écoulement d'air dans le cyclone (18).
12. Aspirateur selon la revendication 10, dans lequel la position de la porte (78) est contrôlée par un moyen (94) répondant à la concentration des matières particulaires dans l'air évacué du cyclone (18).
13. Aspirateur selon l'une quelconque des revendications précédentes, dans lequel la ou chaque soupape de purge (20) est destinée à être ouverte lorsque la pression dans le passage d'écoulement d'air correspond à celle produite par un écoulement d'air équivalent à un orifice utile d'un diamètre compris entre 10 mm et 15 mm ou moins.
14. Aspirateur selon la revendication 13, dans lequel la ou chaque soupape de purge (20) est destinée à être ouverte lorsque la pression dans le passage d'écoulement d'air correspond à celle produite par un écoulement d'air équivalent à un orifice utile d'un diamètre de 13 mm ou moins.
15. Aspirateur selon l'une quelconque des revendications 1 à 12, dans lequel la quantité de matières particulaires dans l'air au niveau de l'orifice de sortie d'air propre ou près de celui-ci est déterminée par l'intermédiaire d'un capteur (94) agencé en aval du cyclone (18).
16. Aspirateur selon la revendication 15, dans lequel le capteur (94) comporte une source de lumière (96) et un détecteur (98).
17. Procédé d'actionnement d'un aspirateur à cyclone comportant des premier et deuxième cyclones (16, 18), agencés en série, comprenant les étapes ci-dessous:
- admission d'air sale dans le premier cyclone (16);
 - nettoyage partiel de l'air sale dans le premier cyclone (16) pour produire de l'air partiellement filtré;
 - amenée de l'air partiellement filtré du premier cyclone (16) vers le deuxième cyclone (18);
 - nettoyage ultérieur de l'air partiellement filtré dans le deuxième cyclone (18) pour produire de l'air ayant subi un nettoyage ultérieur; et
 - évacuation de l'air ayant subi un nettoyage ultérieur du deuxième cyclone (18);
- caractérisé en ce que** de l'air purgé est admis et combiné avec l'air partiellement filtré, avant l'entrée de celui-ci dans le deuxième cyclone (18) pour maintenir le débit d'écoulement de l'air dans le deuxième cyclone (18) et pour réduire les matières particulaires dans l'air ayant subi un nettoyage ultérieur.

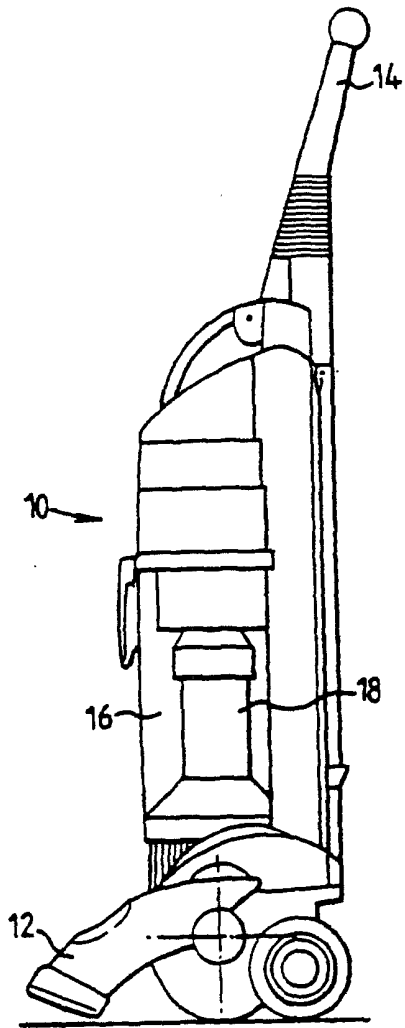


FIG. 1a

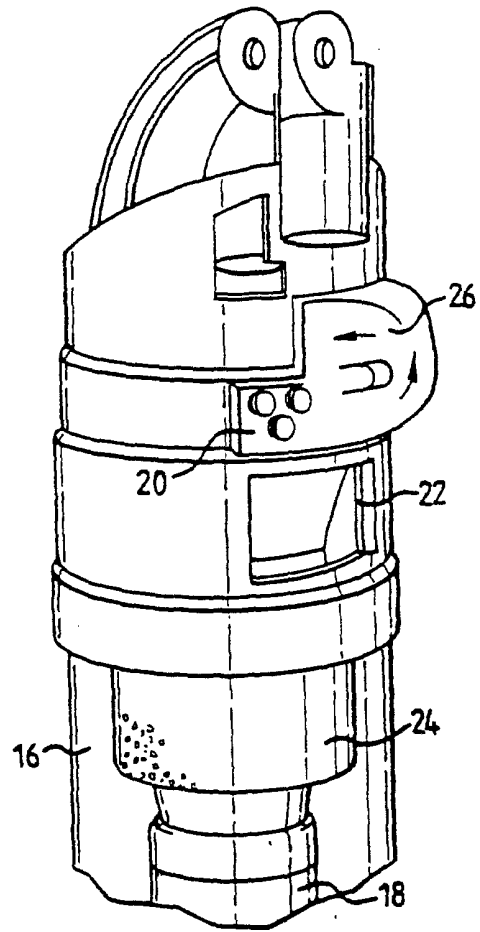


FIG. 2

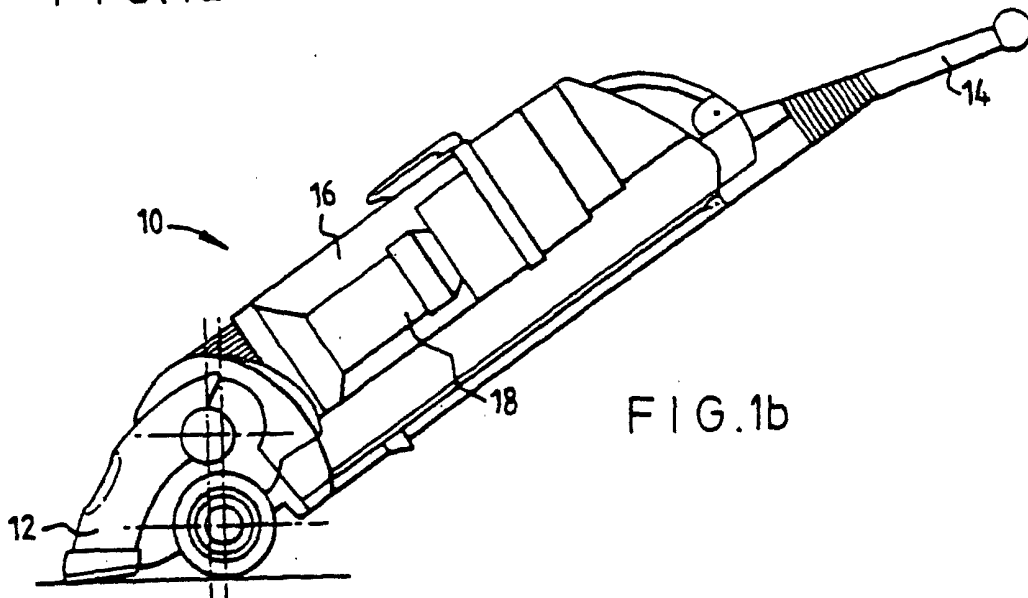


FIG. 1b

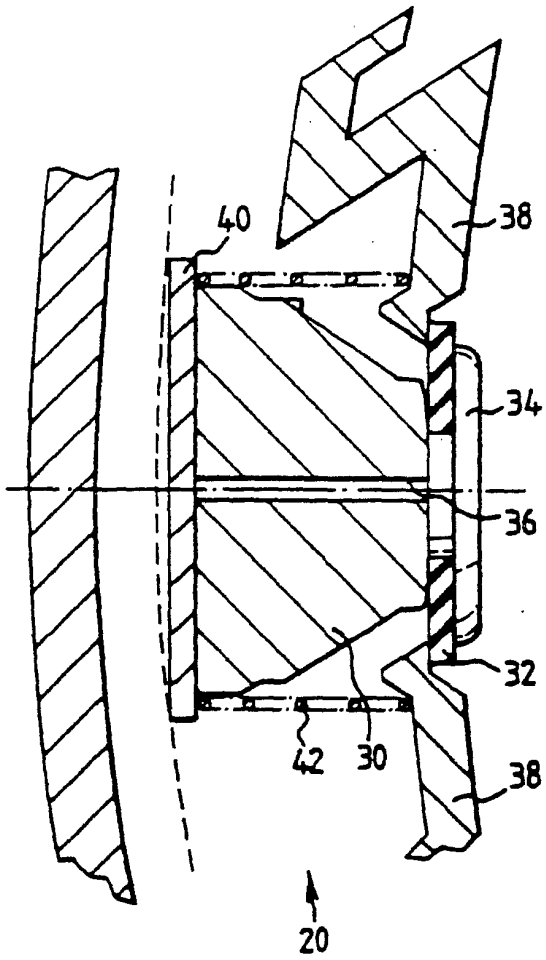


FIG. 3

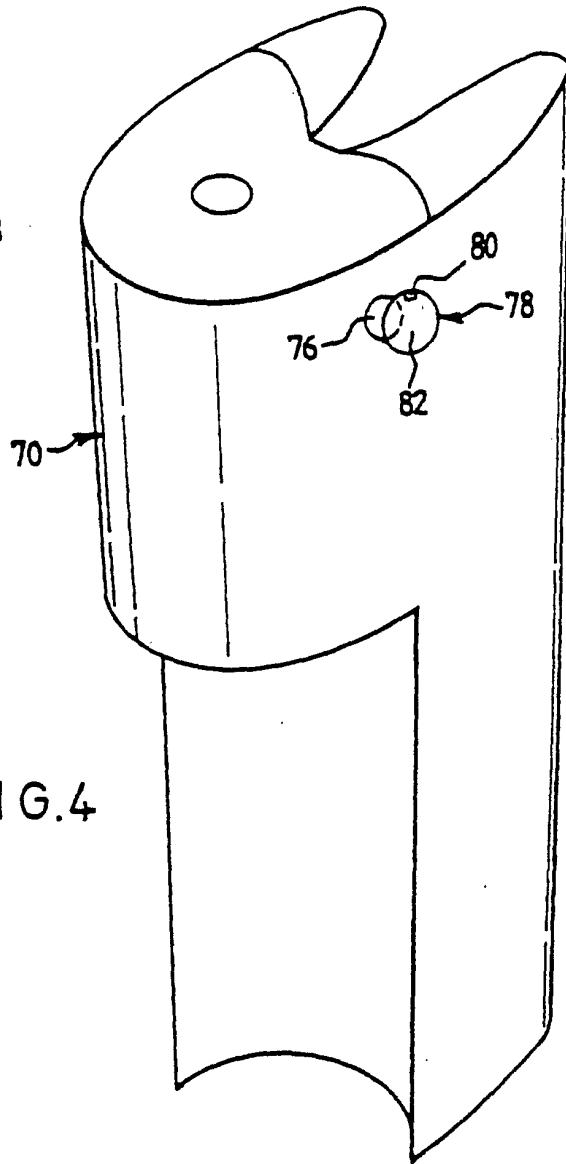


FIG. 4

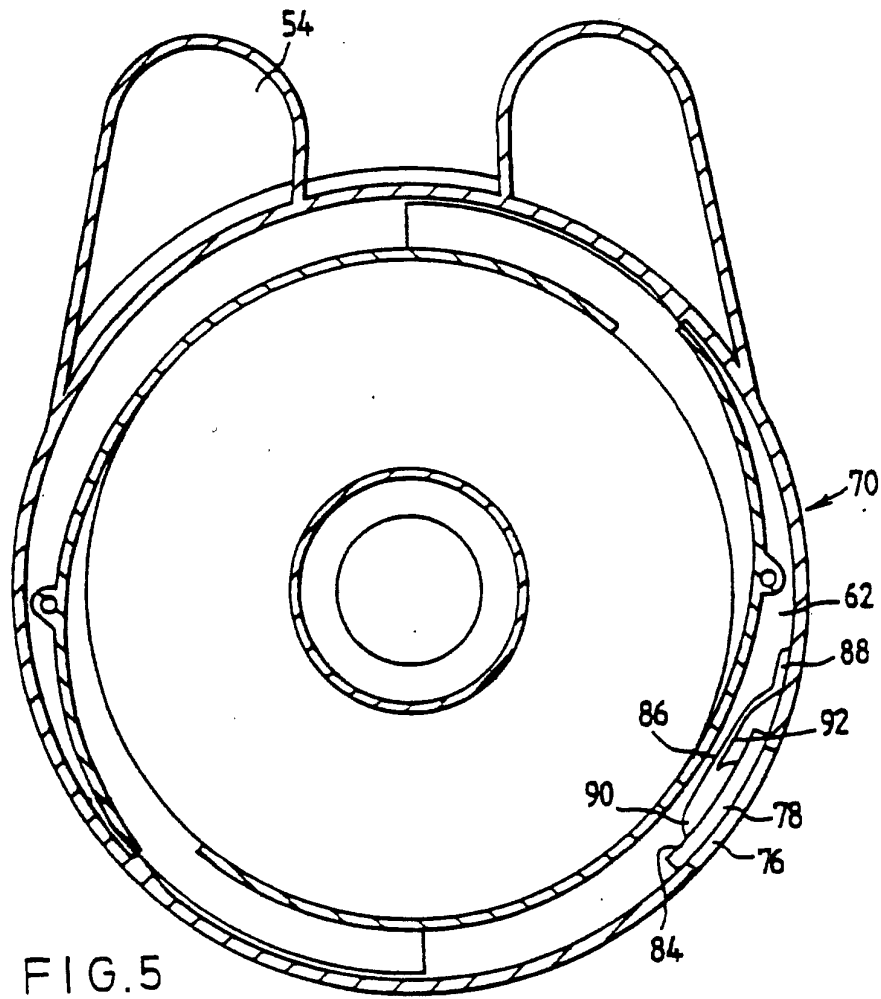


FIG. 5

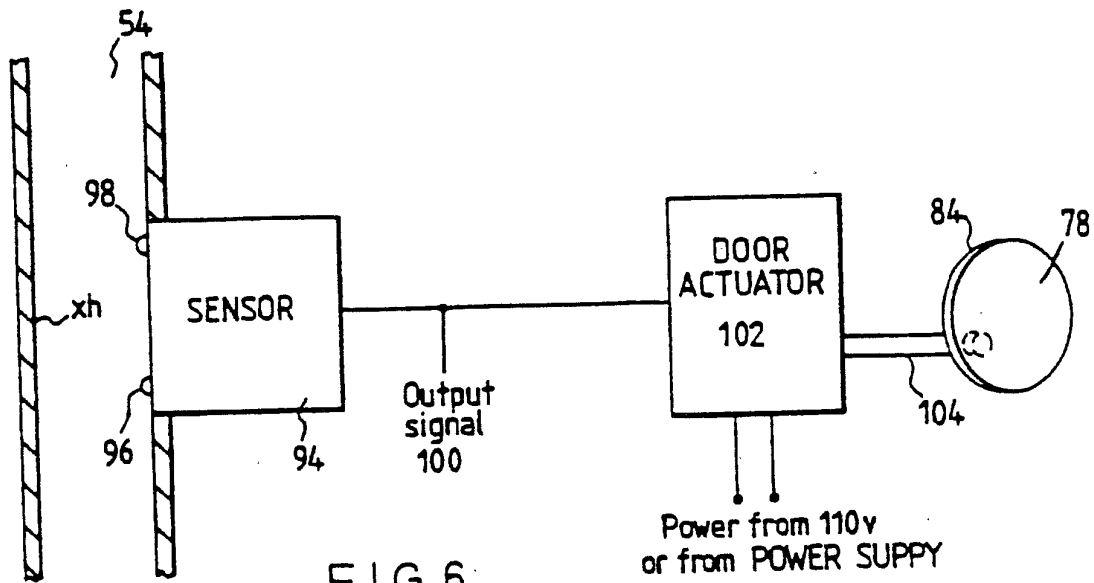


FIG. 6