

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 656 263 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
01.03.2000 Bulletin 2000/09

(51) Int. Cl.⁷: **B41J 11/48**

(21) Application number: **94118797.3**

(22) Date of filing: **29.11.1994**

(54) **Printer with paper feed mechanism**

Drucker mit Papierzufuhrmechanismus

Imprimante avec mécanisme d'alimentation en papier

(84) Designated Contracting States:
DE FR GB

(30) Priority: **03.12.1993 JP 33935593**

(43) Date of publication of application:
07.06.1995 Bulletin 1995/23

(73) Proprietor:
SEIKO EPSON CORPORATION
Tokyo 160-0811 (JP)

(72) Inventors:
• **Nakayama, Yoshiaki**
Suwa-shi, Nagano (JP)

• **Kishida, Takeo**
Suwa-shi, Nagano (JP)
• **Tsuboki, Tatsumi**
Suwa-shi, Nagano (JP)

(74) Representative:
Grünecker, Kinkeldey,
Stockmair & Schwanhäusser
Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(56) References cited:
US-A- 4 511 904 **US-A- 4 789 258**
US-A- 5 026 184

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 656 263 B1

Description

BACKGROUND OF THE INVENTION

[0001] This invention relates generally to a printer and, more particularly, to a printer capable of attaching an automatic sheet feeder thereto in place of a manual sheet insertion guide by removing the manual sheet insertion guide therefrom.

[0002] Printers that allow a manual sheet insertion guide to be removed therefrom and an automatic sheet feeder, which is an optional unit, to be attached thereto in place of the removed manual sheet insertion guide have heretofore been well known. However, these printers of the prior art have generally suffered from the problem that the removed manual sheet insertion guide can be lost when the automatic sheet feeder is attached.

[0003] A common method of overcoming this problem comprises a printer which allows the automatic sheet feeder to be attached to the printer while the manual sheet insertion guide is also attached to the printer. However, this design requires that the printer main body have a space for receiving both the manual sheet insertion guide and the automatic sheet feeder and space to provide paper paths for the two paper feed arrangements, which requires a large structure for the printer main body.

[0004] Accordingly, it would be advantageous to provide a printer which prevents a removed manual sheet insertion guide from being lost when an automatic sheet feeder is installed in the printer, and allows the use of a single insertion slot for both the automatic sheet feeder and the manual sheet insertion guide, so that the printer can remain a small structure.

SUMMARY OF THE INVENTION

[0005] Generally speaking, in accordance with the present invention, a printer having a printer main body and a manual sheet insertion guide is provided. The printer main body has a print section and a sheet feed inlet for supplying a sheet to the print section. The manual sheet insertion guide is attached to the printer main body so as to be removable therefrom and serves to supply a sheet to the sheet feed inlet manually. The printer allows an automatic sheet feeder to be attached to the printer main body in place of the manual sheet insertion guide by removing the manual sheet insertion guide from the printer main body. The automatic sheet feeder is designed to receive and support the manual sheet insertion guide, which is removed from the printer main body, on the automatic sheet feeder after the automatic sheet feeder is attached to the printer body.

[0006] Thus, the printer performs a printing operation at the print section on the sheet supplied from the manual sheet insertion guide when the manual sheet insertion guide is attached to the printer main body, and

performs a printing operation at the print section on a sheet automatically supplied from the automatic sheet feeder when the manual sheet insertion guide is removed and the automatic sheet feeder is attached to the printer main body instead of the manual sheet insertion guide. When the manual sheet insertion guide is attached to the automatic sheet feeder, the manual sheet insertion guide may constitute a sheet discharge tray supporting a sheet that is discharged after being supplied from the automatic sheet feeder and printed upon. In addition, the manual sheet insertion guide is attached to the automatic sheet feeder at such an angle so as to still be operable to allow the head end of a sheet which is guided by the manual sheet insertion guide to enter into the sheet feed inlet when the sheet is moved toward the sheet feed inlet.

[0007] Accordingly, it is an object of the present invention to provide a printer which allows the manual sheet insertion guide which is removed from the printer to be attached to the automatic sheet feeder, when the automatic sheet feeder is attached to the printer, therefore preventing the loss of the manual sheet insertion guide.

[0008] Another object of the present invention is to provide a printer in which the removed manual sheet insertion guide is attached to the replacement automatic sheet feeder and not to the printer main body when the replacement automatic sheet feeder is attached to the printer main body, therefore not requiring an additional space for attaching the manual sheet insertion guide to the printer main body at the same time as the automatic sheet feeder is attached, which allows the printer to be smaller.

[0009] A further object of the present invention is to provide a printer in which the manual sheet insertion guide which is attached to the automatic sheet feeder serves as a sheet discharge tray that supports a sheet which is discharged after being supplied from the automatic sheet feeder and printed upon, therefore not requiring an independent sheet discharge tray on the printer main body or on the automatic sheet feeder.

[0010] Yet another object of the present invention is to provide a printer in which the manual sheet insertion guide is attached to the automatic sheet feeder at such an angle so as to still be operable and to allow the head end of a sheet which is guided by the manual sheet insertion guide to enter into the same sheet feed inlet as is used by the automatic sheet feeder when the sheet is moved toward the sheet feed inlet, thus allowing a sheet of a size different from the sheet supplied from the automatic sheet feeder to be supplied to the printer main body from the manual sheet insertion guide while the automatic sheet feeder is inserted in the printer.

[0011] Still other objects and advantages of the invention will in part be obvious and will in part be apparent from the specification and drawings.

[0012] The invention accordingly comprises the features of construction, combination of elements, and arrangement of parts, which will be exemplified in the

construction hereinafter set forth, and the scope of the invention will be indicated in the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] For a fuller understanding of the invention, reference is had to the following description taken in connection with the accompanying drawings, in which:

FIG. 1 is a cross-sectional view depicting a printer of a first embodiment of the present invention with a manual sheet insertion guide attached to the printer main body;

FIG. 2 is a cross-sectional view depicting the printer of FIG. 1 with an automatic sheet feeder attached to the printer main body, and a manual sheet insertion guide attached to the automatic sheet feeder;

FIG. 3 is a cross-sectional view depicting the printer of FIG. 2 showing the manual feed of a sheet of paper through the printer;

FIG. 4 is a cross-sectional view depicting the printer of FIG. 1 with a continuous sheet being fed to the printer;

FIG. 5 is a top plan view of the printer of FIG. 4; and

FIG. 6 is a cross-sectional view taken along line VI-VI of FIG. 5.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0014] Reference is first made to FIG. 1 wherein a printer main body 10 has a print section A and a sheet feed inlet B for supplying a sheet P to print section A. Print section A further includes a platen 11 around which sheet P may extend during printing, and a print head 12 disposed so as to confront platen 11 on printer case 13 with a sheet therebetween. A sheet feed inlet B is formed on the back of a case 13. Sheet P is supplied to sheet feed inlet B and is thereafter forwarded to print section A via a sheet feed path formed of platen 11 and a sheet guide 14. After print head 12 prints material onto sheet P, sheet P is forwarded by sheet discharge rollers 15a and 15b, and is discharged from a sheet discharge outlet C formed between a rear end edge 13d of a cover 13c and a rear upper end edge 13a of case 13.

[0015] As shown in FIGS. 5 and 6, a manual sheet insertion guide 20 includes a guide plate 21 and a pair of edge guides 22 and 22' slidably attached to guide plate 21.

[0016] Guide plate 21 has a top plate 21a and side plates 21b and 21b'. Manual sheet insertion guide 20 is removably attached to main body 10 by engaging a pair of pins 13e and 13e' with a pair of substantially V-shaped grooves 21c and 21c' formed in guide plate 21. Each pin 13e, 13e' projects inward from opposed sides of the rear upper end of case 13. Each groove 21c and 21c' is formed on side plates 21b and 21b', respectively, and has an opening 21d (FIG. 6) into which pins 13e

and 13e' are inserted for positioning in grooves 21c, 21c', respectively. As such, manual sheet insertion guide 20 is releasably attached to main body 10.

[0017] Pins 13e and 13e' and grooves 21c and 21c' are constructed to permit motion relative to each other. Therefore, manual sheet insertion guide 20 is not only slidable with respect to main body 10 in grooves 21c, 21c', but is also pivotable about pins 13e and 13e' when these pins are engaged in the ends of grooves 21c and 21c'.

[0018] As shown in FIG. 1, manual sheet insertion guide 20 is inclined with respect to main body 10 when used as a sheet feed guide. Rib-like projections 13r disposed only at both ends on the rear side of a sheet discharge stacker 13f are abutted by the distal end of manual sheet insertion guide 20 and thus regulate the pivoting of manual sheet insertion guide 20.

[0019] Reference is now made to FIGS. 5 and 6 wherein each edge guide 22 and 22' is depicted as respectively comprising bottom plates 22a and 22a', hook portions 22b disposed on a bottom front end of each bottom plate 22a and 22a', clip portions 22c disposed on a bottom rear end of bottom plates 22a and 22a', side plates 22d and 22d' and top plates 22e and 22e'. Each edge guide 22 and 22' is slidably attached to guide plate 21 by hook portions 22b respectively being engaged with the front edge of guide plate 21 and by clip portions 22c resiliently biasing the rear portion of guide plate 21.

[0020] To supply sheet P, side plates 22d and 22d' guide the side edges of sheet P, and top plates 22e and 22e' guide the upper surface of sheet P. In addition, the upper surfaces of side plates 22d and 22d' as well as top plates 22e and 22e' are designed to guide the lower surface of sheet P that is to be discharged after being printed upon.

[0021] Referring next to FIGS. 2 and 5, resilient pawls 23 and 23' are formed integrally on guide plate 21 of manual sheet insertion guide 20. When manual sheet insertion guide 20 is removed from printer main body 10, these resilient pawls 23 and 23' attach manual sheet insertion guide 20 to an automatic sheet feeder 30 by engaging the resilient pawls with recessed portions 31 formed on the side surfaces of automatic sheet feeder 30.

[0022] For use with continuous paper, a tractor feeder 40 is provided in FIG. 4 for supplying a continuous sheet P1 to printer main body 10.

[0023] A mode of use and operation of the thus constructed printer will be described next.

Manual Insertion

[0024] As shown in FIG. 1, when manual sheet insertion guide 20 is attached to printer main body 10, sheet P is supplied to sheet feed inlet B from manual sheet insertion guide 20 in order to allow sheet P to be printed on at print section A. Printed sheet P is thereafter dis-

charged from sheet discharge outlet C after being forwarded by sheet discharge rollers 15a and 15b. A discharged sheet P2 has its back surface supported by top plates 22e and 22e' of respective edge guides 22 and 22' and a lower end P2a of discharged sheet P2 is supported by a stacker 13f formed at an upper portion on the back of case 13.

Automatic Sheet Feeding

[0025] As shown in FIG. 2, when manual sheet insertion guide 20 is removed from printer main body 10 and automatic sheet feeder 30 is attached to printer main body 10 in its place, sheet P is automatically supplied from automatic sheet feeder 30 in order to allow sheet P to be printed upon at print section A. Automatic sheet feeder 30 is attached to main body 10 by engaging a pair of insertion pawl portions 39 to projected portions 19 formed on the inner surfaces of the side frames of printer main body 10 that support platen 11 and the like (FIG. 2).

[0026] When automatic sheet feeder 30 is attached to main body 10, manual sheet insertion guide 20 which has been removed from printer main body 10 can be attached to automatic sheet feeder 30. As a result of this construction, manual sheet insertion guide 20 is retained in contact with the apparatus, and will not be lost. Since manual sheet insertion guide 20 is designed to be attached to automatic sheet feeder 30 and not to printer main body 10 when automatic sheet feeder 30 is attached to printer main body 10, it is no longer necessary to reserve an additional space for attaching manual sheet insertion guide 20 to printer main body 10. Therefore, since only one insertion slot is required, the size of printer main body 10 can be greatly reduced.

[0027] As shown in FIG. 2, manual sheet insertion guide 20, which is attached to automatic sheet feeder 30, serves as a sheet discharge tray. This discharge tray supports sheet P2 which is discharged after being supplied from automatic sheet feeder 30 and printed upon. Support rod 25 (FIG. 2) is inserted into a bore in the end of manual sheet insertion guide 20 and help supports sheet P2 after it is discharged.

[0028] As shown in FIG. 3, manual sheet insertion guide 20 is attached to automatic sheet feeder 30 at such an angle as to still be operable to allow the head end of sheet P which is guided by manual sheet insertion guide 20 to enter sheet feed inlet B when sheet P is moved toward sheet feed inlet B. Therefore, if a sheet P' of a size other than that able to be fed from automatic sheet feeder 30 must be supplied to the printer main body 10, this sheet P' can be supplied from manual sheet insertion guide 20 while automatic sheet feeder 30 is still installed.

Continuous Sheet

[0029] As shown in FIG. 4, printing can also be per-

formed on a continuous sheet P1 with manual sheet insertion guide 20 laid flat on printer main body 10. Manual sheet insertion guide 20 is carried on main body 10 with respective grooves 21c and 21c' engaged with corresponding pins 13e and 13e' of main body case 13 and with projected pieces 21e and 21e' projecting from side plates 21b and 21b' respectively. Manual sheet insertion guide 20 abuts the upper surface of main body case 13, and guides continuous sheet P1 after being discharged from sheet discharge outlet C.

[0030] Thus, the printer of the present invention not only prevents the removed manual sheet insertion guide 20 from being lost, but also prevents printer main body 10 from becoming too large.

Claims

1. A printer for printing on at least sheets of paper, comprising:

a printer main body formed with a sheet feed inlet for the passage of sheets of paper to the interior of the printer main body;
a print section situated within said printer main body for printing on sheets of paper received from said sheet feed inlet;
an automatic sheet feeder;
first coupling members in said automatic sheet feeder and printer main body permitting releasable mounting of said automatic sheet feeder on said printer main body to automatically supply a plurality of said sheets of paper to said sheet feed inlet;
a manual sheet insertion guide;
second coupling members on said manual sheet insertion guide and said printer main body permitting releasable mounting of said manual sheet insertion guide in place of said automatic sheet feeder onto said printer main body to supply individual sheets of paper to said sheet feed inlet; and
third coupling members on said automatic sheet feeder and said manual sheet insertion guide permitting releasable mounting of said manual sheet insertion guide onto said automatic sheet feeder when said automatic sheet feeder is mounted to said printer main body.

2. The printer of claim 1, wherein said manual sheet insertion guide is positioned to act as a sheet discharge tray when mounted on said automatic sheet feeder.
3. The printer of claim 2, further comprising a support rod coupled to said manual sheet insertion guide and positioned to further support discharged sheets.

4. The printer of claim 2, further comprising paper guides mounted in lateral displacement along said manual sheet insertion guide for laterally positioning a sheet of paper to be manually fed, said paper guides including paper guide side plates projecting from said manual sheet insertion guide and paper guide top plates disposed on the distal ends of said paper guide side plates for supporting the discharged sheets. 5
5. The printer of claim 2, wherein said manual sheet insertion guide is coupled to said automatic sheet feeder at a predetermined angle which allows a sheet to be manually supplied from said manual sheet insertion guide to said sheet feed inlet. 10
6. The printer of claim 1, and including a tractor feed mechanism mounted below said manual sheet insertion guide for feeding continuous paper to said print selection, said second coupling members permit said manual sheet insertion guide to be pivotably displaced on said printer main body between a first manual feed position and a second position where it serves as a discharge tray for said continuous paper. 20 25
7. The printer of claim 1, wherein said second coupling members comprise laterally extending pin members in said printer main body and grooves on said manual sheet insertion guide dimensioned to be received in said grooves. 30
8. The printer of claim 1, wherein said third coupling members comprise a pair of resilient pawl members projecting from said manual sheet insertion guide for operative coupling with said automatic sheet feeder. 35
9. A method of printing, comprising the steps of: 40
 - providing a printer main body having a print section situated within said printer main body for printing on a sheet of paper and formed with a sheet feed inlet providing access for a sheet of paper to said print section; 45
 - dismounting a manual sheet insertion guide from a location in said printer main body in registration with said sheet feed inlet at which it permitted manual feed of sheets of paper to said print section; 50
 - releasably mounting an automatic sheet feeder to said printer main body substantially at the position previously occupied by said manual sheet insertion guide in registration with said sheet feed inlet to automatically supply a plurality of said sheets of paper to said print section; and
 - releasably mounting said manual sheet inser-

tion guide to said automatic sheet feeder.

10. The method of claim 9, further comprising the step of positioning said manual sheet insertion guide on said automatic sheet feeder so as to serve as a discharge tray for printed paper.
11. The method of claim 9, including the step of positioning said manual sheet insertion guide on said automatic sheet feeder at an angle selected to permit manual feed of sheets of paper through said sheet feed inlet along said manual sheet insertion guide.

15 Patentansprüche

1. Drucker zum Drucken auf zumindest Papierblättern, der aufweist:
 - ein Druckerhauptgehäuse, das mit einem Blattzuführungseinlaß für den Durchgang von Papierblättern zu dem Inneren des Druckerhauptgehäuses ausgebildet ist;
 - einen Druckabschnitt, der innerhalb des Druckerhauptgehäuses zum Drucken auf Papierblättern, die von dem Blattzuführungseinlaß aufgenommen sind, gelegen ist;
 - eine automatische Blattzuführungseinrichtung;
 - erste Kopplungselemente in der automatischen Blattzuführungseinrichtung und dem Druckerhauptgehäuse, die ein lösbares Befestigen der automatischen Blattzuführungseinrichtung an dem Druckerhauptgehäuse ermöglichen, um automatisch eine Vielzahl von Papierblättern zu dem Blattzuführungseinlaß zuzuführen;
 - eine manuelle Blatteinsetzführung;
 - zweite Kopplungselemente auf der manuellen Blatteinsetzführung und dem Druckerhauptgehäuse, die ein lösbares Befestigen der manuellen Blatteinsetzführung anstelle der automatischen Blattzuführungseinrichtung auf dem Druckerhauptgehäuse ermöglichen, um individuelle Papierblätter zu dem Blattzuführungseinlaß zuzuführen; und
 - dritte Kopplungselemente an der automatischen Blattzuführungseinrichtung und der manuellen Blatteinsetzführung, die ein lösbares Befestigen der manuellen Blatteinsetzführung auf der automatischen Blattzuführungseinrichtung ermöglichen, wenn die automatische Blattzuführungseinrichtung mit dem Druckerhauptgehäuse befestigt ist.
2. Drucker nach Anspruch 1, wobei die manuelle Blatteinsetzführung so positioniert ist, um als eine Blattausgabeschale zu wirken, wenn sie auf der automatischen Blattzuführungseinrichtung befe-

stigt ist.

3. Drucker nach Anspruch 2, der weiterhin einen Tragestab aufweist, der mit der manuellen Blatteinsetzföhrung gekoppelt ist und so positioniert ist, um weiterhin ausgegebene Blätter zu tragen. 5
4. Drucker nach Anspruch 2, der weiterhin Papierführungen, die in einer seitlichen Verschiebung entlang der manuellen Blatteinsetzföhrung zum seitlichen Positionieren eines Papierblatts, das manuell zugeführt werden soll, befestigt sind, wobei die Papierführungen Papierführungsseitenplatten umfassen, die von der manuellen Blatteinsetzföhrung und Papierführungsobenseitenplatten, die auf den distalen Enden der Papierführungsseitenplatten angeordnet sind, zum Tragen der ausgegebene Blätter angeordnet sind, vorstehen. 10 15
5. Drucker nach Anspruch 2 und wobei die manuelle Blatteinsetzföhrung mit der automatischen Blattzuföhrungseinrichtung unter einem vorbestimmten Winkel gekoppelt ist, der ermöglicht, daß ein Blatt manuell von der manuellen Blatteinsetzföhrung zu dem Blattzuföhrungseinlaß zugeführt wird. 20 25
6. Drucker nach Anspruch 1, der einen Traktionszuföhrungsmechanismus umfaßt, der unterhalb der manuellen Blatteinsetzföhrung zum Zuföhren von Endlospapier zu dem Druckabschnitt befestigt ist, wobei die zweiten Kopplungselemente ermöglichen, daß die manuelle Blatteinsetzföhrung schwenkbar an dem Druckerhauptgehäuse zwischen einer ersten, manuellen Zuföhrungsposition und einer zweiten Position, wo sie als eine Ausgabeschale für das Endlospapier dient, schwenkbar verschoben wird. 30 35
7. Drucker nach Anspruch 1, wobei die zweiten Kopplungselemente sich seitlich erstreckende Stiftelemente in dem Druckerhauptgehäuse und Nuten an der manuellen Blatteinsetzföhrung aufweisen, dimensioniert so, um in die Nuten aufgenommen zu werden. 40
8. Drucker nach Anspruch 1, wobei die dritten Kopplungselemente ein Paar elastischer Klauenelemente aufweisen, die von der manuellen Blatteinsetzföhrung zum betriebsmäßigen Koppeln mit der automatischen Blattzuföhrungseinrichtung vorstehen. 45 50
9. Verfahren zum Drucken, das die Schritte aufweist:
 Vorsehen eines Druckerhauptgehäuses, das einen Druckabschnitt besitzt, der innerhalb des Druckerhauptgehäuses gelegen ist, zum Drucken auf ein Papierblatt, und mit einem Blattzu-

föhrungseinlaß ausgebildet ist, der einen Zugang für ein Papierblatt zu dem Druckabschnitt bildet;

Lösen einer manuellen Blatteinsetzföhrung von einer Stelle in dem Druckerhauptgehäuse in Ausrichtung zu dem Blattzuföhrungseinlaß, an dem er eine manuelle Zuföhr von Papierblättern zu dem Druckabschnitt ermöglicht; lösbares Befestigen einer automatischen Blattzuföhrungseinrichtung an dem Druckerhauptgehäuse im wesentlichen an der Position, die zuvor durch die manuelle Blatteinsetzföhrung belegt war, in Ausrichtung zu dem Blattzuföhrungseinlaß, um automatisch eine Vielzahl von Papierblättern zu dem Druckabschnitt zuzuföhren; und lösbares Befestigen der manuellen Blatteinsetzföhrung an der automatischen Blattzuföhrungseinrichtung.

10. Verfahren nach Anspruch 9, das weiterhin den Schritt eines Positionierens der manuellen Blatteinsetzföhrung auf der automatischen Blattzuföhrungseinrichtung aufweist, um so als eine Ausgabeschale für bedrucktes Papier zu dienen.
11. Verfahren nach Anspruch 9, das den Schritt eines Positionierens der manuellen Blatteinsetzföhrung auf der automatischen Blattzuföhrungseinrichtung unter einem Winkel umfaßt, der so ausgewählt ist, um eine manuelle Zuföhrung von Papierblättern durch den Blattzuföhrungseinlaß entlang der manuellen Blatteinsetzföhrung zu ermöglichen.

Revendications

1. Imprimante destinée à assurer une impression au moins sur des feuilles discontinues de papier, comprenant :
 un corps principal d'imprimante, réalisé avec une entrée d'alimentation en feuille destinée au passage de feuilles de papier vers l'intérieur du corps principal d'imprimante,
 une section d'impression disposée à l'intérieur du corps principal d'imprimante et destinée à imprimer les feuilles de papier reçues par l'entrée d'alimentation en feuille,
 un organe d'alimentation automatique, des premiers organes de raccordement placés dans l'organe d'alimentation automatique et le corps principal d'imprimante et permettant un montage temporaire de l'organe d'alimentation automatique sur le corps principal de l'imprimante pour la transmission automatique de plusieurs feuilles de papier à l'entrée d'alimentation en feuille,
 un guide manuel d'insertion de feuille,

- des seconds organes de raccordement placés sur le guide manuel d'insertion de feuille et le corps principal d'imprimante et permettant un montage temporaire du guide manuel d'insertion de feuille à la place de l'organe d'alimentation automatique sur le corps principal de l'imprimante pour la transmission de feuilles individuelles de papier à l'entrée d'alimentation en feuille, et
- des troisièmes organes de raccordement placés sur l'organe d'alimentation automatique et le guide manuel d'insertion de feuille et permettant un montage temporaire du guide manuel d'insertion de feuille sur l'organe d'alimentation automatique lorsque l'organe d'alimentation automatique est monté sur le corps principal de l'imprimante.
2. Imprimante selon la revendication 1, dans laquelle le guide manuel d'insertion de feuille est positionné afin qu'il joue le rôle d'un plateau d'évacuation de feuille lorsqu'il est monté sur l'organe d'alimentation automatique.
 3. Imprimante selon la revendication 2, comprenant en outre une tige de support couplée au guide manuel d'insertion de feuille et positionnée afin qu'elle supporte les feuilles évacuées.
 4. Imprimante selon la revendication 2, comprenant en outre des guides de papier montés sous forme déplacée latéralement le long du guide manuel d'insertion de feuille et destinés à positionner latéralement une feuille de papier qui doit avancer manuellement, les guides de papier comprenant des plaques latérales de guide de papier qui dépassent du guide manuel d'insertion de feuille et des plaques supérieures de guide de papier placées aux extrémités externes des plaques latérales des guides de papier pour le support des feuilles évacuées.
 5. Imprimante selon la revendication 2, dans laquelle le guide manuel d'insertion de feuille est raccordé à l'organe d'alimentation automatique suivant un angle prédéterminé qui permet la transmission manuelle d'une feuille par le guide manuel d'insertion de feuille à l'entrée d'alimentation en feuille.
 6. Imprimante selon la revendication 1, comprenant un mécanisme d'alimentation à tracteur monté sous le guide manuel d'insertion de feuille et destiné à faire avancer une feuille continue de papier vers la section d'impression, les seconds organes de raccordement permettant au guide manuel d'insertion de feuille d'être déplacé de manière pivotante sur le corps principal de l'imprimante entre une première position d'avance manuelle et une seconde position dans laquelle il est utilisé comme plateau d'évacuation de la feuille continue de papier.
 7. Imprimante selon la revendication 1, dans laquelle les seconds organes de raccordement comprennent des broches dépassant latéralement dans le corps principal de l'imprimante et des gorges formées sur le guide manuel d'insertion de feuille et ayant des dimensions leur permettant de se loger dans les gorges.
 8. Imprimante selon la revendication 1, dans laquelle les troisièmes organes de raccordement comportent deux organes à cliquets élastiques dépassant du guide manuel d'insertion de feuille et destinés à être couplés pendant le fonctionnement à l'organe d'alimentation automatique.
 9. Procédé d'impression, comprenant les étapes suivantes :

la disposition d'un corps principal d'imprimante ayant une section d'impression placée à l'intérieur du corps principal d'imprimante et destinée à imprimer une feuille de papier, et comportant une entrée d'alimentation en feuille permettant à une feuille de papier d'avoir accès à la section d'impression,

le démontage d'un guide manuel d'insertion de feuille d'un emplacement sur le corps principal d'imprimante qui correspond à l'entrée d'alimentation en feuille par laquelle une avance manuelle de feuille de papier vers la section d'impression est permise,

le montage temporaire d'un organe d'alimentation automatique sur le corps principal d'imprimante pratiquement dans la position occupée antérieurement par le guide manuel d'insertion de feuille, en face de l'entrée d'alimentation en feuille de manière que plusieurs feuilles de papier puissent être transmises automatiquement à la section d'impression, et

le montage temporaire du guide manuel d'insertion de feuille sur l'organe d'alimentation automatique.
 10. Procédé selon la revendication 9, comprenant en outre une étape de positionnement du guide manuel d'insertion de feuille sur l'organe d'alimentation automatique afin qu'il soit utilisé comme plateau d'évacuation du papier imprimé.
 11. Procédé selon la revendication 9, comprenant une étape de positionnement du guide manuel d'insertion de feuille sur l'organe d'alimentation automatique avec un angle choisi pour permettre l'avance manuelle de feuille de papier par l'entrée d'alimen-

tation en feuille le long du guide manuel d'insertion
de feuille.

5

10

15

20

25

30

35


40


45

50

55

FIG. 1

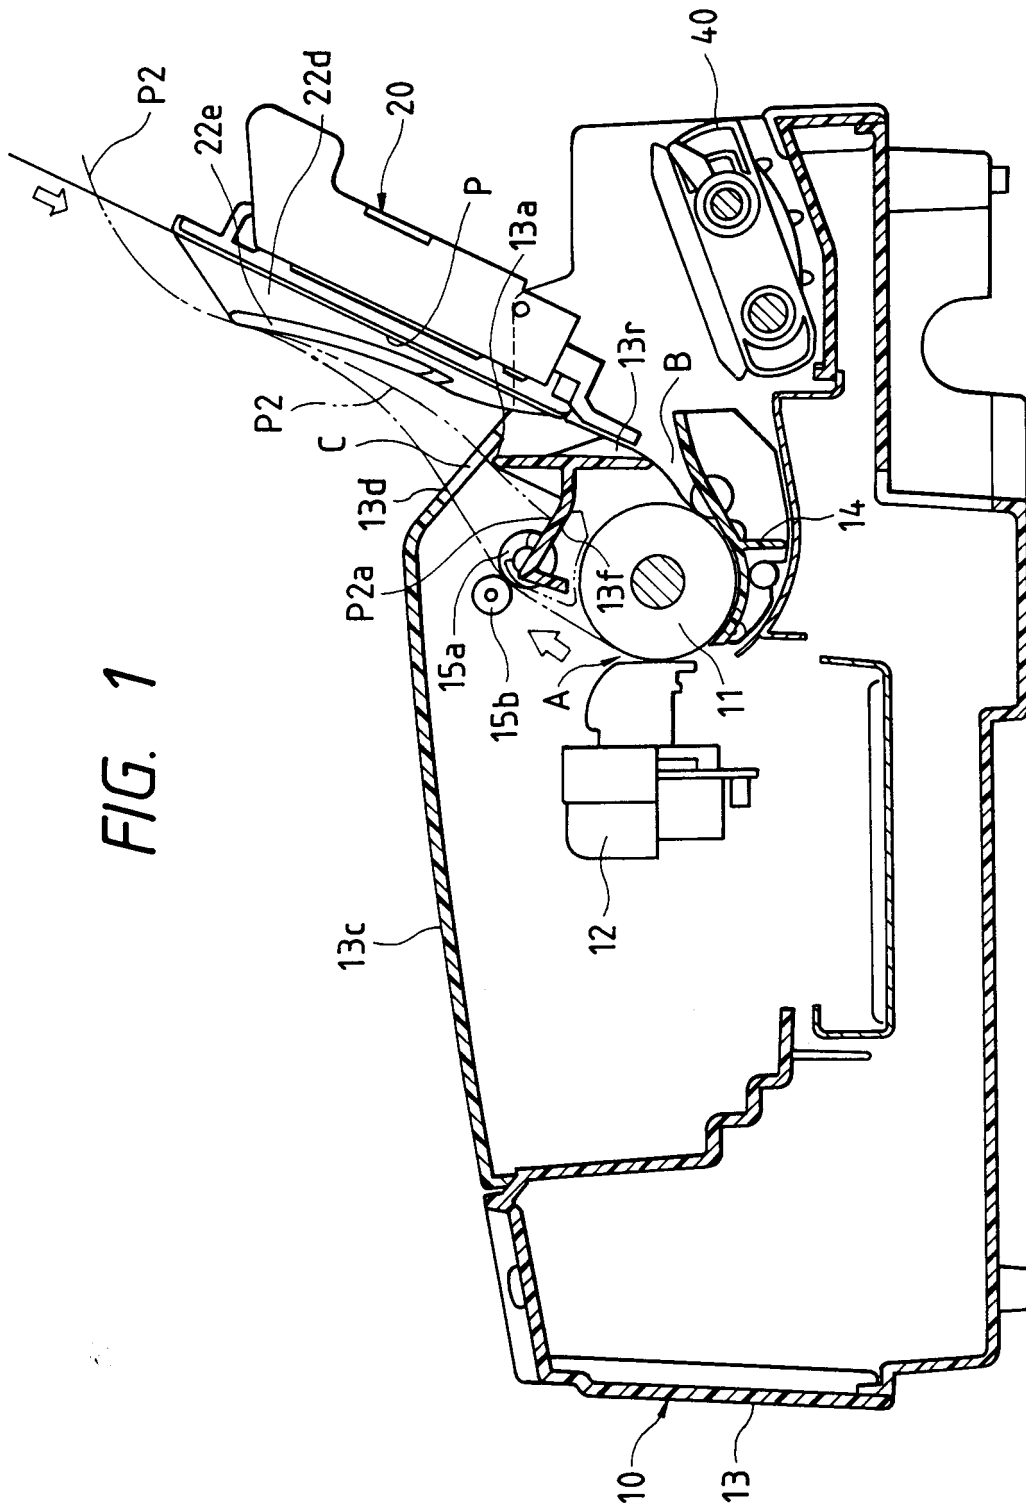

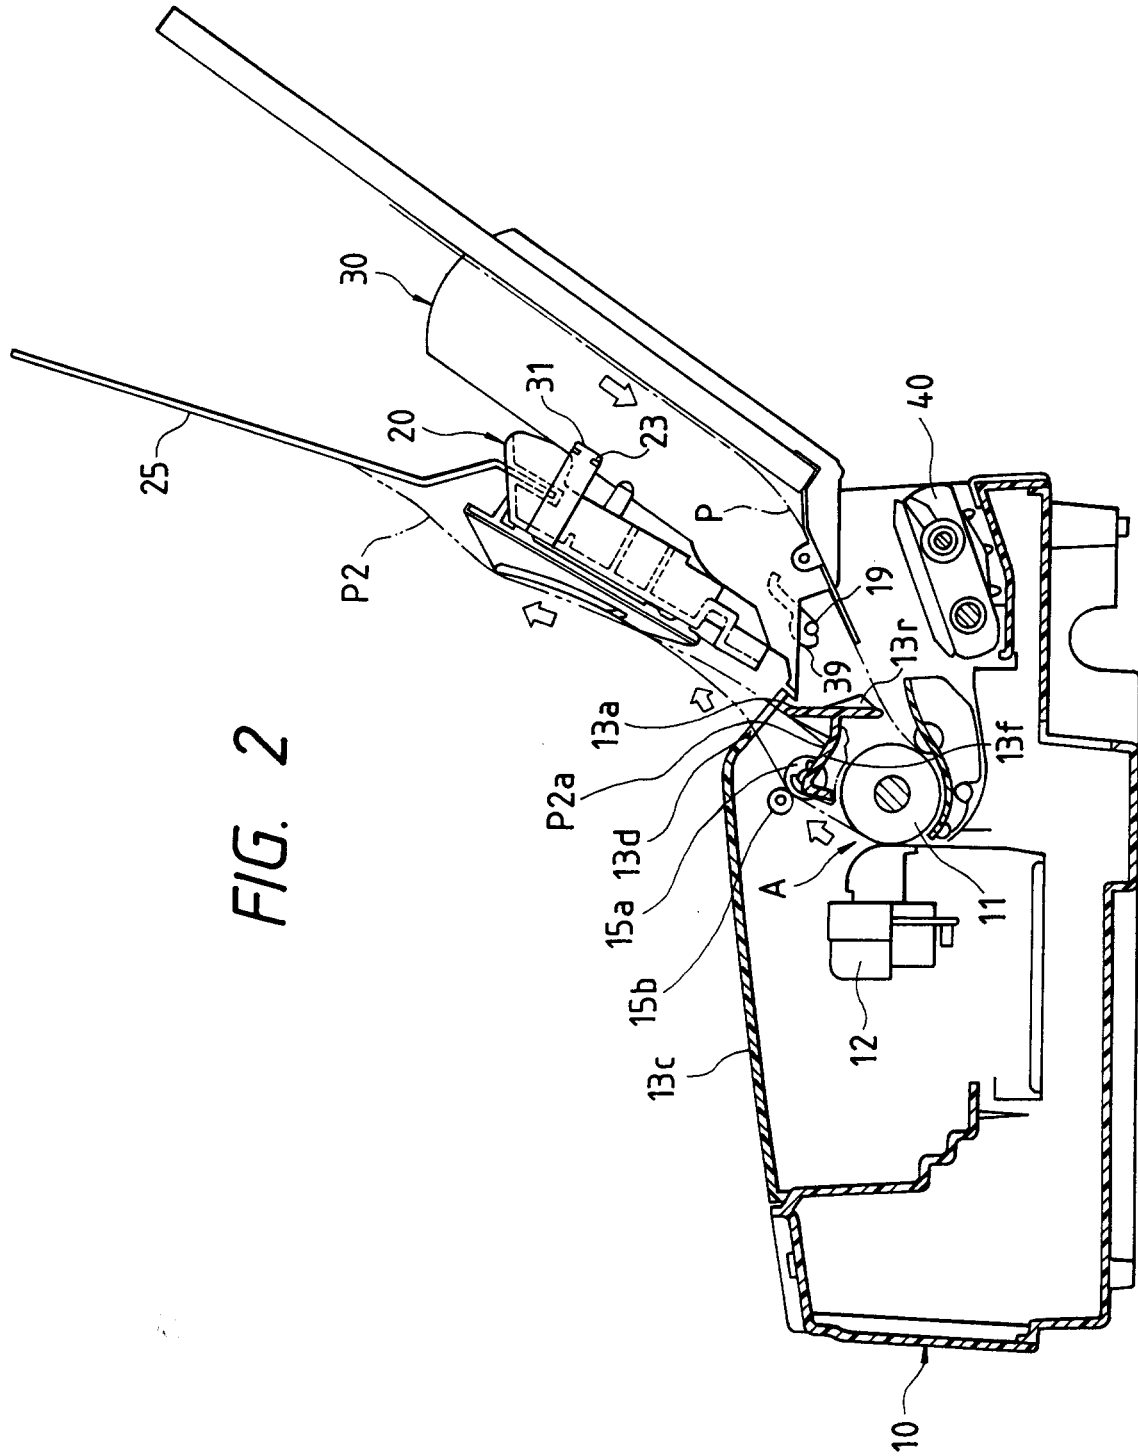

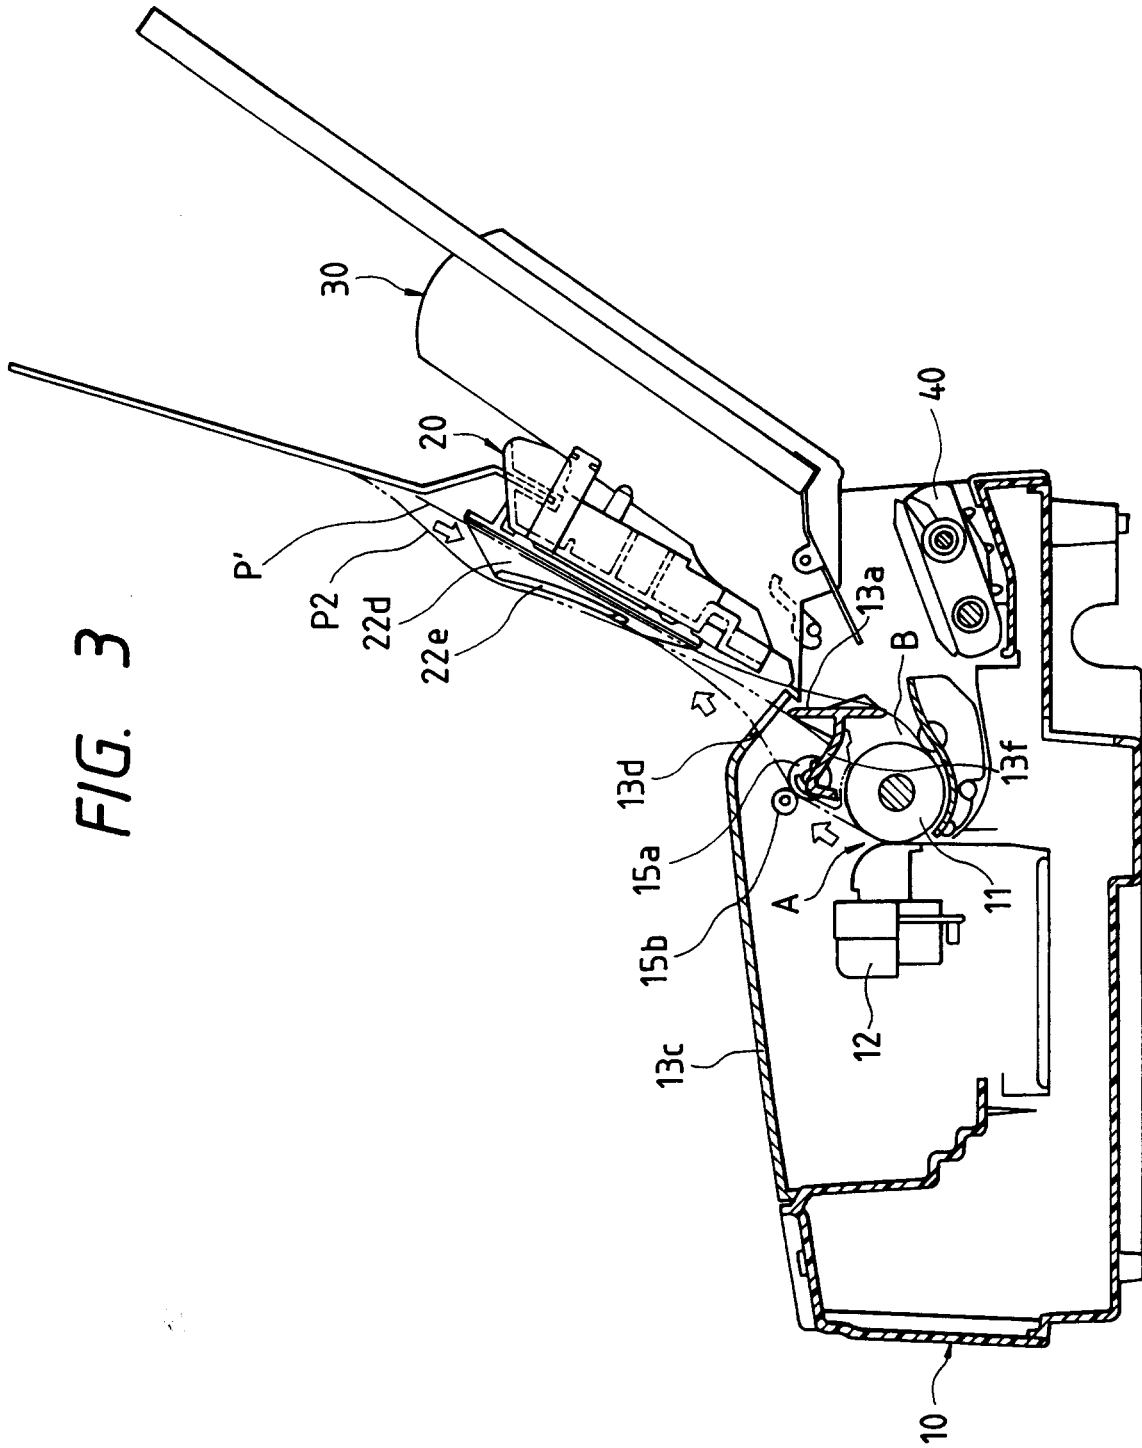


FIG. 4

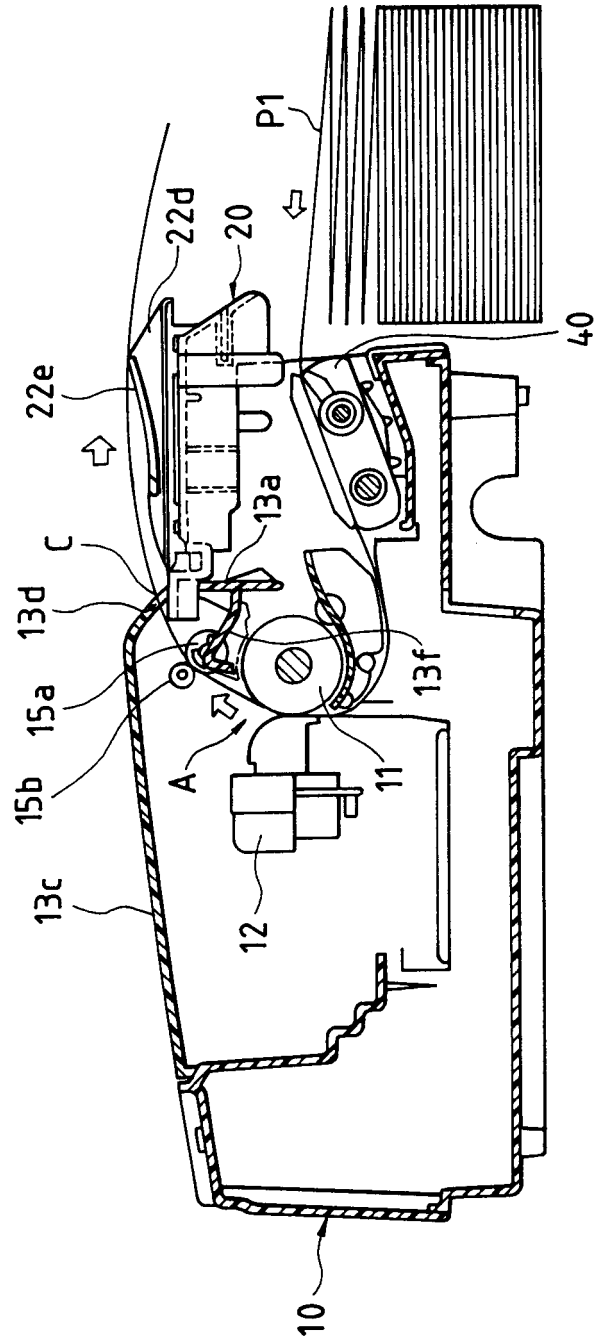


FIG. 5

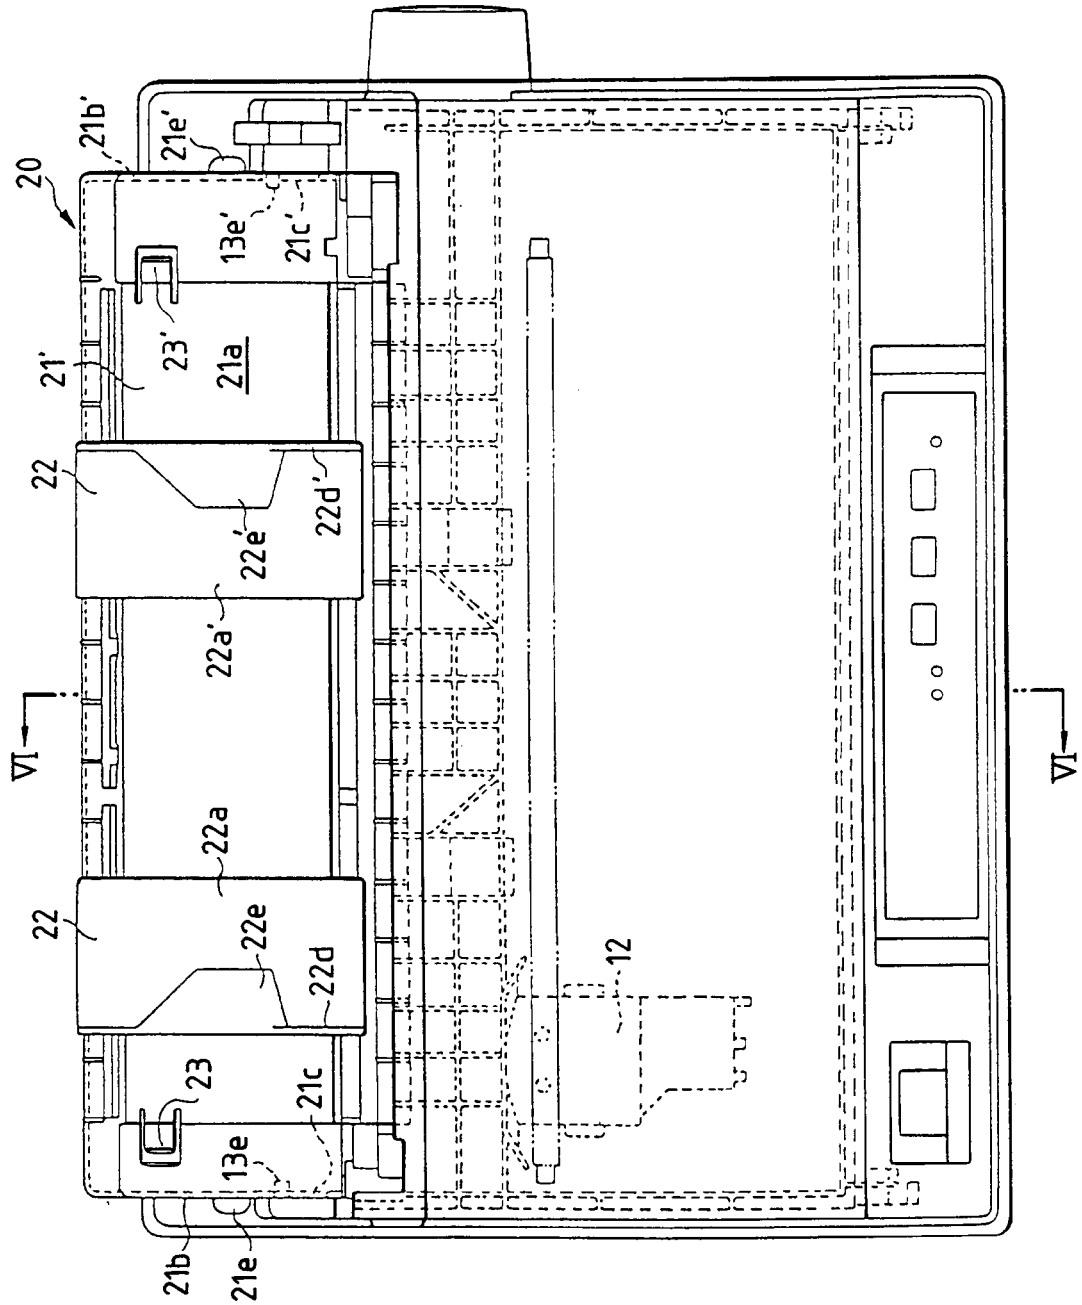


FIG. 6

