(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 666 463 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
04.11.1998 Bulletin 1998/45

(51) Int Cl.[6]: **F41B 6/00**

(21) Application number: **95100691.5**

(22) Date of filing: **19.01.1995**

(54) **Method and apparatus for accelerating flying bodies**

Verfahren und Vorrichtung zur Beschleunigung von Flugkörpern

Méthode et appareil pour accélérer des objets volants

(84) Designated Contracting States:
AT BE CH DE ES FR GB IT LI NL SE

(30) Priority: **31.01.1994 JP 28904/94**

(43) Date of publication of application:
09.08.1995 Bulletin 1995/32

(73) Proprietors:
- **Tanaka, Koichi**
  Nishikasugai-gun, Aichi (JP)
- **MORITA AND COMPANY CO., LTD.**
  Nagoya, Aichi (JP)

(72) Inventor: **Tanaka, Koichi**
Shitatsu-cho, Nishikasugai-gun Aichi (JP)

(74) Representative: **Prüfer, Lutz H., Dipl.-Phys. et al**
Harthauser Strasse 25d
81545 München (DE)

(56) References cited:
US-A- 4 656 918

- **2ND SYMPOSIUM ON ELECTROMAGNETIC LAUNCH TECHNOLOGY '83, BOSTON, MA, USA, 10-13 OCT. 1983, vol. MAG-20, ISSN 0018-9464, IEEE TRANSACTIONS ON MAGNETICS, MARCH 1984, USA, MCKINNEY K ET AL 'Multiple stage pulsed induction acceleration'**
- **AVIATION WEEK AND SPACE TECHNOLOGY, vol. 133,no. 4, July 1990 NEW YORK US, pages 78-79, XP 000174536 B.W.HENDERSON 'Livermore proposes light gas gun for launch of small payloads'**
- **PHYSICS IN HIGH MAGNETIC FIELDS. PROCEEDINGS OF THE OJI INTERNATIONAL SEMINAR, HAKONE, JAPAN, 10-13 SEPT. 1980, ISBN 3-540-10587-5, 1981, BERLIN, WEST GERMANY, SPRINGER-VERLAG, WEST GERMANY, pages 64-71, MIURA N ET AL 'Generation of megagauss fields by electromagnetic flux compression'**
- **IEEE TRANSACTIONS ON MAGNETICS, no. 2, March 1984 NEW YORK US, pages 291-293, R.S.HAWKE ET AL. 'Rail accelerator development for ultra-high pressure research'**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 666 463 B1

Description

This invention relates to a method of accelerating a flying body according to the preamble of claim 1, which can shoot flying bodies at a superhigh speed and which can be implemented at a low running cost without requiring any gigantic equipment, as well as to an apparatus according to the preamble of claim4.

For example, rockets and artificial satellites which travel the outer space are constantly exposed to the danger of bumping against meteorites and dusts flying at very high speeds (e.g. 50 km/sec) through the space. Thus, in order to simulate the bumping of a rocket against such high-speed flying matters on the ground so as to test how the rocket is to be damaged, bump tests, in which high-speed flying bodies are allowed to impinge upon an object to be tested, are carried out. Impact tests using high-speed flying bodies are also carried out frequently in developing new materials so as to test their physical properties. Meanwhile, as the apparatus for accelerating and shooting flying bodies at a high speed against the object to be tested, for example, a high-pressure gas gun which shoots various types of solid flying bodies from a barrel-like pipe thereof by releasing at once the compression of a high-pressure gas, a powder gun, as well as, a rail gun and a plasma gun which resort to the principle of electromagnetic acceleration are known.

However, the speed of the flying body shot by such high-pressure gas gun, which may depend on the compression degree of the high-pressure gas employed, is far from those of the high-speed flying matters which are possible to bump against the space traveling vessels such as rockets (e.g. 50 km/sec) or those of the high-speed flying bodies required for testing the physical properties of new materials (e.g. 10 km/sec). Accordingly, the high-pressure gas gun is not employable for the simulation tests on the ground, disadvantageously. As the apparatus which can shoot flying bodies at much higher speeds than by the high-pressure gas gun, the above-described powder gun, rail gun, plasma gun, etc. are known. It is possible to shoot flying bodies at a high speed of about 10 km/sec using these guns based on the principle of electromagnetic acceleration, but such speed is far from reaching into the superhigh speed of meteorites, dusts, etc. flying through the outer space (e. g. 50 km/sec). Further, the rail gun and plasma gun involve problems in that they require long rails, and thus the scale of the equipment is enlarged, and that the rails are fused by sparks to be unusable each time the guns are used, leading to extremely increased running cost.

A method according to the preamble of claim 1 and an apparatus according to the preamble of claim 4 are known from US-A 4 656 918 and from IEEE Transactions of Magnetics , Vol. MAG-20 No. 2, March 1984, respectively.

This invention is proposed in view of many problems inherent in the prior art means for accelerating high-speed flying bodies and in order to solve them suitably, and it is an objective of the invention to provide a method of accelerating flying bodies which enables shooting flying bodies at a speed comparable to the level attainable by the rail gun, and which can be implemented at a low running cost without requiring any gigantic equipment, as well as, an apparatus therefor.

As a means for generating a superhigh magnetic field, a magnetic flux compression method called Cnare's method is known, and the present invention utilizes the Maxwell stress to be generated concomitantly with this electromagnetic flux compression. Therefore, the electromagnetic flux compression method will be described first of all. Fig. 7 shows an apparatus developed for generating a strong magnetic field (S. Chikakado et al. "KAGAKU (Science)" February number, pp. 74-77, published by Iwanami Shoten, Publishers (1977)). This apparatus essentially consists of a capacitor 10 which can store extremely high electric charge, a primary coil 14 connected to the capacitor 10 via a switching element 12, and a conductive cylindrical liner 16 disposed coaxially in the primary coil 14. The capacitor 10 has sufficiently high capacity and storage voltage, and, for example, an enormous electrostatic energy of about 285 KJ can be stored therein. Meanwhile, the inductance of the power circuit consisting of the capacitor 10 and the switching element 12 is set to a very low level of, for example, about 340 nH. Incidentally, the cylindrical liner 16 is made of a conductive metal such as copper and aluminum.

When the switching element 12 is closed to release the electric charge stored in the capacitor 10 at once, a pulsative primary current of about 1 MA flows across the primary coil 14 in a very short while. While no magnetic field intrudes into the inner space of the cylindrical liner 16, in accordance with the Fleming's rule, at the moment that a primary current I flowed across the primary coil 14, a great induced current i flows afterward across the liner 16 in the opposite direction with respect to the primary current I. At this moment a strong magnetic field is generated only in the narrow annular space defined between the primary coil 14 and the liner 16, and the liner 16 is suddenly compressed radially inward and deformed due to the so-called Maxwell stress (the speed of deformation amounts to as high as 1 km/sec). The intensity of the magnetic field is extremely increased, due to abrupt contraction of the volume of the inner space of the liner 16, to provide finally a strong magnetic field of about 200 MA/m. Incidentally, the electrostatic energy, inductance and primary current values are cited from the description in S. Chikakado et al. "KAGAKU (Science)" February number (1977).

This invention utilizes the magnetic flux compression method described above, and the basic principle of the invention is to shoot flying bodies at a superhigh speed resorting to the Maxwell stress induced by the strong magnetic field generated in the space defined between the primary coil and the liner, when a great electric

charge is applied momentarily across the primary coil to form a primary current so as to allow an induced current to flow across the cylindrical liner (or an equivalence).

Namely, in order to solve the above-described problems and attain the intended objects suitably, the method of accelerating a flying body according to one aspect of this invention comprises applying momentarily a high pressure electric charge stored in a capacitor to a primary coil to flow a pulsative primary current so as to form an induced current across a conductive cylindrical liner, disposed in the primary coil, in the direction opposite to that of the primary current; and compressing abruptly the cylindrical liner radially inward so as to shoot a flying body, interposed in a severed portion of a cylindrical wall of the liner and assuming electrical continuity therewith, toward an axis of the liner based on electromagnetic acceleration.

The method of accelerating a flying body according to another aspect of the invention comprises applying momentarily a high pressure electric charge stored in a capacitor to a primary coil to flow a pulsative primary current so as to form an induced current across a conductive cylindrical airtight container, disposed in the primary coil, in the direction opposite to that of the primary current; and compressing abruptly the airtight container radially inward so as to shoot outward a flying body loaded in a predetermined position of the airtight container with the aid of the compressive force of a gas charged in the airtight container.

In order to suitably implement the method of accelerating a flying body, the apparatus for accelerating a flying body according to another aspect of the invention comprises a capacitor in which a high-pressure electric charge can be stored; a primary coil connected to the capacitor via a switching means; a conductive cylindrical liner disposed in the primary coil; an opening defined on a cylindrical wall of the cylindrical liner by severing fully the liner; and a flying body interposed in the opening and assuming electrical continuity with the liner; wherein a high-pressure electric charge stored in the capacitor is momentarily applied to the primary coil so as to compress abruptly the cylindrical liner radially inward and to shoot the flying body interposed in the opening toward the axis of the liner.

Meanwhile, the apparatus for accelerating a flying body according to another aspect of the invention comprises a capacitor in which a high pressure electric charge can be stored; a primary coil connected to the capacitor via a switching means; an airtight container disposed in the primary coil; an opening defined at a predetermined portion of the airtight container; and a flying body loaded in the airtight container; wherein a high pressure electric charge stored in the capacitor is momentarily applied to the primary coil so as to compress abruptly the airtight container radially inward and to shoot outward the flying body loaded in the opening of the airtight container.

BRIEF DESCRIPTION OF THE DRAWINGS

The features of this invention that are believed to be novel are set forth with particularity in the appended claims. The invention, together with the objects and advantages thereof, may best be understood by reference to the following description of the preferred embodiments taken in conjunction with the accompanying drawings in which:

Fig. 1 is a plan view showing schematically an embodiment of the apparatus for accelerating flying bodies according to a first aspect of the invention;

Fig. 2 is a schematic perspective view of a cylindrical liner to be employed in the apparatus for accelerating flying bodies of the embodiment according to the first aspect of the invention with a primary coil being omitted; in which a flying body is intimately loaded in a first opening of the cylindrical liner;

Fig. 3 is a schematic perspective view of the cylindrical liner to be employed in the apparatus for accelerating flying bodies of the embodiment according to the first aspect of the invention, with a primary coil being omitted; in which the flying body is being shot from the apparatus;

Fig. 4 is a partially cut-away perspective view of a flying body provided with conductive armatures on both sides thereof, provided that the flying body is made of an electrically insulating material or a metal having poor conductivity;

Fig. 5 is a schematic vertical cross-sectional side view of an apparatus for implementing a method of accelerating flying bodies according to a second aspect of the invention, with a flying body being loaded therein;

Fig. 6 is a schematic vertical cross-sectional side view of an apparatus for implementing a method of accelerating flying bodies according to a second aspect of the invention, in which the flying body is being shot from the apparatus with the aid of gas pressure; and

Fig. 7 is a schematic view of an apparatus for implementing the magnetic flux compression method.

PREFERRED EMBODIMENT OF THE INVENTION

The method and apparatus for accelerating flying bodies according to this invention will be described below by way of preferred embodiments with reference to the attached drawings. Fig. 1 is a plan view showing schematically an embodiment of the apparatus for accelerating flying bodies according to a first aspect of the

invention, in which a primary coil 20 is of a rigid and solid structure made of a conductive metal such as steel with a single winding or a winding of 2 or 3 turns are applied. To both open ends of the primary coil 20 are connected a power circuit consisting of a switching element 22 typified by ignitron and a capacitor 24. The capacitor 24 is adapted to be charged with a high electrostatic energy of, for example, about 285 KJ. A cylindrical liner 26 is disposed in the circular hollow core space of the primary coil 20 coaxially therewith, and a predetermined annular space G is formed between these two members 20,26.

The cylindrical liner 26 is, for example, made of a conductive metal such as copper and aluminum, and a first opening 28 having a predetermined aperture is defined so as to fully sever the cylindrical wall of the liner 26 radially. A flying body 30 is to be intimately loaded in this first opening 28, as will be described later. A second opening 32 having a predetermined aperture is also formed on the cylindrical wall at a position opposing to the first opening 28 thereof via the cylinder axis. Namely, the cylindrical liner 26 basically consists of two separate pieces of arcuate segments 26a,26b, and the portions of the lateral surfaces of these two segments 26a,26b where the second opening 32 is formed are connected by welding thereto a pair of connecting plates 34 having good conductivity so as to secure mechanical and electrical continuity between these two segments 26a,26b. Incidentally, it can happen that the first opening 28 is fused by the sparks generated when the flying body 30 loaded therein is shot at a high speed under electromagnetic acceleration to such a degree as cannot be used again. Accordingly, as shown in Fig. 3, it is recommended to provide removably a pair of shoes 36 made of a metal having good conductivity at each open end of the arcuate segments 26a,26b defining this first opening 28. These shoes 36 are to be replaced with new ones every time they are fused by shooting the flying body 30.

Since the flying body 30 is usually made of a conductive metal, an electrically closed loop is formed along the cylindrical wall of the liner 26 by loading the flying body 30 into the first opening 28 of the cylindrical liner 26. However, the flying body 30 is sometimes required to be made of an electrically insulating material or a metal having poor conductivity depending on the physical properties and other essential properties of the target object to be tested. In such cases, for example, it is proposed to apply a pair of armatures 38 made of a conductive material on each lateral surface of the flying body 30 so as to close the first opening 28 of the cylindrical liner 28 with these armatures 38 to secure electrical continuity between the arcuate segments 26a,26b. In other words, when the flying body 30 is made of an insulating material, the cylindrical liner 26 assumes electrically an open loop, even if the flying body 30 is loaded in the first opening 28. However, the presence of the armatures 38 in the first opening 28 can resume a closed loop.

Next, action of the apparatus for accelerating flying bodies according to this constitution will be described. It should be appreciated that the flying body 30 is intimately loaded in the first opening 28 of the cylindrical liner 26, as shown in Fig. 2, to form an electrically closed loop along the liner 26. If the switching element 22 shown in Fig. 1 is closed (turned on) in this state, the great electric charge charged in the capacitor 24 is applied at once to the primary coil 20 in a very short while. Then, a pulsative primary current of about 1 MA flows across the primary coil 20 to generate an induced current which flows across the cylindrical liner 26 in the direction opposite to that of the primary current, so that the liner 26 is abruptly compressed radially inward due to the so-called Maxwell stress. Accordingly, the flying body 30 loaded in the first opening 28 is shot inward in the radial direction of the liner 26 as it undergoes deformation under compression, as shown in Fig. 3. The speed that the cylindrical liner 26 deforms due to the Maxwell stress as described above is extremely great, so that the speed that the flying body 30 is shot is superhigh which greatly exceeds the speed of the flying body shot by a conventional gas gun.

Incidentally, since the flying body 30 released from the first opening 28 is shot outward through the second opening 32 of the cylindrical liner 26, the object to be subjected to a breakdown test or physical property tests may be disposed as a target in the shooting direction. While one flying body 30 is adapted to be shot in the illustrated embodiment, the cylindrical liner 26 may be adapted to be able to load thereon a plurality of flying bodies 30 along the periphery thereof so as to shoot the flying bodies 30 in multiple directions. Further, physical property tests may be carried out by loading on the cylindrical liner 26 two flying bodies 30 on each side of the axis of the cylinder to oppose to each other and shooting them at the same time so that they may bump against each other at the central position of the cylinder. In this case, the speed that these two flying bodies 30 bump against each other is doubled, enabling superhigh-speed tests.

Figs. 5 and 6 show schematically an apparatus in which the method of accelerating flying bodies according to a second aspect of the invention is implemented. In this accelerating apparatus, the constitution of the power circuit consisting of a switching element 22 and a capacitor 24 and that of a primary coil 20 are the same as the embodiment of Fig. 1. However, a cylindrical airtight container 40 made of a metal having good conductivity is disposed in the primary coil 20 coaxially therewith, and an annular space G having a predetermined clearance is formed between the inner wall surface of the coil 20 defining the hollow core space and the outer wall surface of the airtight container 40. The airtight container 40 constitutes, for example, a pressure vessel in which a high-pressure gas is to be charged, and a flying body 30 is adapted to be intimately loaded in an opening 42 defined at one end of the container 40. Incidentally, a pipe 44 extending in alignment with the axis of the air-

tight container 40 to the outside of the container 40 is preferably connected to the opening 42 so as to guide the shooting direction of the flying body 30 by the pipe 44 when the flying body 30 is shot, as will be described later.

Next, action of the apparatus for accelerating flying bodies according to this constitution will be described. As described already referring to Fig. 2, a great electric charge charged in the capacitor 24 is applied at once to the primary coil 20 in a very short while by closing the switching element 22. Then, a pulsative primary current of about 1 MA flows across the primary coil 20 to generate an induced current which flows across the airtight container 40 in the direction opposite to that of the primary current, so that the airtight container 40 is abruptly compressed radially inward due to the so-called Maxwell stress. Accordingly, the flying body 30 loaded in the opening 42 can be shot out of the container 40 at an extremely high speed with the aid of the gas pressure of a high-pressure gas charged in the airtight container 40, as shown in Fig. 6. In this case, the gas to be charged in the airtight container 40 may not necessarily be of high pressure, and it may be of normal pressure depending on the application.

In view of the aspect that the method and apparatus for accelerating flying bodies can shoot flying bodies at a superhigh speed, there are proposed an application to bumping tests of superhigh-speed flying bodies to be carried out against rockets and artificial satellites which were unachievable by means of the conventional gas guns and the like due to their insufficient shooting speed, an application of high-speed shooting of deuterium ice pellets into a plasma space in a fusion reactor and other applications.

It should be apparent to those skilled in the art that the present invention may be embodied in many other specific forms without departing from the spirit or scope of the invention. Therefore, the present embodiments are to be considered as illustrative and not restrictive, and the invention is not to be limited to the details given herein, but may be modified within the scope of appended claims.

Claims

1. A method of accelerating a flying body which comprises:

   applying momentarily a high pulsative primary current to a primary coil (20) so as to form an induced current across a conductive essentially cylindrical body (26, 40) disposed in said primary coil (20), in the direction opposite to that of said primary current characterized in that, said primary current is applied such that
   said cylindrical body (26, 40) is compressed abruptly radially inward so as to accelerate a flying body (30) disposed in an opening (28,42) in a predetermined position of said essentially cylindrical body (26, 40) by means of a force caused by said primary current.

2. The method of accelerating a flying body according to claim 1, characterized by

   applying momentarily a high electric charge stored in a capacitor (24) to said primary coil (20) to flow said pulsative primary current so as to form said induced current across said conductive essentially cylindrical body, formed as a conductive cylindrical liner (26) and disposed in said primary coil (20), in the direction opposite to that of said primary current such that
   said cylindrical liner (26) is compressed abruptly radially inward so as to accelerate said flying body (30) interposed in a severed portion of cylindrical wall of said liner (26), which is said predetermined position, and assuming electrical continuity therewith, towards an axis of said liner (26) based on electromagnetic acceleration caused by said pulsative primary current.

3. The method of accelerating a flying body according to claim 1, characterized by

   applying momentarily a high electric charge stored in a capacitor (24) to said primary coil (20) to flow said pulsative primary current so as to form said induced current across said conductive essentially cylindrical body, formed as a conductive cylindrical airtight container (40) and disposed in said primary coil (20), in the direction opposite to that of said primary current such that
   said airtight container (40) is compressed abruptly radially inward so as to accelerate outward said flying body (30) loaded in said predetermined position of said airtight container (40) with the aid of the compressive force of a gas charged in said airtight container (40), which is caused by said pulsative primary current.

4. An apparatus for accelerating a flying body, which comprises:

   a capacitor (24) in which a high electric charge can be stored;
   a primary coil (20) connected to said capacitor (24) via switching means (22); and
   a conductive essentialy cylindrical body (26, 40) disposed in said primary coil (20); characterized by
   an opening (28, 42) defined in said conductive essentially cylindrical body (26, 40); and

a flying body (30) disposed in said opening (28, 42);
wherein a high electric charge stored in said capacitor (24) is momentarily applied to said primary coil and causes the flow of a pulsative primary current in said primary coil (20) so as to compress abruptly said cylindrical body (26, 40) radially inward and to accelerate said flying body (30) disposed in said opening (28, 42) by means of a force caused by said pulsative primary current.

5. The apparatus according to claim 4, characterized

in that said conductive essentially cylindrical body is formed as a conductive cylindrical liner (26) disposed in said primary coil (20);
in that said opening (28) is defined in a cylindrical wall of said cylindrical liner (26) by severing fully said liner (26);
in that said flying body (30) is interposed in said opening (28) and assumes electrical continuity with said liner (26); and
in that said high electric charge stored in said capacitor (24) is momentarily applied to said primary coil so as to press abruptly said cylindrical liner (26) radially inward and to accelerate said flying body (30) interposed in said opening (28) towards the axis of said liner (26).

6. The accelerating apparatus according to claim 5,
wherein an armature (38) made of a conductive material is applied to said flying body (30), provided that said flying body (30) is made of an electrically insulating material so as to recover electrical continuity of said cylindrical liner (26) at said opening (28).

7. The apparatus for accelerating a flying body according to claim 4, characterized

in that said conductive essentially cylindrical body is formed as an airtight container (40) disposed in said primary coil (20);
in that said opening (42) is defined at a predetermined portion of said airtight container (40);
in that said flying body (30) is loaded in said opening (42) of said airtight container (40); and
in that said high electric charge stored in said capacitor (24) is momentarily applied to said primary coil (20) so as to compress abruptly said airtight container (40) radially inward and to accelerate said flying body (30) outwards of said airtight container (40).

8. The apparatus according to claim 7,
wherein a gas is charged to said airtight container (40) to a high pressure.

9. The apparatus according to claim 7,
wherein a gas is charged to said airtight container (40) to normal pressure.

Patentansprüche

1. Verfahren zum Beschleunigen eines Flugkörpers, mit:

momentanes Anlegen eines hohen pulsierenden Primärstromes an eine Primärspule (20) so, daß ein induzierter Strom über einen in der Primärspule (20) vorgesehenen leitenden im wesentlichen zylindrischen Körper (26, 40) in der Richtung entgegengesetzt zu der des Primärstromes gebildet wird,
dadurch gekennzeichnet, daß der Primärstrom derart angelegt wird,
daß der zylindrische Körper (26, 40) abrupt radial nach innen so zusammengedrückt wird, daß ein in einer Öffnung (28, 42) an einer vorbestimmten Position des im wesentlichen zylindrischen Körpers (26, 40) vorgesehener Flugkörper (30) mittels einer durch den Primärstrom verursachten Kraft beschleunigt wird.

2. Verfahren zum Beschleunigen eines Flugkörpers nach Anspruch 1, gekennzeichnet durch

momentanes Anlegen einer in einem Kondensator (24) gespeicherten hohen elektrischen Ladung an die Primärspule (20) so, daß der pulsierende Primärstrom so fließt, daß der induzierte Strom über den leitenden im wesentlichen zylindrischen Körper, der als eine leitende zylindrische Einlage (26) gebildet und in der Primärspule (20) vorgesehen ist, in der Richtung entgegengesetzt zu der des Primärstromes derart gebildet wird,
daß die zylindrische Einlage (26) abrupt radial nach innen so zusammengedrückt wird, daß sie den Flugkörper (30), der an einer abgeschnittenen Position einer zylindrischen Wand der Einlage (26) vorgesehen ist, die die vorbestimmte Position ist, und der eine elektrische Verbindung damit annimmt, zu einer Achse der Einlage (26) beschleunigt auf der Grundlage einer durch den pulsierenden Primärstrom verursachten elektromagnetischen Beschleunigung.

3. Verfahren zum Beschleunigen eines Flugkörpers nach Anspruch 1, gekennzeichnet durch

momentanes Anlegen einer in einem Kondensator (24) gespeicherten hohen elektrischen Ladung an die Primärspule (20) so, daß der pul-

sierende Primärstrom so fließt, daß der induzierte Strom über den leitenden im wesentlichen zylindrischen Körper, der als ein leitender zylindrischer luftdichter Behälter (40) gebildet ist und in der Primärspule (20) vorgesehen ist, in der Richtung entgegengesetzt zu der des Primärstromes derart gebildet wird,
daß der luftdichte Behälter (40) abrupt radial nach innen so zusammengedrückt wird, daß der in der vorbestimmten Position des luftdichten Behälters (40) geladene Flugkörper (30) nach außen beschleunigt wird mit der Hilfe der zusammendrückenden Kraft eines Gases, das in dem luftdichten Behälter (40) geladen ist, was durch den pulsierenden Primärstrom verursacht wird.

4. Gerät zum Beschleunigen eines Flugkörpers, mit:

einem Kondensator (24), in dem eine hohe elektrische Ladung gespeichert werden kann,
einer mit dem Kondensator (24) über ein Schaltelement (22) verbundene Primärspule (20) und
einem in der Primärspule (20) vorgesehenen leitenden im wesentlichen zylindrischen Körper (26, 40);

gekennzeichnet durch

eine in dem leitenden im wesentlichen zylindrischen Körper (26, 40) definierte Öffnung (28, 42) und
einen in der Öffnung (28, 42) vorgesehenen Flugkörper (30),
wobei eine in dem Kondensator (24) gespeicherte hohe elektrische Ladung momentan an die Primärspule angelegt wird und den Fluß eines pulsierenden Primärstromes in der Primärspule (20) so bewirkt, daß der zylindrische Körper (26, 40) abrupt radial nach innen zusammengedrückt wird und der in der Öffnung (28, 42) vorgesehene Flugkörper (30) mittels einer durch den pulsierenden Primärstrom verursachten Kraft beschleunigt wird.

5. Gerät nach Anspruch 4, dadurch gekennzeichnet,

daß der leitende im wesentlichen zylindrische Körper als eine in der Primärspule (20) vorgesehene leitende zylindrische Einlage (26) gebildet ist,
daß die Öffnung in einer zylindrischen Wand der zylindrischen Einlage (26) durch vollständiges Schneiden der Einlage (26) definiert ist,
daß der Flugkörper (30) in die Öffnung (28) eingefügt ist und eine elektrische Verbindung mit der Einlage (26) annimmt und
daß die in dem Kondensator (24) gespeicherte hohe elektrische Ladung momentan an die Primärspule so angelegt wird, daß abrupt die zylindrische Einlage (26) radial nach innen gepreßt wird und den in die Öffnung (28) eingefügten Flugkörper (30) zu der Achse der Einlage (26) beschleunigt.

6. Beschleunigungsgerät nach Anspruch 5,
bei dem ein aus einem leitenden Material hergestellter Anker (38) an dem Flugkörper (30) angebracht ist, wenn vorgesehen ist, daß der Flugkörper (30) aus einem elektrisch isolierenden Material hergestellt ist, so daß die elektrische Verbindung der zylindrischen Einlage (26) an der Öffnung (28) wiederhergestellt ist.

7. Gerät zum Beschleunigen eines Flugkörpers nach Anspruch 4, dadurch gekennzeichnet,

daß der leitende im wesentlichen zylindrische Körper als ein in der Primärspule (20) vorgesehener luftdichter Behälter (40) gebildet ist,
daß die Öffnung (42) an einer vorbestimmten Position des luftdichten Behälters (40) definiert ist,
daß der Flugkörper (30) in die Öffnung (42) des luftdichten Behälters (40) geladen ist und
daß die in dem Kondensator (24) gespeicherte hohe elektrische Ladung momentan an die Primärspule (20) so angelegt wird, daß abrupt der luftdichte Behälter (40) radial nach innen zusammengedrückt wird und daß der Flugkörper (30) nach außerhalb von dem luftdichten Behälter (40) beschleunigt wird.

8. Gerät nach Anspruch 7,
bei dem ein Gas in den luftdichten Behälter (40) auf einen hohen Druck geladen ist.

9. Gerät nach Anspruch 7,
bei dem ein Gas in den luftdichten Behälter (40) auf Normaldruck geladen ist.

Revendications

1. Procédé pour accélérer un objet volant, qui comprend :

l'application momentanée d'un courant primaire pulsatoire élevé à une bobine primaire (20) afin de former un courant induit dans un objet conducteur globalement cylindrique (26, 40) disposé dans ladite bobine primaire (20), dans la direction opposée à celle dudit courant primaire, caractérisé en ce que ledit courant primaire est appliqué de telle sorte que

ledit objet cylindrique (26, 40) est comprimé radialement de manière abrupte vers l'intérieur afin d'accélérer un objet volant (30) disposé dans une ouverture (28, 42) dans une position prédéterminée dudit objet globalement cylindrique (26, 40) au moyen d'une force due audit courant primaire.

2. Procédé pour accélérer un objet volant selon la revendication 1, caractérisée par

l'application instantanée d'une charge électrique élevée stockée dans un condensateur (24) à ladite bobine primaire (20) pour faire circuler ledit courant primaire pulsatoire de manière à former ledit courant induit dans ledit objet conducteur globalement cylindrique ayant la forme d'une chemise cylindrique conductrice (26) et disposé dans ladite bobine primaire (20), dans la direction opposé à celle dudit courant primaire de telle sorte que
ladite chemise cylindrique (26) est comprimée radialement de manière abrupte vers l'intérieur afin d'accélérer ledit objet volant (30) intercalé dans une partie sectionnée de la paroi cylindrique de ladite chemise (26) qui est ladite position prédéterminée, et qui assure la continuité électrique avec celle-ci, en direction d'un axe de ladite chemise (26) basé sur une accélération électromagnétique due audit courant primaire pulsatoire.

3. Procédé pour accélérer un objet volant selon la revendication 1, caractérisé par

l'application momentanée d'une charge électrique élevée stockée dans un condensateur (24) à ladite bobine primaire (20) pour faire circuler ledit courant primaire pulsatoire afin de former ledit courant induit dans ledit objet conducteur globalement cylindrique ayant la forme d'un conteneur étanche cylindrique (40) et disposé dans ladite bobine primaire (20), dans la direction opposée à celle dudit courant primaire de telle sorte que
ledit conteneur étanche (40) est comprimé radialement de manière abrupte vers l'intérieur afin d'accélérer vers l'extérieur ledit objet volant (30) chargé dans ladite position prédéterminée dudit conteneur étanche (40) à l'aide de la force de compression d'un gaz chargé dans ledit conteneur étanche (40) qui est due audit courant primaire pulsatoire.

4. Appareil pour accélérer un objet volant qui comprend :

un condensateur (24) dans lequel une charge électrique élevée peut être stockée ;
une bobine primaire (20) connectée audit condensateur (24) par l'intermédiaire de moyens de commutation (22) ; et
un objet conducteur globalement cylindrique (26, 40) disposé dans ladite bobine primaire (20) ; caractérisé par
une ouverture (28, 42) définie dans ledit objet conducteur globalement cylindrique (26, 40) ; et
un objet volant (30) disposé dans ladite ouverture (28, 42) ;
dans lequel une charge électrique élevée stockée dans ledit condensateur (24) est instantanément appliquée à ladite bobine primaire et permet la circulation d'un courant primaire pulsatoire dans ladite bobine primaire (20) afin de comprimer de manière abrupte ledit objet cylindrique (26, 40) radialement vers l'intérieur et d'accélérer ledit objet volant (30) disposé dans ladite ouverture (28, 42) au moyen d'une force due audit courant primaire pulsatoire.

5. Appareil selon la revendication 4, caractérisé en ce que ledit objet conducteur globalement cylindrique a la forme d'une chemise cylindrique conductrice (26) disposée dans ladite bobine primaire (20) ;

en ce que ladite ouverture (28) est définie dans une paroi cylindrique de ladite chemise cylindrique (26) en sectionnant totalement ladite chemise (26) ;
en ce que ledit objet volant (30) est intercalé dans ladite ouverture (28) et assure la continuité électrique avec ladite chemise (26) ; et
en ce que ladite charge électrique élevée stockée dans ledit condensateur (24) est instantanément appliquée à ladite bobine primaire afin de comprimer de manière abrupte ladite chemise cylindrique (26) radialement vers l'intérieur et d'accélérer ledit objet volant (30) intercalé dans ladite ouverture (28) vers l'axe de ladite chemise (26).

6. Appareil d'accélération selon la revendication 5, dans lequel une armature (38) constituée d'un matériau conducteur est appliquée audit objet volant (30), à condition que ledit objet volant (30) soit constitué d'un matériau électriquement isolant afin de rétablir la continuité électrique de ladite chemise cylindrique (26) au niveau de ladite ouverture (28).

7. Appareil pour accélérer un objet volant selon la revendication 4, caractérisé en ce que ledit objet conducteur globalement cylindrique a la forme d'un conteneur étanche (40) disposé dans ladite bobine primaire (20) ;

en ce que ladite ouverture (42) est définie au niveau d'une partie prédéterminée dudit conteneur étanche (40) ;
en ce que ledit objet volant (30) est chargé dans ladite ouverture (42) dudit conteneur étanche (40), et
en ce que ladite charge électrique élevée stockée dans ledit condensateur (24) est instantanément appliquée à ladite bobine primaire (20) afin de comprimer de manière abrupte ledit conteneur étanche (40) radialement vers l'intérieur et d'accélérer ledit objet volant (30) vers l'extérieur dudit conteneur étanche (40).

8. Appareil selon la revendication 7, dans lequel un gaz est chargé dans ledit conteneur étanche (40) à une pression élevée.

9. Appareil selon la revendication 7, dans lequel un gaz est chargé dans ledit conteneur étanche (40) à pression normale.

FIG. 7

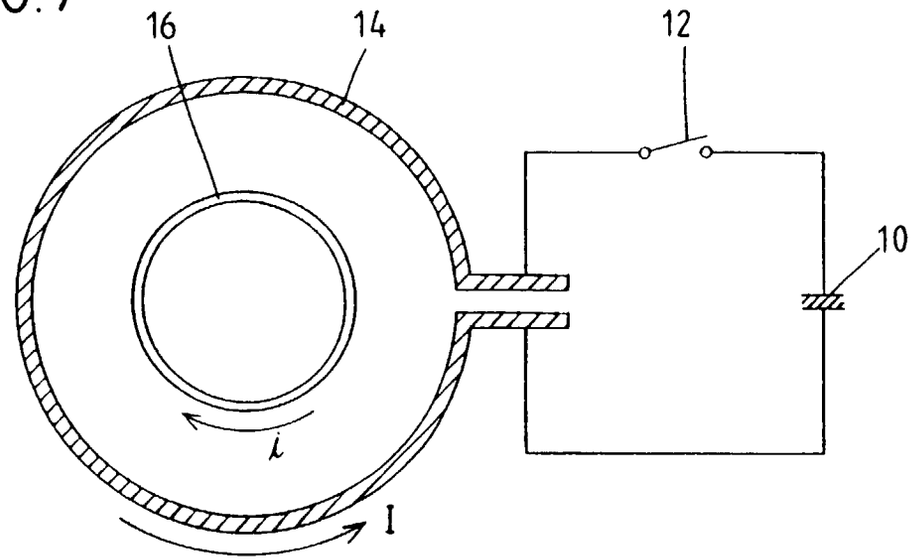


FIG. 1

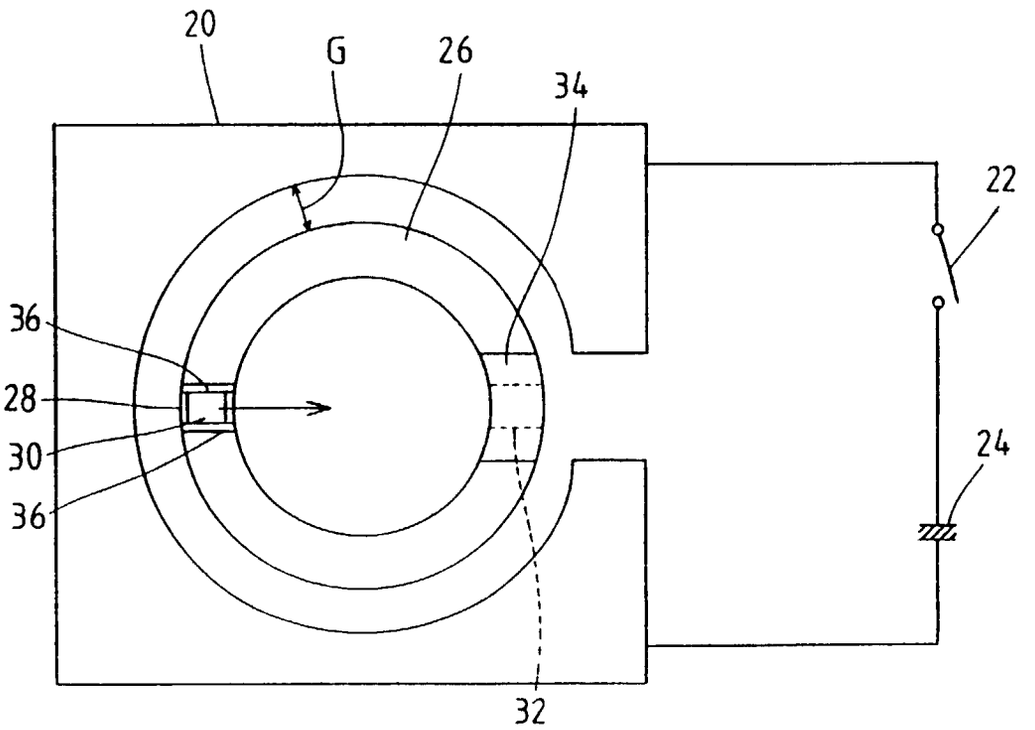


FIG.2

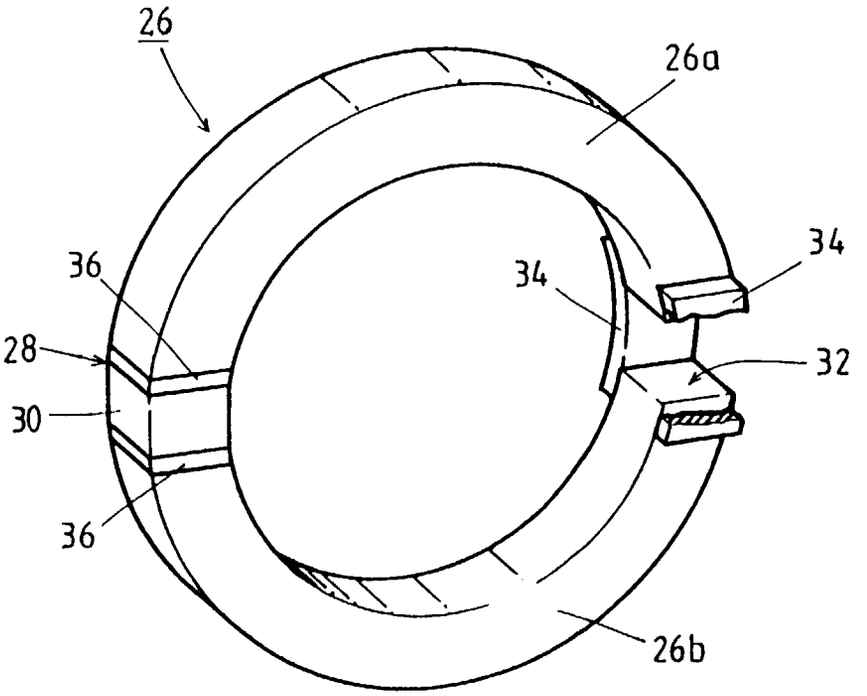


FIG.3

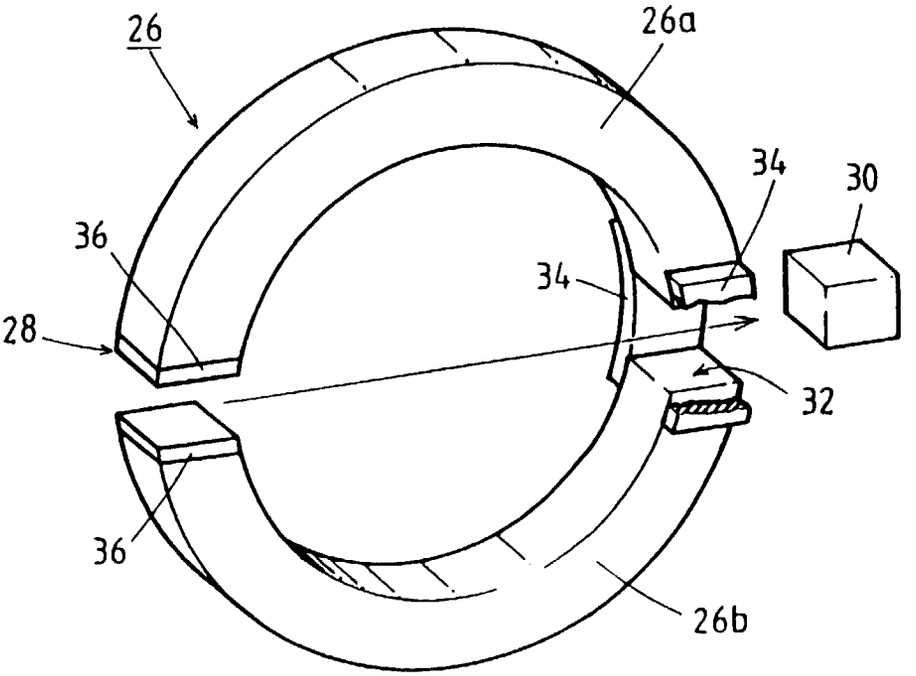


FIG. 4

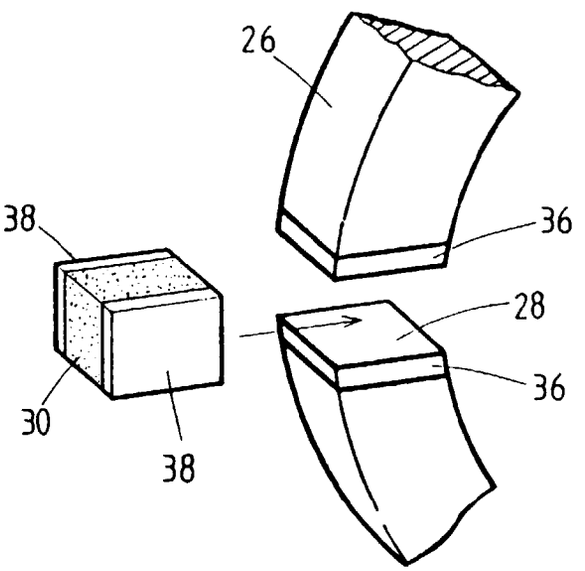


FIG.5

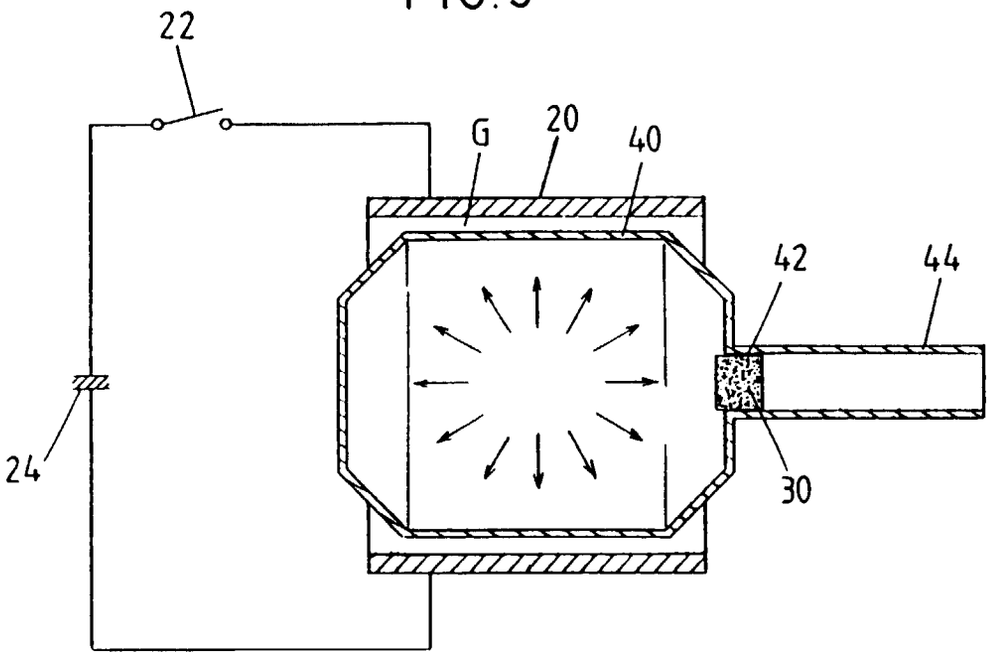


FIG.6

