

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 668 158 A1

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **95200901.7**(51) Int. Cl.⁶: **B41C 1/04**(22) Date of filing: **08.07.91**

This application was filed on 10 - 04 - 1995 as a
divisional application to the application
mentioned under INID code 60.

(30) Priority: **09.07.90 JP 180893/90**
09.07.90 JP 180894/90

(43) Date of publication of application:
23.08.95 Bulletin 95/34

(60) Publication number of the earlier application in
accordance with Art.76 EPC: **0 466 433**

(84) Designated Contracting States:
DE FR GB

(71) Applicant: **SONY CORPORATION**
7-35, Kitashinagawa 6-chome
Shinagawa-ku
Tokyo (JP)

(72) Inventor: **Kuwahara, Sohichi, c/o Sony Corp.**
7-35 Kitashinagawa 6-chome
Shinagawa-ku,
Tokyo (JP)


Inventor: **Tatsumi, Ito, c/o Sony Corp.**
7-35 Kitashinagawa 6-chome
Shinagawa-ku,
Tokyo (JP)

Inventor: **Hirashima, Shigeyoshi, c/o Sony**
Corp.
7-35 Kitashinagawa 6-chome
Shinagawa-ku,
Tokyo (JP)

(74) Representative: **Nicholls, Michael John**
J.A. KEMP & CO.
14, South Square
Gray's Inn
London WC1R 5LX (GB)

(54) **A printing plate.**

(57) A printing plate (2a'') made of a thermoplastic
resin sheet for use in gravure printing, comprising:
a plurality of holes (82,83,a-h) formed in accor-
dance with an image information; characterised by
slots (a2-h2; a3-h3) whose widths are narrower
than said holes (82,83,a-h), said slots (a2-h2; a3-h3)
being adjacent to said plurality of holes (82,83,a-h).

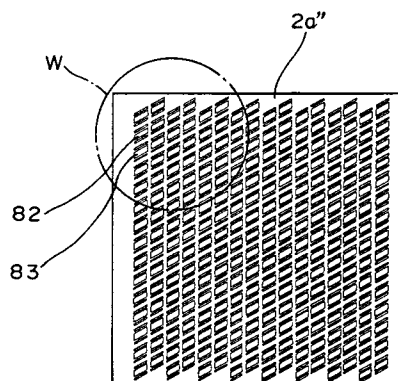FIG. 15**EP 0 668 158 A1**

The present invention generally relates to a printing plate and, more particularly, is directed to a printing plate suitable for printing such as a gravure printing and so on.

A wide variety of printing methods are proposed for printing and a variety of printing plates, such as relief printing, offset printing, intaglio printing, silk screen printing or the like are employed. Particularly, when pictures such as photographs and so on are printed on a large number of copies at high speed, intaglio printing is used.

The assignee of the present invention has previously proposed an inexpensive apparatus for making a printing plate and a printing plate thereof. The previously-proposed apparatus and the printing plate thereof can provide a printing of high quality and are suitable for the printing of medium quantity of papers of that they can be made for personal use or for office use (see US-A-07/404 555 filed 8 September 1989).

Figure 1 of the accompanying drawings shows a conceptual diagram of an optical system of such previously-proposed apparatus for making a printing plate. According to this conventional apparatus, a small energy emitting type semiconductor laser 1 of about 1 Watt is employed to form holes 3 on a printing plate 2.

As shown in Figure 1, an input image signal 4 from an image scanner or the like is supplied to the semiconductor laser 1, in which it is directly modulated by turning on and off the semiconductor laser 1 by the image input signal which results from pulse code modulating (PCM) a drive current. For this reason, a laser beam emitted from the semiconductor laser 1 is turned on and off in synchronism with the image signal.

Referring to Figure 1, the laser beam from the semiconductor laser 1 is collimated by a collimator lens 5 and introduced through an objective lens 6 into the printing plate 2 so that the laser beam is focused on the surface position of the printing plate 2. The semiconductor laser 1, the collimator lens 5 and the objective lens 6 constitute a laser block 14, and this laser block is located so as to focus the laser beam on a plate cylinder 8 at its predetermined position on the leftmost side. The plate cylinder 8 is rotated in the direction shown by an arrow B in Figure 1 by a plate cylinder rotating motor (not shown) coupled to a plate cylinder shaft 9 so that, when the plate cylinder 8 is rotated once, the holes 3 of one track along the circumference of the plate cylinder 8 are made by the laser beams to thereby form the holes 3 of predetermined one track amount. Then, if the laser block 14 is moved in the axial direction of the plate cylinder 8 by the amount of one pixel to allow the laser beam to scan the surface of the printing plate 2, the predetermined holes 3 are formed over two tracks.

Therefore, if such scanning of laser beam is sequentially carried out on the whole surface of the plate cylinder 8, then holes 3 corresponding to the light and shade (i.e. image information) of the input image signal 4 are formed on a synthetic resin material coated on the surface of the printing plate 2.

When a printed product is produced by using the printing plate 2 and a screen while overlapping inks, such as cyan (C), magenta (M), yellow (Y), black (B) or the like, a dark and light stripe pattern called moiré appears in various shapes. In order to prevent moiré from occurring, angles at which the printing plates 2 are attached to respective colour printing plates are adjusted variously so as to make the moiré inconspicuous. For example, the angles of the printing plates 2 of deep colours such as cyan, magenta, black or the like are set to be 30° in which the moiré becomes inconspicuous relatively such as when the angle of the black printing plate 2 is 45°, the angle of the magenta printing plate 2 is 75°, the angle of the yellow printing plate 2 is 90° and the angle of the cyan printing plate 2 is 105°. If the attaching angle is 15°, the moiré tends to become conspicuous as compared with the attaching angle of 30°. However, if the yellow printing plate of low colour concentration is disposed between the cyan and magenta printing plates (in this case, the yellow printing plates are disposed at the angle of 15° relative to the cyan and magenta printing plates), the moiré can be made inconspicuous.

Accordingly, it is an object of the present invention to provide a printing plate in which the aforementioned shortcomings and disadvantages of the prior art can be substantially eliminated.

According to the present invention, there is provided a printing plate made of a thermoplastic resin sheet for use in gravure printing, comprising:

a plurality of holes formed in accordance with an image information; characterised by slots whose widths are narrower than said holes, said slots being adjacent to said plurality of holes.

The present invention will be further described by way of non-limitative example, with reference to the accompanying drawings, in which like reference numerals are used to identify the same or similar parts in the several views, and in which:-

Figure 1 is a conceptual diagram of an optical system showing a laser scanning system according to the prior art;

Figure 2 is a schematic diagram showing a projection pattern of a conventional semiconductor laser;

Figure 3 (formed of Figures 3A and 3B) is a systematic block diagram showing a modified apparatus for making a printing plate and a

printing plate thereof;

Figure 4 is a plan view illustrating the modified apparatus for making a printing plate;

Figure 5 is a perspective view of the printing plate of the present invention and to which references will be made in explaining the condition such the printing plate is wrapped around a plate cylinder;

Figure 6 is a perspective view illustrating the assembled state of a laser block used in the modified apparatus;

Figure 7 is a plan view of the laser block used in the modified apparatus and illustrating its assembled state in a partly cross-sectional fashion;

Figure 8 is an exploded perspective view of the laser block used in the modified apparatus;

Figures 9A, 9B and 10A and 10B are schematic diagrams showing patterns which can be formed by the modified apparatus and waveform diagrams showing waveforms of signals used when these patterns are formed, respectively;

Figures 11A to 11G are schematic diagrams showing a variety of such patterns;

Figures 12A to 12G are schematic diagrams showing dot patterns of the printed products produced by the printing plates shown in Figures 11A to 11G, respectively;

Figure 13 is a schematic diagram showing a dot pattern of a defective printed product obtained by the printing plate above;

Figures 14A to 14C are schematic diagrams showing dots in an enlarged scale, and to which references will be made in explaining the reason that irregularly coupled dots are produced, respectively;

Figure 15 is a schematic diagram showing a pattern formed on the printing plate according to an embodiment of the present invention in an enlarged scale;

Figure 16 is an enlarged schematic diagram of a portion represented by reference symbol W in Figure 15; and

Figure 17 is a schematic diagram of a pattern formed on the printing plate according to a further embodiment of the present invention.

Apparatus for making a printing plate and the printing plate thereof will hereinafter be described with reference to Figures 3 to 17.

Figure 3 shows a systematic block diagram of the apparatus for making a printing plate and is formed of Figures 3A and 3B drawn on two sheets of drawings so as to permit the use of a suitably large scale. Data (image information) corresponding to the light and shade of the image signal is supplied to the semiconductor laser 1 through this system shown in Figures 3A and 3B. In Figures 3A and 3B, like parts corresponding to those of Figures 1 and 2 are marked with the same references

and therefore need not be described in detail.

Referring to Figure 3, a status signal 31, such as stop, reset or the like is supplied from an input operation unit 30 to a microcomputer (hereinafter referred to as a CPU (central processing unit)) 32. The CPU 32 supplies a positive rotation pulse or a reverse rotation pulse to a laser block moving motor driver 33 and a plate cylinder rotating motor driver 34 to drive the laser block moving motor 34 and the plate cylinder rotating motor 36. The plate cylinder driving motor 38 rotates the plate cylinder 8 and the semiconductor laser 1 forms the holes 3 corresponding to data 48 of the input image signal from an input signal source 49 on the printing plate 2. Each time the plate cylinder 8 is rotated, the laser block moving motor 34 is moved by the amount of one pixel data. The CPU 32 includes a control means which rotates the plate cylinder 8 in the up or down direction by the amount of half pixel to thereby control the irradiation position of the laser beam so that the holes 3 are made continuous at a predetermined angle.

While the laser radiation starting position between adjacent tracks is deviated by the amount of a half pixel by rotating the plate cylinder 8 as described above, a rotational angle of the plate cylinder 8 may be detected by using a rotary encoder 90 and a data reading start time from a data RAM (random access memory) 38 may be shifted by a predetermined rotational angle. In this fashion, the holes 3 corresponding to the light and shade of the image are sequentially formed along the circumference of the printing plate 2. The data RAM 38 stores 8 bits of digital image data D obtained by an image scanner or the like per pixel. The CPU 32 drives an address counter 37 so as to supply an output address A to the data RAM 38. In accordance with this address, the image data D is supplied to the addresses A17 to A10 of the gray scale ROM 41 and the gray scale ROM 41 is supplied at its addresses A9 to A0 with 10 bits from a counter 40 which is driven by a pulse from a pulse generator 39. The gray scale ROM 41 is adapted to convert the light and shade of the image into a duration of the laser irradiation time. Data of the gray scale ROM 41 is supplied to an AND gate 42 and the modulated pulse from the pulse generator 39 is controlled, whereby the semiconductor laser 1 is driven by means of a laser driver 43.

The CPU 32 controls a stepping motor 46 which can adjust the irradiation angle of semiconductor laser 1 provided within the laser block. More specifically, the CPU 32 supplies a stepping motor control circuit 44 with data corresponding to the instruction with respect to the radiation angle of the semiconductor laser 1 from the input operation unit 30. Then, the stepping motor control circuit 44

supplies this data to the stepping motor driver 45 to rotate the stepping motor 46 by a predetermined rotational angle.

The overall arrangement of the apparatus shown in the block diagram of FIG. 3 will be described more fully with reference to FIG. 4 and the following drawings. FIG. 4 is a plan view illustrating the apparatus.

As shown in FIG. 4, a plate cylinder rotating unit 12 and a laser block moving unit 13 are mounted on a base table 13. The laser block 14 is moved along a guide unit 15 in the axial direction of the plate cylinder 8. As shown in FIG. 5 which shows the mounted condition of the printing plate 2, the plate cylinder 8 of the plate cylinder rotating unit 12 is cylindrical and made of metal. The printing plate 2 made of synthetic resin is wrapped along the outer diameter of the cylindrical portion of the plate cylinder rotating unit 12 and secured thereto by fitting flat head screws 16 into screw apertures 17 bored through the plate cylinder 8. The method for securing the printing plate 2 around the cylindrical portion of the plate cylinder rotating unit 12 is not limited to the above method and a variety of methods may be selected properly. For example, the printing plate 2 is secured around the cylindrical portion by a double-sided adhesive tape or the like.

The printing plate 2 may be made of a thermoplastic resin whose boiling point is distributed in a relatively narrow range and which is sufficiently hard when cured and in which resin is scattered or sublimated at low temperature when melted. By way of example, as the material of the printing plate 2, it is possible to use such a thermoplastic resin in which about 20 % of carbon is mixed into polyethylene resin, acrylic resin, polypropylene resin or the like. Further, a thickness t of the printing plate 2 is selected to be about 200 microns. Metal caps 19R, 19L are inserted into the right and left ends of the plate cylinder 8 so as to secure the right and left ends of the printing plate 2. Shafts 18R, 18L are implanted on the caps 19R, 19L and coupled to the plate cylinder rotating motor 36, whereby the plate cylinder 8 is rotated in the direction shown by an arrow B in Figure 5. In Figure 4, the reference numerals 20R, 20L designate bearing portions which receive the shafts 18R, 18L of the metal caps 20R, 20L, respectively.

The laser block 14 is disposed in an opposing relation to the printing plate 2 wrapped around the plate cylinder 8 and is arranged so as to move along a guide portion 15 in the axial direction of the plate cylinder 8. The laser block moving unit 13 for moving this laser block 14 is bridged between the bearing portions 21R and 21L and includes a moving member 24 which is engaged with a screw lever 23 rotated by the laser block moving motor

34 so as to move. A laser rod attaching base 50 of the laser block 14 is secured to the moving member 24.

The assembled condition of the laser block 14 will be described with reference to Figures 6 to 8. Figure 6 is a perspective view illustrating the entirety of the laser block 14 in its assembled state, Figure 7 is a partly cross-sectional plan view of the assembled state of the laser block 14 and Figure 8 is an exploded perspective view of the laser block 14.

As shown in Figures 6 to 8, a stepping motor attaching plate 51 is secured to a laser head mounting base 50 formed of a plate of substantially T-letter configuration by screws and the stepping motor 46 is secured to this mounting plate 51 as shown in FIG. 8. A first gear 52 is engaged into and secured to the rotary shaft of the stepping motor 46. A laser holder supporting box 53 is secured to the laser head mounting base 50 and the optical system of the semiconductor laser 1 or the like is assembled within this supporting box 53. The semiconductor laser 1 is secured to a semiconductor laser support 54 and is supplied with an electrical signal from a through-hole 55 bored through the central portion of the semiconductor laser support 54 through a stem pin. This semiconductor laser support 54 is screwed by screws 60 into tap bores 59 bored through the rear surface of a laser holder 58 engaged into a through-hole 57 bored through the center of a second gear 56. A first stepped portion 62 elongated from a flange portion 61 of the laser holder 58 is loosely fitted into a through-hole 64 bored through the center of the laser holder supporting box 53 so as to be freely rotatable, while the through-hole 57 of the second gear 56 is inserted into and secured to the second stepped portion 63 of the laser holder 58. The top of the semiconductor laser 1 is protrusively inserted into one side end of a central aperture 64 bored through the center of the laser holder 58 and the collimator lens 5 is inserted into this central aperture 64 by means of a collimator lens adjusting coil spring 65. Then, a collimator lens adjusting screw 66 is inserted into and screwed into the central aperture 64 and the collimator lens 5 is housed in and secured to the laser holder 58. An outer portion of an objective lens holder 67 is composed of a stepped portion 68 whose outer diameter is the same as that of the flange portion 61 of the laser holder 58, a flange portion 69 and a screw portion 70 having screws formed therearound, and a central aperture 71 is formed at the central portion of the objective lens holder 67. The stepped portion 68 of the objective lens holder 67 is engaged into the through-hole 64 of the laser holder supporting box 53, an objective lens cover 73 into which the objective lens 6 is inserted is

inserted through a focus adjusting spring 72 into a central aperture 71 and a focus adjusting screw 74 is screwed into the screw portion 70, thereby the laser block 14 being constructed. Further, an angle adjusting means 53 for adjusting the radiation angle of the laser is composed of the stepping motor 46, the first and second gears 52, 56 and the laser holder 58.

When the holes 3 are formed along the circumference of the printing plate 2 by the above-mentioned arrangement, the input image signal from the input signal source 49 such as the image scanner or the like is supplied to and pulse code modulated so as to be turned on and off. While the hyperelliptic pattern 10 shown in FIG. 9A is formed on the printing plate 2 by an "on" pulse and an "off" pulse shown in FIG. 9B in the prior art, according to this embodiment, a rectangular pattern 10a or a square pattern 10b shown in FIG. 9A is obtained. To this end, in a relation between an "on" pulse 75a or 75b and an "off" pulse 76a or 76b as shown in FIG. 9B, if the modulated pulse from the pulse generator 39 is changed and if the values of the data RAM 38 and the gray scale ROM 41 or the like are changed so as to extend the on period, then it is possible to obtain the rectangular or square pattern 10a or 10b having a proper aspect ratio.

Further, in this embodiment, by the above angle adjusting means 47 disposed within the laser block 14, the irradiation angle of the semiconductor laser 1 is rotated by a predetermined angle from the hyperelliptic pattern 10 of the horizontal direction as shown in FIG. 11A to the clockwise or counter-clockwise direction before forming the holes 3 on the printing plate 2 so that the irradiation angle is inclined as shown by a pattern 10c shown in FIG. 10A. When the irradiation angle of the semiconductor laser 1 is inclined by a predetermined angle, such predetermined angle is instructed to the CPU 32 by the input operation unit 30 and then the CPU 32 instructs the pulse number for inclining the irradiation angle by a predetermined angle to the stepping motor control circuit 44, whereby the stepping motor 46 is stepped by a predetermined angle. Thus, the laser holder 58 is rotated by a predetermined angle in the clockwise or counter-clockwise direction via the first and second gears 52 and 56 so that the irradiation angle of the semiconductor laser 1 is changed to produce the pattern 10c of FIG. 10A. Under this condition, although the "on" pulse and "off" pulse are set in a relation shown in FIG. 10B, if the duration of the "on" pulse 75d is extended as shown in FIG. 10B in the relation between the "on" pulse 75d and the "off" pulse 76d, then it is possible to obtain a pattern 10d of lozenge as shown in FIG. 10A. As described above, by properly selecting the inclina-

tion angle and the duration of the "on" pulse period, then the lozenge pattern of arbitrary configuration whose inclination angle can be changed relative to the scanning direction can be obtained intermittently. As a result, it is possible to form hole patterns whose widths are in a range of from about 150 μm to about 5 μm . Also, the shape of the pattern can be changed variously from rectangular, square and lozenge so that dot angle, dot shape and dot pitch can be changed with ease. Therefore, it is possible to obtain the apparatus for making a printing plate and a printing plate thereof in which moire of the printed product can be avoided with ease.

FIGS. 11A through 11F are representations of patterns of various configurations formed on the printing plate 2. In these patterns shown in FIGS. 11A to 11F, the concentration of the pattern is made uniform in order to understand the configurations of the patterns more clearly.

In the printing plate 2a shown in FIG. 11A, the hyperelliptic pattern 10 in the horizontal direction is rotated in the counter-clockwise direction and the rotational angle is 30 degrees. In the printing plate 2b shown in FIG. 11B, such hyperelliptic pattern 10 is rotated in the clockwise direction and the rotational angle is 30 degrees, that is, -30 degrees. In the printing plates 2c and 2d shown in FIGS. 11A, 11B, the hyperelliptic patterns 10 in the horizontal direction are respectively rotated in the counter-clockwise and clockwise directions by 60 degrees. When the above printing plates 2a through 2d are produced, as earlier noted, patterns 77a, 77b, ..., 77n are formed in the direction shown by an arrow Y in FIG. 11A, that is, in the circumferential direction of the plate cylinder 8 by the semiconductor laser 1. Next, at the starting position of a pattern 78a at the starting point after the semiconductor laser 1 is moved in the X axis direction or in the axial direction of the plate cylinder 8 by one pixel amount, the laser irradiation is started at the position a half pixel above the position of the pattern 77a. Such control can be performed by the CPU 32 with ease. As described above, the starting points 77a, 78b, ... are positioned in the X axis direction in a zigzag-fashion and therefore such pattern is presented, in which the holes are formed continuously substantially in the irradiation direction of laser beam as generally seen from the printing plate. Further, the pitches in the X direction and Y direction between the pixels are properly set.

FIG. 11E shows the pattern of the printing plate 2e which is obtained by the method described with reference to FIG. 7 without changing the angle. FIG. 11F shows the pattern in which the major axis of the hyperelliptic pattern obtained by the semiconductor laser 1 is made coincident with the vertical direction by adjusting the angle and the laser

beam is scanned in the X axis direction. In the printing plate 2g of FIG. 11G, the pattern is formed by moving the semiconductor laser pattern 10 shown in FIG. 9A along the circumferential direction (Y axis direction) of the plate cylinder 8 similarly to FIG. 11E and in this case, a gap 79 between adjacent tracks provided when the pattern of one track is formed is increased.

FIGS. 12A through 12F show dot patterns 80a to 80g of printing products obtained by the sheets 2a, 2b, 2c, 2d, 2e, 2f shown in FIGS. 11A through 11G. Unlike the dot pattern 80g shown in FIG. 12G, the dot patterns 12A through 12F are composed of the dot patterns 80a, 80b, 80c, 80d having an inclined stripe pattern in which dots are made continuous on the line and the dot patterns 80e, 80f having horizontal and vertical stripes so that the cause of moiré can be reduced by a half as compared with other dot patterns.

Of the plurality of printing plates thus made, cyan C is printed by the printing plate 2a shown, for example, in FIG. 11A, magenta M is printed by the printing plate 2b shown in FIG. 11B and yellow Y and blue B are printed by the printing plate 2g shown in FIG. 11G with the result that printed products in which moiré is inconspicuous could be obtained.

If the printed product 80a having the continuous stripe line shown in FIG. 12A is obtained by using the printing plate 2a shown, for example, in FIG. 11A, then a printed product 80a' in which irregular dots 81 are formed continuously as shown in FIG. 13 is obtained. Such printed product hinders the smooth change of gradation and causes the gradation to be changed partly, which results in an awkward pattern. The reason that the above-mentioned irregular dots 81 are produced will be described with reference to FIGS. 14A to 14C. FIG. 14A shows the intaglio printing dot pattern of the printing plate 2a in an enlarged scale. Assuming now that a, b, c, d and e, f, g, h are printing plate dot patterns between adjacent slant lines 82, 83, then printing plate dots a, b, c, d and e, f, g, h are coupled to one another to obtain printed products of slant stripe lines 82, 83. In this case, if inks A and E slightly contact with the intaglio dot pattern a on the line 82 and the intaglio dot pattern e on the line 83 by means of a doctor knife or the like as shown in FIG. 14B, then a surface tension occurs between the inks A and E to escape the inks that should remain in the intaglio dot patterns a and e. As a consequence, as shown in FIG. 14C, the amount in which the ink is escaped to the outside from the intaglio dot patterns a and e is increased and the lines 82 and 83 are covered with the ink so that the irregular dot patterns 81 are produced as shown in FIG. 13.

With reference to Figures 15 and 16, let us describe an intaglio dot pattern of a printing plate 2a' according to the present invention in which the occurrence of the above irregularly-coupled dot pattern 81 is suppressed. Figure 16 shows a part of the intaglio dot pattern represented by reference letter W in Figure 15 in an enlarged scale. As shown in Figure 16, such a pattern is formed that intaglio slots $a_3, b_3, c_3, d_3, a_2, b_2, c_2, d_2, e_3, g_3, h_3$ and e_2, f_2, g_2, h_2 are formed closely above and below the intaglio dot patterns a, b, c, d and e, f, g, h on the lines 82 and 83 so as to have widths narrower than those of the above intaglio dot patterns a, b, c, d and e, f, g, h. Such pattern as shown in FIG. 16 can be arranged with ease by the earlier-noted arrangement of FIG. 3. More specifically, the irradiation angle of the laser beam from the semiconductor laser 1 is adjusted so as to become 30 degrees in the counter-clockwise direction and then narrow, wide and narrow "on" pulses are supplied to the semiconductor laser 1. According to the thus made printing plate, even if the ink is flowed from the intaglio dot patterns a and e by a relatively large amount, then the ink from the intaglio dot pattern a is influenced with the intaglio slots a_3, a_2 and the ink from the intaglio dot pattern e is influenced with the intaglio slots e_3, e_2 , thereby producing the pattern in which the intaglio patterns a and e can be separated from each other.

If the ink escaped from the intaglios dot pattern a reaches the intaglio slots a_2 and e_3 in FIG. 16, then the amount of the ink escaped from the intaglio slot e_3 is small as compared with the amount of the ink escaped from the intaglio dot pattern e. Then, this influence can be substantially prevented from being exerted upon the intaglio slots f_3 and b_2 .

Figure 17 shows a further example of a printing plate of the present invention. As shown in Figure 17, the lower side intaglio slots $a_2, b_2, c_2, d_2, e_2, f_2, g_2, h_2$ shown in Figure 16 are removed and the intaglio slots are provided only in the upper side as shown by a_3, b_3, c_3, d_3 and e_3, f_3, g_3, h_3 .

According to the thus made printing plates, the irregular continuous dots on the printed product can be reduced so that the printing product in which the gradation is partly changed abruptly cannot be made with ease. Furthermore, it is possible to use the apparatus for making a printing plate and the printing plate thereof in which the moiré can be reduced.

Having described the preferred embodiments of the invention with reference to the accompanying drawings, it is to be understood that the invention is not limited to those precise embodiments and that various changes and modifications thereof could be effected by one skilled in the art without departing from the scope of the invention as de-

fined in the appended claims.

Claims

1. A printing plate (2a") made of a thermoplastic resin sheet for use in gravure printing, comprising:
 - a plurality of holes (82,83,a-h) formed in accordance with an image information; characterised by slots (a2-h2; a3-h3) whose widths are narrower than said holes (82,83,a-h), said slots (a2-h2; a3-h3) being adjacent to said plurality of holes (82,83,a-h).
2. A printing plate according to claim 1, wherein each of said holes (82,83,a-h), has a slot (a2-h2; a3-h3) alongside it parallel with one side.
3. A printing plate according to claim 1, wherein each of said holes (82,83,a-h), has a pair of slots (a2-h2; a3-h3) spaced on each side thereof.

FIG. 1

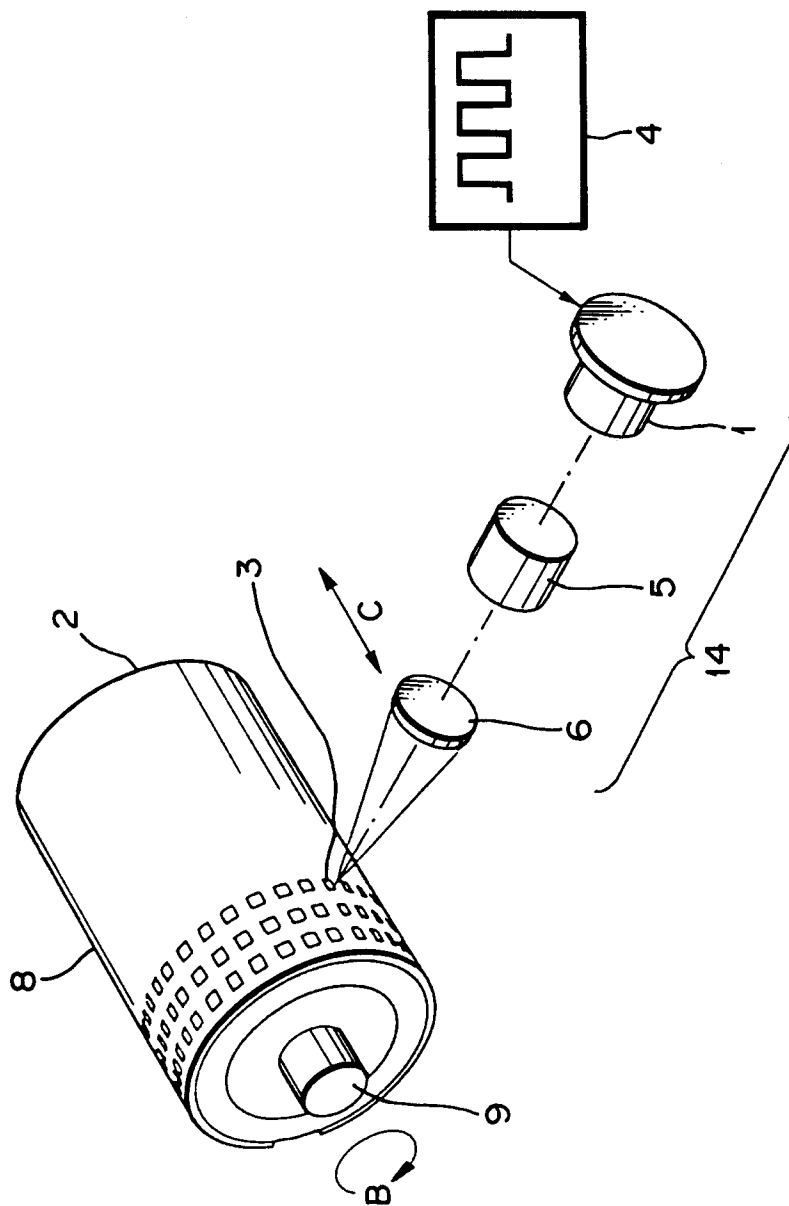
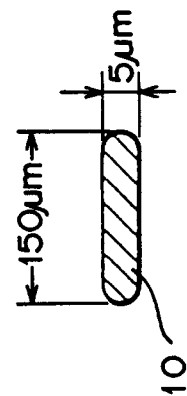


FIG. 2



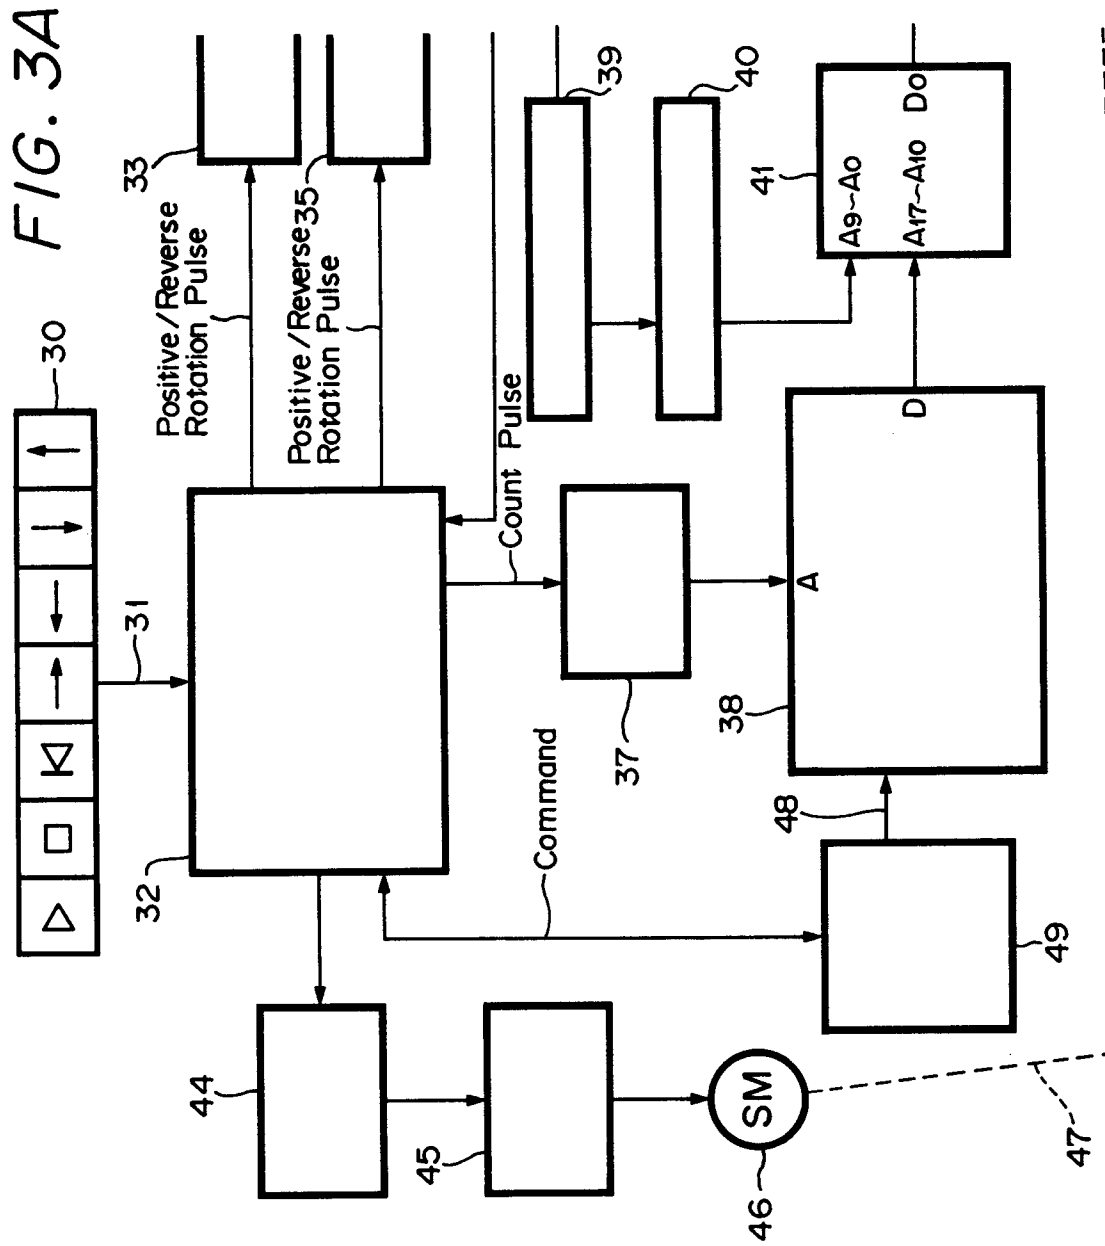


FIG. 3

FIG. 3A

FIG. 3B

FIG. 3B

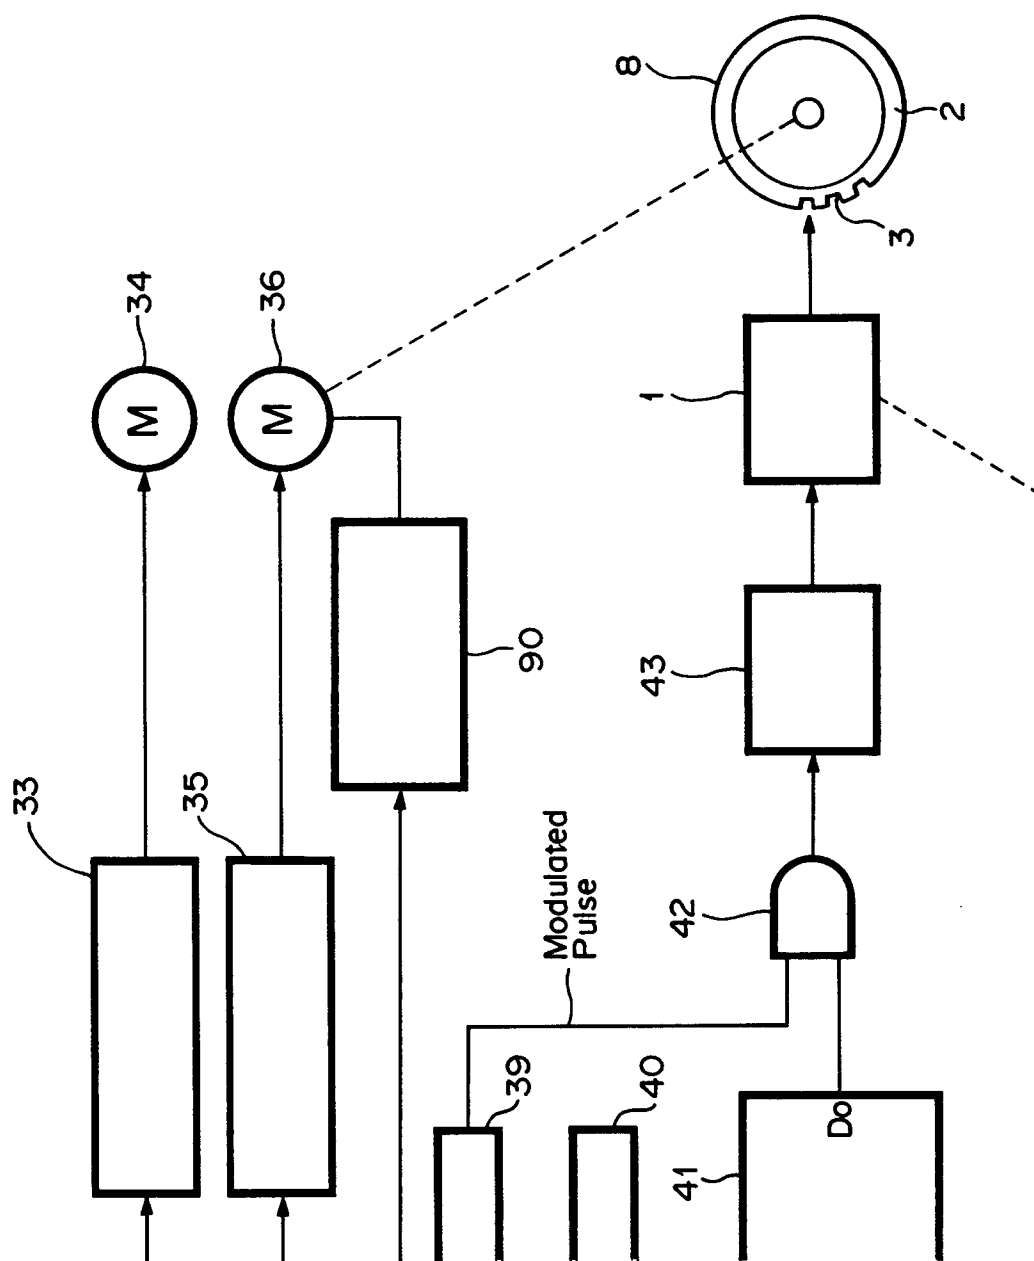
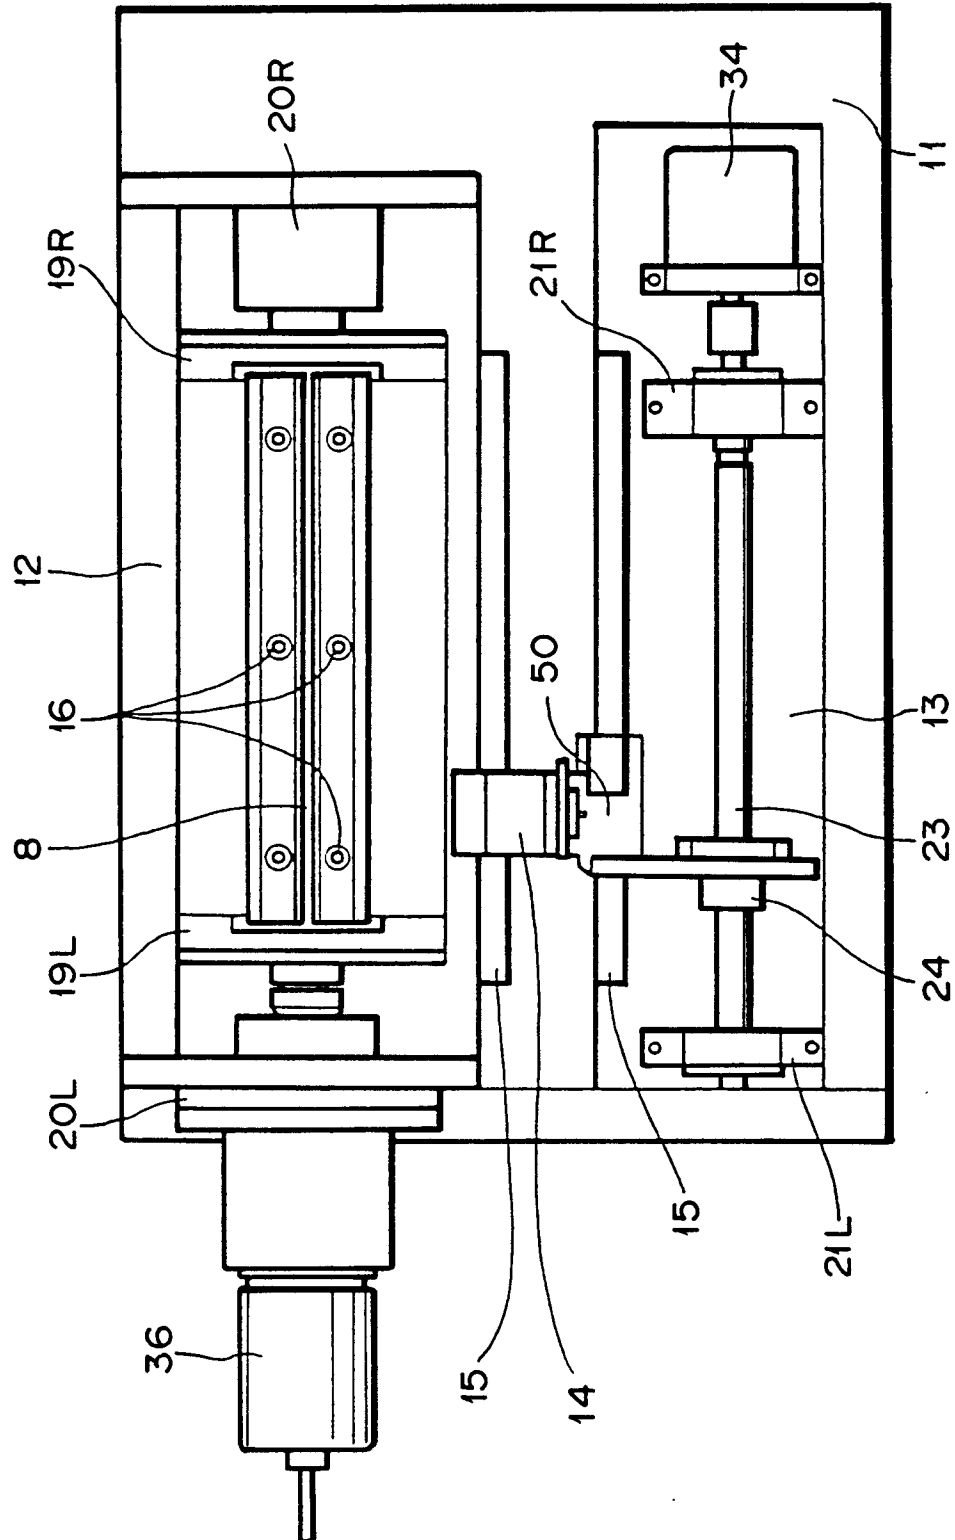


FIG. 4



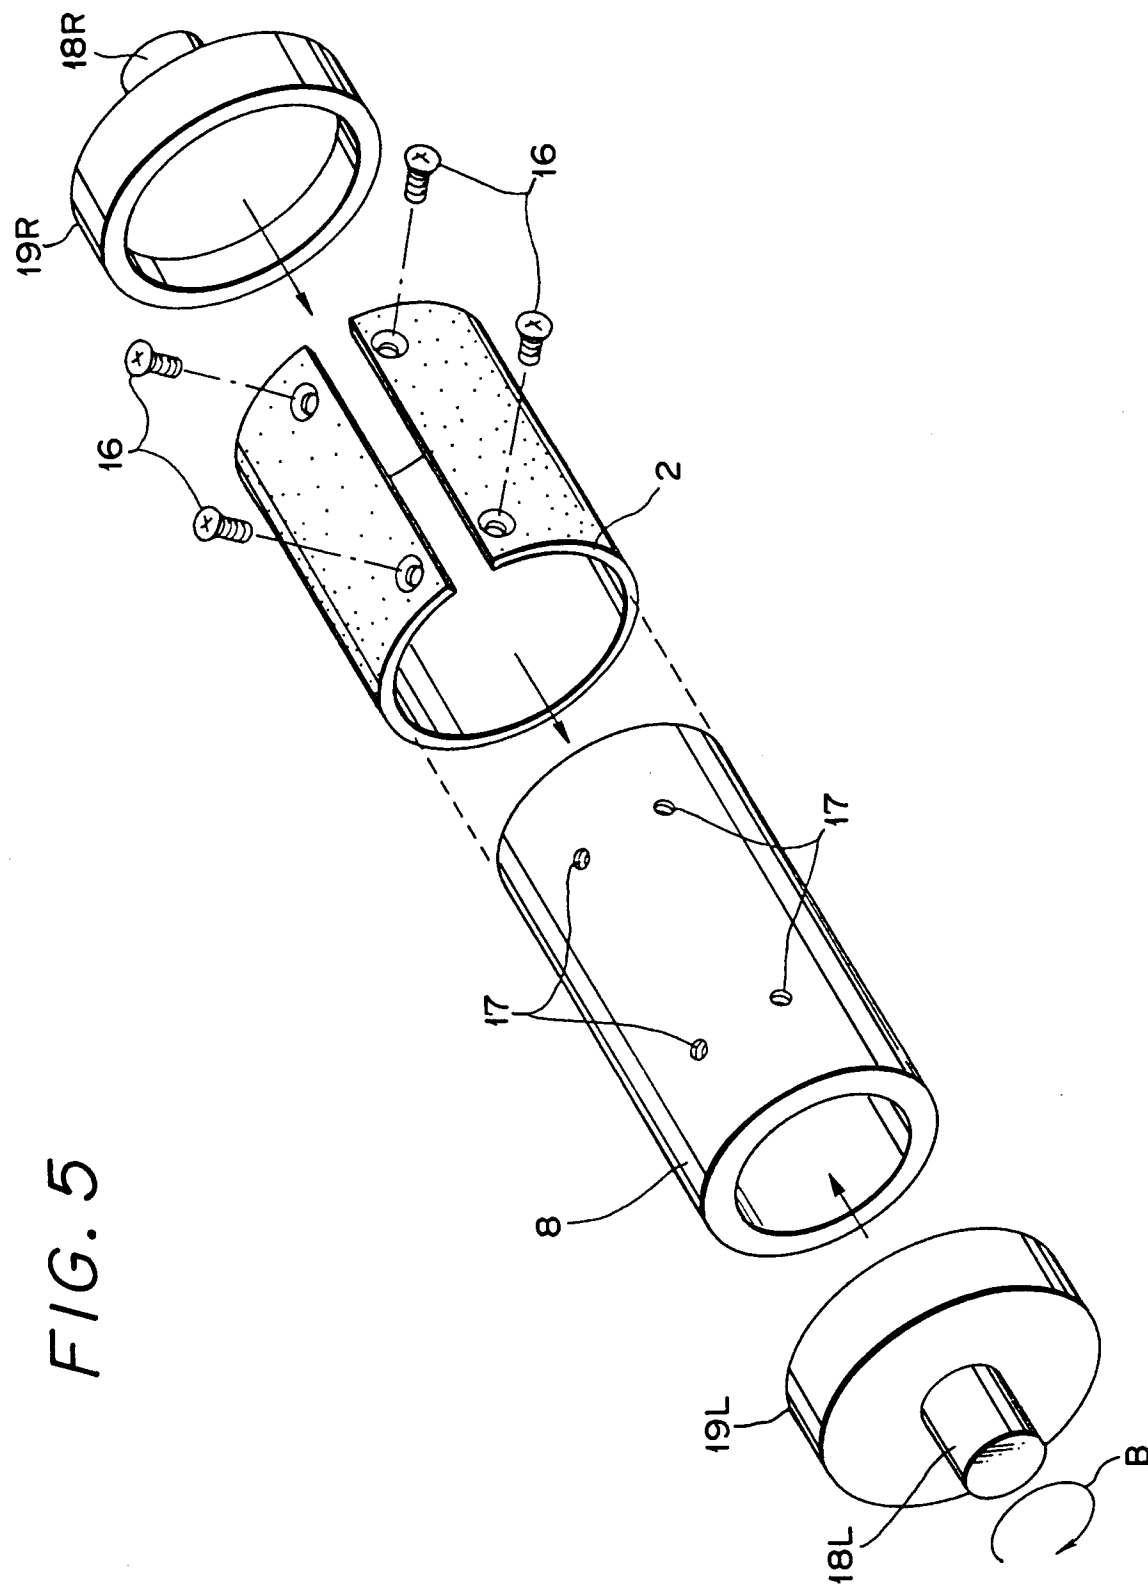


FIG. 6

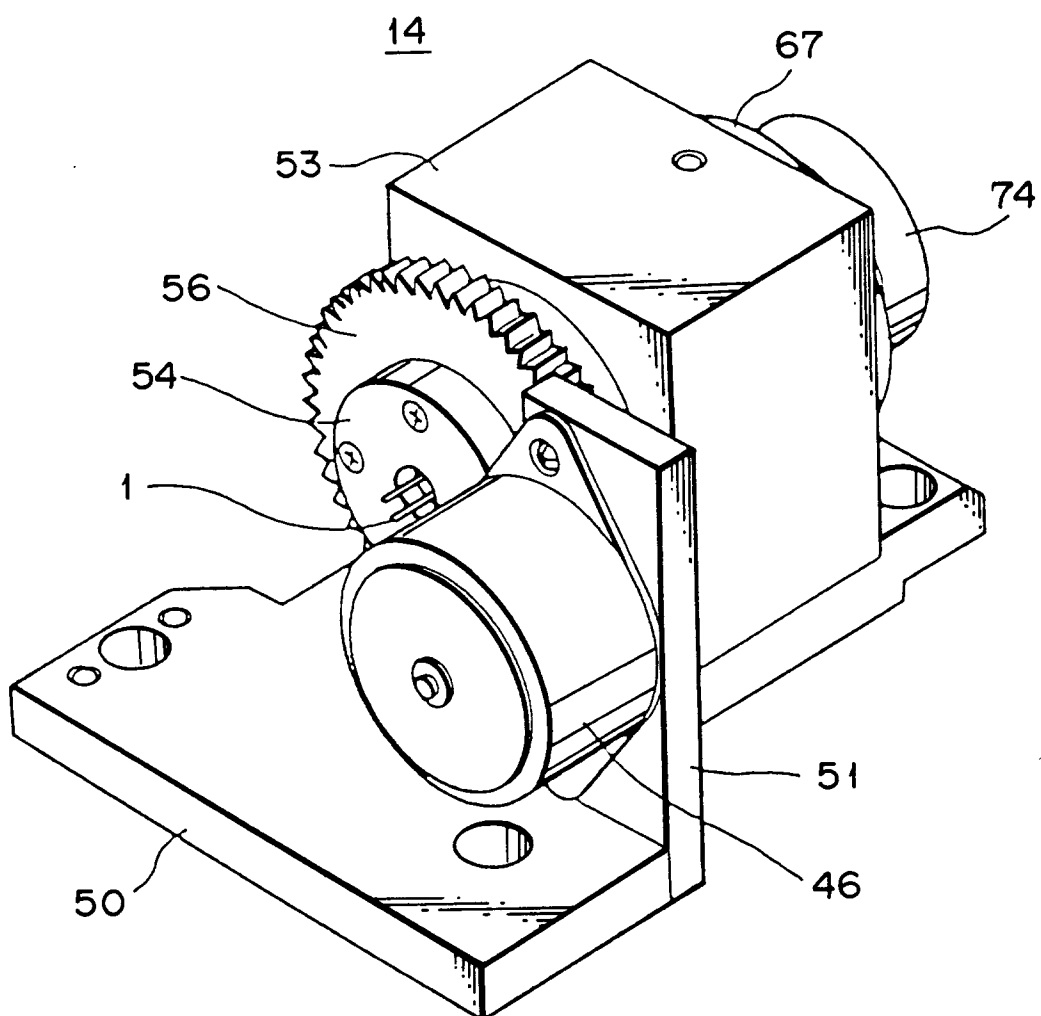
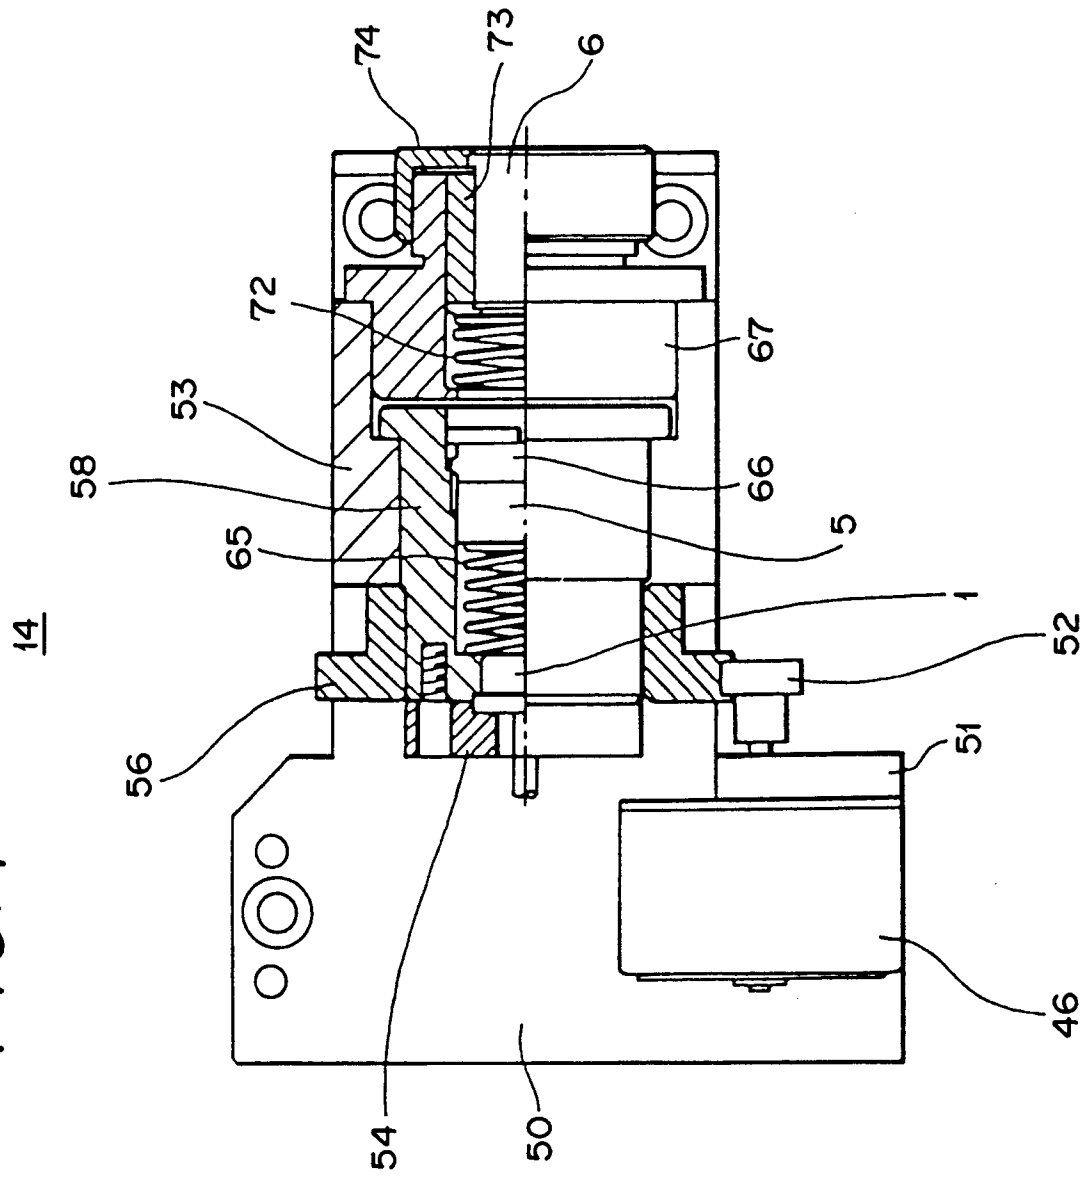


FIG. 7



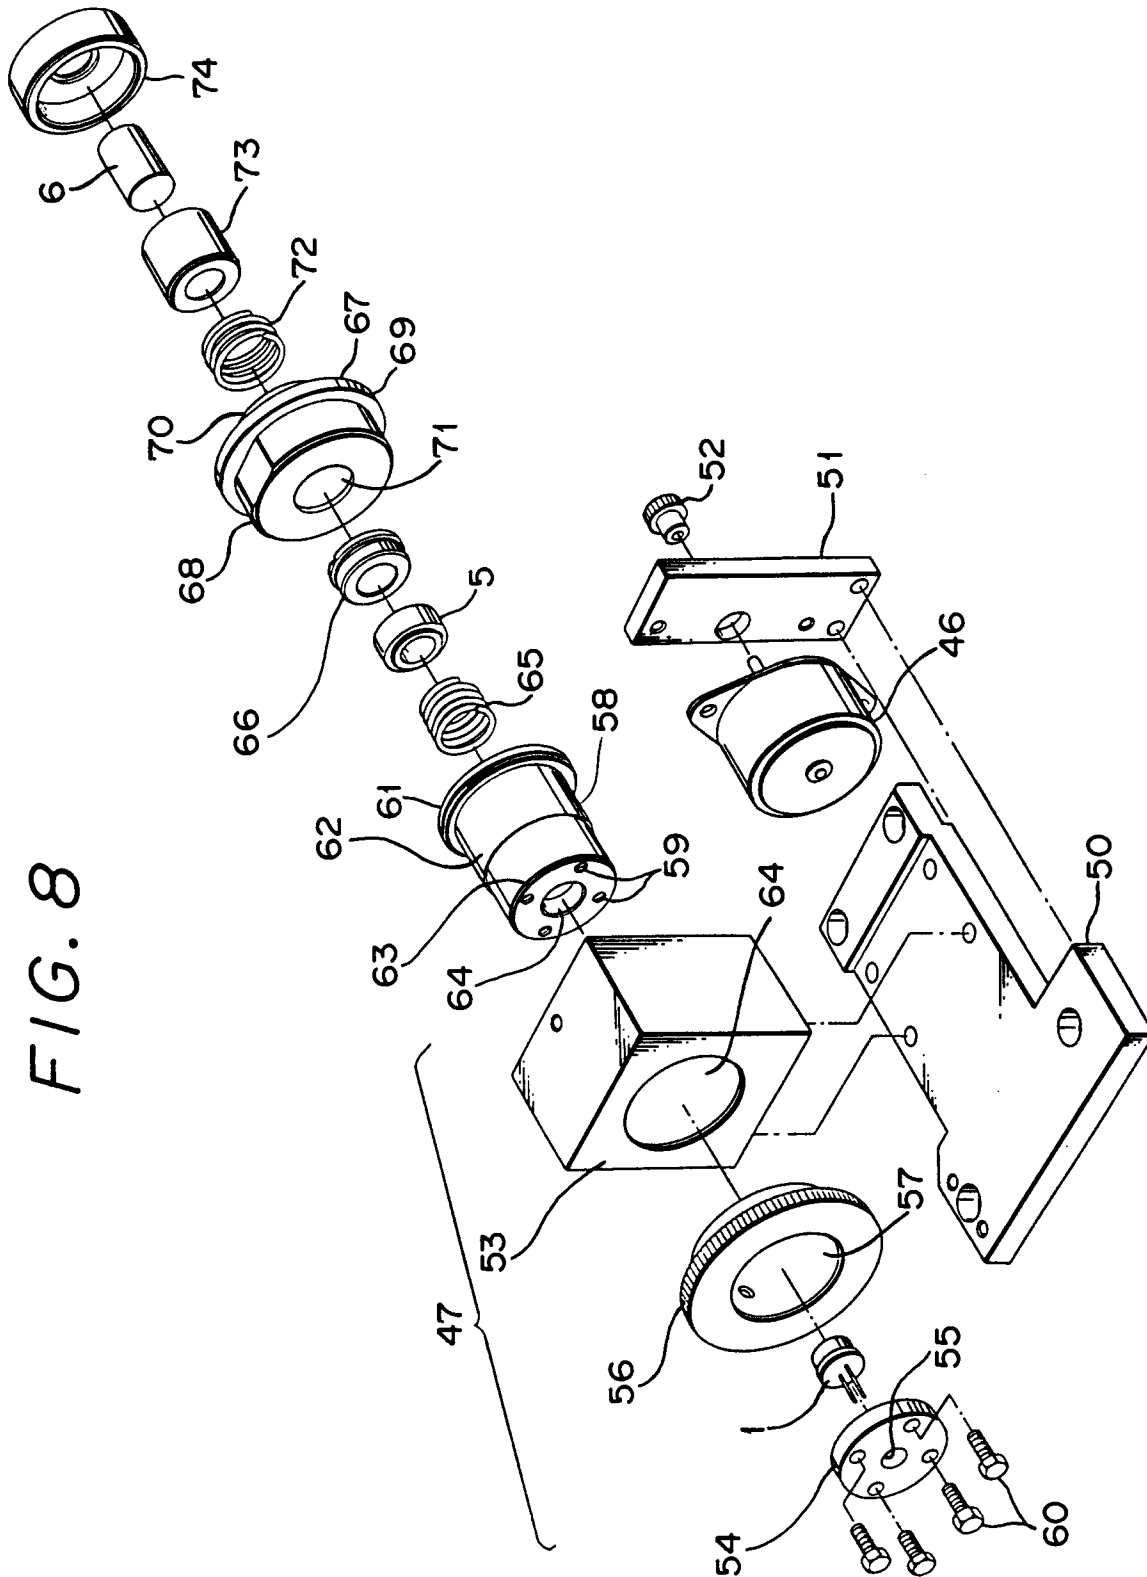


FIG. 9A

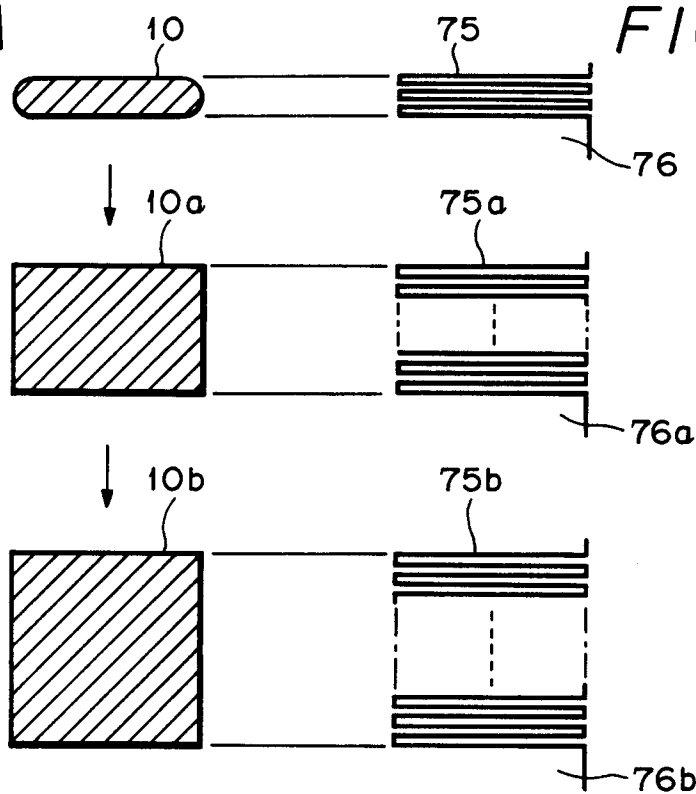


FIG. 9B

FIG. 10A

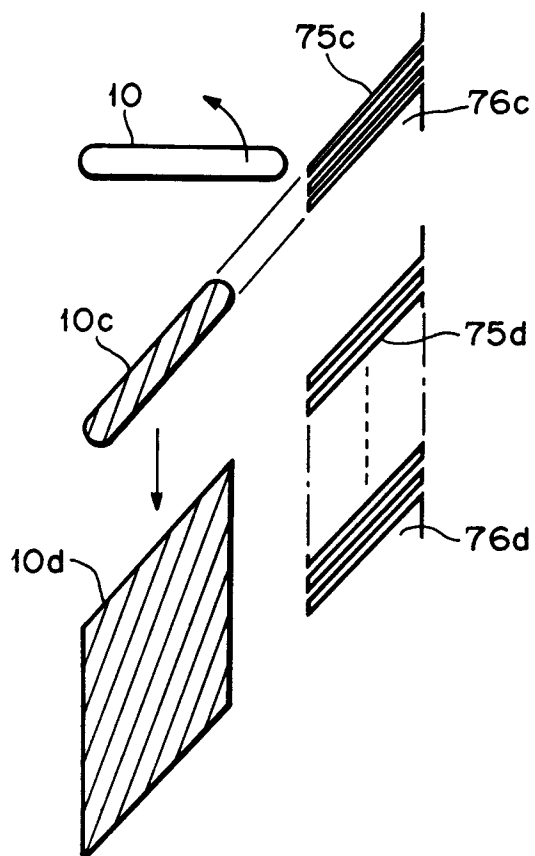


FIG. 10B

FIG. 11C

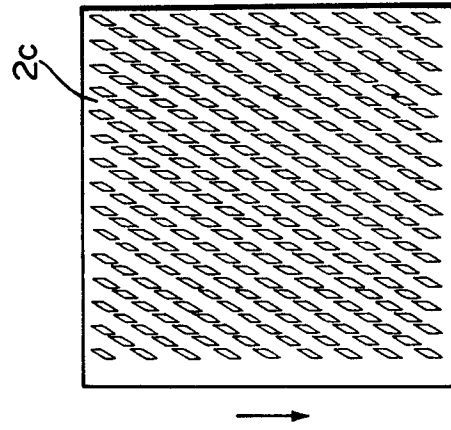


FIG. 11B

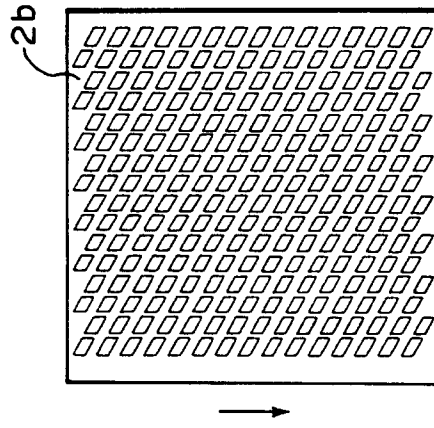


FIG. 11A

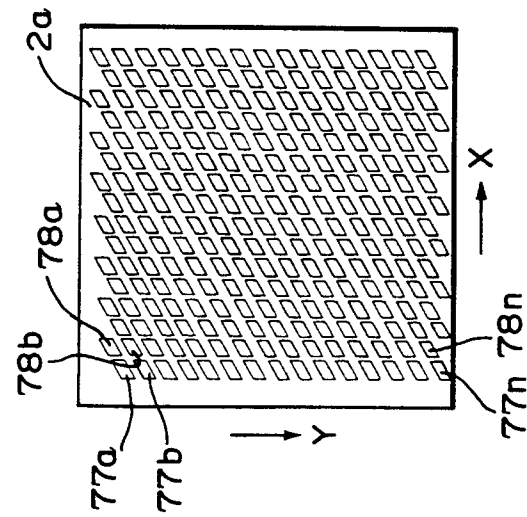


FIG. 11D

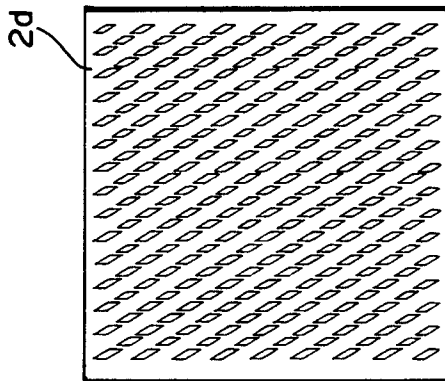


FIG. 11E

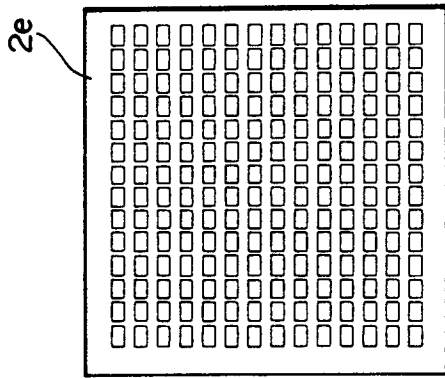


FIG. 11F

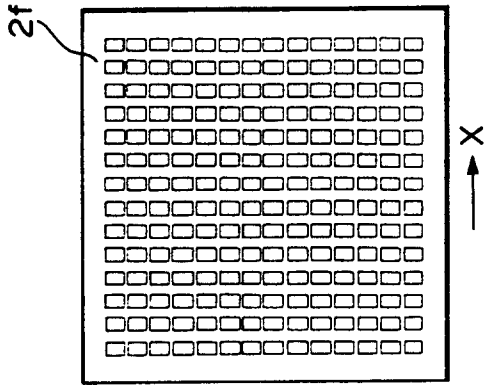


FIG. 11G

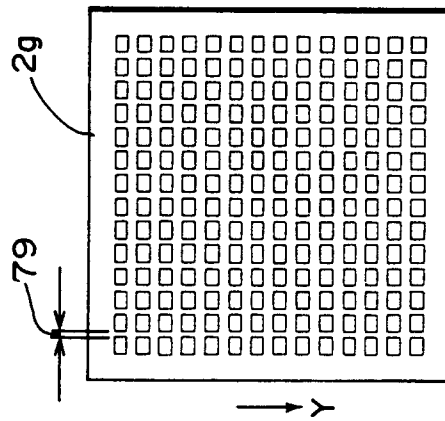


FIG. 12C

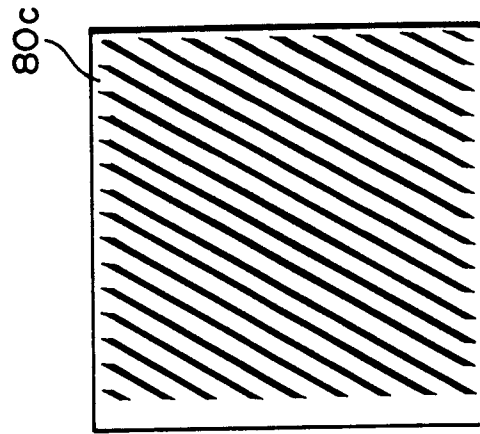


FIG. 12B

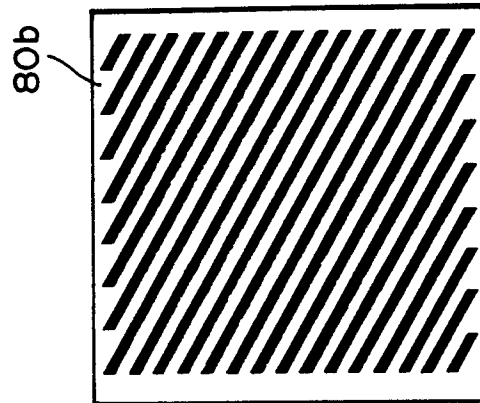


FIG. 12A

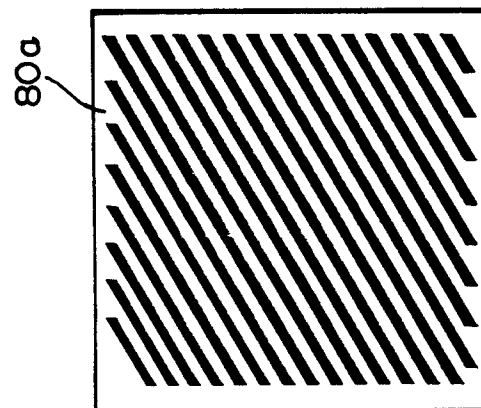


FIG. 12D

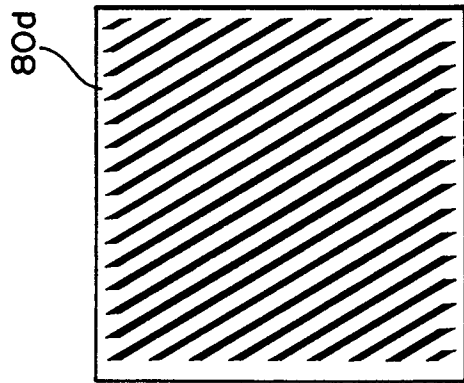


FIG. 12E

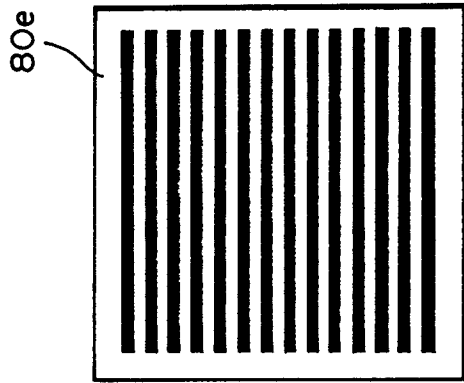


FIG. 12F

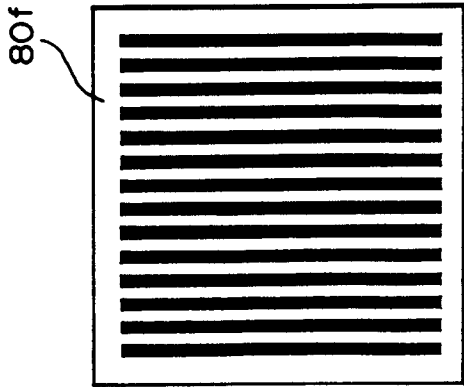


FIG. 12G

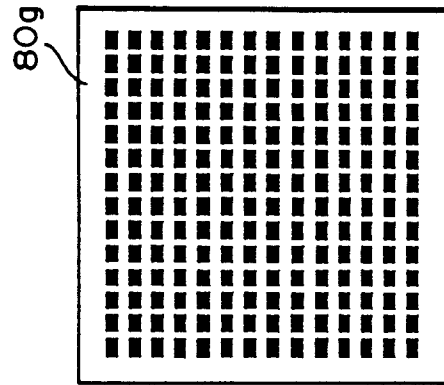
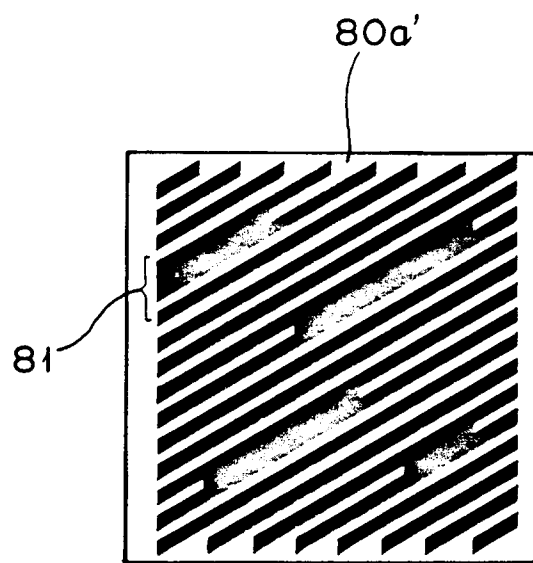


FIG. 13



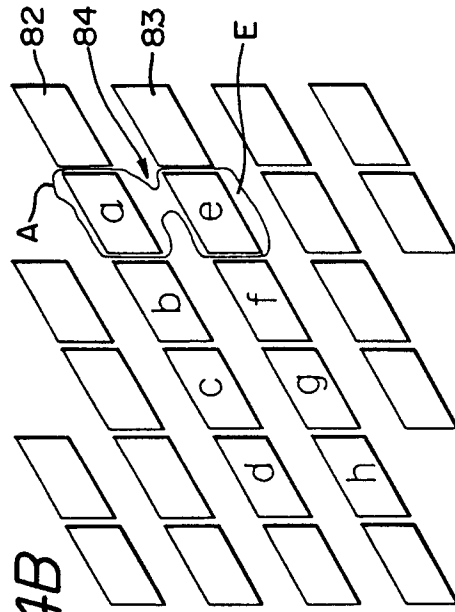


FIG. 14A

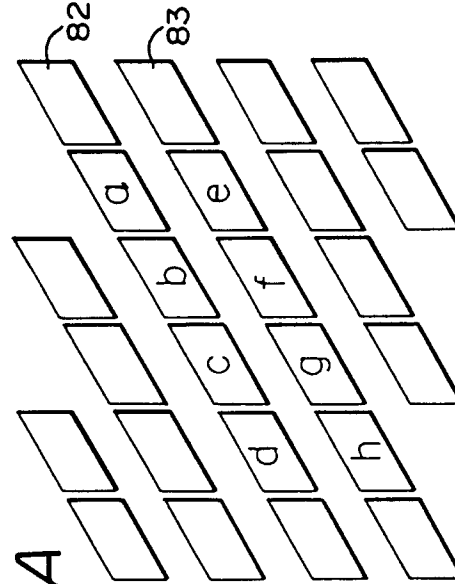


FIG. 14B

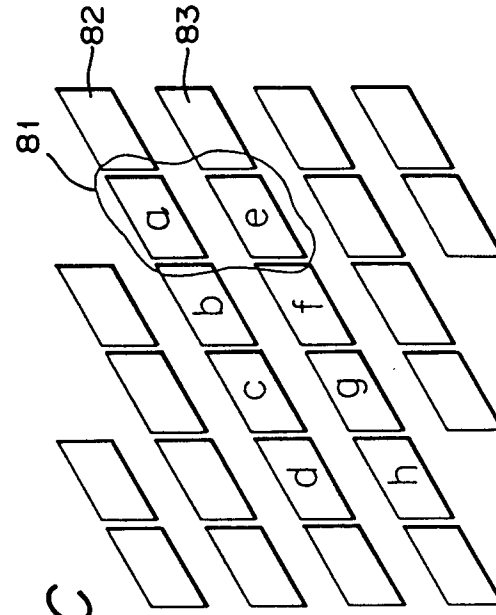


FIG. 14C

FIG. 15

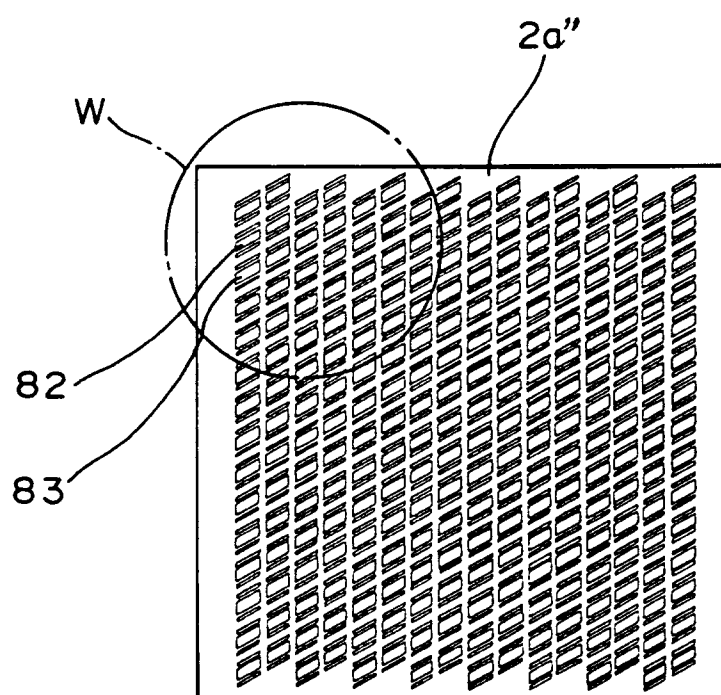


FIG. 16


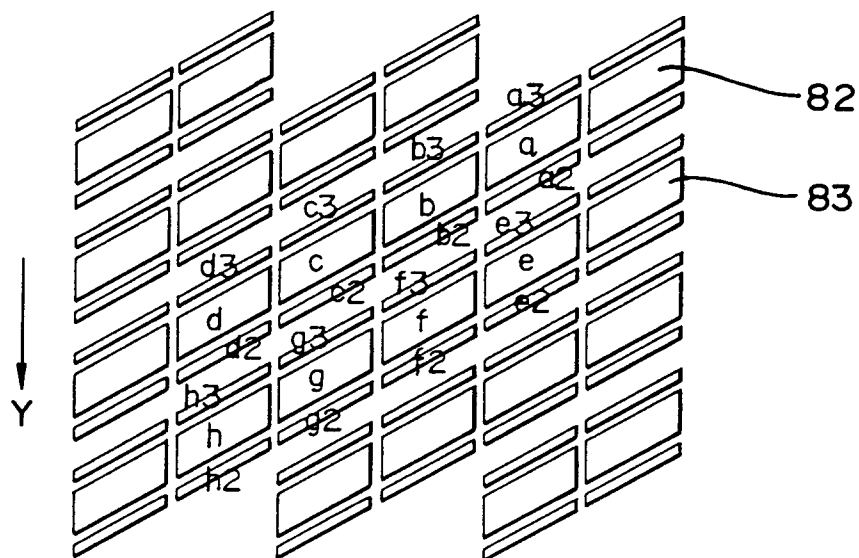


FIG. 17



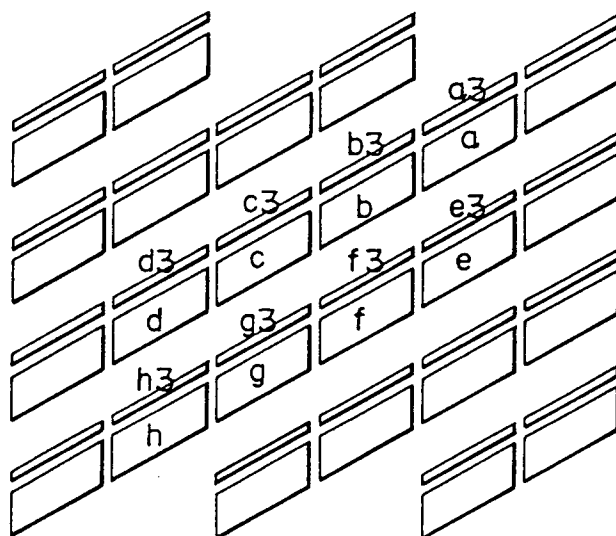

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 20 0901

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.5)
A	GB-A-2 223 984 (SONY CORP) 25 April 1990 * abstract * ---	1	B41C1/04
A	US-A-2 662 455 (FREUND) * column 6, line 40 - line 52 * ---	1-3	
A	PATENT ABSTRACTS OF JAPAN vol. 012 no. 109 (M-682) ,8 April 1988 & JP-A-62 238743 (DAINIPPON PRINTING CO LTD) 19 October 1987, * abstract * -----	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.5)
			B41C
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 26 June 1995	Examiner Hazel, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			