

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets




(11) Publication number:

0 674 360 A1

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **95103660.7**(51) Int. Cl.⁶: **H01R 13/41**(22) Date of filing: **14.03.95**(30) Priority: **25.03.94 DE 4410455**(43) Date of publication of application:
27.09.95 Bulletin 95/39(84) Designated Contracting States:
AT BE ES FR GB IT NL SE(71) Applicant: **FRAMATOME CONNECTORS
INTERNATIONAL**
Tour Fiat - Cédex 16
F-92084 Paris La Défense (FR)(72) Inventor: **May, Guntram**
Logastrasse 4
D-90518 Altdorf (DE)
Inventor: **Steinhardt, Helmut**
Danteweg 28
D-90427 Nürnberg (DE)(74) Representative: **Patentanwälte Beetz - Timpe -
Siegfried Schmitt-Fumian - Mayr**
Steinsdorfstrasse 10
D-80538 München (DE)(54) **Water-tight Contact Pin Bushing in Cast Plastic Parts, More Particularly Plug Casings.**

(57) This invention relates to a water-tight contact pin bushing in cast plastic parts (1), more particularly plug casings. The contact pins (2) have cross-sectional changes over their cast part length. The cross-sectional changes comprise at least two truncated cones (3a, 3b) which are substantially rotationally symmetrical relatively to the pin axis and the major base surfaces of which form shoulders (5) respectively situated opposite the nearest surface of the plastic part. The distance d between the shoulders (5) and the associated surfaces of the plastic part (1) is large enough to prevent the plastic breaking open in the shoulder zone.

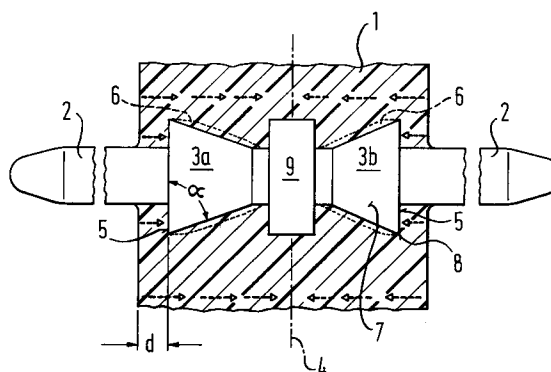Fig.1**EP 0 674 360 A1**

This invention relates to a water-tight contact pin bushing in cast plastic parts, more particularly plug casings. Plug casings having a plurality of contact pins, known as plug boards, must be of water-tight construction on the plug-in side for numerous applications. The contact pins can be secured in the plug board by being pressed in or by injection moulding encapsulation. Various steps are known to guarantee the required sealing properties of the plug boards on the connection side. In the case of contact pins which have been pressed in it is known to provide a plurality of successive truncated cones all oriented with their apices in the direction of pressing in and providing a relatively tight clamping fit in the plastic casing as a result of the resilience of the plastic material. Nevertheless, reliable water-tightness is not always possible to achieve, since the relatively high forces to which plastic parts are subjected may result in continuous ducts being formed.

Another way of sealing such plugs proposes grouting the contact pins in the casing. For example, a plug board is known in which the contact pins are fitted with clearance. To seal the contact pins, the plug board is grouted with an UV-hardening two-component silicone. This represents an extremely high manufacturing expense, necessitating separate operations. The two-component silicone requires pre-treatment of the plug board by a primer or plasma etching. The liquid silicone is applied by special metering systems and must be hardened in UV-furnaces. The silicone remains liquid in the shadow of the contact pins, which are bent at an angle in many applications. Even if the silicone is subjected to only slight mechanical load, e.g. on movements of the contact pins, the adhesion is lost so that reliable sealing is again impossible to guarantee.

The object of the present invention is to propose a water-tight contact pin bushing in cast plastic parts, more particularly plug casings, which is very reliable, involves minimum production expenditure, and yet permits contact pin adjustment with minimum tolerances.

This problem is solved as indicated in the claims. The sub-claims relate to preferred embodiments of the present invention.

The contact pin bushing according to the invention is absolutely water-tight since the cast plastic material completely surrounds the round contour of the base surface of the truncated cone without any hairline ducts forming. No additional operations are required, e.g. application of UV-hardening silicone, so that a plug board with adjusted contact pins can be taken in finished form from the injection moulding tool.

The invention is explained in detail hereinafter with reference to the description of one exemplified

embodiment and the drawing wherein:

Figure 1 is a diagrammatic longitudinal section through a contact pin taken out through a plastic part.

5 Figure 2 is a perspective view of a contact pin of rectangular cross-section, and

Figure 3 is a specific example of the use of the water-tight contact pin bushing according to the invention.

10 Figure 1 shows a plastic part 1 into which the contact pin 2 is moulded. The contact pin 2 is taken through the plastic part 1 so as to be water-tight, and part 1 may, more particularly, be part of a plug board. To this end, two truncated cones 3a and 3b are disposed on the contact pin inside the plastic part 1. Each of the two truncated cones 3a and 3b has its major base surface pointing away from the meridian plane 4 of the plastic part 1 and is directed towards that surface of the plastic part which is closest to it. The truncated cone merges at the opposite end into a cross-section of the contact pin 2. The aperture angle α of the truncated cone, i.e. the angle between the major base of the truncated cone and of the conical surface, is preferably of the order of 70° . The major base of the truncated cone forms a shoulder 5 extending concentrically around the contact pin axis. The shoulder 5 is cast sufficiently deeply in the plastic material for the plastic layer between the shoulder 5 and the corresponding surface of the plastic part in this zone to have a thickness d which is sufficient to prevent the plastic material from tearing open on shrinkage of the plastic during cooling.

25 This shrinkage, which is represented by the broken-line arrows 6 in Figure 1, occurs on cooling of the cast plastic. Since this shrinkage takes place to a far greater degree than the shortening of the length of the metal contact pin during cooling, forces occur at the interfaces between the contact pins and the plastic material, and will be considered in greater detail hereinafter. The shrinkage movement is in each case away from the surfaces of the plastic part towards the central region thereof, indicated by the meridian plane 4 in Figure 1. In other words, a force directed towards the meridian plane 4 acts in each case on the shoulders 5 of the truncated cones 3a and 3b and ensures that the contact pin is retained without play. Between the planes of the shoulders 5 and the meridian plane 4 the shrinkage leads to the tendency of cavities 6 being formed around the conical surfaces 7 of the truncated cones 3a and 3b. This effect is not entirely inevitable, although the material shrinkage in the radial direction around the contact pin axis substantially reduces the degree of cavity formation. However, this is not important in so far as concerns the tight fit of the contact pins since it is basically the edge 8 of the shoulder 5 which deter-

mines the tight anchoring and sealing properties of the bushing. This edge 8 remains tightly and sealingly enclosed by cast plastic even after shrinkage thereof. The arrangement of the truncated cones according to the invention as described proves superior to other known arrangements and also to simply cylindrical cross-sectional changes. If the truncated cones according to the invention were replaced by cylinders, cavities would form at the shoulders situated towards the meridian plane 4 and could no longer be substantially compensated for by radial shrinkage, so that a far weaker hold would apply for the contact pins axially. If the truncated cones were arranged with their apices each pointing away from the meridian plane, this would also result in large cavities forming inside the plastic part, and the peripheral edge of the shoulders 5, which governs the sealing properties, would be in the immediate vicinity of such cavities. In such cases it would not be possible to expect the plastic material to be tightly pressed on to the conical surface of the truncated cones, so that there would be no guarantee of either a secure fit or absolute water-tightness.

Figures 1 shows another cylindrical change of the cross-section of the contact pin 2 in the region of the meridian plane 4. This cylinder 9 serves further to strengthen the holding of the contact pin. Its arrangement on the meridian plate 4 ensures that no cavities form anywhere, so that it is tightly enclosed on all sides. Thus the tearing-out forces required to release a contact pin from its anchorage are greatly increased. At the same time, its construction and its central position in the moulding prevents any accumulation of material.

Figure 2 shows an alternative embodiment of a contact pin in which the waterproof contact pin bushing can be used. This contact pin has a rectangular cross-section. The truncated cones 3a and 3b, however, are rotationally symmetrical, this being absolutely essential to achieving a water-tight bushing. The circular or, if required, oval shape of the peripheral edge 8 of the shoulder 5 for the first time allows sealing shrinkage of the plastic material on to this edge. Edges which have a contour with corners have hitherto not resulted in a really sealing-tight contact pin bushing. Since only the contour of the peripheral edge 8 is involved, the remaining cross-section of the contact pin may be of any desired shape, more particularly square or rectangular. The peripheral change in the form of truncated cones or cylinders can be obtained by upsetting, hammering or other shaping.

Figure 3 shows a specific example of a water-tight contact pin bushing in a plug board. Like elements in Figures 1 and 2 have been given like references in Figure 3. The plastic part 1 is part of a plug board, contact pins 2 being disposed in two

rows parallel to one another. The contact pins 2 in the cast plastic part have cross-sectional changes in the form of truncated cones 3 and a cylinder 9. The truncated cones 3 are each so aligned that their apex points towards the meridian plane 4 of the plastic part and the major base is directed towards the nearest side wall. The cylindrical widening of the cross-section of the contact pin 2 is disposed in the meridian plane 4 between the side surfaces. The top and bottom contact pins 2 in Figure 3 differ in that their diameters are different on the plug side. In both cases, the diameters of the shoulders 5 and of the cylinder 9 are substantially equal to the diameter of the contact pin on the plug side. In addition to the frusto-conical cross-sectional changes, another cylindrical widening 10 of the cross-section is provided in the case of the top contact pin 2 remote from the plug side, one end face of the widened portion 10 terminating flush with the surface of the plastic part. The material thicknesses between the shoulders 5 and the nearest surfaces of the plastic part are so dimensioned as to reliably prevent any tearing out. The provision of four truncated cones and a cylinder 9 disposed in the meridian plane reliably guarantees the sealing tightness of the contact pin bushing in the plastic part and provides the highest possible resistance to tearing out.

The plug board shown in Figure 3 can be produced in one operation in an appropriate injection moulding tool, from which the finished end product can be immediately removed. No further processing or additional sealing by UV-hardening silicone is required.

Claims

1. A water-tight contact pin bushing in cast plastic parts (1), more particularly in plug casings, comprising,
 - contact pins (2) having cross-sectional changes over their cast part length, characterised in that the cross-sectional changes comprise at least two truncated cones (3a, 3b) which are substantially rotationally symmetrical relatively to the pin axis and the major base surfaces of which form shoulders (5) situated opposite the nearest surface of the plastic part (1), and in that the distance d between the shoulders (5) and the associated surfaces of the plastic part (1) is large enough to prevent the plastic from breaking open in the shoulder zone.
2. A contact pin bushing according to Claim 1, characterised in that the truncated cones (3a, 3b) have an angle α of about 70° between the

base surface (5) and the conical surface (7).

3. A contact pin bushing according to Claim 1 or 2, characterised in that the contact pins (2) are cylindrical and the minor base surfaces of the truncated cones (3a, 3b) have substantially the same cross-section as the contact pins (2). 5
4. A contact pin bushing according to any one of the preceding claims, characterised in that the contact pins (2) have a polygonal cross-section, the major base surfaces (5) of the truncated cones (3a, 3b) having a circular or oval periphery (8). 10
15
5. A contact pin bushing according to any one of the preceding claims, characterised in that in addition to the frusto-conical cross-sectional changes (3a, 3b) of the contact pins (2) cylindrical zones (9) are provided inside or at the surface of the cast zone of the contact pins (2) with a cross-section which is larger or smaller than the cross-section of the rest of the contact pin (2). 20
25
6. A contact pin bushing according to any one of the preceding claims, characterised in that the cross-sectional changes of the contact pins (2) are produced by stamping or upsetting. 30
7. A contact pin bushing according to any one of Claims 1 to 5, characterised in that the truncated cones (3a, 3b) and cylinder (9) are parts which are applied to and fixed on the contact pins (2). 35
8. A contact pin bushing according to any one of the preceding claims, characterised by its use in PCB plug boards made by injection moulding for equipping printed circuit boards. 40
45
50
55

Fig.1

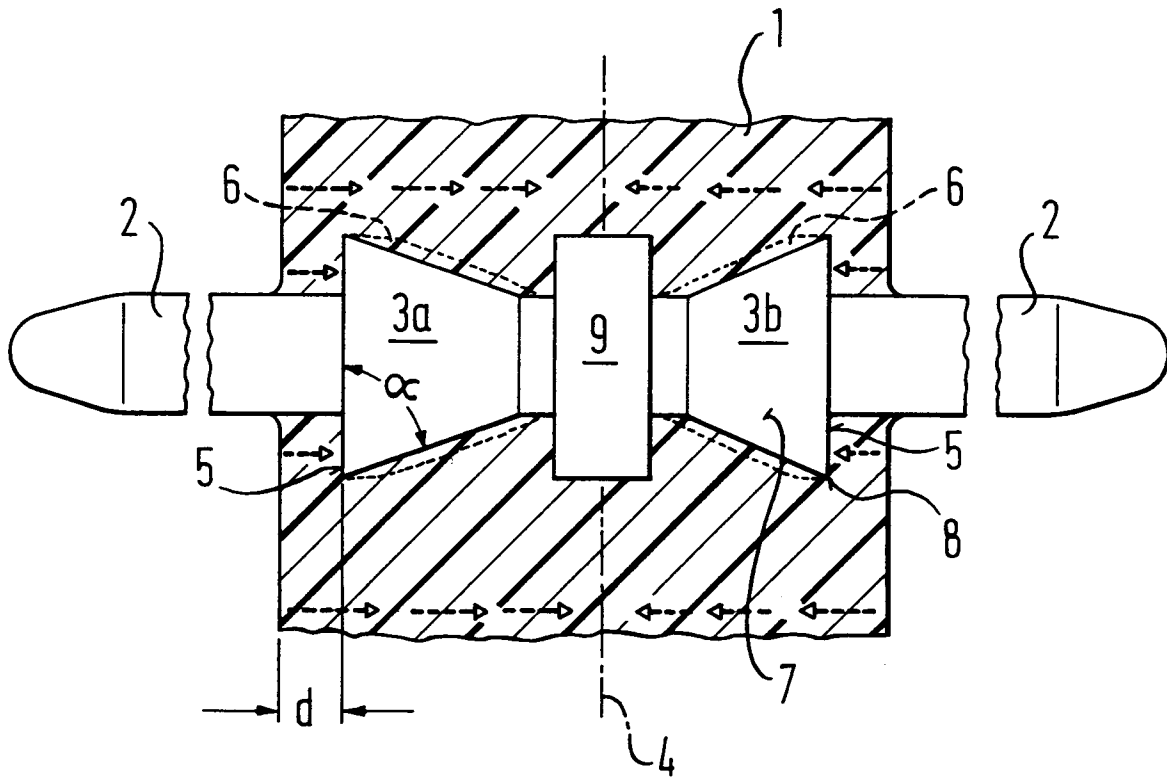


Fig. 2


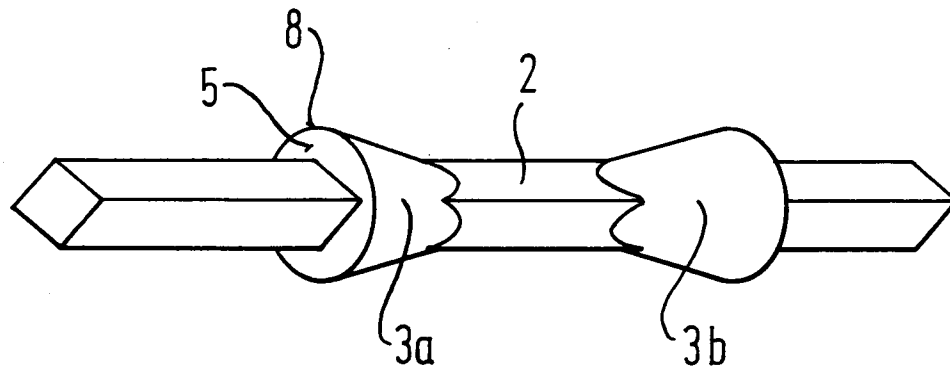


Fig. 3



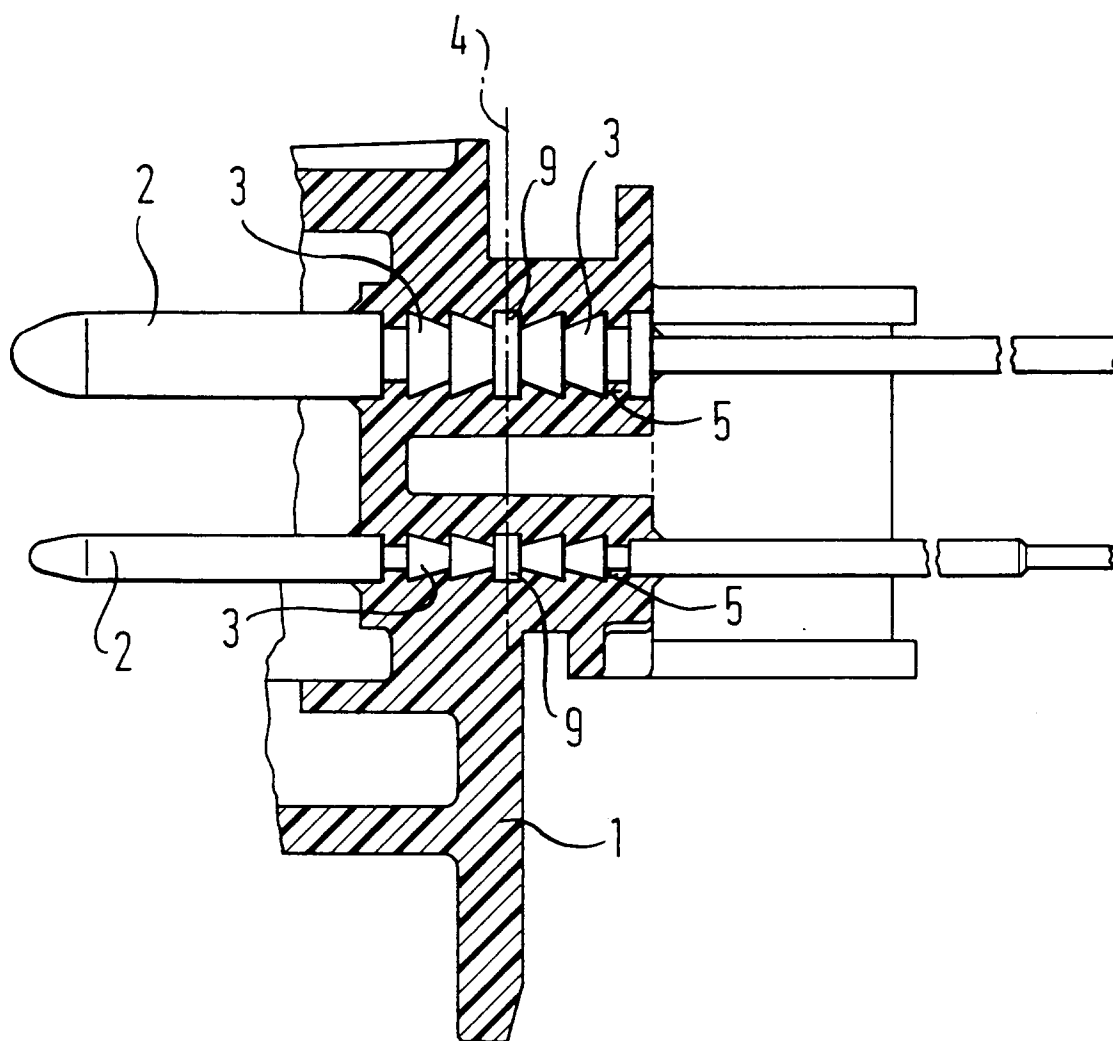

Europäisches
Patentamt

EUROPÄISCHER RECHERCHENBERICHT

Nummer der Anmeldung
EP 95 10 3660

EINSCHLÄGIGE DOKUMENTE			
Kategorie	Kennzeichnung des Dokuments mit Angabe, soweit erforderlich, der maßgeblichen Teile	Betrifft Anspruch	KLASSIFIKATION DER ANMELDUNG (Int.Cl.6)
A	DE-B-11 43 881 (HACKETHAL-DRAHT UND KABEL-WERKE) * das ganze Dokument * ---	1-8	H01R13/41
A	US-A-3 897 131 (LARRY RONALD STAUFFER) * Zusammenfassung; Ansprüche; Abbildungen 4-7 * ---	1-8	
A	WO-A-90 14699 (MICROWAVE DEVELOPMENT) * Zusammenfassung; Ansprüche; Abbildungen * ---	2-5,7	
A	EP-A-0 548 810 (THE WHITAKER) * Zusammenfassung; Ansprüche; Abbildungen * ---	1	
A	FR-A-1 548 609 (MELLIANI) * das ganze Dokument * -----	6-8	
			RECHERCHIERTE SACHGEBIETE (Int.Cl.6)
			H01R
Der vorliegende Recherchenbericht wurde für alle Patentansprüche erstellt			
Recherchenort DEN HAAG		Abschlußdatum der Recherche 21. Juli 1995	Prüfer Durand, F
KATEGORIE DER GENANNTEN DOKUMENTE X : von besonderer Bedeutung allein betrachtet Y : von besonderer Bedeutung in Verbindung mit einer anderen Veröffentlichung derselben Kategorie A : technologischer Hintergrund O : nichtschriftliche Offenbarung P : Zwischenliteratur T : der Erfindung zugrunde liegende Theorien oder Grundsätze E : älteres Patentdokument, das jedoch erst am oder nach dem Anmeldedatum veröffentlicht worden ist D : in der Anmeldung angeführtes Dokument L : aus andern Gründen angeführtes Dokument & : Mitglied der gleichen Patentfamilie, übereinstimmendes Dokument			