



(12)

EUROPEAN PATENT APPLICATION

(21) Application number : **95303778.5**

(51) Int. Cl.⁶ : **C09B 67/10, C09B 67/48, B01F 5/06**

(22) Date of filing : **02.06.95**

(30) Priority : **03.06.94 JP 122310/94**

(43) Date of publication of application :
06.12.95 Bulletin 95/49

(84) Designated Contracting States :
DE FR GB

(71) Applicant : **TOYO INK MANUFACTURING CO., LTD.**
No. 3-13, Kyobashi 2-chome
Chuo-ku
Tokyo (JP)

(72) Inventor : **Ide, Yusaku, Toyo Ink Manufacturing Co., Ltd.**
3-13, Kyobashi 2-chome Chuo-ku
Tokyo (JP)

(74) Representative : **Woods, Geoffrey Corlett J.A. KEMP & CO.**
14 South Square
Gray's Inn
London WC1R 5LX (GB)

(54) **Method of adjusting pigment particles, pigment and colorant composition.**

(57) A method of treating pigment particles, which comprises


(a) pressurizing water and a substantially water-insoluble solvent ;

(b) introducing the pressurized water and the pressurized solvent into a flow system having a diameter-decreased flow path and/or a curved flow path, wherein the diameter-decreased flow path accelerates the water and the solvent, the curved flow path causes a shear force, and collision of the accelerated water with the accelerated solvent or collision of the accelerated water and the accelerated solvent with a wall constitutes the curved flow path ;

(c) thereby obtaining an aqueous uniform dispersion of the water and the solvent ; and

(d) bringing the dispersion into contact with a pigment to cause crystal growth or crystal transition of the pigment.

FIG. 1

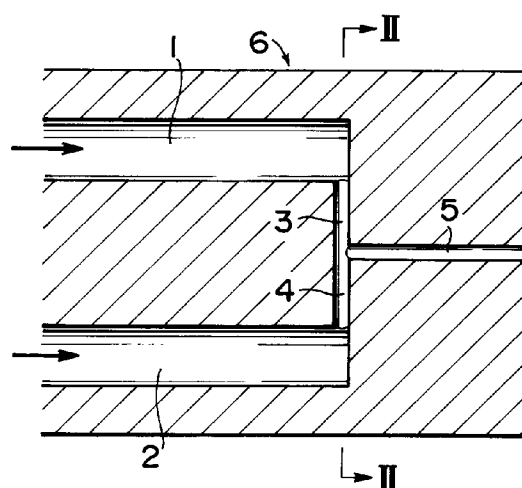

Field of the Invention

The present invention relates to a method of adjusting pigment particles in which a substantially water-insoluble solvent is brought into contact with a pigment in an aqueous system, a particles-adjusted pigment obtained by this method, and a colorant composition. More specifically, it relates to a method of adjusting pigment particles for providing a pigment suitable for use in a coating composition, an ink, a plastic, a dye, a toning agent, a color toner and other coloring materials.

Prior Art of the Invention

Pigments are widely used in colorant compositions in the field of coloring materials, while pigments are required to have workability and properties suitable for use. For example, pigments are required to be excellent in dispersibility, fluidity, density, gloss, clearness, transparency, viscosity, stability with time and others depending upon use. For imparting a pigment with suitability concerning these properties, it is general practice to adjust the particles of the pigment with a solvent in an aqueous system.

For example, JP-A-3-45659, JP-A-2-73869, JP-A-1-259068, JP-A-63-199769 and JP-A-62-131072 disclose methods in which pigment particles are adjusted by crystal growth or crystal transition of a crude pigment. JP-A-55-48254 and the text of No. 35 Pigment Introduction Course (Shikizai Kyokai (Coloring Material Society)) disclose methods in which pigment particles are adjusted by crystal growth.

In the above methods, pigment particles are adjusted with a solvent in an aqueous system for the following reasons. Pigments are mainly produced in an aqueous system, and the treatment of a pigment in an aqueous system is effective since the pigment is free from forming aggregates and is present as fine particles. As an adjuster of pigment particles for imparting the pigment with the above properties, the water-soluble solvent is selected from lower alcohols, polyhydric alcohols and ketones. Since, however, pigment particles cannot be treated with a substantially water-insoluble solvent alone in an aqueous system, the substantially water-insoluble solvent is improved in various ways, and used for the treatment in an aqueous system.

A substantially water-insoluble solvent is emulsified in the presence of a surfactant, and used for the treatment in an aqueous system, while the number of those substantially water-insoluble solvents which can be emulsified is limited.

When a pigment is surface-modified in an emulsion, a gravure ink and a coating composition causes bleeding and poor water resistance, a plastic causes migration and an ink shows poor emulsifiability, since the surfactant remains in the pigment. Therefore, the

pigment is limited in use. Further, there is a defect in that since a substantially water-insoluble solvent which is emulsified has a large particle diameter relative to the particle diameter of a pigment, the effect of the solvent on the adjustment of the pigment particles is low.

Summary of the Invention

It is an object of the present invention to provide a method of adjusting pigment particles, which is excellent in the adjustment of pigment particles by crystal growth and crystal transition, a particles-adjusted pigment obtained by the method, and a colorant composition containing the pigment and a vehicle.

It is another object of the present invention to provide a method of adjusting pigment particles in which an aqueous dispersion of water and a substantially water-insoluble solvent is brought into contact with a pigment in an aqueous system, a particles-adjusted pigment obtained by the method, and a colorant composition containing the pigment and a vehicle.

It is further another object of the present invention to provide a method of adjusting pigment particles in which a substantially water-insoluble solvent is brought into contact with a pigment in an aqueous system in the absence of a surfactant or in the presence of a surfactant in an amount insufficient for substantially emulsifying the water-insoluble solvent, a particles-adjusted pigment obtained by the method, and a colorant composition containing the pigment and a vehicle.

According to the present invention, there is provided a method of adjusting pigment particles, which comprises

pressurizing water and a substantially water-insoluble solvent,

introducing the pressurized water and the pressurized water-insoluble solvent into a flow system having a diameter-decreased flow path and/or a curved flow path to cause a shear force in a mixture of the water and the water-soluble solvent, of which the flow is accelerated while the mixture is passing the diameter-decreased portion, mutual collision of the mixture of which the flow has been accelerated or collision of the mixture of which the flow has been accelerated against a wall constituting the curved flow path,

thereby obtaining an aqueous uniform dispersion of water and the substantially water-insoluble solvent, and

bringing the aqueous uniform dispersion into contact with a pigment in an aqueous system to cause crystal growth or crystal transition of the pigment.

According to the present invention, further, there is provided a pigment whose particles are adjusted by the above method.

According to the present invention, further, there

is provided a colorant composition containing the above pigment and a vehicle.

Brief Description of Drawings

Fig. 1 is a schematic cross-sectional view of an ultrahigh-pressure dispersing apparatus in which two portions of a mixture containing water and the substantially water-insoluble solvent are allowed to collide with each other.

Fig. 2 is a schematic cross-section view of a II-II line portion taken from an ultrahigh-pressure dispersing apparatus shown in Fig. 1.

Fig. 3 is a schematic cross-sectional view of an ultrahigh-pressure dispersing apparatus in which two portions of a mixture containing water and the substantially water-insoluble solvent are allowed to collide with each other.

Fig. 4 is a schematic cross-section view of a IV-IV line portion taken from an ultrahigh-pressure dispersing apparatus shown in Fig. 3.

Fig. 5 shows a schematic cross-sectional view of an ultrahigh-pressure in which a mixture containing water and the substantially water-insoluble organic surface modifier is allowed to collide against a wall.

Fig. 6 is a schematic cross-section view of a VI-VI line portion taken from an ultrahigh-pressure dispersing apparatus shown in Fig. 5.

Detailed Description of the Invention

The pigment used in the present invention includes organic pigments and inorganic pigments. Specifically, the pigment includes those specified as CI pigments in the color index (CI).

The pigment used in the present invention preferably has the form of a pigment produced in an aqueous system, and is preferably used in an aqueous slurry, for homogeneously and effectively bringing a substantially water-insoluble solvent into contact with the pigment.

When the pigment is in the state of a dry powder, it is preferably used as it is when the solvent has high wettability. When the solvent has low wettability, a pigment in the state of a dry powder may be dispersed in water with a dispersing apparatus such as a sand mill, a ball mill, an attritor, a paint conditioner or a high-speed mixer, and the aqueous dispersion or the dispersion of the pigment in water may be used in the present invention.

When the pigment is that which is produced in an organic solvent, it may be used in the state of a dry powder as above, it may be used in the state of an aqueous slurry prepared by removing the organic solvent, or it may be used as a dispersion of it in water.

The substantially water-insoluble solvent used in the present invention refers to a solvent which is water-insoluble or sparingly soluble in water at room

temperature and has the capability of achieving crystal growth or crystal transition, and it is preferably removed from the pigment under heat.

Examples of the above substantially water-insoluble solvent include hydrocarbons such as n-hexane, n-heptane, n-octane, n-decane, 2,2-dimethylbutane, petroleum benzene, mineral spirit, cyclohexane, methylcyclohexane, benzene, toluene, xylene, ethylbenzene, isopropylbenzene, solvent naphtha and turpentine oil; halogenated hydrocarbons such as chloroform, carbon tetrachloride, ethylene chloride, 1,1,1-trichloroethane, 1,1,2,2-tetrachloroethane, trichloroethylene, tetrachloroethylene and chlorobenzene; alcohols such as 3-pentanol, n-hexanol, n-heptanol and nonyl alcohol; ethers such as dichloroethyl ether and n-dibutyl ether, ketones such as methyl n-propyl ketone, methyl n-butyl ketone and ethyl n-butyl ketone; esters such as ethyl acetate, n-propyl acetate, n-butyl acetate, isobutyl acetate and n-amyl acetate; and carbon disulfide. These solvents may be used alone or in combination.

Although not specially limited, the amount of the substantially water-insoluble solvent based on the pigment is generally determined depending upon use of the pigment, while the amount of the substantially water-insoluble solvent per 100 parts by weight of the pigment is preferably 0.5 to 300 parts by weight, more preferably 1 to 200 parts by weight.

When the above amount is less than 0.5 part by weight, almost no substantial effect of the solvent on the adjustment is obtained. When it exceeds 300 parts by weight, no further effect is obtained.

In the present invention, the aqueous dispersion can be obtained by colliding water and the substantially water-insoluble solvent against each other and/or against a wall of an ultrahigh-pressure dispersing apparatus in the absence of a surfactant or in the presence of a surfactant in an amount insufficient for emulsifying the substantially water-insoluble solvent.

Figs. 1 to 6 show schematic internal structures of ultrahigh-pressure dispersing apparatus. In Figs. 1 and 2, a mixture containing water and the substantially water-insoluble solvent is separated and introduced through flow paths 1 and 2 at a pressure of at least 200 kg/cm² in an arrow direction, two separated portions of the mixture are allowed to collide with each other near the inlet to a flow path 5, and recovered through the flow path 5. In Fig. 1, numeral 6 is an ultrahigh-pressure dispersing apparatus. The flow path 1 has a diameter-decreased portion 3, and the flow path 2 has a diameter-decreased portion 4. Further, the flow path 5 has a diameter smaller than those of the flow paths 1 and 2. In the diameter-decreased portions 3 and 4, the flow of the mixture is accelerated so that a shear force is exerted on the mixture to promote the dispersing of the mixture. In Figs. 3 and 4, a mixture containing water and the sub-

stantially water-insoluble solvent is separated and introduced through flow paths 7 and 8 at a pressure of at least 200 kg/cm² in an arrow direction, and two separated portions of the mixture are allowed to collide with each other near the inlet to a flow path 10, and recovered through the flow path 10. The flow path 7 and the flow path 8 have a diameter-decreased portion 9 toward the inlet to the flow path 10. In Figs. 5 and 6, a mixture containing water and the substantially water-insoluble solvent is introduced through a flow path 11 at a pressure of at least 200 kg/cm², allowed to collide against a wall 14, passed through a flow path 12, and recovered through a flow path 13. Numeral 15 is a support.

The ultrahigh-pressure dispersing apparatus is not specially limited so long as the mixture of water and the substantially water-insoluble solvent can be introduced at a pressure of least 200 kg/cm². For example, the ultrahigh-pressure dispersing apparatus is selected from a Gaulin homogenizer (supplied by Gaulin Corporation) and a nanomizer (supplied by Nanomizer Inc.).

The pressure for the introduction of the preliminary mixture and the collision is at least 200 kg/cm². The higher the above pressure is, the stabler the resultant aqueous dispersion is. When the above pressure is lower than 200 kg/cm², the substantially water-insoluble solvent is readily separated from water, and it is difficult to prepare the aqueous dispersion.

When the aqueous dispersion is prepared, water and the substantially water-insoluble solvent may be separately introduced into the ultrahigh-pressure dispersing apparatus at predetermined rates, or a preliminary mixture of water and the substantially water-insoluble solvent may be prepared with a mixing apparatus such as high-speed mixer or a homomixer before dispersed under ultrahigh-pressure.

The amount of the substantially water-insoluble solvent based on water is 1 to 80 % by weight. The higher the concentration of the substantially water-insoluble solvent is, the higher the productivity is. However, when the above amount exceeds 80 % by weight, it is difficult to obtain an aqueous dispersion. When it is less than 1 % by weight, not only the productivity is poor, but also it is difficult to obtain an aqueous dispersion. The above amount is preferably 5 to 60 % by weight.

The particles-adjusted pigment of the present invention can be obtained by mixing the above aqueous dispersion with a pigment with stirring, or by dispersing the pigment in the above aqueous dispersing with a dispersing apparatus such as a sand mill, a ball mill, an attritor, a paint conditioner or a high-speed mixer. It is preferred to add the aqueous dispersion to an aqueous slurry containing a pigment in the state of fine particles, since the substantially water-insoluble solvent can be uniformly brought into contact with the pigment.

The temperature for the above mixing with stirring or the above dispersing can be set at a temperature between room temperature and the boiling point of water or the azeotropic point of water and the solvent, while it is preferred to carry out the above mixing or dispersing under heat for promoting the adjustment of the pigment particles by crystal growth or crystal transition of the pigment and for removing the solvent by volatilization.

The particles-adjusted pigment of the present invention is generally recovered in the step of conventional filtering or washing the above mixture or dispersion with water. Further, a surface-treating additive may be used as required.

The particles-adjusted pigment of the present invention may be used in the form of a paste, or may be dried or milled and used in the form of a powder.

The colorant composition of the present invention is obtained by dispersing the above particles-adjusted pigment in a vehicle, and includes an offset ink, a gravure ink, a coating composition, a plastic and a water-based color. The vehicle is not specially limited, and it may contain an auxiliary agent and an extender pigment.

The above particles-adjusted pigment is preferably dispersed in a vehicle with a dispersing apparatus such as a dissolver, a high-speed mixer, a homomixer, a sand mill, an attritor, a two-roll mill or a three-roll mill.

The above particles-adjusted pigment is generally in the form of a powder when dispersed. However, when the colorant composition is a water-based one, an offset ink or a polyethylene composition, the particles-adjusted pigment may be in the form of a paste (obtained without drying) when dispersed.

The vehicle for the offset ink contains 20 to 50 % by weight of a rosin-modified phenolic resin, a petroleum resin, an alkyd resin or a drying oil-modified resin of any one of these, 0 to 30 % by weight of linseed oil, tung oil or soybean oil, and 10 to 60 % by weight of a solvent such as n-paraffin, isoparaffin, aromatic, naphthene or an α -olefin.

The vehicle for the gravure ink contains 10 to 50 % by weight of gum rosin, wood rosin, tall oil rosin, lime rosin, rosin ester, a maleic acid resin, a polyamide resin, a vinyl resin, nitrocellulose, cellulose acetate, ethyl cellulose, chlorinated rubber, cyclized rubber, a ethylenevinyl acetate copolymer, a polyurethane resin, a polyester resin, an alkyd resin, an acrylic resin, gilsonite, dammar, shellac, a mixture of at least two of these resins, a water-soluble resin obtained by water-solubilizing at least one of these resins or a mixture of at least two of these resins or an emulsion resin of at least one of these resins, and 30 to 80 % by weight of a hydrocarbon, an alcohol, a ketone, an ether alcohol, an ether, an ester or water.

The vehicle for the coating composition contains 20 to 80 % by weight of an acrylic resin, an alkyd res-

in, an epoxy resin, chlorinated rubber, a synthetic resin emulsion, a silicone resin, a fluorine resin, a polyurethane resin, a polyester resin, a melamine resin, a urea resin, a mixture of at least two of these resins, a water-soluble resin obtained by water-solubilizing at least one of these resins or a mixture of at least two of these resins or an emulsion resin of at least one of these resins, and 10 to 60 % by weight of a hydrocarbon, an alcohol, a ketone, an ether alcohol, an ether, an ester or water.

The vehicle for the plastic includes polyethylene, polypropylene, polybutadiene, ethylene-based ionomer, polyvinyl chloride, polyvinylidene chloride, an ABS resin, an acrylic resin, a methacrylic resin, polyvinyl alcohol, cellulose-based plastic, an epoxy resin, a polyester resin, a phenolic resin, a urea resin, a melamine resin, a polyurethane resin, a silicone resin, a polyamide resin, polystyrene, polyacetal, polycarbonate, polyphenylene ether, polyphenylene sulfite, polysulfone, polyetherimide, polyether ketone and complexes of these.

The vehicle for the water-based color contains at least one of nonionic, anionic and cationic surfactants and sulfonic acid amide-containing, hydroxystearic acid-containing and ϵ -caprolactam-containing polymer dispersing agents, a polyhydric alcohol selected from glycerin, ethylene glycol, triethylene glycol, propylene glycol and pentaerythritol, water, and optionally at least one auxiliary agent selected from an amine, an antiseptic and an antifoaming agent.

According to the present invention, a predetermined amount of the substantially water-insoluble solvent is mixed with a predetermined amount of water, the resultant mixture is pressurized, and introduced into the specified ultrahigh-pressure dispersing apparatus at a pressure of at least 200 kg/cm², to cause a shear force in the mixture of which the flow is accelerated while the mixture is passing the diameter-decreased flow path, mutual collision of the mixture of which the flow has been accelerated and collision of the mixture of which the flow has been accelerated against a wall constituting the flow path, whereby an aqueous dispersion of which the preparation has been so far impossible can be obtained in the absence of a surfactant or in the presence of a surfactant in an amount insufficient for emulsifying the substantially water-insoluble solvent.

It is considered that the substantially water-insoluble solvent is finely pulverized to a molecular level by the collision under a high pressure to form a stable aqueous dispersion owing to an intermolecular attracting force between water and the substantially water-insoluble solvent.

In the method of adjusting pigment particles, provided by the present invention, molecules of the substantially water-insoluble solvent are brought into contact with the pigment particle surface, so that the contact area of the solvent per unit weight is greater

than the contact area of a conventional emulsion particles, and even a small amount of the solvent has an excellent effect on the adjustment of pigment particles by crystal transition or crystal growth.

Examples

The present invention will be explained more in detail hereinafter with reference to Examples, in which "part" stands for "part by weight" and "%" stands for "% by weight".

Example 1

90 Parts of water and 10 parts of xylene were introduced into a nanomizer (supplied by Nanomizer Inc.) at a pressure of 1,300 kg/cm², and this operation of introduction of the resultant mixture (dispersion) was repeated twice more, to give an aqueous dispersion. 50 Parts of the aqueous dispersion was added to a slurry prepared by dispersing 100 parts, as a dry product, of CI Pigment Yellow 12 synthesized by a conventional method in 200 parts of water, and the mixture was stirred at room temperature for 30 minutes. Further, the mixture was heated up to 80°C, and then stirred for 30 minutes. The resultant mixture was filtered and washed with water to give 99 parts, as a dry product, of a particles-adjusted pigment in the form of a paste.

The above particles-adjusted pigment was observed through an electron microscope to show that the particles had uniform particle forms. On the other hand, a pigment prepared in Comparative Example 1 to be described below had nonuniform particle forms. An offset ink containing the above particles-adjusted pigment exhibited excellent gloss over an offset ink containing the pigment prepared in Comparative Example 1. Further, an emulsion of the offset ink in this Example showed a surface tension of 70 dyne/cm, while an emulsion of the offset ink in Comparative Example 1 showed a surface tension of 59 dyne/cm. Thus, it is seen that the particles-adjusted pigment in this Example exhibited excellent suitability for emulsification.

Comparative Example 1

89 Parts of water, 10 parts of xylene and 1 part of a nonionic surfactant (Nonal 310, supplied by Kao Corp.) were mixed with a high-speed mixer to give an emulsion. A comparative pigment was obtained in the same manner as in Example 1 except that the 50 parts of the aqueous dispersion was replaced with 50 parts of the above emulsion.

Example 2

0.05 Part of a nonionic surfactant (Nonal 310,

supplied by Kao Corp.) was added to a mixture containing 89.95 parts of water and 10 parts of xylene, and these components were mixed with a high-speed mixer. The resultant mixture showed a partial formation of an emulsion, while water and xylene were in an almost separate state. The mixture was introduced into a nanomizer (supplied by Nanomizer Inc.) at a pressure of 300 kg/cm², and this operation of introduction of the resultant mixture (dispersion) was repeated twice more, to give an aqueous dispersion. Thereafter, the procedures in Example 1 were repeated to give 99 parts, as a dry product, of a particles-adjusted pigment in the form of a paste.

The above particles-adjusted pigment was observed through an electron microscope to show that the particles had uniform particle forms. An offset ink containing the above particles-adjusted pigment exhibited excellent gloss over an offset ink containing the pigment prepared in Comparative Example 1. Further, an emulsion of the offset ink in this Example showed a surface tension of 67 dyne/cm. Thus, it is seen that the particles-adjusted pigment in this Example exhibited excellent suitability for emulsification.

Example 3

A dry method attritor having a volume of 1 liter was charged with 2 kg of steel balls having a diameter of 8 mm, and then 150 parts of a crude copper phthalocyanine (CI Pigment Blue 15:3) was charged into the attritor and dry-milled at an internal temperature of 60°C for 2 hours. Then, a pigment powder was taken out.

Separately, 500 parts of water and 50 parts of tetrachloroethylene were introduced into a Gaulin homogenizer (supplied by Gaulin Corporation) at a pressure of 500 kg/cm², and this operation of introduction of the resultant mixture (dispersion) was repeated twice more, to give an aqueous dispersion. Then, the aqueous dispersion and 100 parts of the above pigment powder were mixed, and the mixture was stirred at 90°C for 30 minutes, filtered, washed with water and dried to give 98 parts of a particles-adjusted pigment.

An emulsion of an offset ink containing the above particles-adjusted pigment showed a surface tension of 71 dyne/cm, while the counterpart in Comparative Example 3 to be described below showed a surface tension of 53 dyne/cm. Thus, it is seen that the particles-adjusted pigment in this Example exhibited excellent suitability for emulsification.

Comparative Example 3

498 Parts of water, 50 parts of tetrachloroethylene and 2 parts of an anionic surfactant (Demol N, supplied by Kao Corp.) were mixed with a high-speed

mixer to give an emulsion. Thereafter, 97 parts of a comparative pigment was obtained in the same manner as in Example 3 except that the aqueous dispersion was replaced with the above emulsion.

Example 4

97 Parts of a particles-adjusted pigment was obtained in the same manner as in Example 3 except that the tetrachloroethylene was replaced with n-di-butyl ether. An emulsion of an offset ink containing the above particles-adjusted pigment showed a surface tension of 68 dyne/cm. Thus, it is seen that the particles-adjusted pigment in this Example exhibited excellent suitability for emulsification.

Example 5

60 Parts of water and 40 parts of nonyl alcohol were introduced into a nanomizer (supplied by Nanomizer Inc.) at a pressure of 1,000 kg/cm², and this operation of introduction of the resultant mixture (dispersion) was repeated twice more, to give an aqueous dispersion. An aqueous slurry was prepared by dispersing 100 parts, as a dry product, of CI Pigment Blue 15:3 obtained by forming a crude copper phthalocyanine into a pigment with a kneader and separating a kneading aid, in 1,000 parts of water. 10 Parts of the above aqueous dispersion was added to the so-prepared aqueous slurry, and the mixture was stirred for 30 minutes, filtered, washed with water and dried to give 98 parts of a particles-adjusted pigment.

The particles-adjusted pigment was excellent in dispersibility. That is, it gave an offset ink having the largest coarse particle size, measured with a grindometer, of less than 5 µm by dispersing it with a three-roll mill twice, while a pigment of which the particles were not adjusted required the above dispersing treatment four times.

Example 6

70 Parts of water and 30 parts of n-butyl acetate were introduced into a nanomizer (supplied by Nanomizer Inc.) at a pressure of 1,000 kg/cm², and this operation of introduction of the resultant mixture (dispersion) was repeated twice more, to give an aqueous dispersion. An aqueous slurry was prepared by dispersing 100 parts, as a dry product, of CI Pigment Red 57:1 obtained by a conventional method in 2,000 parts of water. 10 Parts of the above aqueous dispersion was added to the so-prepared aqueous slurry, and the mixture was stirred at 80°C for 30 minutes, filtered, washed with water and dried to give 97 parts of a particles-adjusted pigment.

A gravure ink containing the above particles-adjusted pigment showed a viscosity of 630 cps, while a gravure ink containing a pigment of which the par-

ticles were not adjusted showed a viscosity of 3,200 cps. Thus, it is seen that the above particles-adjusted pigment showed excellent fluidity.

The offset inks and the gravure inks described in the above Examples were prepared as follows.

Preparation Example (Offset ink)

16 Parts of a pigment and 54 parts of a rosin-modified phenolic resin were mixed, and the mixture was dispersed with a three-roll mill to prepare a base ink. 20 Parts of a rosin-modified phenolic resin varnish and 10 parts of a solvent for an offset ink were mixed with the base ink to give an offset ink.

Preparation Example (Gravure ink)

10 Parts of a pigment, 70 parts of a mixed varnish of polyamide and nitrocellulose and 20 parts of ethyl acetate were placed in a 225-ml glass bottle together with 300 g of 3 mm ϕ steel balls, and dispersed with a paint conditioner for 1 hour to give a gravure ink.

As described above, the method of adjusting pigment particles, provided by the present invention, uses a substantially water-insoluble solvent as an adjuster for a pigment in an aqueous system, and exhibits an excellent effect on the adjustment of pigment particles by crystal transition or crystal growth of the pigment. Further, the particles-adjusted pigment of the present invention contains no surfactant, or a surfactant is contained in such a small amount that the substantially water-insoluble solvent is not emulsified, so that the particles-adjusted pigment is not affected by the surfactant and can be used in a colorant composition without limiting the field of use.

Claims

1. A method of treating pigment particles, which comprises
 - (a) pressurizing water and a substantially water-insoluble solvent;
 - (b) introducing the pressurized water and the pressurized solvent into a flow system having a diameter-decreased flow path and/or a curved flow path, wherein the diameter-decreased flow path accelerates the water and the solvent, the curved flow path causes a shear force, and collision of the accelerated water with the accelerated solvent or collision of the accelerated water and the accelerated solvent with a wall constitutes the curved flow path;
 - (c) thereby obtaining an aqueous uniform dispersion of the water and the solvent; and
 - (d) bringing the dispersion into contact with a pigment to cause crystal growth or crystal

transition of the pigment.

2. A method according to claim 1, wherein the solvent is a hydrocarbon, halogenated hydrocarbon, ketone, ester or carbon disulfide.
3. A method according to claim 1, wherein the solvent is a liquid which is water-insoluble or sparingly soluble in water at room temperature and is capable of achieving crystal growth or crystal transition, and can be removed from the pigment under heat.
4. A method according to claim 1, 2 or 3, wherein the water and the solvent are mixed to form a preliminary mixture before being pressurized.
5. A method according to any one of the preceding claims, wherein the flow system has at least two flow paths into which the water and the solvent or two portions of a mixture of these are separately introduced, a diameter-decreased flow path where the water and the solvent collide with each other, and a flow path through which the pressurized mixture after collision is recovered.
6. A method according to any one of claims 1 to 4, wherein the flow system has one flow path into which a mixture of the pressurized water and the pressurized solvent are introduced and at least one diameter-decreased flow path through which the pressurized mixture is passed and recovered.
7. A method according to any one of the preceding claims, wherein the water and from 1 to 80% by weight, based on the total amount of the water and the solvent, of the solvent are introduced.
8. A method according to any one of the preceding claims, wherein the aqueous dispersion contains from 0.5 to 300 parts by weight of the solvent per 100 parts by weight of the pigment.
9. A method according to any one of the preceding claims, wherein the water and the solvent are pressurized at a pressure of at least 200 kg/cm².
10. A method according to any one of the preceding claims, wherein the aqueous dispersion and the pigment are brought into contact with each other at a temperature between room temperature and the boiling point of water or between room temperature and the azeotropic point of water and the solvent.
11. A pigment obtainable by a method as claimed in any one of the preceding claims.

12. A colorant composition containing a pigment as claimed in claim 11 and a vehicle.

13. A composition according to claim 12, wherein the vehicle is a vehicle for an offset ink.

5

14. A composition according to claim 12, wherein the vehicle is a vehicle for a gravure ink.

15. A composition according to claim 12, wherein the vehicle is a vehicle for a coating composition.

10

16. A composition according to claim 12, wherein the vehicle is a vehicle for a plastic.

15

17. A composition according to claim 12, wherein the vehicle is a vehicle for a water-based color.

20

25

30

35

40

45

50

55

FIG. 1

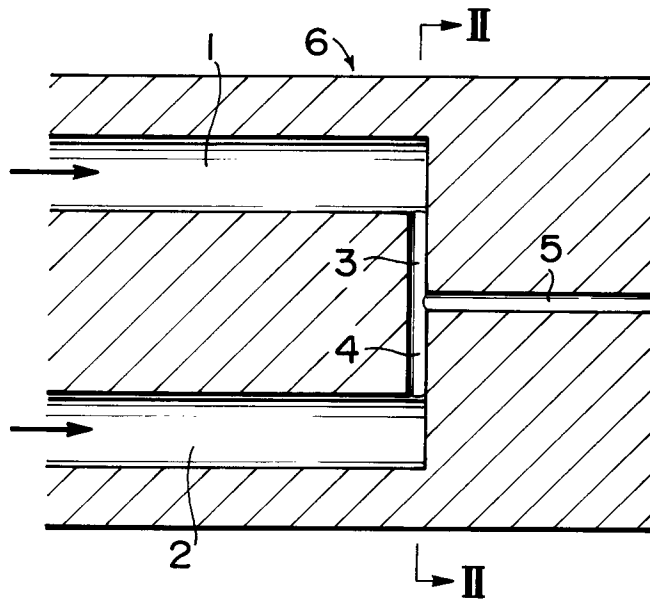


FIG. 2

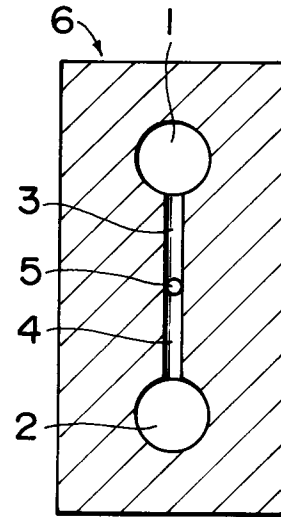


FIG. 3

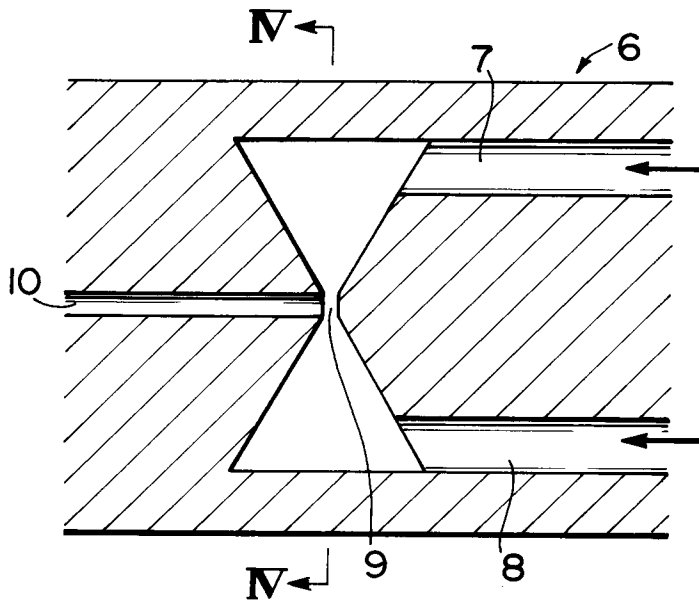


FIG. 4

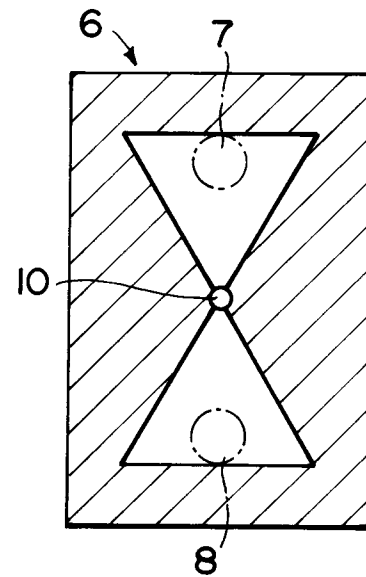


FIG. 5


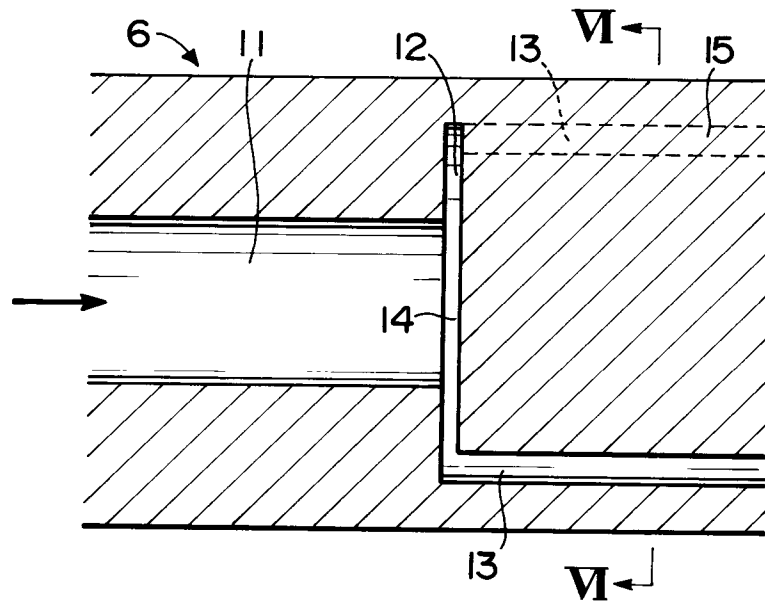


FIG. 6



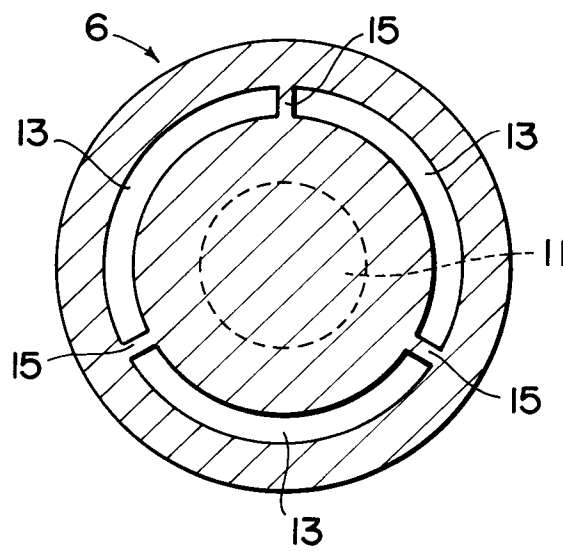

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 30 3778

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	US-A-4 533 254 (COOK EDWARD J ET AL) 6 August 1985 * abstract *	1-17	C09B67/10 C09B67/48 B01F5/06
Y	DE-A-23 23 580 (ALLIED CHEM) 28 November 1974 * page 3, last paragraph - page 4, paragraph 1 *	1-17	
A	DE-A-27 26 007 (FUJI PHOTO FILM CO LTD) 22 December 1977 * page 9, paragraph 2 - page 10, paragraph 1 *	1-17	
A	GB-A-2 063 695 (KONISHIROKU PHOTO IND) 10 June 1981 * abstract; figure 7 *	1-17	
A	EP-A-0 317 876 (BASF CORP) 31 May 1989 * abstract *	1-17	TECHNICAL FIELDS SEARCHED (Int.Cl.6)
D	& JP-A-01 259 068		
A	EP-A-0 187 916 (CASSELLA FARBWERKE MAINKUR AG) 23 July 1986 * example 3 *	1-17	C09B B01F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28 September 1995	Examiner Dauksch, H
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 01.92 (P04C01)