

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 691 433 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:

**10.01.1996 Bulletin 1996/02**(51) Int Cl.<sup>6</sup>: **E01C 19/46**(21) Application number: **95304496.3**(22) Date of filing: **26.06.1995**

(84) Designated Contracting States:

**AT BE CH DE DK ES FR GB GR IE IT LI LU NL  
PT SE**(30) Priority: **09.07.1994 GB 9413887**(71) Applicant: **Holt, Adrian  
Leicester (GB)**(72) Inventor: **Holt, Adrian  
Leicester (GB)**(74) Representative: **Marshall, John Grahame et al  
Leicester LE1 6RX (GB)****(54) A continuous mobile production and laying process for thin macadam surfacing**

(57) A technique for the continuous production and laying of cold or emulsion macadam on a road or other hard surface involves the use of mobile apparatus containing a mixing chamber (6) in which the macadam is made up from its raw materials.

The mobile apparatus includes means (7) for depositing a primer layer of binder on the surface to be covered, before feeding the macadam onto the surface. The macadam is then distributed laterally and pressed and formed by an adjustable screed (9) to make a surface of the chosen depth.

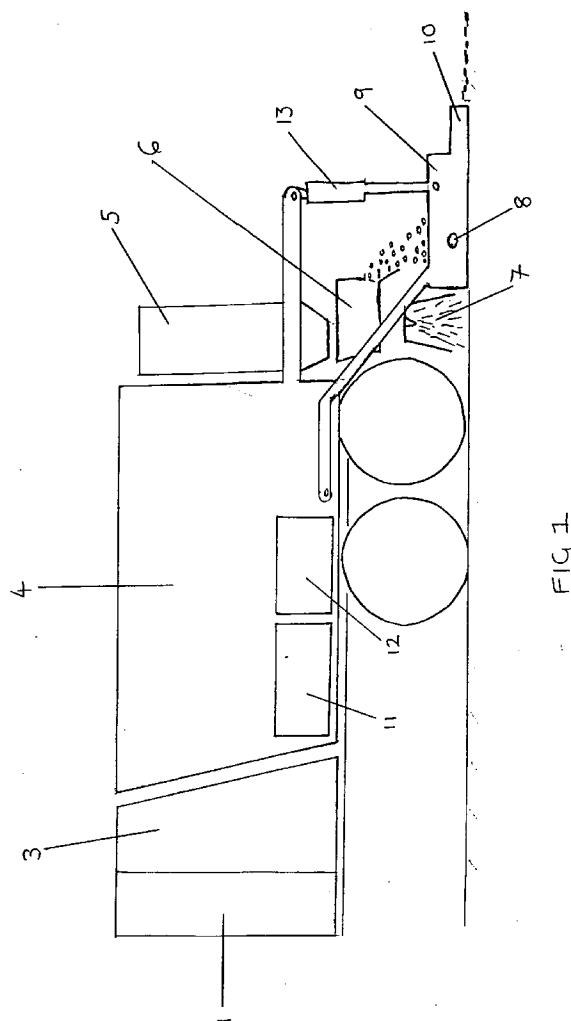


FIG 1

**EP 0 691 433 A1**

## Description

### Prior Art

Macadam is a combination of quarried, crushed stone and a binder, usually a hydrocarbon bitumen. It may be produced by raising the temperature of both components to 150°C-180°C, and mixing so that the binder coats the surface of the stones. Alternatively, an emulsion of bitumen in water may be used instead of a hot binder, in which case the resulting macadam is referred to as a cold macadam or as emulsion macadam.

The production units for the use of hot or cold binder are normally static, and sited at a quarry. Transportable production units do exist, but these are always static during the actual production of Macadam.

Macadams are of a granular nature and employ predominately a single or nominal sized stone, the size varying according to the requirement. For instance a macadam may be available with nominal stone sizes of 3mm, 6mm, 10mm, 14mm or 20 mm. The nominal sized stone may be combined with smaller sizes in varying proportions to provide an open textured, medium textured or dense macadam. The material is capable of being heaped, and the technique of placing is either by hand raking or paving machine. Such a paving machine is filled with pre-mixed macadam, which it then deposits in a layer on the surface to be covered. Normally a very thin layer of bitumen (perhaps 0.1-0.2 litres of 40% bitumen emulsion per M<sup>2</sup>) would be applied to the recipient surface to augment the adhesion of the new macadam to the surface. This is called a "tack coat" and a very low level of adhesive bonding is achieved.

Macadams require mechanical compaction by rolling with metal wheels to achieve both structural stability and a smooth finished surface. The surface displays voids and a negative or concave texture. Macadams have good regulating capacity, improve ride quality and contribute to the structural strength of the road. Open or medium textured macadams have a high texture depth, and are pervious. They provide good skid resistance, surface water shedding and drainage and low perceived levels of tyre noise.

A drawback of macadams is that they do not achieve structural stability in layers of less than 20 mm, and the normal lower limit for thickness on roads is 30 mm. To allow for this thickness it is necessary either to remove an equivalent depth of the substrate, or to raise kerbs and other street furniture. Both of these alternatives are costly and inconvenient.

Another example of a product made by combining stone with a bitumen emulsion is Slurry Seal or Micro Asphalt. This material employs stones of gradually reducing size, smoothly graded from the maximum size employed to less than 75 microns. The stones are combined with binder emulsion, water, and other additives, so as to produce a flowable liquid slurry with no capacity for heaping. The material is placed in layers either by

brush, rubber bladed squeegee, or a towed applicator with rubber sealing gaskets at the leading edge and elsewhere to reduce material leakage. The layers are normally relatively thin, i.e. around 3 mm to 20 mm, and the use of slurry seal therefore avoids the problems of macadams described above.

Slurry seals are very dense impervious materials which are not normally rolled to achieve compaction. If rolling is specified, it is with a smooth pneumatic tyred machine. Slurry seals display a relatively low texture depth. Texture is achieved by designing the material so that a proportion of the largest stones therein are exposed so as to provide a positive, or convex texture. Drawbacks of slurry seals are that:

a) They do not contribute significantly to the structural strength of the road.

b) They have limited regulating capacity, tending to follow and reproduce, albeit to a reduced extent, profile deficiencies in the substrate. In consequence, they will not significantly improve the riding quality of a road.

c) They are not pervious, and water will be shed across the surface rather than through the material.

d) They do not achieve high skid resistance, and are not usually recommended for high speed roads.

e) Thinner slurry seals, e.g. nominal thickness of 3-6mm would not be expected to provide long service life.

It is therefore desirable to provide an apparatus for laying a surface for roads and the like which avoids the drawbacks of a traditional macadam surface, without the loss of performance that results from using a slurry seal.

### The Invention

The invention provides an apparatus for producing and laying a cold or emulsion macadam on a surface to be covered, comprising:

means for metering stones and a binder into a mixing chamber;

means for mixing the stones and the binder together in the mixing chamber to produce the macadam;

means for laying a primer on the surface to be covered;

means for laying the macadam on the surface to be covered, including means for distributing the macadam laterally and means for controlling the depth of the macadam laid;

means for moving the apparatus along the surface to be covered such that any part of the surface is first laid with the primer and then with macadam.

The apparatus preferably further includes means for

providing primer and macadam for hand application in inaccessible areas.

The invention also provides a method for producing and laying a cold or emulsion macadam on a surface to be covered, the method comprising the steps of:

providing a supply of stones and binder within a mobile apparatus;

metering the stones and binder into a mixing chamber within the mobile apparatus;

mixing the stones and binder in the mixing chamber to produce a macadam;

laying a primer on the surface to be covered;

laying the macadam on the surface to be covered, distributing the macadam laterally and controlling the depth of the macadam laid on the surface.

The step of laying the primer and the macadam on the surface to be covered may be carried out by hand in inaccessible areas, with the primer and the macadam being provided from the mobile apparatus.

In easily accessible areas, these steps are preferably carried out fully automatically, and the method further includes the step of moving the mobile apparatus along the surface to be covered so that any part of the surface is first laid with the primer and then with macadam.

Cold or emulsion macadam is used and therefore no heating is required in the mixing chamber. Cold macadam is non-hazardous in terms of high temperature and fumes, and is therefore preferable to hot macadam from an environmental and a Health and Safety point of view. In addition, hot macadam becomes progressively less satisfactory for laying as its temperature falls, and viscosity of the binder increases. The consequence of delays is that either the material is rejected or defective work is carried out.

The binder may be an emulsion of bitumen, polymer modified bitumen or other hydrocarbon binding agent, and additives may be included to improve its performance.

Solid components may be conveyed to the mixing chamber by use of a moving belt, a screw, by air blowing or by gravity. The rate at which these materials are conveyed may be controlled by adjustment of the linear or rotational velocity of the belt, air flow, screw or rotary valve, or alternatively by adjustment of a gate or aperture.

Liquid components may be conveyed by creating elevated pressure in the storage tanks, pumping or any other means of liquid propulsion.

The mixing of the stones and binder in the mixing chamber may be carried out by any design of blending apparatus, provided that thorough and continuous blending is achieved in the macadam discharged therefrom. An effective design is a horizontal twin shafted pug mill with contra rotating shafts, and interlocking blades. The length of the pug mill may be 1 - 2.0 metres long designed such that the components enter at one end, and are blended en route to the discharge or opposite end.

The application of the adhesive or priming layer of binder to the road surface may be effected by a series of spray nozzles placed within a spray bar, such that an even transverse distribution of binder is made over the operational width. The binder is conveyed to the spray nozzles under pressure. Other methods of distribution may include brushing, screeding, extrusion and the like. The distribution rate may be controlled or varied by effecting a constant flow in the priming binder, and varying the forward speed of the apparatus, or integrating the flow rate with a variable forward speed.

The macadam discharging from the blending apparatus is preferably distributed across the pre-primed operational width required by screw augers which may be rotated in either direction. As the apparatus moves forward, macadam passes under a screed bar whose height and inclination may be adjustable as required to provide depth control, and conform to other features such as camber.

Screed adjustment may be effected mechanically, hydraulically or electrically by manual or automatic means. Screed adjustment control may be provided remotely by cabling or radio transmission, and a platform may be provided at the rear of the screed for use by the operator. Heating of the screed may be required, and this may be provided by means such as compressed combustible gas.

Following the laying of the macadam, the new surface is preferably compacted by rolling, as previously described.

By using a priming layer of high performance binder or adhesive, the invention enables the adhesive strength of the bond between the macadam and the substrate to be greatly increased. The amount of binder used in the priming layer is preferably between 0.6 and 1.8 litres of binder per M<sup>2</sup>, i.e. significantly more than is used in the traditional "tack coat" for macadam. The greatly increased bond strength enables the independent strength of the macadam layer to be reduced below its normal lower limit for independent structural stability, without adversely affecting the structural stability of the road. The loss in strength in the macadam is made up for by the increase in bond strength.

By carefully controlling the application of the priming layer and the macadam, the invention allows the layer thickness of the macadam to be as low as 15 mm to 25 mm, dependent on the nominal stone size used.

In addition, the invention allows macadam to be mixed and laid continuously which is more convenient than the traditional method of pre-mixing the macadam at a quarry. It provides independence of any external manufactured material supply source, and eliminates the normal requirement for manufactured material supply vehicles to operate in train. The total size and weight of machinery is therefore reduced and access and manoeuvrability are improved. Only sufficient macadam required for laying is manufactured and wastage is therefore negligible.

## Drawings

Figure 1 is a schematic representation of a side view of apparatus according to the invention.

Figure 2 is a top view of the apparatus of Figure 1.

## Description of Preferred Embodiment

Referring to Figures 1 and 2, apparatus according to the invention includes a stone aggregate hopper 4, which is filled with stones of an approximately uniform size. Their size depends on the macadam specification and may be, for example, 6, 10, 14 or 20 mm.

A binder tank 2 is filled with binder material to be used in making the macadam, and a water tank 3 stores the water that is also required in this process. Additional liquid components such as chemical additives are stored in tanks 11 and 12. Each tank includes means for metering its contents into a blender chamber 6, where the binder, water and stone and any additives are mixed together to make a macadam. Additional fines or other solids may be fed into the mixture from a solids hopper 5. The rate of delivery for each component is displayed on an operator's instrument panel (not shown) and the systems are routinely monitored for consistency and reliability.

A priming material tank 1 contains binder to be used as the adhesive or priming coat, applied to the road surface before application of the macadam. This binder is conveyed to a primer material spray bar 7 under pressure for application to the road. The distribution rate may be controlled or varied by effecting a constant flow in the priming binder and varying the forward speed of the apparatus, by adjusting the flow speed, or by a combination of the two.

As the apparatus moves forward, macadam is discharged from the blender chamber 4 onto the pre-primed road surface. The macadam is distributed across the operational width required by screw augers 8 which may be rotated in either direction. Behind the distribution auger 8 is a screed bar 9 whose height and inclination may be adjusted by a screed height control 13 as required, to provide depth control and ensure that the macadam layer conforms to road features such as camber. A platform 10 is provided at the rear of the screed for use by a screed control operator.

covered;

means for laying the macadam on the surface to be covered, including means for distributing the macadam laterally and means for controlling the depth of the macadam laid;

means for moving the apparatus along the surface to be covered such that any part of the surface is first laid with the primer and then with macadam.

2. Apparatus according to claim 1 further including means for providing primer and macadam for hand application to the surface to be covered.

3. A method for producing and laying a cold or emulsion macadam on a surface to be covered, the method comprising the steps of:

providing a supply of stones and binder within a mobile apparatus;

metering the stones and binder into a mixing chamber within the mobile apparatus;

mixing the stones and binder in the mixing chamber to produce a macadam;

laying a primer on the surface to be covered;

laying the macadam on the surface to be covered, distributing the macadam laterally and controlling the depth of the macadam laid on the surface.

4. A method according to claim 3 further including the step of moving the mobile apparatus along the surface to be covered so that any part of the surface is first laid with the primer and then with macadam.

5. A method according to any of claims 3 to 5, further including the step of compacting the newly laid macadam surface by rolling.


## Claims


1. An apparatus for producing and laying a cold or emulsion macadam on a surface to be covered, comprising:

means for metering stones and a binder into a mixing chamber;

means for mixing the stones and the binder together in the mixing chamber to produce the macadam;

means for laying a primer on the surface to be

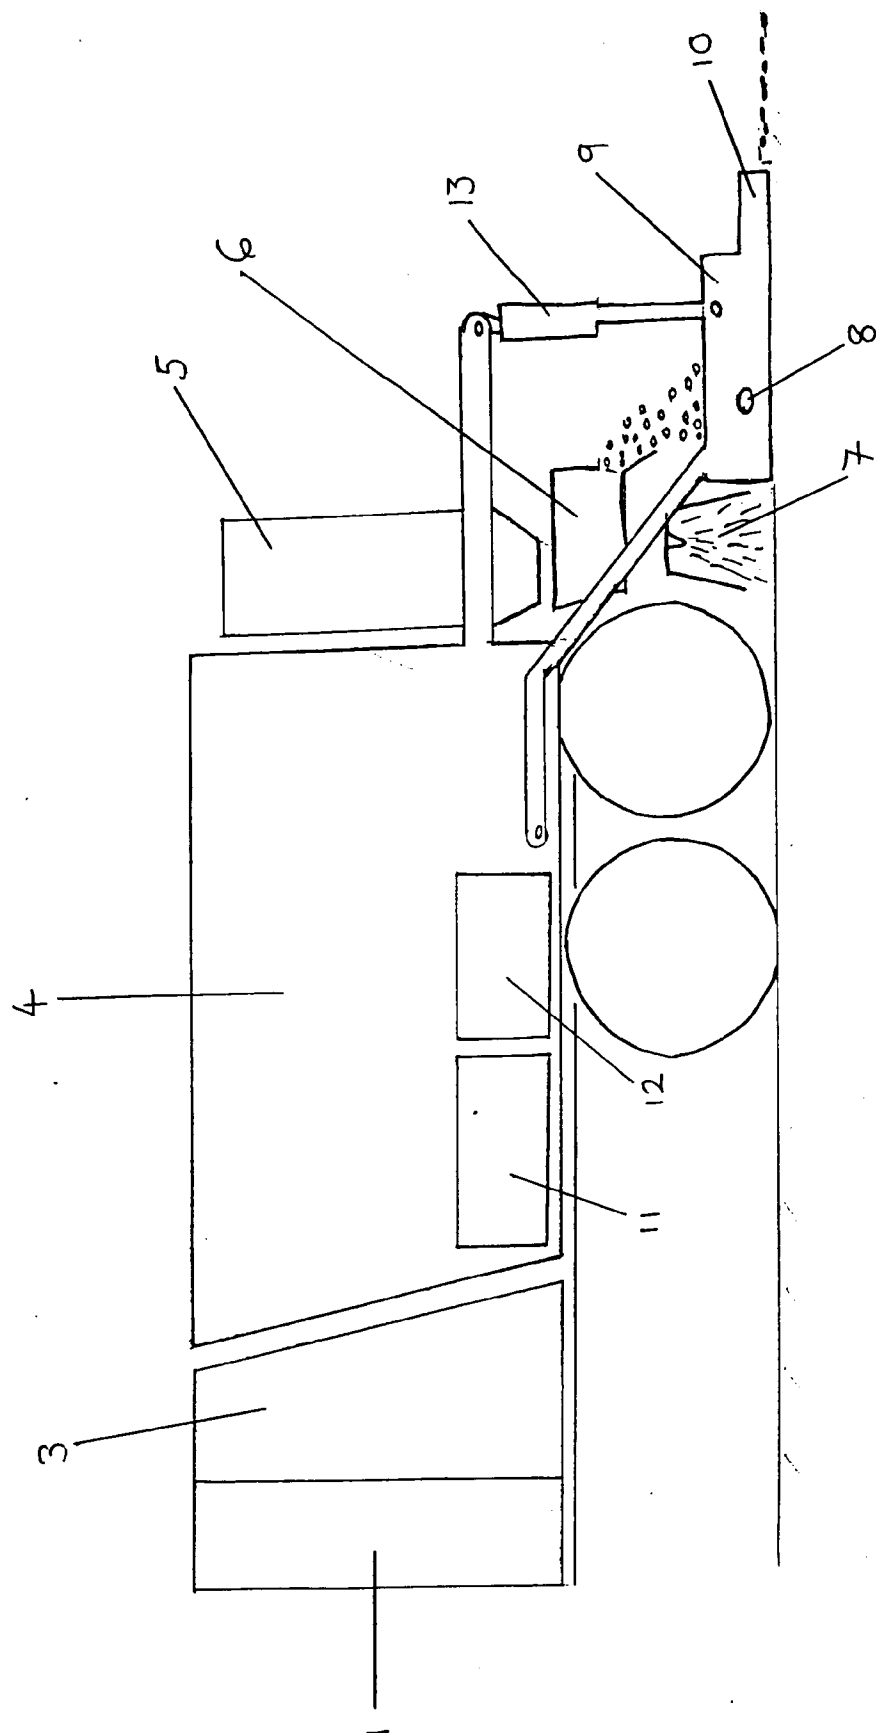

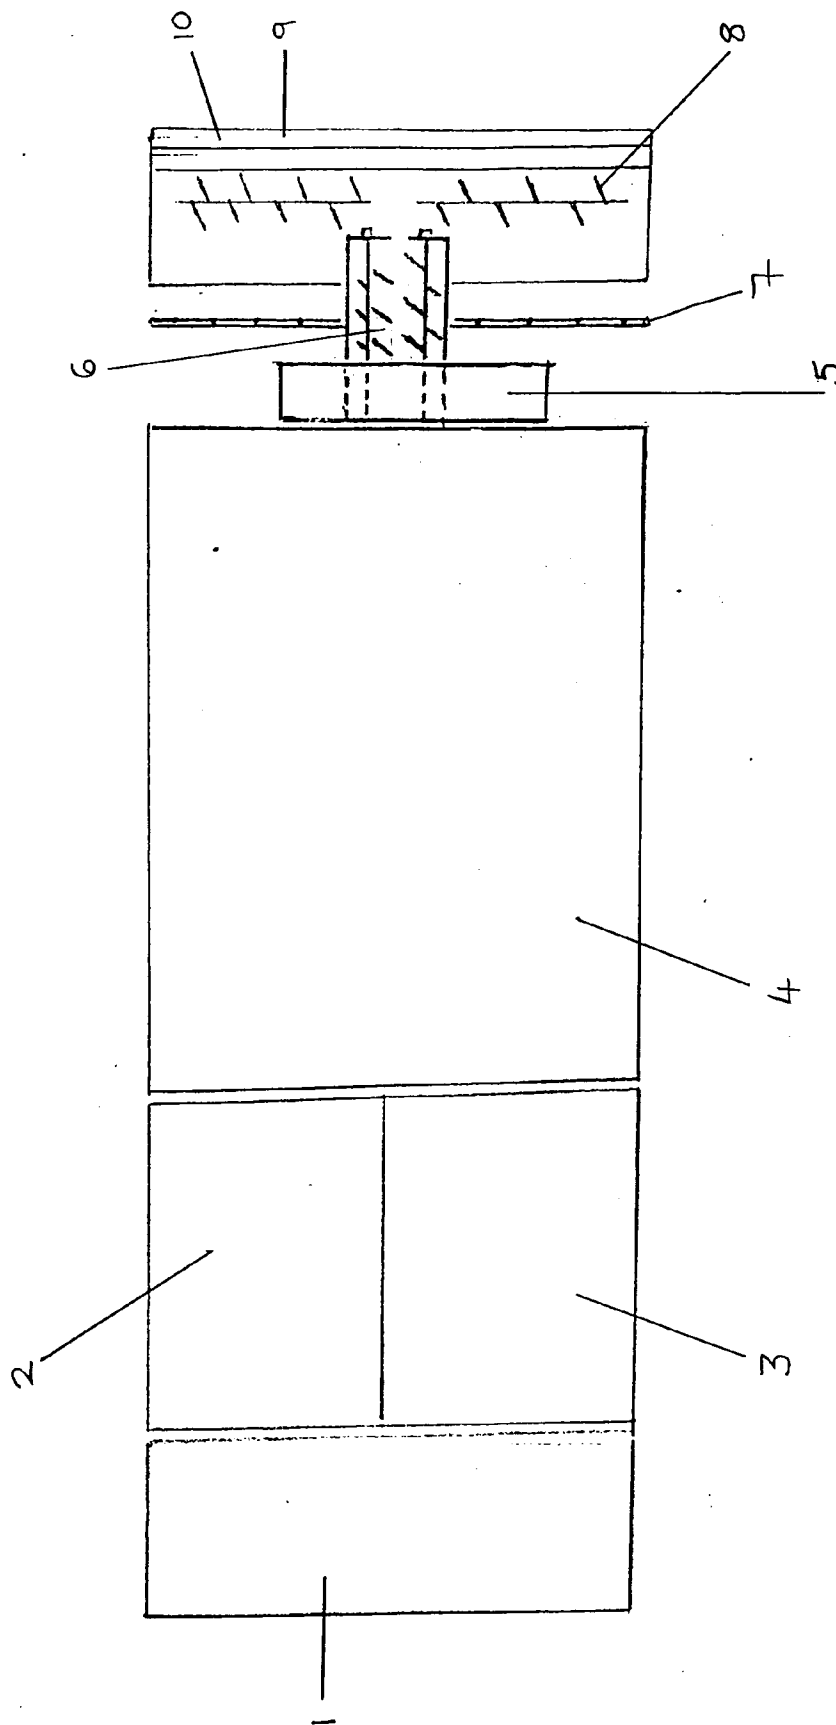



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 95 30 4496

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP-A-0 409 700 (SCREG ROUTES & TRAVAUX) 23 January 1991	1,3,4	E01C19/46
Y	* the whole document * ---	2,5	
Y	WO-A-92 22706 (ROTOPATCH AB) 23 December 1992	2	
A	* abstract; figures * ---	1	
Y	US-A-4 072 435 (COHO RALPH W ET AL) 7 February 1978	5	
A	* abstract * * column 9, line 47 - line 52; figure 1 * -----	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			E01C
Place of search		Date of completion of the search	Examiner
THE HAGUE		11 October 1995	Dijkstra, G
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  .....  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 01.92 (P04C01)