



(11) **EP 0 708 805 B9**

(12) **CORRECTED NEW EUROPEAN PATENT SPECIFICATION**

(15) Correction information:

Corrected version no 1 (W1 B2)
Corrections, see
Drawings 1

(51) Int Cl.:

C09K 3/30 (2006.01) **B65D 83/14** (2006.01)
C09K 3/10 (2006.01)

(48) Corrigendum issued on:

21.03.2012 Bulletin 2012/12

(86) International application number:

PCT/US1994/006900

(45) Date of publication and mention of the opposition decision:

22.12.2010 Bulletin 2010/51

(87) International publication number:

WO 1995/002651 (26.01.1995 Gazette 1995/05)

(45) Mention of the grant of the patent:

19.08.1998 Bulletin 1998/34

(21) Application number: **94923895.0**

(22) Date of filing: **17.06.1994**

(54) **SEALS FOR USE IN AN AEROSOL DELIVERY DEVICE**

DICHTUNGEN FÜR EINE VORRICHTUNG ZUM ABGEBEN EINES AEROSOLS

DIAPHRAGMES D'ETANCHEITE DESTINE A UN DISPOSITIF DE VAPORISATION D'AEROSOL

(84) Designated Contracting States:

CH DE ES FR GB IT LI SE

(56) References cited:

EP-A- 0 372 772 WO-A-92/11190
WO-A-93/22221 FR-A- 2 549 568
JP- - 3 269 081 US-A- 5 112 660

(30) Priority: **15.07.1993 US 92001**

(43) Date of publication of application:

01.05.1996 Bulletin 1996/18

(73) Proprietor: **MINNESOTA MINING AND MANUFACTURING COMPANY**

St. Paul, MN 55133-3427 (US)

- **ENCYCL. OF POLYMER SCIENCE & ENGINEERING., vol.6, 1985 pages 522 - 548 J.WILEY AND SONS 'ETHYLENE- PROPYLENE-DIENE ELASTOMERS' cited in the application**
- **W.G. GORMAN: 'Alternative Propellants' PHARMACEUTICAL AEROSOL TECHNOLOGY 1993,**
- **HIRAMATSU ET AL. NIPPON GOMU KYOKAISH vol. 64, no. 3, 1991, pages 161 - 167**

(72) Inventor: **KWON, Oh-seung**

Saint Paul, MN 55133-3427 (US)

(74) Representative: **Vossius & Partner**

P.O. Box 86 07 67
81634 München (DE)

EP 0 708 805 B9

DescriptionTechnical Field

5 **[0001]** This invention relates to devices for delivering aerosols. In another aspect this invention relates to sealing members. In yet another aspect this invention relates to sealing members for use in devices for delivering aerosols.

Description of the Related Art

10 **[0002]** The continuing use of aerosol formulations comprising conventional chlorofluorocarbon propellants is being debated due to the suspected role of such propellants in atmospheric depletion of ozone. Accordingly, formulations based on alternative propellants such as HFC-134a (1,1,1,2-tetrafluoroethane) and HFC-227 (1,1,1,2,3,3,3-heptafluoropropane) are being developed to replace those conventional propellants thought to contribute to atmospheric ozone depletion.

15 **[0003]** Containers for aerosol formulations commonly comprise a vial body coupled to a valve ferrule. The valve ferrule comprises a valve stem through which the formulation is dispensed. Generally the valve ferrule includes a rubber valve seal (a diaphragm) intended to allow reciprocal movement of the valve stem while preventing leakage of propellant from the container. These rubber valve seals are commonly made of thermoset rubbers such as butyl rubber, butadiene-acrylonitrile ("Buna") rubbers, and neoprene (polychloroisoprene), which are compounded with vulcanizing agents prior
20 to being fashioned into valve seals.

[0004] It has been found that some conventional devices for delivering aerosols suffer impaired performance when used in connection with HFC-134a or HFC-227. Selection of suitable materials for use as diaphragms to contain aerosol formulations based on these alternative propellants is complicated by interactions between the seal material and the formulation components, including the propellant. Conventional devices involving diaphragms of neoprene (polychloroprene), butyl rubber, or butadiene-acrylonitrile "buna" rubbers allow substantial leakage of HFC-134a or HFC-227 from
25 some formulations over time. Particularly in low volume formulations such as pharmaceutical formulations for use in inhalation therapy, this leakage can cause a substantial increase in concentration of the active ingredient in the formulation, resulting in delivery of an improper dose. Furthermore, with some formulations the valve stem tends to stick, pause, or drag during the actuation cycle.

30 **[0005]** Certain thermoplastic elastomers have found use as improved seal materials in aerosol canisters. For example, valve seals comprising certain styrene-ethylene/butylene-styrene block copolymers are disclosed in commonly assigned copending application 07/878,041.

[0006] WO92/11190 discloses a device for delivering an aerosol, comprising: a valve stem, a diaphragm having walls defining a diaphragm aperture, and a casing member having walls defining a casing aperture, wherein the valve stem
35 passes through the diaphragm aperture and the casing aperture and is in slidable sealing engagement with the diaphragm aperture, and wherein the diaphragm is in sealing engagement with the casing member, the diaphragm material comprising: a thermoplastic elastomer comprising a copolymer of about 80 to about 95 mole percent ethylene and a total of about 5 to about 20 mole percent of one or more comonomers selected from the group consisting of 1-butene, 1-hexene, and 1-octene.

40 **[0007]** U.S. 5,112,660 discloses a hose for use in transporting refrigerant fluids which comprises an inner tube, reinforcing layer and an outer cover superimposed in the order mentioned, said inner tube being formed of a rubber composition comprising an ethylene-propylene-diene terpolymer as a base rubber, said base rubber having an iodine value of from 15 to 50, rubber composition containing not more than 20 parts by weight of process oil per 100 parts by weight of said ethylene-propylene-diene terpolymer, and said rubber composition having a 1,1,1,2-tetrafluoroethane gas permeation level of not more than 35 gf/m²/72 hour as vulcanized when heated at 100°C and measured over a period of
45 time of from 24 hours to 96 hours.

[0008] EPDM rubber treated with a silicone adhesive agent has also been proposed for use in combination with a polytetrafluoroethylene lip as a component of a seal for a rotating shaft of a compressor for use with mixtures of HFC-134a and a polyalkylene glycol refrigerator oil. Journal of Japan Rubber Society, 1991, 64, 161 (Hiramatsu et al.).

50 **[0009]** EPDM rubbers have not been used in applications involving a reciprocating dynamic seal (that is, a seal between components that reciprocate relative to and in contact with the seal) for containing HFC-134a. EPDM rubbers have been incorporated into materials known as thermoplastic elastomer blends and thermoplastic elastomers alloys. These materials involve a dispersion of an elastomeric EPDM in a thermoplastic matrix (e.g., polyethylene or polypropylene). Such materials have been used as gasket materials, e.g., in automotive applications. There is nothing to suggest, however,
55 that such materials would be suitable for use in fashioning a diaphragm for use in containing an aerosol formulation based on HFC-134a or HFC-227.

Summary of the Invention

[0010] This invention provides a device for delivering an aerosol according to any of claims 1 to 9.

[0011] This invention also provides a metered-dose device for delivering an aerosol that comprises, in addition to the above-discussed valve stem, diaphragm, and casing member, a tank seal having walls defining a tank seal aperture, and a metering tank of a predetermined volume and having an inlet end, an inlet aperture, and an outlet end, wherein the outlet end is in sealing engagement with the diaphragm, the valve stem passes through the inlet aperture and the tank seal aperture and is in slidable engagement with the tank seal aperture, and the tank seal is in sealing engagement with the inlet end of the metering tank, and wherein the valve stem is movable between an extended closed position, in which the inlet end of the metering tank is open and the outlet end is closed, and a compressed open position in which the inlet end of the metering tank is substantially sealed and the outlet end is open.

[0012] Leakage and smoothness of operation are improved in the devices of the invention compared to like devices involving the conventional diaphragm materials.

Brief Description of the Drawings

[0013] The drawing is represented by FIGS. 1 and 2.

[0014] FIG. 1 is a partial cross-sectional view of one embodiment of a device of the invention, wherein the valve stem is in the extended closed position.

[0015] FIG. 2 is a partial cross-sectional view of the embodiment illustrated in FIG. 1, wherein the valve stem is in the compressed open position.

Detailed Description of the Invention

[0016] As used herein the term "stable to dimensional change when exposed to 1,1,1,2-tetrafluoroethane" means that a diaphragm having a thickness of about 1.0 mm (0.040 inch), an inside diameter of about 2.5 mm (0.10 inch), and an outside diameter of about 8.6 mm (0.34 inch) will maintain its original inside and outside diameter within eight percent when soaked (i.e., submerged) in 1,1,1,2-tetrafluoroethane for 30 days at 20°C and analyzed according to the Swelling Test Method set forth below. Likewise a material stable to dimensional change when exposed to any other substance (e.g., HFC-227 or an aerosol formulation) is defined in the same manner but using the particular substance as the soaking liquid.

[0017] In order to minimize and/or prevent leakage of refrigerants, propellants, or other formulation components, especially propellants such as 1,1,1,2-tetrafluoroethane and 1,1,1,2,3,3,3-heptafluoropropane, from a sealed chamber, this invention provides a device comprising an elastomeric sealing member. The sealing member is in the form of a diaphragm for use in connection with an aerosol formulation, preferably a pharmaceutical aerosol formulation, and exhibits a leak rate of less than 500 mg/year, more preferably less than 300 mg/year when tested according to the Leak Rate Test Method set forth below which is performed at 30°C.

[0018] A sealing member for use in a device of the invention comprises an elastomer comprising an ethylene-propylene-diene rubber ("EPDM"). Such rubbers are well known and disclosed, e.g., in Encyclopedia of Polymer Science & Engineering, Vol. 6, pp. 522-548, John Wiley & Sons, 1985, and in Developments in Rubber Technology and Synthetic Rubbers, Vol. 2, Applied Science Publishers, New York, 1981, Chapter 4, p. 87. Generally the diene component of an EPDM base rubber can be any suitable non-conjugated diene, e.g., a linear diene such as 1,4-hexadiene, or a bicyclic diene such as dicyclopentadiene, methylenenorbornene, methyltetrahydroindene, or the like. The EPDM base rubber can be crosslinked by vulcanization to various degrees in order to obtain desirable hardness and compression set properties (discussed below). The EPDM can also contain conventional polymer additives such as processing aids, colorants, tackifiers, lubricants, silica, talc, or processing oils such as mineral oil in suitable amounts readily selected by those skilled in the art. The EPDM is preferably free of adhesive agents such as silicone adhesive agents.

[0019] The sealing member can contain an EPDM (with or without such optional polymer additives) as substantially the only polymer component. In another embodiment the EPDM is present as part of a thermoplastic elastomer blend or alloy, that is, it is present, e.g., in the form of particles, substantially uniformly dispersed in a continuous thermoplastic matrix. Particle size of the EPDM can be readily selected by those skilled in the art. Suitable thermoplastic matrices are selected in order to provide a blend or alloy that has appropriate processing characteristics (e.g., melting point). Exemplary matrix materials include polyethylene and preferably polypropylene. The degree of crosslinking (vulcanization) of the EPDM, the particle size of the EPDM, and the relative amounts of the EPDM and the thermoplastic matrix material are selected in order to provide suitable hardness and compression set.

[0020] Excessive permeability of the diaphragm to an aerosol propellant will render an aerosol device unsuitable for containing the propellant. The diaphragm material in a device of the invention, however, has a suitably low permeability to 1,1,1,2-tetrafluoroethane or 1,1,1,2,3,3,3-heptafluoropropane in order that the leak rate of a device of the invention

is suitable for pharmaceutical applications (e.g., less than about 500 mg/year when tested according to the Leak Rate Test Method described below). Materials of suitably low permeability can be selected readily by those skilled in the art. For example, permeability of EPDM materials to 1,1,1,2-tetrafluoroethane is known to vary with the iodine value of the EPDM and with the amount of process oil incorporated in the EPDM (see, e.g., U.S. Pat. No. 5,112,660, Saito et al.,
5 incorporated herein by reference).

[0021] It has been found that excessive expansion or contraction of the diaphragm in an aerosol valve can result in an ineffective dynamic seal between the valve stem and the diaphragm. EPDM materials, however, have been found to be dimensionally stable when exposed to 1,1,1,2-tetrafluoroethane or 1,1,1,2,3,3,3-heptafluoropropane. The diaphragm material is stable to dimensional change (as that term is defined above) such that diaphragm dimensions change
10 no more than 8%, preferably no more than about 5%, and most preferably no more than about 3%.

[0022] Shore A hardness of a diaphragm material for use in the invention is preferably between about 50 and about 90, more preferably between about 70 and about 85. Also, it is preferred that the material have a suitable compression set in order that the static seal between the diaphragm and the other components of the device (e.g., the valve ferrule and the metering tank of the device illustrated in the accompanying Drawing) remains adequate over the life of the device. Compression set can be measured by ASTM D 395 (incorporated by reference). Values of less than about 40,
15 more preferably less than about 35, and most preferably less than about 20 are desirable (measured at 70 hours, 20°C according to Method B of ASTM D 395).

[0023] Certain suitable elastomers are commercially available. Among EPDM rubbers is included KL70L3841 or KL3866 (Kirkhill Rubber Company, Brea, CA). Other suitable EPDMs can be prepared using methods known to those skilled in the art and described generally in Encyclopedia of Polymer Science & Engineering, Vol. 6, pp. 522-548, John Wiley & Sons, 1985. Among the thermoplastic elastomer blends and alloys are included SANTOPRENE™ elastomers 271-64, 271-73, and 271-80 (Advanced Elastomer Systems, Akron, OH). Other suitable blends and alloys can be prepared using methods known to those skilled in the art and disclosed, e.g., in "Thermoplastic Elastomers Prepared by Dynamic Vulcanization", paper number 41, American Chemical Society Rubber Division, November 1992 (Coran et al.) and Rubber Chem. Technol. 1980, 83, 141 (Coran et al.), both of which are incorporated herein by reference. Preferred elastomers include those commercial materials enumerated above.
20

[0024] The device of the invention will be described with reference to the Drawing. FIG. 1 shows device **10** comprising valve stem **12**, casing member **14**, and diaphragm **16**. The casing member has walls defining casing aperture **18**, and the diaphragm has walls defining diaphragm aperture **17**. The valve stem passes through and is in slidable sealing engagement with the diaphragm aperture. The diaphragm is also in sealing engagement with casing member **14**. Diaphragm **16** represents an elastomeric sealing member. Such a sealing member can be one piece or it can be in the form of a plurality of thinner layers arranged in a stack.
25

[0025] The illustrated embodiment is a device for use with pharmaceutical formulations. The diaphragm in the illustrated embodiment is a single piece of a thickness sufficient to form an effective seal with the casing member, preferably about 0.125 mm (0.005 inch) to about 1.25 mm (0.050 inch). It has an outside diameter of about 8.6 mm (0.340 inch), and an inside diameter sufficient to form an effective seal with the valve stem. As valve stems having an outside diameter of about 2.79 mm (0.110 inch) are commonly used, suitable diaphragm inside diameter can be in the range of about 2.03 mm (0.080 inch) to about 2.67 mm (0.105 inch). Diaphragm dimensions suitable for use with other general types of devices can be easily selected by those skilled in the art.
30

[0026] Valve stem **12** is in slidable engagement with diaphragm aperture **17**. Helical spring **20** holds the valve stem in an extended closed position as illustrated in FIG. 1. Valve stem **12** has walls defining orifice **22** which communicates with exit chamber **24** in the valve stem. The valve stem also has walls defining channel **26**.
35

[0027] In the illustrated embodiment casing member **14** comprises mounting cup **28** and canister body **30** and defines formulation chamber **32**. The illustrated embodiment further comprises tank seal **34** having walls defining tank seal aperture **35**, and metering tank **36** having inlet end **38**, inlet aperture **40**, and outlet end **42**. The metering tank also has walls defining metering chamber **44** of predetermined volume (e.g., 50 µL). Outlet end **42** of metering tank **36** is in sealing engagement with diaphragm **16**, and valve stem **12** passes through inlet aperture **40** and is in slidable engagement with tank seal **34**.
40

[0028] When device **10** is intended for use with a suspension aerosol formulation it further comprises retaining cup **46** fixed to mounting cup **28** and having walls defining retention chamber **48** and aperture **50**. When intended for use with a solution aerosol formulation retaining cup **46** is optional. Also illustrated in device **10** is sealing member **52** in the form of an O-ring that substantially seals formulation chamber **32** defined by mounting cup **28** and canister body **30**. Sealing member **52** preferably comprises the elastomer described above.
45

[0029] Operation of device **10** is illustrated in FIGS. 1 and 2. In FIG. 1, the device is in the extended closed position. Aperture **50** allows open communication between retention chamber **48** and formulation chamber **32**, thus allowing the aerosol formulation to enter the retention chamber. Channel **26** allows open communication between the retention chamber and metering chamber **44** thus allowing a predetermined amount of aerosol formulation to enter the metering chamber through inlet aperture **40**. Diaphragm **16** seals outlet end **42** of the metering tank.
50

5 [0030] FIG. 2 shows device 10 in the compressed open position. As valve stem 12 is depressed channel 26 is moved relative to tank seal 34 such that inlet aperture 40 and tank seal aperture 35 are substantially sealed, thus isolating a metered dose of formulation within metering chamber 44. Further depression of the valve stem causes orifice 22 to pass through aperture 18 and into the metering chamber, whereupon the metered dose is exposed to ambient pressure. Rapid vaporization of the propellant causes the metered dose to be forced through the orifice, and into and through exit chamber 24. Device 10 is commonly used in combination with an actuator that facilitates inhalation of the resulting aerosol by a patient.

10 [0031] A particularly preferred device of the invention is a metered dose configuration substantially as described above and illustrated in the Drawing. Other particular configurations, metered dose or otherwise, are well known to those skilled in the art and suitable. For example the devices described in U.S. Pat. Nos. 4,819,834 (Thiel), 4,407,481 (Bolton), 3,052,382 (Gawthrop), 3,049,269 (Gawthrop), 2,980,301 (DeGorter), 2,968,427 (Meshberg), 2,892,576 (Ward), 2,886,217 (Thiel), and 2,721,010 (Meshberg) (all incorporated herein by reference) involve a valve stem, a diaphragm, and a casing member in the general relationship described herein. Generally any and all sealing members (such as diaphragms, seals, and gaskets) that serve to minimize and/or prevent escape of components, especially propellant, from such assemblies can comprise the above described elastomer.

15 [0032] The devices of the invention find particular use with aerosol pharmaceutical formulations involving a propellant comprising HFC-134a or HFC-227 and ethanol. Any such formulation can be used.

20 [0033] The pharmaceutical formulations according to the present invention comprise HFC-134a or HFC-227 in an amount effective to function as an aerosol propellant, a drug having local or systemic action and suitable for use by inhalation, and any optional formulation excipients. Exemplary drugs having local effect in the lung include bronchodilators such as albuterol formoterol, pirbuterol (eg pirbuterol acetate), and salmeterol, and pharmaceutically acceptable salts and derivatives thereof, and steroids such as beclomethasone, fluticasone, and flunisolide, and pharmaceutically acceptable salts, derivatives, solvates, and clathrates thereof. Exemplary drugs having systemic effect include peptides such as insulin, calcitonin, interferons, colony stimulating factors, and growth factors. The drug is present in the formulation in an amount sufficient to provide a predetermined number of therapeutically effective doses by inhalation, which can be easily determined by those skilled in the art considering the particular drug in the formulation. Optional excipients include those disclosed, e.g., in EP-A-372,777 (Purewal et al., incorporated herein by reference) such as a polar cosolvent, and others known to those skilled in the art.

25 [0034] Depending upon the particular configuration of a device of the invention, a pharmaceutical aerosol formulation can be filled into an aerosol canister of the invention, e.g., by conventional pressure filling or cold filling methods. The formulation can then be administered by inhalation (e.g., to the lung) by coupling the aerosol canister to an aerosol actuator and dispensing the formulation via the actuator.

30 Diaphragm Preparation

35 [0035] Diaphragms can be prepared by conventional techniques known to those skilled in the art, such as compression molding, extrusion, and injection molding. The EPDM rubber diaphragms exemplified herein were die cut from a sheet prepared by the vendor. The thermoplastic elastomer blend diaphragms exemplified herein were prepared according to the general method set forth below:

40 Extrusion

45 [0036] A sample of a selected elastomer is fed into the feed throat of a Haake RHEOCORT™ single-screw extruder fitted with a Haake RHEOMIX™ three-zone extruder head and equipped with a 1.9 cm (0.75 inch) diameter screw having a 3:1 pitch and a length to diameter ratio of 25:1 (screw speed: 180 rpm; extruder temperature: 171°C zone 1, 182°C zone 2, 199°C zone 3; die temperature: 210°C; melt temperature: 164°C). The melt is extruded through a flat film die, fitted with a shim to provide the desired opening, and over a cooled chrome roller. The thickness of the resulting sheet is controlled by appropriate adjustment of screw speed and speed of the cooled roller. Diaphragms are hand cut from the sheet with a die of appropriate size.

50 Test Methods

Sealing members were tested as follows:

55 Leak Rate

[0037] Aerosol canister bodies (10 mL) are filled with an aerosol formulation and fitted with a metered dose valve substantially as described and illustrated above and comprising a diaphragm of a selected size and material. The valve

EP 0 708 805 B9

is actuated several times in order to assure its function. The mass of the filled device is measured. The filled device is allowed to stand under the indicated conditions for a period of time, after which time mass is again measured. The loss of mass over time is extrapolated to one year and reported in mg/year.

[0038] As used in the claims below the "Leak Rate Test Method" involves twenty-five independent determinations as described above, using HFC-134a as the aerosol formulation and using a valve having a stainless steel valve stem with a 2.79 mm (0.110 inch) outside diameter and fitted with a diaphragm of the specified diaphragm material. The diaphragm is 0.89 mm (0.035 inch) thick having an inside diameter of 2.41 mm (0.095 inch), and having an outside diameter of 8.64 mm (0.34 inch).

Valve Delivery

[0039] The mass of a filled device is measured. The device is then inverted and actuated one time. Mass is again determined and the valve delivery is recorded as the difference. Measurement of through life valve delivery involves making the above-described valve delivery measurement for each actuation of a valve until the formulation is expired (typically about 200 actuations).

Swelling

[0040] Diaphragms having a thickness of about 1.0 mm (0.040 inch), an inside diameter of about 2.5 mm (0.10 inch) and an outside diameter of about 8.6 mm (0.34 inch) are placed in a transparent closed measuring chamber (Comes Maschinenbau AG, Möhlin, Switzerland). The cell is filled with a soaking liquid and stored at the indicated temperature for the indicated period of time. The dimensions of the diaphragms are measured by viewing the diaphragms with a microscope through the window of the cell. Change of inside diameter and outside diameter is recorded as the average of three independent determinations.

[0041] The formulations used in the TABLES below in order to demonstrate the invention are as follows, wherein all parts and percentages are by weight:

Formulation	Albuterol Sulfate (%)	Beclomethasone Dipropionate (%)	Oleic Acid (%)	Ethanol (%)	HFC 134a (%)	HFC 227 (%)
1	0.385	---	0.03	15	84.585	---
2	---	0.084	---	7.993	91.923	---
Reference 3	0.5	---	---	---	99.5	---
4	0.5	---	---	10	89.5	--
5	0.5	---	---	10	---	89.5
Reference 6	0.5	---	---	---	---	99.5

[0042] As illustrated in the TABLES below, some of the sealing members are superior to others for use in the dynamic seal of a pressurized aerosol container. The TABLES below occasionally contain data that appear somewhat inconsistent with other data. These aberrant results are generally attributable to failure of several (e.g., one or two) vials in the test group.

[0043] In the TABLES that follow, "ID" represents the inside diameter of the diaphragm; "ss" indicates a stainless steel valve stem; "pl" indicates a Delrin™ acetal resin valve stem; "N" indicates the number of independent determinations used to evaluate the leak rate and valve delivery values. When two values are given, the first represents the number of determinations used to evaluate leak rate, the second represents the number of determinations used to evaluate valve delivery. Leak rate and valve delivery are shown along with standard deviation. Unless otherwise indicated the outside diameter of the diaphragms is 8.64 mm (0.34 inch) and the thickness is 0.89 mm (0.035 inch).

[0044] For comparative purposes, diaphragms were prepared from "Buna" rubber and from butyl rubber, both materials being commonly used in commercially available metered dose inhalers. These diaphragms were tested (upright storage of the aerosol canisters at a temperature of 30°C) with formulations as indicated in TABLES 1 and 2 below.

EP 0 708 805 B9

TABLE 1 - BUNA RUBBER

Formulation	ID (mm)	Stem	Time (Weeks)	N	Leak Rate (mg/yr)	Valve Delivery (mg/actuation)
4	2.11	ss	0	20/12	---	50.56 ± 1.70
			4		386 ± 20	51.11 ± 1.33
			12		377 ± 14	53.82 ± 1.77
	2.24	ss	0	20/12	---	52.81 ± 1.64
			4		347 ± 49	52.97 ± 1.33
			12		392 ± 13	54.19 ± 2.70
	2.36	ss	0	20/12	---	53.05 ± 1.42
			4		345 ± 12	51.88 ± 3.76
			12		386 ± 13	54.14 ± 1.79
	2.49	ss	0	20/12	---	53.88 ± 1.80
			4		345 ± 16	53.78 ± 1.02
			12		388 ± 19	54.05 ± 1.14
	2.11	pl	0	20/12	---	50.62 ± 0.71
			4		312 ± 18	49.00 ± 1.18
			12		395 ± 160	51.02 ± 0.71
	2.24	pl	0	20/12	---	53.32 ± 1.80
			4		335 ± 12	52.53 ± 2.37
			12		380 ± 13	53.71 ± 0.79
	2.36	pl	0	20/12	---	51.22 ± 0.75
			4		324 ± 19	49.94 ± 1.36
			12		378 ± 22	51.00 ± 0.45
	2.49	pl	0	20/12	---	51.27 ± 0.60
			4		322 ± 12	50.57 ± 0.62
			12		368 ± 13	51.13 ± 0.63

TABLE 2 - BUTYL RUBBER

Formulation	ID (mm)	Stem	Time (Weeks)	N	Leak Rate (mg/yr)	Valve Delivery (mg/actuation)
4	2.11	ss	0	20/12	---	58.86 ± 2.59
			4		174 ± 24	57.98 ± 2.04
			12		216 ± 16	58.13 ± 3.15
	2.24	ss	0	20/12	---	57.86 ± 2.49
			4		152 ± 9	58.02 ± 1.27
			12		197 ± 10	58.39 ± 3.32
	2.36	ss	0	20/12	---	59.12 ± 2.19
			4		151 ± 8	58.72 ± 3.35
			12		195 ± 9	58.92 ± 3.46
	2.49	ss	0	20/12	---	58.74 ± 2.54
			4		168 ± 28	58.02 ± 2.14
			12		208 ± 30	60.59 ± 4.11
	2.11	pl	0	20/12	---	55.92 ± 0.59
			4		159 ± 12	54.45 ± 1.73
			12		247 ± 160	54.62 ± 1.04

EP 0 708 805 B9

(continued)

Formulation	ID (mm)	Stem	Time (Weeks)	N	Leak Rate (mg/yr)	Valve Delivery (mg/actuation)
	2.24	pl	0	20/12	---	56.31 ± 0.28
			4		169 ± 25	54.50 ± 3.10
			12		218 ± 22	54.37 ± 2.59
	2.36	pl	0	20/12	---	56.20 ± 0.73
			4		161 ± 14	54.32 ± 1.58
			12		211 ± 15	55.04 ± 0.78
	2.49	pl	0	20/12	---	56.67 ± 1.11
			4		156 ± 11	55.16 ± 0.43
			12		204 ± 11	55.24 ± 0.78

[0045] The results in TABLES 1 and 2 show that, when used with the indicated formulations, "Buna" diaphragms generally exhibit leak rates higher than 300 mg/year with generally acceptable valve delivery variability. The results also show that the butyl rubber diaphragms exhibit acceptable leak rates when used with the indicated formulations but valve delivery variability is not acceptable.

[0046] Hand cut diaphragms were prepared from the materials set forth in TABLES 3-9 below. Tables 3-5 are reference examples. The diaphragms were incorporated into 50 microliter SPRAYMISER™ metered dose aerosol valves and tested (inverted storage of the aerosol canisters at 40°C, except in connection with TABLE 9, wherein storage temperature was 30°C) with the formulations indicated in the respective TABLES. The absence of an entry indicates that no measurement was made.

TABLE 3 - SANTOPRENE™ RESIN 271-64

Formulation	ID (mm)	Time (Weeks)	Leak Rate (mg/yr) ± SD
3	2.29	1	44 ± 10
	2.29	3	87 ± 5
	2.29	6	87 ± 4
	2.41	1	37 ± 11
	2.41	3	86 ± 9
	2.41	6	86 ± 9
	2.54	1	36 ± 7
	2.54	3	88 ± 6
	2.54	6	90 ± 5

TABLE 4 - SANTOPRENE™ RESIN 271-73

Formulation	ID (mm)	Time (Weeks)	Leak Rate (mg/yr) ± SD
3	2.29	1	31 ± 8
	2.29	3	90 ± 10
	2.29	6	88 ± 8
	2.41	1	45 ± 12
	2.41	3	99 ± 12
	2.41	6	90 ± 10

EP 0 708 805 B9

(continued)

Formulation	ID (mm)	Time (Weeks)	Leak Rate (mg/yr) ± SD
	2.54	1	44 ± 10
	2.54	3	92 ± 10
	2.54	6	90 ± 6

TABLE 5 - SANTOPRENE™ RESIN 271-80

Formulation	ID (mm)	Time (Weeks)	Leak Rate (mg/yr) ± SD
3	2.29	1	21 ± 7
	2.29	3	84 ± 10
	2.29	6	82 ± 8
	2.41	1	36 ± 15
	2.41	3	98 ± 15
	2.41	6	98 ± 12
	2.54	1	37 ± 8
	2.54	3	97 ± 10
	2.54	6	96 ± 9

TABLE 6 - SANTOPRENE™ RESIN 271-64

Formulation	ID (mm)	Time (Weeks)	Leak Rate (mg/yr) ± SD
4	2.29	1	255 ± 35
	2.29	3	360 ± 34
	2.29	6	320 ± 28
	2.41	1	252 ± 26
	2.41	3	374 ± 56
	2.41	6	335 ± 21
	2.54	1	260 ± 29
	2.54	3	380 ± 28
	2.54	6	351 ± 24

TABLE 7 - SANTOPRENE™ RESIN 271-73

Formulation	ID (mm)	Time (Weeks)	Leak Rate (mg/yr) ± SD
4	2.29	1	230 ± 24
	2.29	3	345 ± 24
	2.29	6	310 ± 20
	2.41	1	254 ± 31

EP 0 708 805 B9

(continued)

5

Formulation	ID (mm)	Time (Weeks)	Leak Rate (mg/yr) ± SD
	2.41	3	367 ± 28
	2.41	6	318 ± 22
	2.54	1	244 ± 28
	2.54	3	356 ± 30
	2.54	6	326 ± 26

10

TABLE 8 - SANTOPRENE™ RESIN 271-80

15

Formulation	ID (mm)	Time (Weeks)	Leak Rate (mg/yr) ± SD
4	2.29	1	257 ± 35
	2.29	3	363 ± 36
	2.29	6	330 ± 31
	2.41	1	267 ± 36
	2.41	3	365 ± 35
	2.41	6	341 ± 39
	2.54	1	257 ± 25
	2.54	3	360 ± 24
	2.54	6	340 ± 19

20

25

30

TABLE 9 - KIRKHILL KL70L3866 EPDM RUBBER

35

Formulation	ID (mm)	Time (Weeks)	Leak Rate (mg/yr)
1	2.49	1	146
	2.49	3	206
	2.49	6	248
2	2.49	1	87
	2.49	3	141
	2.49	6	174

40

45

[0047] The results in TABLES 3-9 above show that the indicated materials have acceptable leak rate and valve delivery variability when used as diaphragm materials in metered dose inhalers containing formulations with HFC-134a as the propellant.

50

[0048] Certain thermoplastic elastomer alloy materials were extruded into a sheet 1.0 mm (0.040 inch) thick. Diaphragms having an inside diameter of 2.4 mm (0.095 inch) and an outside diameter of 8.64 mm (0.340 inch) were punched and then soaked for 11 days at 20°C in the indicated formulation, and measured for dimensional stability. Results are shown in TABLE 10 below.

55

TABLE 10

Material	Formulation	ID (% Change)	OD (% Change)
SANTOPRENE 271-64	Reference 3	-2.5	3.7

EP 0 708 805 B9

(continued)

Material	Formulation	ID (% Change)	OD (% Change)
	4	-1.1	0.3
SANTOPRENE 271-73	Reference 3	0	-0.4
	4	-0.4	-0.4
SANTOPRENE 271-80	Reference 3	2.2	-0.3
	4	0.9	-1.4

[0049] Diaphragms were punched from a sheet of an EPDM rubber material 0.89 mm (0.035 inch) thick. ID was 2.49 mm (0.098 inch) and OD was 8.64 mm (0.340 inch). The diaphragms were soaked for eleven (11) days at 30°C in the indicated formulation. Dimensional stability was measured. Results are shown in TABLE 11 below.

TABLE 11

Material	Formulation	ID (% Change)	OD (% Change)
KL70L3841	Reference 3	-0.65	0.6
KL70L3866	Reference 3	-1.1	0.6
KL70L3841	4	-1.3	0.2
KL70L3866	4	-0.1	0.1

[0050] The exemplified materials show suitable dimensional stability in the indicated formulations.

[0051] A thermoplastic elastomer alloy material based on polypropylene and an EPDM rubber (SANTOPRENE™ 271-64) was extruded into a sheet 1.0 mm (0.040 inch) thick. Diaphragms were punched out having an ID of 2.4 mm (0.095 inch) and an OD of 8.64 mm (0.340 inch). The diaphragms were incorporated into 50 µL SPRAYMISER™ metered dose aerosol valves and tested (the aerosol canisters were stored at 30°C, upright for leak rate measurement and inverted for valve delivery and through-life valve delivery) with the formulations listed in TABLES 12 and 13 below.

TABLE 12

Formulation	Time (weeks)	Valve Delivery (mg ± SD)	Leak Rate (mg/yr ± SD)
5	0	63.9 ± 1.0	---
	4	66.3 ± 0.98	22.2 ± 0.50
	6	65.4 ± 0.91	29.4 ± 4.2
Reference 6	0	72.2 ± 1.0	---
	4	72.2 ± 1.7	11.7 ± 3.4
	6	72.0 ± 0.90	14.1 ± 1.1

TABLE 13

Formulation	Time (weeks)	Through-Life Valve Delivery (mg ± SD)	
		Vial 1	Vial 2
5	0	---	---
	4	65.3 ± 0.39	64.7 ± 0.40
	6	66.8 ± 0.63	65.1 ± 0.58
Reference 6	0	---	---
	4	40.3 ± 22.3	49.4 ± 14.4
	6	48.4 ± 16.6	40.3 ± 20.1

[0052] The results in TABLE 12 show that the exemplified material has a very low leak rate when used with the indicated formulations. TABLE 13 shows suitable through-life valve delivery for Formulation 5. Formulation 6, however, having no ethanol present, is seen to exhibit high variability of valve delivery over the life of the formulation.

5

Claims

1. A device (10) for delivering a metered dose of an aerosol, comprising:

10 a valve stem (12), a diaphragm (16) comprising an ethylene-propylene-diene rubber and having walls defining a diaphragm aperture (17), and a casing member (14) having walls defining a formulation chamber (32) and a casing aperture (18), wherein the valve stem (12) passes through the diaphragm aperture (17) and the casing aperture (18) and is in slidable, sealing engagement with the diaphragm aperture (17), and wherein the diaphragm (16) is in sealing engagement with the casing member (14), the device having contained in the formulation chamber (32) thereof, a medicinal aerosol formulation comprising drug and 1,1,1,2-tetrafluoroethane or 1,1,1,2,3,3,3-heptafluoropropane and wherein the diaphragm is stable to dimensional change when exposed to the medicinal aerosol formulation and exhibits a leak rate of less than 500mg/year when tested according to the Leak Rate Test Method at 30°C and wherein the medicinal aerosol formulation is a pharmaceutical inhalation formulation comprising 1,1,1,2-tetrafluoroethane or 1,1,1,2,3,3,3-heptafluoropropane in an amount effective to function as an aerosol propellant, a drug in an amount sufficient to provide a predetermined number of therapeutically effective doses for inhalation and a polar cosolvent which is ethanol.

20

2. A device according to Claim 1 wherein the ethylene-propylene-diene rubber is the only polymer component of the diaphragm.

25

3. A device according to Claim 1 wherein the ethylene-propylene-diene rubber is present in the form of particles dispersed in a continuous thermoplastic matrix.

4. A device according to Claim 3 wherein the thermoplastic matrix is polypropylene or polyethylene.

30

5. A device according to Claim 1 wherein the diaphragm exhibits a leak rate of less than 300 mg/year when tested according to the Leak Rate Test Method.

6. A device according to Claim 1 further comprising:

35

a tank seal (34) having walls defining a tank seal aperture (35), and a metering tank (36) of a predetermined volume and having an inlet end (38), an inlet aperture (40) and an outlet end (42), wherein the outlet end (42) is in sealing engagement with the diaphragm (16), the valve stem (12) passes through the inlet aperture (40) and the tank seal aperture (35) and is in slidable engagement with the tank seal aperture (35), and the tank seal (34) is in sealing engagement with the inlet end (38) of the metering tank, and wherein the valve stem (12) is movable between an extended closed position; in which the inlet end (38) of the metering tank is open and the outlet end (42) is closed, and a compressed open position in which the inlet end (38) of the metering tank is substantially sealed and the outlet end (42) is open.

40

7. A device according to Claim 1 wherein the drug is albuterol sulfate.

45

8. A device according to Claim 1 wherein the drug is beclomethasone dipropionate.

9. A device according to Claim 1 wherein the drug is pirbuterol acetate.

50

Patentansprüche

1. Vorrichtung (10) zum Abgeben einer dosierten Menge von einem Aerosol, umfassend: einen Ventilschaft (12), eine Membran (16), die einen Ethylen-Propylen-Dien-Kautschuk umfasst, mit einer Membranöffnung (17) definierenden Wänden und ein Gehäuseteil (14) mit Wänden, die eine Formulierungskammer (32) und eine Gehäuseöffnung (18) definieren, wobei der Ventilschaft (12) durch die Membranöffnung (17) und die Gehäuseöffnung (18) hindurchgeht und sich in einem verschiebbaren Dichtungseingriff mit der Membranöffnung (17) befindet, und wobei die Membran

55

(16) sich in einem Dichtungseingriff mit dem Gehäuseteil (14) befindet, wobei die Vorrichtung in der Formulierungskammer (32) davon eine medizinische Aerosolformulierung enthält, die Arzneimittel und 1,1,1,2-Tetrafluorethan oder 1,1,1,2,3,3,3-Heptafluorpropan umfasst und wobei die Membran gegenüber einer Maßänderung stabil ist, wenn sie der medizinischen Aerosolformulierung ausgesetzt ist, und eine Leckrate von weniger als 500 mg/Jahr bei einer Prüfung nach dem Leckraten-Testverfahren bei 30°C aufweist, und wobei die medizinische Aerosolformulierung eine pharmazeutische Inhalationsformulierung ist, die 1,1,1,2-Tetrafluorethan oder 1,1,1,2,3,3,3-Heptafluorpropan in einer wirksamen Menge umfasst, um als Aerosoltreibmittel zu funktionieren, und ein Arzneimittel in einer Menge umfasst, die ausreicht, eine vorbestimmte Anzahl an therapeutisch wirksamen Dosen zur Inhalation bereitzustellen, und ein polares Hilfslösemittel, welches Ethanol ist, umfasst.

2. Vorrichtung nach Anspruch 1, wobei der Ethylen-Propylen-Dien-Kautschuk die einzige Polymerkomponente der Membran ist.
3. Vorrichtung nach Anspruch 1, wobei der Ethylen-Propylen-Dien-Kautschuk in Form von Partikeln vorliegt, die in einer kontinuierlichen thermoplastischen Matrix dispergiert sind.
4. Vorrichtung nach Anspruch 3, wobei die thermoplastische Matrix Polypropylen oder Polyethylen ist.
5. Vorrichtung nach Anspruch 1, wobei die Membran eine Leckrate von weniger als 300 mg/Jahr bei Prüfung nach dem Leckraten-Testverfahren aufweist.
6. Vorrichtung nach Anspruch 1, ferner umfassend: eine Behälterdichtung (34) mit einer Behälterdichtungsöffnung (35) definierenden Wänden und einem Dosierbehälter (36) mit einem festgelegten Volumen und einem Einlassende (38), einer Einlassöffnung (40) und einem Auslassende (42), wobei das Auslassende (42) sich im Dichtungseingriff mit der Membran (16) befindet, der Ventilschaft (12) durch die Einlassöffnung (40) und die Behälterdichtungsöffnung (35) hindurchgeht und sich im verschiebbaren Eingriff mit der Behälterdichtungsöffnung (35) befindet und die Behälterdichtung (34) sich im Dichtungseingriff mit dem Einlassende (38) von dem Dosierbehälter befindet, und wobei der Ventilschaft (12) zwischen einer ausgefahrenen geschlossenen Position, in welcher das Einlassende (38) von dem Dosierbehälter offen und das Auslassende (42) geschlossen ist, und einer zusammengedrückten offenen Position beweglich ist, in der das Einlassende (38) von dem Dosierbehälter im Wesentlichen abgedichtet und das Auslassende (42) offen ist.
7. Vorrichtung nach Anspruch 1, wobei das Arzneimittel Albuterolsulfat ist.
8. Vorrichtung nach Anspruch 1, wobei das Arzneimittel Beclomethasondipropionat ist.
9. Vorrichtung nach Anspruch 1, wobei das Arzneimittel Pirbuterolacetat ist.

Revendications

1. Dispositif (10) pour distribuer une dose dosée d'un aérosol, comprenant:

une tige de soupape (12), un diaphragme (16) comprenant un caoutchouc éthylène - propylène - diène et présentant des parois qui définissent une ouverture de diaphragme (17), et un élément d'enveloppe (14) présentant des parois qui définissent une chambre de formulation (32) et une ouverture d'enveloppe (18), dans lequel la tige de soupape (12) passe à travers l'ouverture de diaphragme (17) et l'ouverture d'enveloppe (18) et se trouve en engagement coulissant étanche avec l'ouverture de diaphragme (17), et dans lequel le diaphragme (16) est en engagement étanche avec l'élément d'enveloppe (14), le dispositif présentant, contenue dans la chambre de formulation (32) de celui-ci, une formulation d'aérosol médicamenteuse comprenant un médicament et du 1,1,1,2-tétrafluoroéthane ou du 1,1,1,2,3,3,3-heptafluoropropane, et dans lequel le diaphragme résiste aux variations dimensionnelles lorsqu'il est exposé à la formulation d'aérosol médicamenteuse, et présente un taux de fuites qui est inférieur à 500 mg par an lorsqu'il est testé selon la méthode de test de taux de fuites à 30°C, et dans lequel la formulation d'aérosol médicamenteuse est une formulation d'inhalation pharmaceutique comprenant du 1,1,1,2-tétrafluoroéthane ou du 1,1,1,2,3,3,3-heptafluoropropane en une quantité efficace pour fonctionner comme propulseur d'aérosol, un médicament en une quantité suffisante pour produire un nombre prédéterminé de doses à inhaler efficaces sur le plan thérapeutique, et un cosolvant polaire qui est l'éthanol.

EP 0 708 805 B9

2. Dispositif selon la revendication 1, dans lequel le caoutchouc éthylène - propylène - diène est le seul composant polymère du diaphragme.
- 5 3. Dispositif selon la revendication 1, dans lequel le caoutchouc éthylène - propylène - diène est présent sous la forme de particules qui sont dispersées dans une matrice thermoplastique continue.
4. Dispositif selon la revendication 3, dans lequel la matrice thermoplastique est constituée de polypropylène ou de polyéthylène.
- 10 5. Dispositif selon la revendication 1, dans lequel le diaphragme présente un taux de fuites inférieur à 300 mg par an lorsqu'il est testé selon la méthode de test de taux de fuites.
6. Dispositif selon la revendication 1, comprenant en outre:
15 un joint de réservoir (34) présentant des parois qui définissent une ouverture de joint de réservoir (35), et un réservoir de dosage (36) d'un volume prédéterminé et présentant une extrémité d'entrée (38), une ouverture d'entrée (40) et une extrémité de sortie (42), dans lequel l'extrémité de sortie (42) est en engagement étanche avec le diaphragme (16), la tige de soupape (12) passe à travers l'ouverture d'entrée (40) et l'ouverture de joint de réservoir (35), et est en engagement coulissant avec l'ouverture de joint de réservoir (35), et le joint de
20 réservoir (34) est en engagement étanche avec l'extrémité d'entrée (38) du réservoir de dosage, et dans lequel la tige de soupape (12) est mobile entre une position fermée étendue, dans laquelle l'extrémité d'entrée (38) du réservoir de dosage est ouverte et l'extrémité de sortie (42) est fermée, et une position ouverte comprimée, dans laquelle l'extrémité d'entrée (38) du réservoir de dosage est sensiblement obturée et l'extrémité de sortie (42) est ouverte.
25
7. Dispositif selon la revendication 1, dans lequel le médicament est le sulfate d'albutérol.
8. Dispositif selon la revendication 1, dans lequel le médicament est le dipropionate de béclo méthasone.
- 30 9. Dispositif selon la revendication 1, dans lequel le médicament est l'acétate de pirbutérol.

35

40

45

50

55

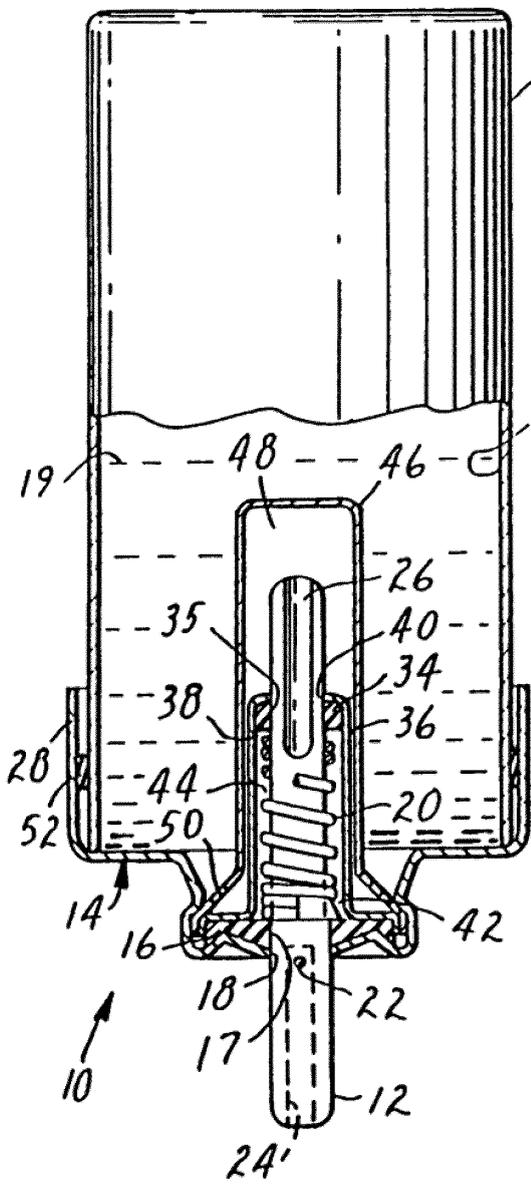


FIG. 1

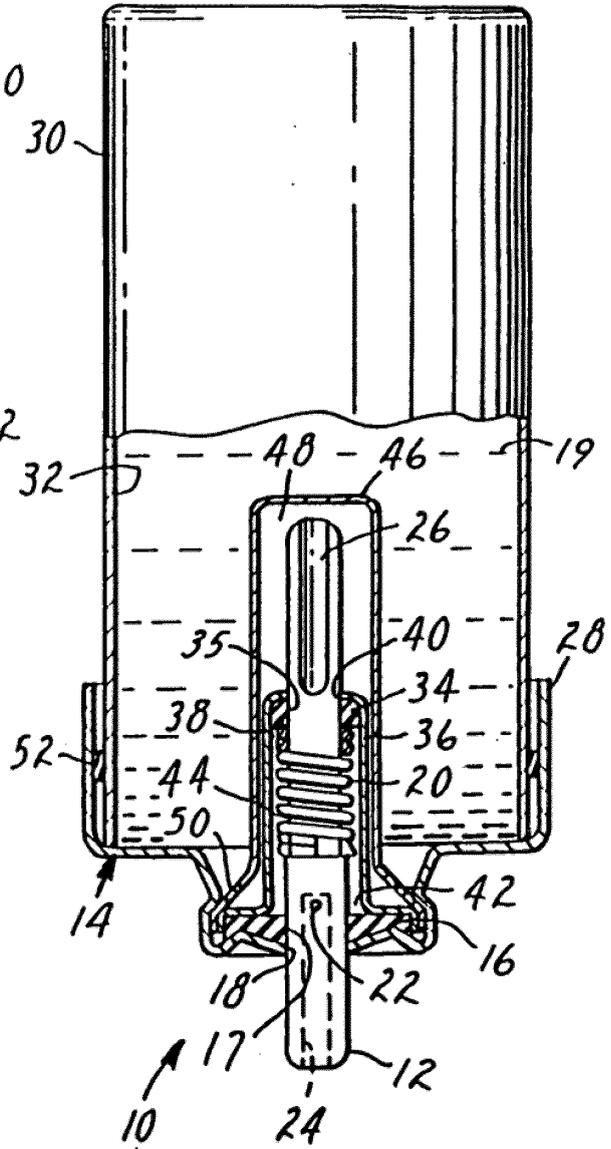


FIG. 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 07878041 A [0005]
- WO 9211190 A [0006]
- US 5112660 A [0007] [0020]
- US 4819834 A [0031]
- US 4407481 A [0031]
- US 3052382 A [0031]
- US 3049269 A [0031]
- US 2980301 A [0031]
- US 2968427 A [0031]
- US 2892576 A [0031]
- US 2886217 A [0031]
- US 2721010 A [0031]
- EP 372777 A [0033]

Non-patent literature cited in the description

- **Hiramatsu.** *Journal of Japan Rubber Society*, 1991, vol. 64, 161 [0008]
- **Encyclopedia of Polymer Science & Engineering.** John Wiley & Sons, 1985, vol. 6, 522-548 [0018] [0023]
- **Developments in Rubber Technology and Synthetic Rubbers,** Applied Science Publishers, 1981, vol. 2, 87 [0018]
- **Coran.** *Thermoplastic Elastomers Prepared by Dynamic Vulcanization*, November 1992 [0023]
- **Coran.** *Rubber Chem. Technol.*, 1980, vol. 83, 141 [0023]