



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 717 953 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**12.08.1998 Bulletin 1998/33**

(51) Int. Cl.<sup>6</sup>: **A47L 15/46, A47L 15/50**

(21) Application number: **95830529.4**

(22) Date of filing: **20.12.1995**

### (54) Apparatus for detecting the presence of dishes in the basket of a dishwashing machine

Vorrichtung zum Erkennen der Anwesenheit von Geschirr in dem Geschirrkorb einer  
Geschirrspülmaschine

Dispositif pour détecter la présence de vaisselle dans le panier d'un lave-vaisselle

(84) Designated Contracting States:  
**DE ES FR GB SE**

(30) Priority: **22.12.1994 IT MI942608**

(43) Date of publication of application:  
**26.06.1996 Bulletin 1996/26**

(73) Proprietor: **SMEG S.p.A.**  
**Guastalla (Reggio Emilia) (IT)**

(72) Inventor: **Bertazzoni, Roberto**  
**I-Guastalla (Reggio Emilia) (IT)**

(74) Representative:  
**Adorno, Silvano et al**  
**c/o SOCIETA' ITALIANA BREVETTI S.p.A.**  
**Via Carducci, 8**  
**20123 Milano (IT)**

(56) References cited:  
**DE-A- 2 701 879**

- PATENT ABSTRACTS OF JAPAN vol. 14 no. 236**  
**(C-0720) ,18 May 1990 & JP-A-02 060624**  
**(MATSUSHITA SEIKO CO. LTD.) 1 March 1990,**

EP 0 717 953 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

The present invention relates to apparatuses for dishwashing machines, and in particular to an apparatus for detecting the presence of dishes in the baskets of a dishwasher.

It is known that such an apparatus makes easier the programming operations of the machine by the user and/or optimizes the performance/consumption ratio according to the load. For example, the machine can detect the absence of dishes in one of the baskets and accordingly automatically set the program for a reduced load ( $\frac{1}{2}$  load), or it can change the program parameters (steps, times, temperatures, amount of detergent, etc.) according to the amount and kind of dishes actually present, or it can distribute the amounts of water and detergent differently between the upper and lower basket.

Prior art detecting apparatuses are essentially divided into direct and indirect apparatuses. The typical direct apparatus detects the weight of the crockery load (e.g. JP-A-2060624), while examples of indirect apparatuses are those which detect the amount of removed dirt or the decrease of the water temperature occurring in a beginning step of the washing. This second type of detecting apparatus implies quite complicated and expensive devices, for example capable of detecting the turbidity of the rinsing water, or a precise change in the temperature thereof or the amount of dirt remaining in the filter after the rinsing. Moreover, these apparatuses have a low reliability, since the detected data are heavily affected by the parameters of the starting washing step and by the kind of dirt on the dishes. For example, a substance which is easily removed from the dishes but causes a great turbidity of the water, such as tomato sauce, would cause an indication of "hard" dirt which is completely the opposite of the actual situation.

The weight detecting apparatuses have less problems of reliability, however they still imply rather complicated and expensive devices. In fact, some members such as springs, load cells and the like are necessarily present in that they must interact with the baskets for detecting the weight thereof. This requires that the basket supporting devices be made so as to include the above-mentioned weight detecting devices, or the supports be connected to the walls of the washing chamber through said devices. Since the basket supports typically consist of guides formed by drawing directly on the plates which make up the walls, it is apparent that such modifications involve a manufacturing operation much more complicated and expensive than a conventional one.

Therefore, the object of the present invention is to provide an apparatus for detecting the presence of dishes in the baskets which overcomes the above-mentioned drawbacks of prior art apparatuses.

This object is achieved by means of an apparatus having the characteristics cited in claim 1.

A first fundamental advantage of the detecting apparatus according to the present invention is its structural simplicity, which results in low manufacturing cost and high operating reliability.

5 A second advantage of the present apparatus comes from the fact that all its members do not require interaction with any structural member of the dishwasher other than the baskets, thus leaving the greatest freedom in the choice of the position thereof and/or in the type of supporting device.

10 These and other advantages and characteristics of the detecting apparatus according to the present invention will be apparent to those skilled in the art from the following detailed description of an embodiment thereof referring to the annexed drawings wherein:

Fig.1 is a schematic sectional front view of a dishwasher including the detecting apparatus of the invention;

Fig.2 is a schematic sectional side view of the dishwasher of fig.1;

Fig.3 is a front view sketch showing the travel of the mobile profiles which make part of the apparatus, with respect to the position of the sensors which detect the displacements of said profiles; and

Fig.4 is a sectional side view showing a second embodiment of said sensors.

20 Referring to figs.1 and 2, there is seen that a conventional dishwasher includes an upper basket 1 and a lower basket 2 provided with parallel supports 3 arranged in two rows, wherein the plates are placed in an almost vertical position. Since the lower basket 2 is generally used to arrange not only plates but also pots and the like, each of its two rows of supports 3 is united into a removable insert 4 which can be removed from basket 2 so as to house the pots easily without the obstacle of supports 3. It is apparent that the same kind of structure can be adopted also for the upper basket 1, however the latter is generally used for plates on the right side and for glasses and cups on the left side, as illustrated in fig.1.

25 30 35 40 45 50 The detection of the presence of dishes in baskets 1 and 2 is carried out by means of mobile profiles 5 arranged longitudinally along the sides of the baskets, next to supports 3. Each mobile profile 5 essentially consists of a rod pivoted at its ends to the basket structure, and kept in an almost horizontal position by return springs 6. This embodiment is illustrated in fig.2 with reference to the upper basket 1 only, while the mobile profiles 5 of the lower basket 2 have been omitted for the sake of clarity.

55 As clearly shown in fig.1, the angular position of the mobile profiles 5 is defined by the presence or absence of the dishes, and particularly by the size of the plates inserted between supports 3. The arcs illustrated in fig.1 which indicate the angular travels of profiles 5, are schematically shown in fig.3, together with the positions of

the sensors which detect the displacement of profiles 5. These sensors are located behind the rear wall of the washing chamber (rearspace), therefore each mobile profile 5 is provided with a rear end portion 7 which takes the information about the angular position thereof to the rearspace. Similarly, each removable insert 4 is provided with a rear end portion 8 which takes to the rearspace the information about the presence thereof in the lower basket 2.

The above-illustrated arrangement is clearly referred to conventional baskets wherein the plate supports 3 are arranged longitudinally so that the plates are essentially parallel to the dishwasher door. With said arrangement, the sensors may also be located behind the front wall, i.e. inside the door, obviously providing the mobile profiles 5 with end portions 7, 8 at the front rather than at the rear. In case supports 3 are arranged transversally, it is obvious that the mobile profiles 5 will be transverse and the sensors will be located behind one of the chamber side walls instead of the rear wall.

In the sketch of fig.3, the angular travel arcs indicated by SD, IS and ID are respectively referred to the upper right, lower left and lower right mobile profile. For the above-cited reasons, a left mobile profile has not been provided in the upper basket, but it could obviously be provided in combination with the right one or in place thereof.

The sensors located in the rearspace at the lower basket 2 in order to detect the presence of the left and right removable inserts 4, are respectively indicated by S and D. At the upper ends of arcs IS and ID, A and A' indicate the sensors detecting the presence of the mobile profiles 5 in "rest" position, i.e. in the absence of dishes. On the contrary, at the only mobile profile 5 of the upper basket 1, there are located two sensors M and G, positioned in the lower half of arc SD, suitable to detect the angular position of said profile caused by the presence of medium and large diameter plates, respectively.

From the above, it is apparent that any angular position of the lower mobile profiles within arcs PP denotes the presence of dishes in the lower basket 2. On the contrary, an angular position of the mobile profile 5 of the upper basket 1 within arc R denotes the absence of dishes, or the presence of small-size plates which cause little or no displacement of the mobile profile.

These indications about the angular positions of the mobile profiles 5 are combined with the indications of sensors S and D about the presence of the removable inserts 4, in order to obtain the arrangement of the dishes in the two baskets. For example, the presence of inserts 4 together with the activation of sensors A, A' denotes that the lower basket is empty or contains only small-size plates: in fact there are neither pots (since inserts 4 are present) nor plates having such a size as to move the lower mobile profiles and thus deactivate sensors A, A'. In case inserts 4 were not present (sen-

sors S and D not activated), then the basket would be empty or contain just small crockery such as small pots, bowls and the like. In both cases, the 1/2 load operation can be taken into consideration.

The following table contains, for exemplificative purposes, some of the most meaningful combinations obtained from the signals of the sensors, wherein 1 indicates the activated sensor condition (closed circuit) and 0 indicates the not activated sensor condition (open circuit).

N.	Lower basket				Upper basket	
	S	D	A	A'	M	G
I	1	1	1	1	0	1
II	0	0	1	1	0	1
III	1	1	0	0	1	0
IV	0	0	0	0	0	1
V	0	1	0	0	0	0
VI	1	1	0	1	1	0

The first two combinations (I and II) of the table above are the two previously mentioned examples of half load, while combination III suggests a normal washing (large plates down and medium plates up), number IV suggests a strong washing (pots down and large plates up), number V suggests to send more water to the lower basket (pots+large plates down and small plates up), number VI suggests a light/normal washing (large+small plates down and medium plates up), and so on.

It is clear that not all possible combinations have a practical usefulness, some of them being "meaningless" (e.g. complete absence of dishes) and others being redundant (e.g. swapping the signals from S and A with those from D and A'). The total number of possible combinations is equal to  $2^n$  where n is the number of sensors used. In fact, nothing stops from using other sensors (e.g. along arcs PP) in order to increase the detecting precision. Therefore, in the illustrated embodiment employing six sensors the obtainable combinations are 64. Even considering that a certain amount thereof is eliminated for the above-explained reasons, the high number of remaining combinations leads to the use of a microprocessor control unit which can combine the information about the load arrangement with the information from other sensors (temperature, water and detergent level, etc.). However, a simple application is always possible in a machine controlled by an electro-mechanical timer, obviously providing in such case much less information. For example, the half-load switch could be triggered by the simultaneous activation of sensors S, D, A, A' as in combination I of the table

above.

As far as the nature of the sensors employed in the present detecting apparatus is concerned, these are preferably of electromagnetic type. This means that they consist of electric circuits suitable to detect, and to transform into electric signals, the changes in the distribution of the magnetic field caused by the displacement of magnetic elements contained in the end portions 7, 8 of the mobile profiles 5 and of the removable inserts 4. Sensors suitable for this purpose are, for example, reed relays, proximity switches, Hall effect sensors, etc. According to the type of sensor selected, the signals may be of the on/off kind, as those considered above, or continuous variations of one or more quantities of the detecting circuit (voltage, current), possibly usable with a "fuzzy" logic processing. For example, it would be possible that sensors M and G are simultaneously activated, thus denoting the presence in the upper basket 1 of plates having a diameter between medium and large.

An essential advantage of this type of sensor is that the passage of the signal outside the washing chamber does not require making a hole therein, thus avoiding further machining and risks of leaks. However, it is possible to employ less sophisticated sensors such as common microswitches 9 as those illustrated in fig.4. In this case, the rear wall 10 must have openings closed by membranes 11 suitable to prevent water leaks but sufficiently deformable as to allow the activation of microswitches 9. In order to assure said activation even at intermediate positions of the mobile profile 5, the latter is provided with a deformable end portion 12 which is guided by shaped members 13 converging towards membranes 11.

It is clear that the above-described and illustrated embodiment of the detecting apparatus according to the invention is just an example susceptible of various modifications. In particular, the number, arrangement and type of the sensors located behind one or more chamber walls may be freely adapted according to the desired precision of detection. Similarly, the number and arrangement of the mobile profiles 5 may be changed according to the kind of baskets wherein they must be mounted, as far as the introduction of the dishes causes the displacement of the profiles in proportion to the size of the dishes.

## Claims

1. An apparatus for detecting the presence of dishes in the baskets (1, 2) placed in the washing chamber of a dishwashing machine, characterized in that it includes one or more mobile profiles (5) each being pivoted to the structure of a basket (1, 2) and resiliently kept in such a position as to require the displacement thereof in order to introduce the dishes in the basket, said mobile profiles (5) being provided with end portions (7, 12) extending upto the wall of the washing chamber, and also includes a

5

plurality of sensors (A, A', M, G) located behind said wall, at least one sensor along the travel of each end portion (7, 12) of the mobile profile, which are capable to detect the position of the relevant end portion (7, 12) of the mobile profile.

10

2. A detecting apparatus according to claim 1, characterized in that at least one of the baskets (1, 2) includes one or more rows of plate supports (3) united into a removable insert (4) provided with an end portion (8) extending upto the wall of the washing chamber, and a further sensor (S, D), located behind said wall at said end portion (8), which is capable to detect the presence of said insert (4).

15

3. A detecting apparatus according to claim 1 or 2, characterized in that each mobile profile (5) consists of a rod pivoted at its ends and kept in a substantially horizontal position by springs (6), each profile (5) being arranged along one side of the basket (1, 2).

20

4. A detecting apparatus according to one or more of the preceding claims, characterized in that the sensors (A, A', M, G, S, D) consist of electric circuits capable to detect, and transform into electric signals, the changes in the distribution of the magnetic field caused by the displacements of magnetic elements contained in the end portions (7, 8) of the mobile profiles (5) and of the removable inserts (4), said sensors (A, A', M, G, S, D) being preferably reed relays.

25

5. A detecting apparatus according to one of claims 1 to 3, characterized in that the sensors (A, A', M, G, S, D) consist of microswitches (9) located at openings in the chamber wall, said openings being closed by membranes (11) capable to prevent water leaks but sufficiently deformable as to allow the activation of said microswitches (9) by deformable end portions (12) which are guided by shaped members (13) secured to said chamber wall and converging towards said membranes (11).

30

6. A dishwashing machine characterized in that it includes a detecting apparatus according to one or more of the preceding claims..

35

## Patentansprüche

40

1. Vorrichtung zum Erfassen der Anwesenheit von Geschirr in Geschirrkörben (1, 2), welche in der Waschkammer einer Geschirrspülmaschine angebracht sind, dadurch gekennzeichnet, daß ein oder mehrere mobile Profile (5) enthalten sind, welche jeweils mit dem Aufbau eines Geschirrkörbs (1, 2) gelenkig verbunden sind und elastisch in einer derartigen Position gehalten werden, wie es die Ver-

55

schiebung davon erfordert, um das Geschirr in den Geschirrkorb einzuführen, wobei die mobilen Profile (5) mit Endteilen (7, 12) versehen sind, die sich auf die Wand der Waschkammer zu erstrecken, und ebenfalls eine Mehrzahl von Sensoren (A, A', M, G) enthalten ist, welche hinter der Wand lokalisiert sind, wobei wenigstens ein Sensor entlang der Wegstrecke jedes Endteils (7, 12) des mobilen Profils lokalisiert ist, und welche zum Erfassen der Position des relevanten Endteils (7, 12) des mobilen Profils geeignet sind.

2. Erfassungsvorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß wenigstens ein Geschirrkorb (1, 2) eine oder mehrere Reihen von Tellerstützen (3) enthält, die zu einem entfernbaren Einsatz (4) zusammengefügt sind, welcher mit einem Endteil (8) versehen ist, das sich auf die Wand der Waschkammer zu erstreckt, und daß ein weiterer Sensor (S, D) vorgesehen ist, welcher hinter der Wand an dem Endteil (8) lokalisiert ist und zum Erfassen des Vorhandenseins des Einsatzes (4) geeignet ist.

3. Erfassungsvorrichtung nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß jedes mobile Profil (5) aus einer Stange besteht, die an ihren Enden mit einem Drehzapfen versehen ist und in einer im wesentlichen horizontalen Position durch Federn (6) gehalten wird, wobei jedes Profil (5) entlang einer Seite des Geschirrkorb (1, 2) angeordnet ist.

4. Erfassungsvorrichtung nach einem oder mehreren der vorausgehenden Ansprüche, dadurch gekennzeichnet, daß die Sensoren (A, A', M, G, S, D) aus elektrischen Schaltungen bestehen, die geeignet sind, die Änderungen der Verteilung des magnetischen Felds hervorgerufen durch die Verschiebungen von magnetischen Elementen, die in den Endteilen (7, 8) der mobilen Profile (5) und der entfernbaren Einsatz (4) enthalten sind, zu erfassen und in elektrische Signale zu transformieren, wobei die Sensoren (A, A', M, G, S, D) vorzugsweise Reed-Relais sind.

5. Erfassungsvorrichtung nach einem der Ansprüche 1 bis 3, dadurch gekennzeichnet, daß die Sensoren (A, A', M, G, S, D) aus Mikroschaltern (9) bestehen, die an Öffnungen in der Kammerwand lokalisiert sind, wobei die Öffnungen durch Membranen (11) geschlossen sind, die geeignet sind, Wasserleckstellen zu verhindern, jedoch hinreichend verformbar sind, um die Aktivierung der Mikroschalter (9) durch verformbare Endteile (12) zu ermöglichen, welche von geformten Teilen (13) geführt werden, die an der Kammerwand gesichert sind und in Richtung auf die Membranen (11) zu konvergieren.

6. Geschirrspülmaschine, dadurch gekennzeichnet,

daß sie eine Erfassungsvorrichtung nach einem oder mehreren der vorausgehenden Ansprüche enthält.

5 **Revendications**

1. Dispositif pour détecter la présence de vaisselle dans les paniers (1, 2) placés dans la chambre de lavage d'un lave-vaisselle, caractérisé en ce qu'il comprend un ou plusieurs profils mobiles (5) dont chacun est pivoté sur la structure d'un panier (1, 2) et maintenu de manière résiliente dans une position telle qu'il nécessite le déplacement de celui-ci afin d'introduire la vaisselle dans le panier, lesdits profils mobiles (5) étant pourvus de parties d'extrémités (7, 12) s'étendant jusqu'à la paroi de la chambre de lavage, et comprenant également une pluralité de capteurs (A, A', M, G) situés derrière ladite paroi, au moins un capteur étant disposé le long du déplacement de chaque partie d'extrémité (7, 12) dudit profil mobile qui est capable de détecter la position de la partie d'extrémité pertinente (7, 12) du profil mobile.

10 15 20 25 30 35 40 45 50 55

2. Dispositif de détection selon la revendication 1, caractérisé en ce qu'au moins un des paniers (1, 2) comprend une ou plusieurs rangées de supports de plaque (3) disposées en unité dans un insert retirable (4) pourvu d'une partie d'extrémité (8) s'étendant jusqu'à la paroi de la chambre de lavage, et un capteur supplémentaire (S, D) disposé derrière ladite paroi à ladite partie d'extrémité (8), qui est capable de détecter la présence dudit insert (4).

3. Dispositif de détection selon la revendication 1 ou 2, caractérisé en ce que chaque profil mobile (5) est constitué d'une tige pivotée à ses extrémités et maintenue dans une position sensiblement horizontale par des ressorts (6), chaque profil (5) étant arranging le long d'un côté du panier (1, 2).

4. Appareil de détection selon l'une ou plusieurs des revendications précédentes, caractérisé en ce que les capteurs (A, A', M, G, S, D) sont constitués de circuits électriques capables de détecter et de transformer en des signaux électriques des changements dans la distribution du champ magnétique créé par le déplacement d'éléments magnétiques contenus dans les parties d'extrémité (7, 8) des profils mobiles (5) et des inserts retirables (4), lesdits capteurs (A, A', M, G, S, D) étant de préférence des relais à contact scellé.

5. Dispositif de détection selon l'une des revendications 1 à 3, caractérisé en ce que les capteurs (A, A', M, G, S, D) sont constitués de micro-commutateurs (9) situés à des ouvertures dans la paroi de chambre, lesdites ouvertures étant fermées par des

membranes (11) capables d'empêcher les fuites d'eau mais suffisamment déformables pour permettre l'actionnement desdits micro-commutateurs (9) par des parties d'extrémité déformables (12) qui sont guidées par des éléments profilés (13) fixés à 5 ladite paroi de chambre et convergant en direction desdites membranes (11).

6. Lave-vaisselle, caractérisé en ce qu'il comprend un dispositif de détection selon l'une ou plusieurs des 10 revendications précédentes.

15

20

25

30

35

40

45

50

55

Fig. 1

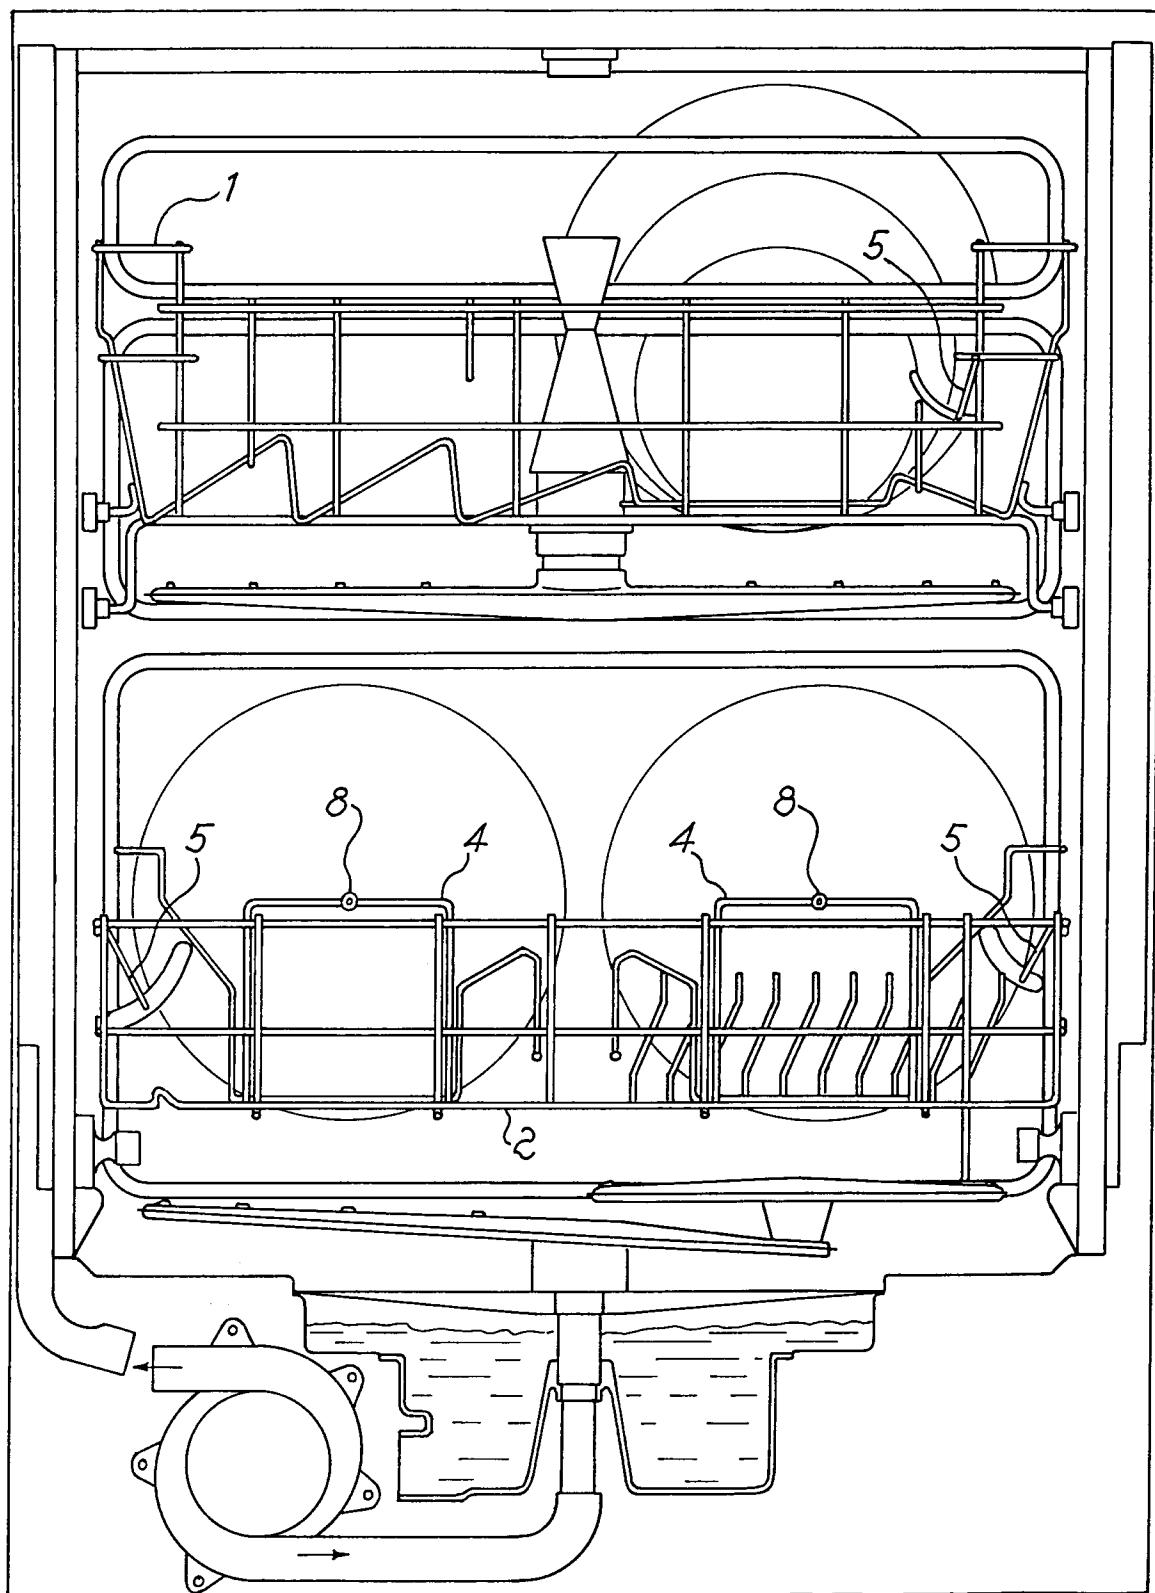
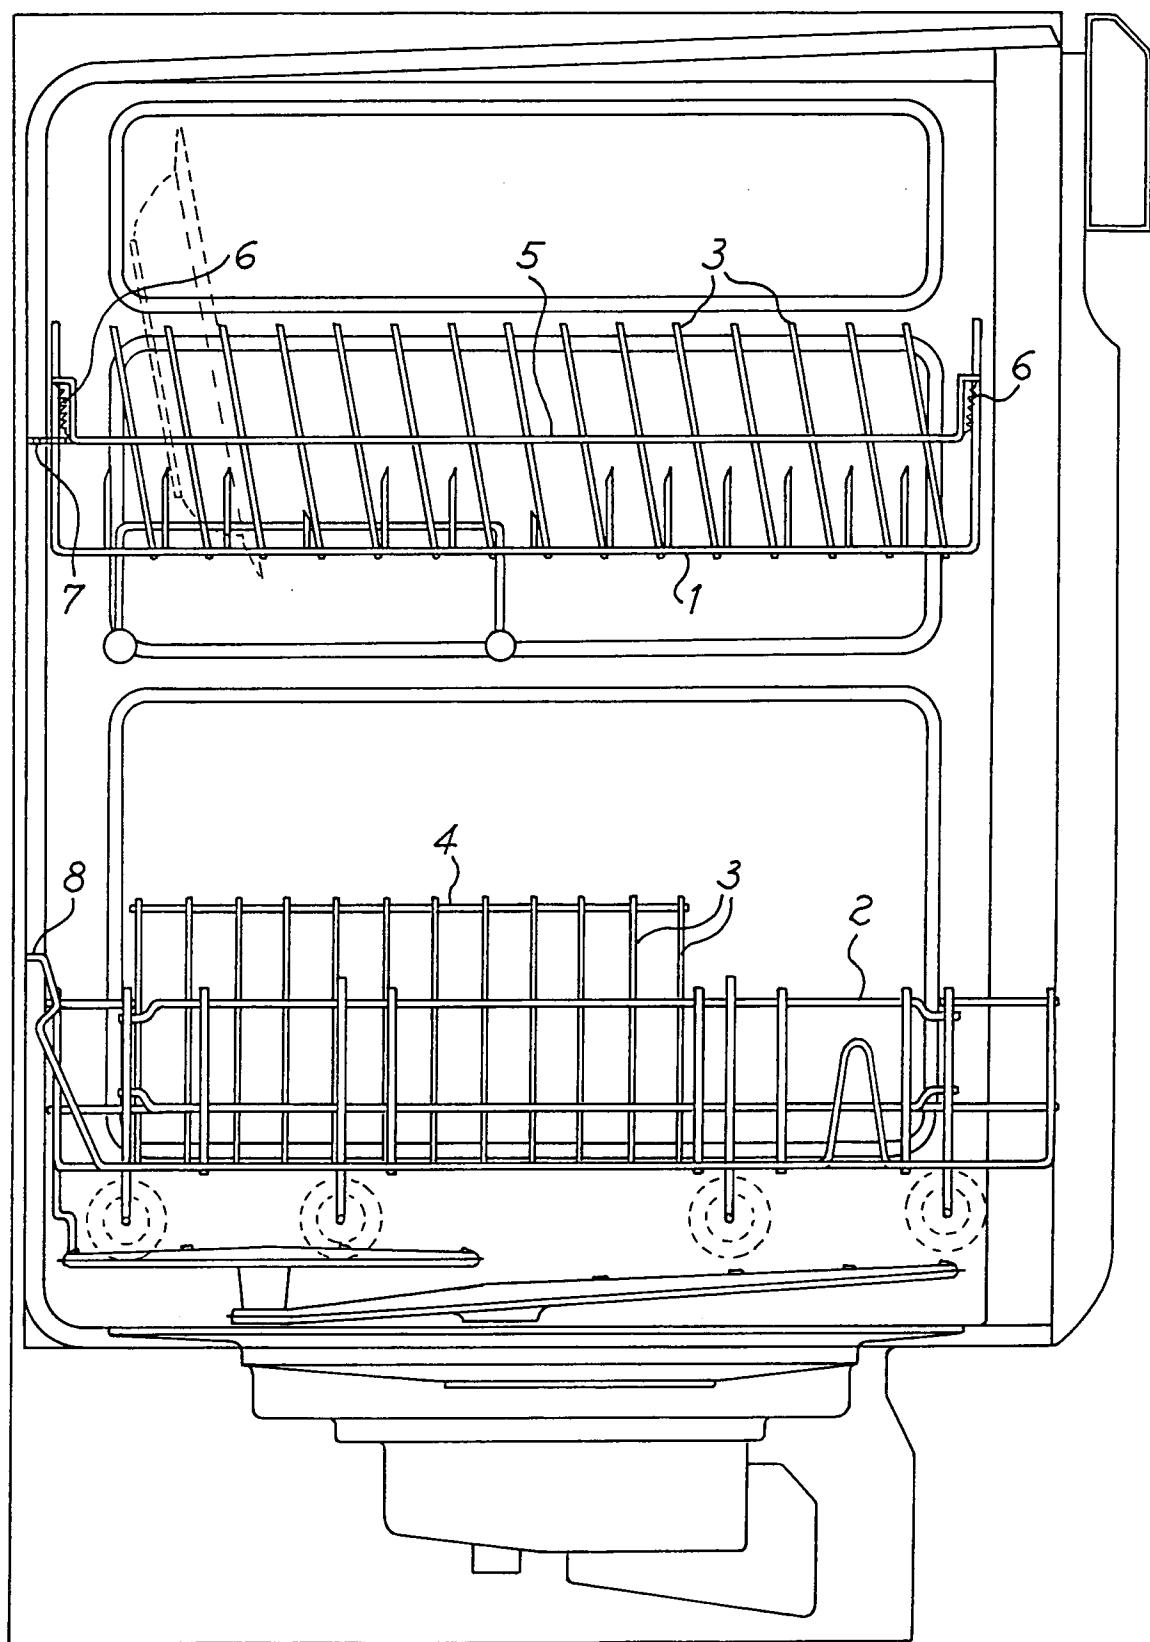


Fig. 2




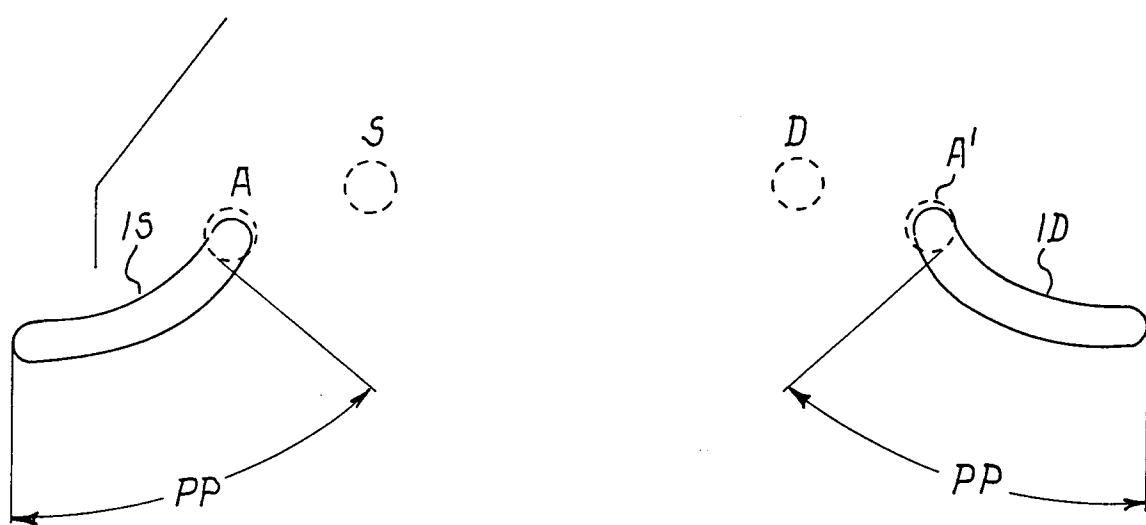


Fig. 4

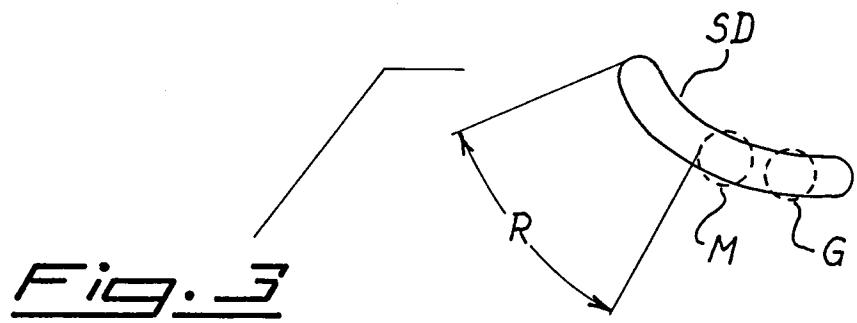