

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 733 860 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

05.06.2002 Bulletin 2002/23

(51) Int Cl.7: **F23Q 23/08**, F23Q 9/04

(21) Application number: **96301921.1**

(22) Date of filing: **20.03.1996**

(54) **Testing device for gas pilot light**

Testvorrichtung für Zündbrenner

Appareil de contrôle pour brûleur d'allumage

(84) Designated Contracting States:
DE ES FR IT NL PT

(30) Priority: **21.03.1995 GB 9505632**

(43) Date of publication of application:
25.09.1996 Bulletin 1996/39

(73) Proprietor: **ROBINSON WILLEY LIMITED**
Old Swan, Liverpool L13 4AJ (GB)

(72) Inventor: **Charmer, Robert**
Chorley, Lancashire PR6 7JS (GB)

(74) Representative:
Gilmour, David Cedric Franklyn et al
POTTS, KERR & CO.
15 Hamilton Square
Birkenhead Merseyside CH41 6BR (GB)

(56) References cited:
GB-A- 2 298 039 **US-A- 4 972 152**

EP 0 733 860 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a testing device for a gas pilot light and more particularly to a portable device for testing the performance of an oxygen-depletion cut-out system of a gas fire or other gas appliance.

[0002] It is important from a safety point of view to ensure that a gas fire or other gas appliance does not continue to burn when the level of oxygen in a room falls below a safe-level for example, as a result of carbon monoxide/dioxide being returned to the room because of a blocked flue. An oxygen-depletion sensing (ODS) pilot jet has been designed such that the pilot light jet has two flames - one directed to the region of the main gas burner and the other directed to a thermocouple. Oxygen is supplied to said flames via an air inlet aperture in the pilot gas supply line and the pilot light device and the air inlet aperture are designed such that in normal conditions, the pilot flames are stable but such that should the oxygen level being supplied to the air inlet aperture drop below the requisite level, the flame becomes unstable and the flame acting on the thermocouple ceases to act on such with the result that the main gas valve supplying the gas fire or like installation shuts off the gas supply to the main burner. Such oxygen-depletion sensing pilot lights (ODS pilot lights) are known and comprise an important safety device and it is a testing device for such with which the present invention is concerned (see, for instance, the GB-A-2298039).

[0003] With the increasing requirements for safety monitoring in respect of gas appliances, the present invention is concerned with providing a method and apparatus for testing or assessing the performance of an oxygen depletion pilot light to ensure that it is still functioning correctly after the device has been in use some time.

[0004] According to the present invention there is provided a portable device for testing the performance of an oxygen-depletion-sensing pilot light jet comprising a reservoir for containing a gas mixture which has an oxygen content just below the level at which the oxygen-depletion-sensing pilot light should safely operate, a gas mixture flow control means in communication or communicable with gas mixture applicator means; said applicator means in a first arrangement permitting said gas mixture to flow from said flow control means to atmosphere at ambient pressure and said applicator means including a supply duct locatable adjacent and/or over the air inlet aperture of an oxygen-depletion-sensing pilot light jet to supply said gas mixture thereto at ambient atmospheric pressure, or in a second arrangement said applicator means comprising a housing locatable to surround an oxygen-depletion-sensing pilot light jet and the air inlet aperture therefor and preferably also the ignition means for the pilot light, to enable supply said gas mixture to the air inlet aperture and to provide said gas mixture as a localised ambient environment to the pilot light.

[0005] Preferably in the first arrangement the free end of the supply duct will be so shaped as to be closely locatable against the surface surrounding the air inlet aperture of the pilot light and may possibly have sealing means which may be provided in different replaceable forms as an adaptor to different surfaces. Attachment means may also be provided for releasably holding said supply duct over said air inlet aperture.

[0006] The applicator means preferably has a main duct or chimney-like member for venting the gas mixture to atmosphere. The applicator means is preferably in the form of a main tubular member with a normally lowermost inlet aperture in communication via the gas mixture flow control means (valve) of the gas mixture reservoir and having said supply duct extending therefrom and preferably at right angles and preferably from a normally lower region adjacent but spaced from the valve to enable supply at atmospheric pressure. It is important that the gas mixture of the testing device should not be applied to the air inlet aperture of the pilot light jet at other than ambient atmospheric pressure or substantially ambient pressure since an inaccurate test might otherwise result.

[0007] In the alternative second arrangement of the applicator means according to the invention such comprises a housing which encloses the whole of the ODS pilot light including the air inlet therefor to provide an ambient atmosphere of said gas mixture for the whole of the pilot light and its flame and preferably the ignition device although an opening may be provided in the housing to permit the pilot light to ignite the adjacent burner in normal manner although preferably the supply to the burner is closed so that only the pilot light is lit. At least one wall portion of the housing will preferably be removable to permit location of the housing over the pilot jet. It is expected that for each range of fire, an especially shaped housing will have to be provided and contoured such as to enable the housing to locate on and around the pilot and its ignition device and such as to prevent or minimize any inflow of ambient air.

[0008] Also according to the present invention a method of testing the performance of an oxygen depletion sensing pilot light jet of a gas fire or other gas appliance insitue, comprises applying an oxygen depleted gas mixture to at least the air inlet of said pilot jet and when the pilot light is lit, and determining whether the pilot flame ceases to act upon the thermocouple of the appliance so as to cut off the main gas supply.

[0009] Preferably in the second arrangement at least, the housing will be located around at least the pilot jet with the inlet in the housing for the gas mixture initially being open to atmosphere so that the pilot flame becomes stable once the adjacent metals become heated. The reservoir containing the depleted oxygen gas mixture is then connected to the inlet or communicates therewith such that said gas mixture enters the housing either by being drawn in by the flame burning and/or by being under slight pressure.

[0010] The invention will be described further, by way of example, with reference to the accompanying drawings, in which:-

Fig. 1 is a schematic part section part elevation of a portable testing device forming one embodiment of the first arrangement of the invention illustrated located in position against an oxygen depletion sensing pilot jet; and

Fig. 2 is a schematic perspective view of a further portable testing device forming a second embodiment of the second arrangement of the invention.

[0011] A testing device according to the present invention is intended for use with an oxygen depletion sensing gas pilot nozzle or jet 1 (such as sold under the trade mark "SIT") which in use has a gas outlet duct and flame 2 directed to the main gas burners (not shown) of the gas fire (not shown) and a thermocouple, gas outlet duct and flame 3 directed to play the flame against a thermocouple 6 with said pilot light being ignitable by a piezo-electric device 7 in known manner. The gas is supplied to the pilot jet 1 via duct 5 and an air inlet aperture 4 is provided in the pilot light jet 1 which jet is designed in known manner such that under normal conditions of operation with the requisite amount of oxygen, the flames from apertures 2 and 3 are just on the limit of stability and such that when the level of oxygen entering through aperture 4 drops below the safe level, flame 3 becomes unstable and ceases to burn and play against thermocouple 6 with the result that the thermocouple acts via an electromagnetic valve (not shown) to cut off the gas supply to the fire in known manner.

[0012] A testing device 8 according to the present invention comprises a pressurized or pressurizable gas bottle 9 forming a reservoir for a gas mixture which has an oxygen content at least just below the level of oxygen required for safe operation of the gas fire. The gas bottle 9 is secured by threaded means 10 to a duct leading via a valve 11 to an applicator means 12. The applicator means 12 comprises a main chimney or tubular body 13 with its normally upper end 13' open to atmosphere and with the tubular body 13 being of a sufficiently large size as to enable gas exiting from the reservoir bottle 9 to be at ambient atmospheric pressure. An applicator or supply duct 14 extends laterally of the main duct 13 and is locatable over the air inlet aperture 4 of the pilot jet 1 and the whole device is designed such that the test gas flowing from bottle 9 is at atmospheric or substantially atmospheric pressure as it enters the air inlet aperture 4 so as to give a proper test result.

[0013] In this respect, the pressure of gas being permitted to flow through valve 11 and the dimensioning of the main duct means 13 and supply duct 14 should be dimensioned to enable gas mixture at or substantially at atmospheric pressure to be applied to the aperture 4. Suitable sealing means 15 such as in the form of an annular resilient ring may be provided at the edge of the

free end of supply duct 14 to ensure proper sealing against the surfaces surrounding inlet aperture 4. The end of duct 14 may be appropriately shaped to fit against said surrounding surfaces.

[0014] It is even envisaged that the free end of duct 14 may have different seating pieces securable thereon as adaptors to different feed pipes for different pilot jets depending on the fire being tested and to ensure a proper sealing/seating. Additionally, releasable securement means, such as a clip, may be provided for releasably securing the supply duct 14 in position over the aperture 4. Instead of a supply duct 14, an open collar or other open channel means may be provided to surround or partially surround the pilot jet feed pipe in the region of inlet aperture 4 to provide said mixture thereto.

[0015] In practice, the pilot flame will be first lit and allowed to become stable by the heating up of adjacent surfaces before the gas mixture is allowed to be drawn in.

[0016] In the embodiment of Fig. 2, a portable box-like housing 16 is provided having a transparent viewing window 17 of suitable heat resistant glass to enable the pilot jets 2 and 3 to be viewed. In Fig. 2, the electrode 7 of the piezo-electric device and the thermocouple 6 have been omitted for the sake of clarity but such will be encompassed within the housing.

[0017] The reservoir 9 for said oxygen depleted gas mixture which contains oxygen just below the level at which the oxygen-depletion-sensing pilot light should operate, is connected via pipe 18 and an inlet aperture 18' in the housing base to the interior of the housing 16. Control valve 11 is also provided to control the gas mixture flow.

[0018] An outlet aperture 19 is provided in the rear of the housing 16 (or the top) to vent the gas mixture from reservoir 9 to atmosphere at atmospheric pressure. It will be appreciated that the housing 16 also surrounds the air inlet 4. By providing the housing to surround all the ignition and nozzle and flame area a more accurate representation of oxygen depletion is created for the test purposes.

[0019] It will be appreciated that because the pilot jet 1, thermocouple 6 and ignition electrode 7 are mounted on a support bracket 20 which is detachably mounted on the gas fire in a position to enable the flame from nozzle 2 to ignite the gas burner (not shown), it will be necessary to construct the housing 16 in parts (not shown) to permit mounting on the requisite surrounding manner. For example, the housing 16 may have a removable or separable bottom panel. Alternatively, and preferably the lower half of the back panel of housing may be detachably removable to permit location of housing 16 and then be mounted in part or completely to close the bottom part. If need be the support bracket for the pilot jet may be loosened or removed to permit location. It is even envisaged that each gas fire may be constructed to include a side wall part and preferably releasable retaining means for the housing 16 to facili-

tate the mounting and testing operation.

[0020] In its broadest aspect the method of the present invention may be performed by an operator inhaling and simply blowing air gently through a duct such as a straw or tube, to the region of the inlet 4.

[0021] Whilst an air mixture of 2% carbon dioxide in air has been mentioned, any suitable gas mixture may be provided to represent oxygen depleted air.

Claims

1. A portable device for testing the performance of an oxygen-depletion-sensing pilot light jet comprising a reservoir for containing a gas mixture which has an oxygen content just below the level at which the oxygen-depletion-sensing pilot light should safely operate, a gas mixture flow control means in communication or communicable with gas mixture applicator means; said applicator means in a first arrangement permitting said gas mixture to flow from said flow control means to atmosphere at ambient pressure and said applicator means including a supply duct locatable adjacent and/or over the air inlet aperture of an oxygen-depletion-sensing pilot light jet to supply said gas mixture thereto at ambient atmospheric pressure, or in a second arrangement said applicator means comprising a housing locatable to surround an oxygen-depletion-sensing pilot light jet and the air inlet aperture therefor and preferably also the ignition means for the pilot light, to enable supply said gas mixture to the air inlet aperture and to provide said gas mixture as a localised ambient environment to the pilot light.
2. A device as claimed in claim 1, in which the free end of the supply duct is so shaped as to be closely locatable against the surface surrounding the air inlet aperture of the pilot light.
3. A device as claimed in claim 2, in which the free end has sealing means for sealing against said surrounding surface.
4. A device as claimed in claim 3, in which the sealing means is provided in different replaceable forms as an adaptor to different surfaces.
5. A device as claimed in any of claims 1 to 4, in which attachment means are provided for releasably holding said supply duct over said air inlet aperture.
6. A device as claimed in any of claims 1 to 5, in which the applicator means has a main duct or chimney-like member for venting the gas mixture to atmosphere.
7. A device as claimed in claim 6, in which the appli-

cator means is in the form of a main tubular member with a normally lower-most inlet aperture in communication via the gas mixture flow control means (valve) of the gas mixture reservoir and having said supply duct extending therefrom.

8. A device as claimed in claim 7, in which said supply duct extends from a normally lower region adjacent but spaced from the valve to enable supply at atmospheric pressure.
9. A device as claimed in claim 1, in which where the applicator means is a housing which encloses the whole of the ODS pilot light including the air inlet therefor to provide an ambient atmosphere of said gas mixture for substantially the whole of the pilot light and its flame except for an opening provided in the housing to permit the pilot light to ignite the adjacent burner in normal manner.
10. A device as claimed in claim 9, in which at least one wall portion of the housing is removable to permit location of the housing over a pilot jet.
11. A device as claimed in claim 9 or 10, in which the housing is also such as to be capable of surrounding the ignition means for a pilot light.
12. A method of testing the performance of an oxygen depletion sensing pilot light jet of a gas fire or other gas appliance in situ, comprising applying an oxygen depleted gas mixture to at least the air inlet of said pilot jet and when the pilot light is lit, and determining whether the pilot flame ceases to act upon the thermocouple of the appliance so as to cut off the main gas supply.
13. A method as claimed in claim 12, in which the oxygen depleted mixture is applied by an operator inhaling and simply blowing air gently through a duct, such as, for example, a straw or tube, to the region of the inlet.

Patentansprüche

1. Tragbare Einrichtung zum Testen der Funktionstüchtigkeit einer Zündflammdüse zur Erfassung einer Sauerstoffverringerung, welche Einrichtung ein Reservoir zur Aufnahme einer Gas Mischung, deren Sauerstoffgehalt gerade unterhalb des Gehaltes liegt, bei dem die Zündflamme zur Erfassung einer Sauerstoffverringerung sicher arbeiten sollte, sowie ein Kontrollmittel für den Gasgemischdurchfluss aufweist, das mit einem Gasgemisch-Applikatormittel in Verbindung steht oder verbindbar ist; wobei die Applikatormittel in einer ersten Anordnung zulassen, dass das Gasgemisch von dem

Durchfluss-Kontrollmittel unter Umgebungsdruck an die Atmosphäre gelangt, und wobei die Applikatormittel einen Versorgungsschacht umfassen, der benachbart zu und/oder über einer Lufteinlassöffnung der Zündflammdüse zur Erfassung einer Sauerstoffverringerung platzierbar ist, um das Gasgemisch unter atmosphärischem Umgebungsdruck dorthin zuzuführen, oder wobei in einer zweiten Anordnung die Applikatormittel ein Gehäuse aufweisen, das so platzierbar ist, dass es die Zündflammdüse zur Erfassung einer Sauerstoffverringerung und die Lufteintrittsöffnung und vorzugsweise auch die Zündmittel für die Zündflamme umgibt, um eine Zufuhr des Gasgemischs zur Lufteintrittsöffnung zu ermöglichen und um das Gasgemisch als eine lokale Umgebungsatmosphäre der Zündflamme bereit zu stellen.

2. Einrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** das freie Ende des Versorgungsschachtes so geformt ist, dass es dicht an der Oberfläche platzierbar ist, die die Lufteintrittsöffnung der Zündflamme umschließt.
3. Einrichtung nach Anspruch 2, **dadurch gekennzeichnet, dass** das freie Ende Dichtungsmittel zur Abdichtung gegenüber der umgebenden Oberfläche aufweist.
4. Einrichtung nach Anspruch 3, **dadurch gekennzeichnet, dass** die Dichtungsmittel in verschiedenen austauschbaren Formen als Adapter für verschiedene Oberflächen vorgesehen sind.
5. Einrichtung nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** Befestigungsmittel zum lösbaren Halten des Versorgungsschachtes über der Lufteintrittsöffnung vorgesehen sind.
6. Einrichtung nach einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** die Applikatormittel einen Hauptschacht oder ein kaminartiges Element aufweisen, um das Gasgemisch an die Atmosphäre zu leiten.
7. Einrichtung nach Anspruch 6, **dadurch gekennzeichnet, dass** die Applikatormittel in der Form eines rohrförmigen Hauptelementes mit einer normalerweise zuunterst liegenden Einlassöffnung sind, die in Verbindung mit dem Gasgemisch-Durchflusskontrollmitteln (Ventil) des Gasgemischsreservoirs steht, und den Versorgungsschacht aufweisen, der sich von dort aus erstreckt.
8. Einrichtung nach Anspruch 7, **dadurch gekennzeichnet, dass** sich der Versorgungsschacht normalerweise von einem unteren Bereich ausgehend erstreckt, der sich in einem Bereich benachbart zu,

jedoch beabstandet vom Ventil befindet, um eine Zufuhr unter atmosphärischem Druck zu ermöglichen.

9. Einrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** dann, wenn die Applikatormittel ein Gehäuse sind, das Gehäuse die gesamte Zündflamme zur Erfassung der Sauerstoffverringerung einschließlich zugehörigen Lufteintritt umschließt, um eine Umgebungsatmosphäre mit dem Gasgemisch für im wesentlichen die Gesamtheit der Zündflamme und ihre Flamme bereit zu stellen mit Ausnahme einer Öffnung, die im Gehäuse vorgesehen ist, um der Zündflamme die Zündung des benachbarten Brenners in üblicher Weise zu erlauben.
10. Einrichtung nach Anspruch 9, **dadurch gekennzeichnet, dass** wenigstens ein Wandabschnitt des Gehäuses entfernbar ist, um eine Anordnung des Gehäuses über einer Flammdüse zu gestatten.
11. Einrichtung nach Anspruch 9 oder 10, **dadurch gekennzeichnet, dass** das Gehäuse auch so ausgebildet ist, dass es die Zündmittel für eine Zündflamme umgeben kann.
12. Verfahren zum Testen der Funktionstüchtigkeit einer Zündflammdüse zur Erfassung einer Sauerstoffverringerung eines Gasfeuers oder einer anderen Gasanwendung in situ mit den Schritten Zuführen eines sauerstoffverringerten Gasgemischs zu wenigstens einem Lufteintritt der Flammdüse, wenn die Zündflamme brennt, und Bestimmung, ob die Zündflamme aufhört auf das Thermoelement der Anwendung einzuwirken, um die Hauptgasversorgung abzustellen.
13. Verfahren nach Anspruch 12, **dadurch gekennzeichnet, dass** das sauerstoffverringerte Gemisch dadurch zugeführt wird, das ein Bediener es inhaliert und einfach die Luft sacht durch einen Schacht wie zum Beispiel einen Strohhalm oder ein Rohr auf den Bereich des Eintritts ausbläst.

Revendications

1. Dispositif portatif pour tester les caractéristiques de fonctionnement d'un injecteur de veilleuse d'allumage à détecteur d'appauvrissement en oxygène, comprenant un réservoir destiné à contenir un mélange gazeux qui a une teneur en oxygène juste inférieure au niveau auquel la veilleuse à détecteur d'appauvrissement en oxygène fonctionnerait en toute sécurité, un moyen de réglage du débit du mélange gazeux, en communication ou pouvant communiquer avec des moyens distributeurs du mélan-

ge gazeux; dans une première configuration, lesdits moyens distributeurs permettant audit mélange gazeux de s'écouler dudit moyen de réglage du débit jusqu'à l'atmosphère à pression ambiante et lesdits moyens distributeurs comprenant un conduit d'alimentation pouvant être placé adjacent à, et/ou au-dessus de l'ouverture d'entrée d'air d'un injecteur de veilleuse à détecteur d'appauvrissement en oxygène pour y fournir ledit mélange gazeux à pression atmosphérique ambiante, ou, dans une seconde configuration, lesdits moyens distributeurs comprenant un boîtier positionnable autour d'un injecteur de veilleuse d'allumage à détecteur d'appauvrissement en oxygène et l'ouverture d'entrée d'air de celui-ci et, de manière préférée, également les moyens d'allumage pour la veilleuse, afin de permettre d'alimenter ledit mélange gazeux à l'ouverture d'entrée d'air et de fournir à la veilleuse ledit mélange gazeux sous forme d'environnement ambiant localisé.

2. Dispositif selon la Revendication 1, dans lequel l'extrémité libre du conduit d'alimentation est conformée de manière à pouvoir être placée en contact étroit contre la surface entourant l'ouverture d'entrée d'air de la veilleuse. 25
3. Dispositif selon la Revendication 2, dans lequel l'extrémité libre possède des moyens d'étanchéité pour assurer l'étanchéité contre ladite surface qui entoure. 30
4. Dispositif selon la Revendication 3, dans lequel les moyens d'étanchéité sont prévus avec différentes formes échangeables, comme adaptateur pour des surfaces différentes. 35
5. Dispositif selon l'une quelconque des Revendications 1 à 4, dans lequel des moyens de raccordement sont prévus pour fixer de manière libérable ledit conduit d'alimentation sur ladite ouverture d'entrée d'air. 40
6. Dispositif selon l'une quelconque des Revendications 1 à 5, dans lequel les moyens distributeurs ont un conduit principal ou élément en forme de cheminée pour évacuer le mélange gazeux dans l'atmosphère. 45
7. Dispositif selon la Revendication 6, dans lequel les moyens distributeurs sont sous la forme d'un élément tubulaire principal avec une ouverture d'entrée normalement la plus basse en communication via les moyens de réglage (valve) du débit du mélange gazeux avec le réservoir de mélange gazeux et ayant ledit conduit d'alimentation qui en part. 50
8. Dispositif selon la Revendication 7, dans lequel ledit

conduit d'alimentation part d'une zone normalement inférieure adjacente à la valve, mais distincte de celle-ci, pour permettre l'alimentation à pression atmosphérique.

9. Dispositif selon la Revendication 1, dans lequel les moyens distributeurs sont un boîtier qui entoure la totalité de la veilleuse à détecteur d'appauvrissement en oxygène, entrée d'air pour celle-ci comprise, pour fournir une atmosphère ambiante audit mélange gazeux pour essentiellement la totalité de la veilleuse et sa flamme à l'exception d'une ouverture ménagée dans le boîtier pour permettre à la veilleuse d'allumer le brûleur adjacent de manière normale. 5
10. Dispositif selon la Revendication 9, dans lequel au moins une portion de paroi du boîtier est amovible pour permettre le positionnement du boîtier sur un injecteur de veilleuse. 10
11. Dispositif selon la Revendication 9 ou 10, dans lequel le boîtier est également prévu pour être apte à entourer le moyen d'allumage d'une veilleuse. 15
12. Procédé de contrôle *in situ* des caractéristiques de fonctionnement d'un injecteur de veilleuse d'allumage à détecteur d'appauvrissement en oxygène, d'un radiateur à gaz ou autre appareil à gaz, comprenant l'application d'un mélange gazeux appauvri en oxygène à l'entrée d'air au moins dudit injecteur de veilleuse et lorsque la veilleuse est allumée, et la détermination du fait que la flamme de veilleuse s'arrête pour agir sur le thermocouple de l'appareil afin de couper l'alimentation principale du gaz. 20
13. Procédé selon la Revendication 12, dans lequel le mélange appauvri en oxygène est fourni par un opérateur inhalant et simplement soufflant doucement de l'air par un conduit, comme par exemple une paille ou un tuyau, sur la zone de l'entrée. 25

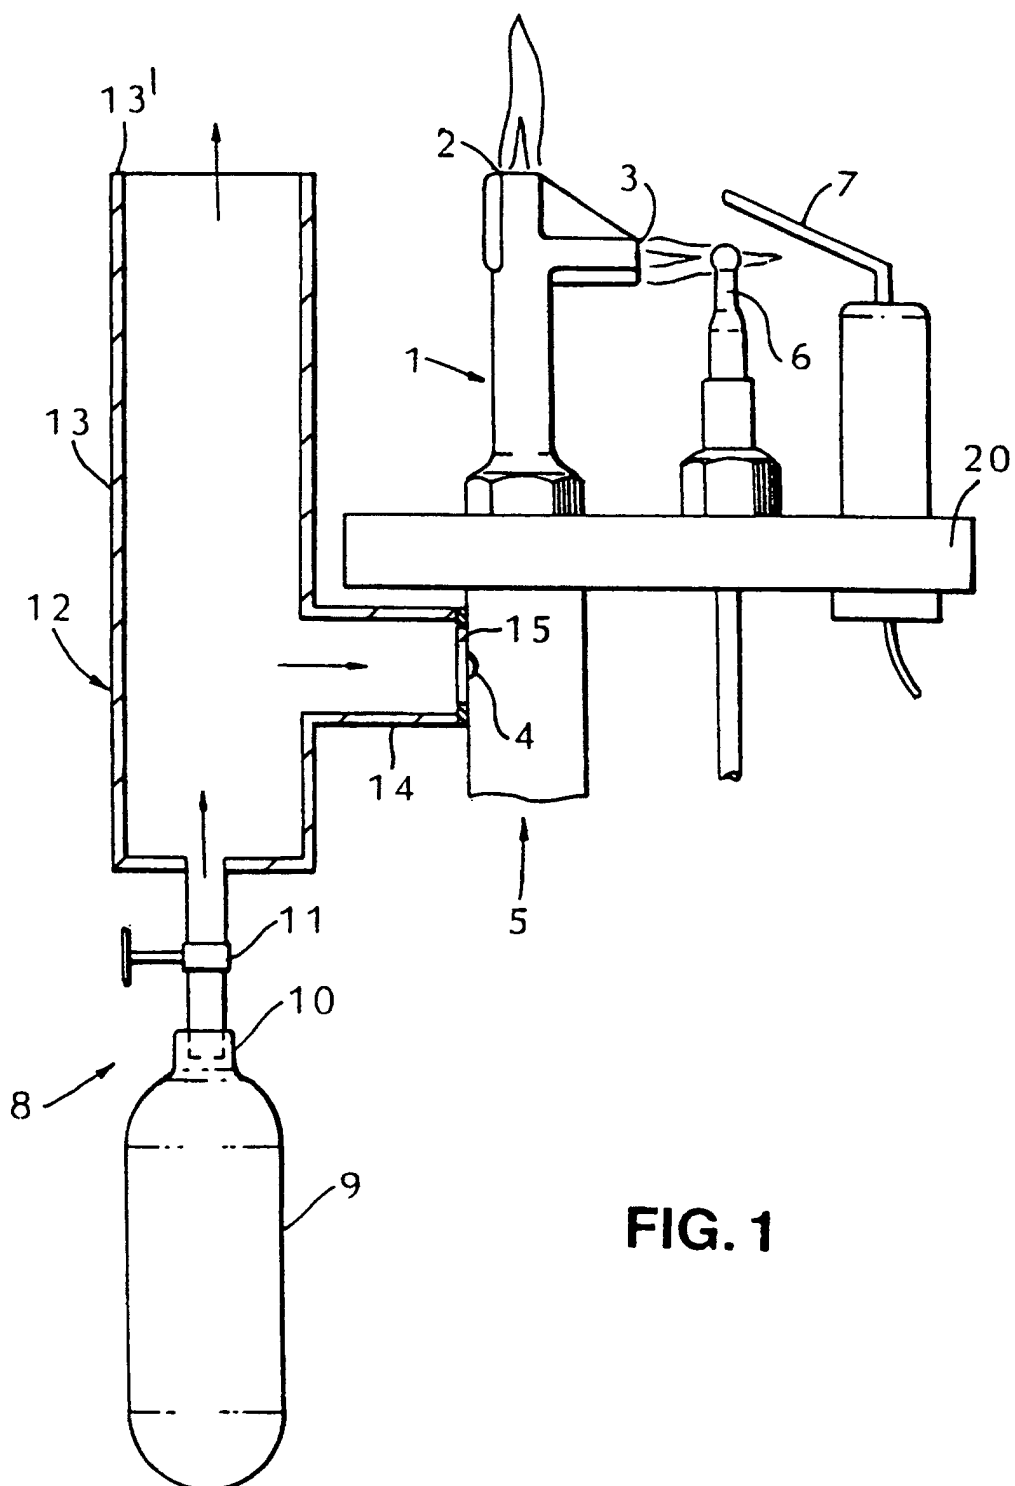


FIG. 1

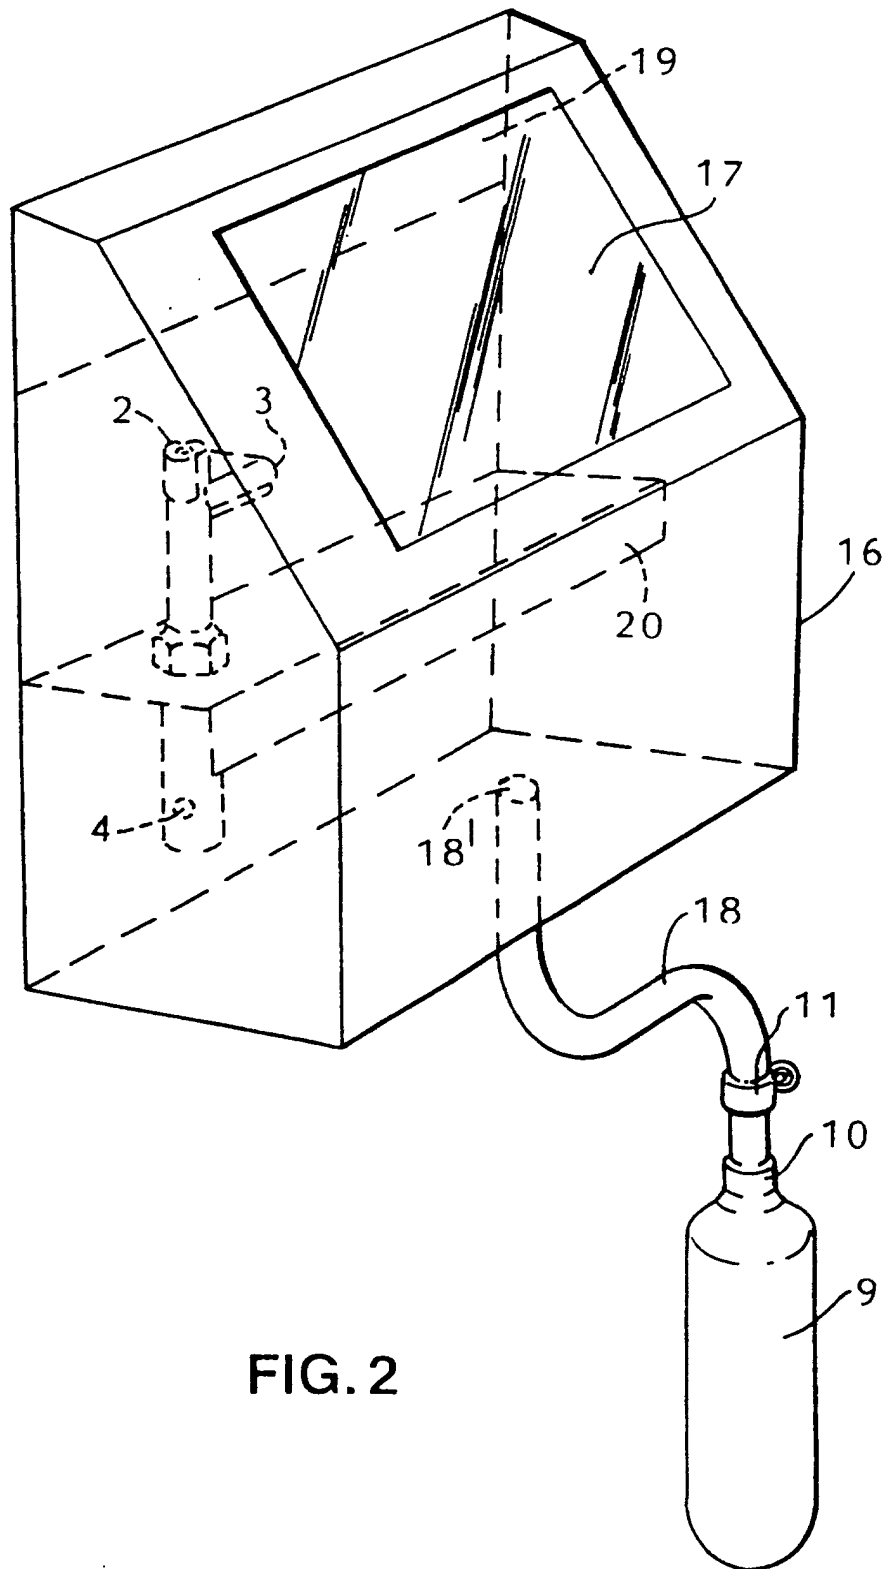


FIG. 2