



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 742 305 B2**

(12) **NEW EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the opposition decision:  
**04.08.2004 Bulletin 2004/32**

(51) Int Cl.7: **D04H 13/00**

(45) Mention of the grant of the patent:  
**20.12.2000 Bulletin 2000/51**

(21) Application number: **96303164.6**

(22) Date of filing: **03.05.1996**

(54) **Permeable fabrics**

Durchlässige Stoffe

Etoffes perméables

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **03.05.1995 GB 9508982**

(43) Date of publication of application:  
**13.11.1996 Bulletin 1996/46**

(73) Proprietor: **DON & LOW LIMITED**  
**Forfar, Angus DD8 1FR, Scotland (GB)**

(72) Inventors:  
• **Ferrar, Andrew Nicholas**  
**Dundee DD5 1NA (GB)**  
• **Simpson, George**  
**Forfar DD8 3LY (GB)**

• **Squires, Leslie James**  
**Blairgowrie, Perthshire PH10 6LA (GB)**  
• **Woodbridge, Timothy**  
**London W3 3PX (GB)**

(74) Representative: **Moreland, David, Dr. et al**  
**Cruikshank & Fairweather,**  
**19 Royal Exchange Square**  
**Glasgow G1 3AE (GB)**

(56) References cited:  
**EP-A- 0 309 073**                    **EP-A- 0 462 574**  
**EP-A- 0 716 176**                    **WO-A-95/09261**  
**CA-A- 2 138 195**                    **US-A- 4 766 029**  
**US-A- 5 208 098**

**EP 0 742 305 B2**

## Description

**[0001]** The present invention relates to gas and/or vapour permeable materials, and production methods therefor. The invention relates to air and/or water vapour permeable fabrics for use in building construction.

**[0002]** Gas and/or vapour permeable fabrics known in the art as possessing good barrier properties to water droplets and/or solid particles generally comprise co-extruded or monolayer films comprising a plurality of micropores or monolithic films which permit the passage of vapour, and/or gases through them. Typically, in such fabrics the passage of vapour and/or gas occurs via molecular diffusion. Fabrics of this kind act as barriers to liquid droplets, such as water droplets, and to solid particulates, yet retain a vapour permeability, (e.g. water vapour permeability) and/or a gas permeability which permits the fabric to "breathe". Hitherto, such fabrics incorporating fibrous materials have not been found to possess sufficiently good barrier properties relative to fabrics which do not include a fibrous barrier component. Furthermore, fabrics of the prior art comprising fibrous materials lack strength and robustness and have been found to be inadequate for use in demanding applications, for example, when used in roofing tile underlays.

**[0003]** Melt-blown fabrics comprising microfilaments, i.e. filaments of typically 1 to 5µm diameter are known in the art. Melt-blown sheet material comprising hydrophobic polymers, such as polyolefins, possesses a degree of resistance to water droplets and to solid particulates while retaining gas permeability and vapour permeability properties. However, such structures typically having an average pore size of about 15µm do not have sufficiently good barrier properties enabling them to be used in demanding applications. Such materials, when exposed to extreme conditions such as wind-driven rain and the like, are prone to leakage which is thought to be caused by continuous flexing of the porous structure permitting the invasion of water droplets and so-called water micro-droplets into the material.

**[0004]** It has been found that typical meltblown materials, having an average pore size of about 15µm and a basis weight of about 40g/m<sup>2</sup>, when incorporated into a structure intended for use as a roofing underlay, exhibit poor barrier properties when exposed to water spray. The barrier properties of the meltblown layer may be enhanced by the use of hydrophobic additives, such as organic fluorocarbon derivatives, which further increase the hydrophobic character of the surface of the fibres. Such additives are known in the art and may be added to the fibre surface by a topical application or may be added as a melt additive. However, even with the advantage conferred by the use of such hydrophobic additives, it has been found that meltblown fabrics with an average pore size of about 15µm and a base weight of less than about 40g/m<sub>2</sub> do not possess adequate barrier properties when exposed to water spray.

**[0005]** It is an object of this invention to provide gas permeable and/or vapour permeable non-woven fabrics incorporating fibrous materials so arranged as to provide water droplet and solid particle barrier properties to such fabrics.

**[0006]** The present invention provides a laminated fabric comprising at least two layers of non-woven sheet material, said fabric comprising (i) a first layer of compressed melt-blown material having an average pore size diameter in the range of from 1µm to about 8µm, laminated to (ii) a second layer of a material having an open porous structure.

**[0007]** The second layer is of a material having a spun-bonded structure.

**[0008]** Preferably, the compressed melt-blown material may have average pore size diameter of from about 3µm to about 7µm in its unlaminated state and from about 2µm to about 7µm in its laminated state. Advantageously, the compressed melt-blown material may have an average pore size diameter of about 4µm in its unlaminated state and from about 2µm to 4µm in its laminated state.

**[0009]** By compressing the melt-blown layer by any conventional compressing means, the porous structure thereof may be at least partially collapsed providing the compressed sheet with properties more usually associated with a film while maintaining its desirable fibrous characteristics.

**[0010]** Whilst compression of the unlaminated melt-blown material to give an average pore size within the preferred range, below the average pore size of uncompressed meltblown sheets, is advantageous, further compression to yield meltblown materials with an even smaller average pore size may be disadvantageous. Compression to yield melt-blown material with an average pore size at the lower end of the above mentioned ranges or beyond can cause embrittlement of the melt-blown material. Such embrittlement of the meltblown material would cause problems when the material is subsequently processed due to the ease with which the material might be torn. The water vapour permeability and air permeability of such very highly compressed materials also could be reduced to levels which are less advantageous in their intended applications.

**[0011]** It has been found that the average pore size of the meltblown sheet can be reduced during lamination to a second (or third) layer of a sheet material having an open porous structure. Lamination of meltblown sheets to such supportive, open layers may be effected by passing the sheet materials simultaneously through, for example, a point bonding calendering process. In this process, which is known in the art, a combination of heat and pressure is applied in an intermittent pattern known as point bonding. The area of such bond points is typically 7% to 40% of the total area of the bonded materials and may preferably be in the range 19% to 25%. It has been found that, although the compression due to such lamination is intermittent, a significant decrease in the

average pore size of the meltblown sheet is achieved. The extent of the reduction in average pore size of the meltblown sheet is typically about 20% to about 32% when the meltblown sheet is processed to form the intermediate layer of a three-layer structure, the two outer layers being spun-bonded layers, the structure being conveniently referred to an SMS (Spun-bonded/meltblown/spun-bonded) structure.

**[0012]** With typical, uncompressed meltblown materials, the degree of compression afforded by the lamination process is insufficient to yield a fabric having a meltblown layer with an average pore size within the range of this invention. The following data is given by way of example. A commercially available meltblown sheet of basis weight 18g/m<sup>2</sup> had a mean flow pore size of 14.7µm. After processing to an SMS structure using conditions known in the art, the mean flow pore size was 11.9µm, a reduction of 19%. In a second example, a meltblown sheet of 20g/m<sup>2</sup> had a mean flow pore size of 13.6µm. After processing to an SMS structure, the mean flow pore size was 9.5µm, a reduction of 30%. In a third example, a meltblown sheet of 13g/m<sup>2</sup> had a mean flow pore size of 20.3µm. After processing to an SMS structure, the mean flow pore size was 14.4µm, a reduction of 29%. In a further example, a meltblown sheet of basis weight 20g/m<sup>2</sup> had a mean flow pore size of 13.0µm. After processing to an SMS structure, the mean flow pore size was 9.2µm, a reduction of 29%. All of the examples were point bonded using a 19% bond area. Thus, in the above examples, although the average pore size was reduced by the lamination process, none of the laminated meltblown sheets achieved an average pore size within the pore size range according to this invention.

**[0013]** However, in carrying out the method in accordance with the present invention it has been found that compression of the meltblown sheet during the lamination process may be achieved even with meltblown sheets which have already been compressed to within the preferred range prior to lamination. Thus, an unlaminated, but compressed, melt-blown sheet of basis weight 25g/m<sup>2</sup> had a mean flow pore size of 3.4µm. After processing to an SMS structure using a point bond pattern of 19%, the mean flow pore size was 2.3µm, a reduction of 32%. This is a significant reduction within the range of the present invention. It has been found that an SMS structure, as defined in this example, has excellent water barrier properties when exposed to water spray.

**[0014]** Typically, the material having an open porous structure may be a spun-bonded polymer as described below.

**[0015]** In an example according to the invention, the layer of compressed melt-blown material may contain additives, such as hydrophobic melt additives and the like, for example an organic fluorocarbon derivative. Such additives are known in the art and may be added to polymers from which melt-blown materials are made

to improve their barrier properties. Examples of polymers from which compressed melt-blown materials may be made include polyolefinic polymers such as polyethylene and polypropylene homopolymers and co-polymers thereof and of mixtures of homopolymers and copolymers. Other additives, such as UV absorbing additives may be advantageously added to the melt polymer so as to inhibit the polymer degradation due to, for example, exposure to ultraviolet light.

**[0016]** Other polymeric materials may also be found suitable as will be apparent to the skilled reader.

**[0017]** Examples of other additives which may be added to the melt-blown material include conventional additives such as flame retardants, pigments and plasticisers, and the like. The fabrics of the invention may typically take the form of sheeting, strips and the like.

**[0018]** It has been found in tests, that while the particle barrier properties of the pre-compressed melt-blown material are improved if the pore size of the material is, on average, of from 1µm to about 8µm in accordance with the invention, preferably from 3µm to about 7µm, the preferred average pore size is about 4µm.

**[0019]** In certain applications, which do not form part of the invention, such as in bedding covers for allergy relief, the particle barrier properties of the finished bedding covers, tested under simulated use conditions, can exceed those of similar covers made from materials which are totally impermeable to air. While not intending to be bound by theory, it is believed that the high air permeability of the fibrous laminate structures of the present invention permits air to flow substantially through the large surface area of the bedding cover material rather than through the seams and closure devices. Materials which are substantially impermeable to air, when subjected to typical "in use" pressures, cause the internal air to be expelled predominantly through the seams and/or closure devices. The expelled air from conventional materials in such circumstances can carry solid particles, such as house dust mite faeces and other particulate material which may be allergenic matter thus rendering the protective cover inefficient. The materials according to the present invention are believed to have a good filtration efficiency due to the smaller average size of the pores of the melt-blown material forming the barrier layer.

**[0020]** The material of the second layer may comprise a fabric which may or may not possess the barrier qualities of the melt-blown material but which acts as a strengthening support therefor. It will be appreciated that any suitable second material, in providing improved supporting strength to the said non-woven laminated fabric, should not substantially reduce the gas and/or vapour permeability of the melt-blown material. Furthermore, it will be appreciated that any second material should be compatible with the compressed melt-blown material. Preferably, such a fabric may also possess the barrier properties of the compressed melt-blown material may be secured in contact therewith so as to provide

a supporting substrate providing backing strength to the said non-woven laminated fabric.

**[0021]** The second layer of spun-bonded material may be thermally point bonded to the said first layer by conventional means, such as by calendaring or ultrasonic welding.

**[0022]** In a preferred example according to the invention the non-woven laminated fabric may comprise at least three layers, in which the layer consisting of a compressed melt-blown material having an average pore size of from 1 $\mu$ m to about 8 $\mu$ m in its unlaminate state is placed between upper and lower spun-bonded polymer supporting layers.

**[0023]** The polymer used in the outer and inner spun-bonded polymer layers may be any suitable polymer which is capable of providing strengthening support to the non-woven laminated fabric without substantial deleterious effect to the gas permeability and/or vapour permeability thereof. The spun-bonded polymer may have an open porous structure and is selected at least on the basis that it has sufficient barrier and/or strengthening properties for its intended use. Suitable spun-bonded polymers can be selected from homopolymers such as polypropylene or polyethylene or can be selected from co-polymers, for example, polyethylene/polypropylene co-polymers or from mixtures of homopolymers and co-polymers depending on the intended application of the laminated fabric. For example, where a tri-laminate structure is to be used for unroofed or unslated roofing underlay it has been found that if the outer spun-bonded polymer layer is comprised of filaments of for example 20 $\mu$ m to 25 $\mu$ m per filament, when positioned in use as a roofing underlay at a surface coverage of at least 50g/m<sup>2</sup>, water droplet barrier properties of the laminate structure are further improved.

**[0024]** It will also be appreciated that additives may also be included in the outer spun-bonded polymer supporting layer. Examples of suitable additives include hydrophobic additives, such as organic fluorocarbon derivatives, ultraviolet light absorbing additives to inhibit polymer degradation, flame retardants and the like.

**[0025]** The invention further provides use of a building product obtainable by a method of producing a non-woven fabric as described above, involving the application of compressive force to a sheet portion of said melt-blown material having an average pore size diameter greater than a predetermined size, and carrying out a bonding step to point-bond said layers together to provide the laminated fabric, said melt-blown material of the fabric when the lamination step is complete having an average pore diameter of said predetermined size lying in the range of from 1 $\mu$ m to about 8 $\mu$ m.

**[0026]** Preferably, the melt-blown fabric of the first layer may be compressed to an average pore size in the range of from 1 $\mu$ m up to 8 $\mu$ m in its unlaminate state. Preferably, the average pore size may be from about 3 $\mu$ m to about 7 $\mu$ m. Most preferably the average pore size is about 4 $\mu$ m.

**[0027]** Typically, the melt-blown fabric of the first layer and the second layer(s) are bonded together in a laminated or layered structure, such as a sheet or strip.

**[0028]** The material having an open porous structure may be a spun-bonded polymer as herein described.

**[0029]** In an example according to the invention in order to provide, for example a roofing underlay fabric, two sheets of material having an open porous structure may be point bonded one to each side of a compressed melt-blown sheet fabric having an average pore size of between 1 $\mu$ m and 8 $\mu$ m thereby forming a tri-laminate sheet material in which the pore size of the melt blown sheet is further reduced within the range of 1 $\mu$ m to 7 $\mu$ m.

**[0030]** The invention finds particular use in articles comprising non-woven laminated fabrics of the invention such as roofing underlays, tarpaulins, camping equipment e.g. tents, building covers such as scaffolding covers and the like.

**[0031]** There will now be described several further embodiments of the invention. The description which is intended to be read with reference to the drawings is given by way of example only and not by way of limitation.

**[0032]** In the drawings:

Figure 1 shows a schematic representation of a two component laminate consisting of a compressed melt-blown barrier layer 1 and the supporting open porous structure 2;

Figure 2 shows a schematic representation of a three component laminate, and

Figure 3 shows an illustration of a three component laminate.

**[0033]** The laminate of Figure 2 comprises an upper supporting open porous layer 3, a compressed melt-blown layer 4 and a lower supporting open porous layer 5.

#### Example 1

**[0034]** A compressed polypropylene melt-blown layer 1 of basis weight 17 g/m<sup>2</sup> and having an average pore size of 7 $\mu$ m was thermally laminated to a polypropylene spun-bonded non-woven fabric 2 of basis weight 33 g/m<sup>2</sup>.

#### Example 2

**[0035]** The layers 1 and 2 of Example 1 were then point bonded in a laminating step which used sufficient pressure further to reduce the average pore size of the melt-blown layer to 5 $\mu$ m. The fabric may be used for the manufacture of industrial protective apparel not according to the invention.

Example 3

**[0036]** The material comprised of an upper layer 3 of UV stabilised polypropylene spun-bonded non-woven fabric of basis weight 70 g/m<sup>2</sup>, a pre-compressed polypropylene melt-blown layer 4 of basis weight 20 g/m<sup>2</sup>, having an average pore size of 4µm and containing a hydrophobic additive and a lower layer 5 of UV stabilised polypropylene spun-bonded non-woven fabric, the layers 3, 4 and 5 being thermally bonded. This material is suitable for application as a roofing underlay.

Example 4

**[0037]** The material comprised an upper layer 6 of polypropylene spun-bonded non-woven fabric of basis weight 20 g/m<sup>2</sup>, a compressed polypropylene melt-blown layer 7 of basis weight 20 g/m<sup>2</sup> having an average pore size of 4µm and a lower layer 8 of polypropylene spun-bonded non-woven fabric of basis weight 20 g/m<sup>2</sup>.

**[0038]** Various modifications may be made within the scope of the invention.

**Claims**

1. Use as a building material of a laminated fabric comprising at least two layers of non-woven sheet material, said fabric comprising:
  - (i) a first layer (4;7) of compressed melt-blown material having an average pore size diameter in the range from 1µm to about 8µm, and
  - (ii) a second layer (3;6) of a material having an open porous structure,

and wherein the second layer (3;6) of material is of a spun-bonded structure.
2. Use as a building material of a laminated fabric as claimed in claim 1, wherein the average pore size diameter of the first layer (4;7) material is in the range of about 2µm to 7µm.
3. Use as a building material of a laminated fabric as claimed in claim 2, wherein the average pore size of the first layer (4;7) material is in the region of 2µm to 4µm.
4. Use as a building material of a laminated fabric as claimed in any one of the preceding claims wherein the first layer (4;7) material is a homopolymer of polyethylene or polypropylene or a co-polymer thereof.
5. Use as a building material of a laminated fabric as claimed in any one of the preceding claims, wherein additives are added to the material of the first layer, which additives comprise hydrophobic additives,

UV absorbing additives, flame retardants, pigments and/or plasticisers.

6. Use as a building material of a laminated fabric as claimed in any one of the preceding claims wherein the second (3;6) layer is bonded to one side of the first layer (4;7) and a third layer (5;8) having an open pore structure is bonded to the opposite side of the first layer.
7. Use as a building material of a laminated fabric as claimed in claim 6, wherein the third layer (5;8) has identical or closely similar composition and structure to that of the second layer.
8. Use as a building material of a laminated fabric as claimed in any one of the preceding claims in which the layers (3,4,5,;6,7,8) comprising the fabric are bonded by a point-bonding technique.
9. Use as a building material of a laminated fabric as claimed in claim 8, wherein the point bonding technique comprises ultrasonic spot welding.
10. Use as a building material of a laminated fabric as claimed in claim 8, wherein the point bonding technique comprises a calendering treatment.
11. Use as a building material of a laminated fabric as claimed in any one of claims 8 to 10, wherein the total area of said points is between 7 and 40% of the fabric area and preferably between about 19% and 25%.
12. Use as a building material of a laminated fabric as claimed in any one of the preceding claims wherein the compressed melt-blown material is rendered into a compressed condition during lamination of the layers.
13. Use as a building material of a laminated fabric as claimed in any one of claims 1 to 11 wherein the melt-blown material is pre-compressed to reduce the average pore size diameter thereof and is further compressed to the required average pore size during lamination of the layers.
14. Use as a building material of a laminated fabric as claimed in any of claims 1 to 13 for a roofing underlay.
15. Use as a building material of a laminated fabric as claimed in any of claims 1 to 13 for a building cover.

**Patentansprüche**

1. Verwendung als Baumaterial eines laminierten

Stoffes, umfassend wenigstens zwei Schichten nichtgewebten Schichtmaterials, wobei der Stoff folgendes umfasst:

(i) eine erste Schicht (4; 7) aus komprimiertem schmelzgeblasenen Material mit einem Durchschnittsporengrößendurchmesser im Bereich von 1 µm bis ungefähr 8 µm, und

(ii) eine zweite Schicht (3; 6) aus einem Material, das eine offene porige Struktur aufweist,

und wobei die zweite Materialschicht (3; 6) aus einer spinngebundenen Struktur hergestellt ist.

2. Verwendung als Baumaterial eines laminierten Stoffes gemäß Anspruch 1, wobei der Durchschnittsporengrößendurchmesser des Materials der ersten Schicht (4; 7) im Bereich von ungefähr 2 µm bis 7 µm liegt.
3. Verwendung als Baumaterial eines laminierten Stoffes gemäß Anspruch 2, wobei die Durchschnittsporengröße des Materials der ersten Schicht (4; 7) im Bereich von 2 µm bis 4 µm liegt.
4. Verwendung als Baumaterial eines laminierten Stoffes gemäß einem der vorhergehenden Ansprüche, wobei das Material der ersten Schicht (4; 7) ein Homopolymer aus Polyethylen oder Polypropylen oder ein Copolymer daraus ist.
5. Verwendung als Baumaterial eines laminierten Stoffes gemäß einem der vorhergehenden Ansprüche, wobei dem Material der ersten Schicht Zusätze beigefügt werden, die hydrophobe Zusätze, UV-absorbierende Zusätze, Flammschutzmittel, Pigmente und/oder Weichmacher umfassen.
6. Verwendung als Baumaterial eines laminierten Stoffes gemäß einem der vorhergehenden Ansprüche, wobei die zweite Schicht (3; 6) mit einer Seite der ersten Schicht (4; 7) verbunden ist und eine dritte Schicht (5; 8) mit einer offenen porigen Struktur mit der gegenüberliegenden Seite der ersten Schicht verbunden ist.
7. Verwendung als Baumaterial eines laminierten Stoffes gemäß Anspruch 6, wobei die dritte Schicht (5; 8) eine der zweiten Schicht identische oder sehr ähnliche Zusammensetzung und Struktur aufweist.
8. Verwendung als Baumaterial eines laminierten Stoffes gemäß einem der vorhergehenden Ansprüche, wobei die den Stoff umfassenden Schichten (3, 4, 5; 6, 7, 8) durch eine Punktbindungstechnik miteinander verbunden sind.

9. Verwendung als Baumaterial eines laminierten Stoffes gemäß Anspruch 8, wobei die Punktbindungstechnik Ultraschallpunktschweißen umfasst.

5 10. Verwendung als Baumaterial eines laminierten Stoffes gemäß Anspruch 8, wobei die Punktbindungstechnik eine Kalandrierbehandlung umfasst.

11. Verwendung als Baumaterial eines laminierten Stoffes gemäß einem der Ansprüche 8 bis 10, wobei die Gesamtfläche der Punkte zwischen 7% und 40%, vorzugsweise zwischen ungefähr 19% und 25% der Stofffläche ist.

12. Verwendung als Baumaterial eines laminierten Stoffes gemäß einem der vorhergehenden Ansprüche, wobei das komprimierte schmelzgeblasene Material während des Laminierens der Schichten in einen komprimierten Zustand gebracht wird.

20 13. Verwendung als Baumaterial eines laminierten Stoffes gemäß einem der Ansprüche 1 bis 11, wobei das schmelzgeblasene Material vorkomprimiert wird, um dessen Durchschnittsporengrößendurchmesser zu reduzieren, und während des Laminierens der Schichten bis zur erforderlichen Durchschnittsporengröße weiter komprimiert wird.

25 14. Verwendung als Baumaterial aus einem laminierten Stoff wie in einem der Ansprüche 1 bis 13 beansprucht für eine Dachabdeckungsunterlage.

30 15. Verwendung als Baumaterial aus einem laminierten Stoff wie in einem der Ansprüche 1 bis 13 beansprucht für eine Gebäudeabdeckung.

#### Revendications

35 1. Utilisation, en tant que matériau de construction, d'un tissu stratifié comprenant au moins deux couches d'un matériau en forme de feuille non tissée, ledit tissu comprenant :

(i) une première couche (4;7) d'un matériau comprimé fondu-soufflé, possédant des pores dont la valeur du diamètre moyen se situe dans la gamme de 1 µm à environ 8 µm, et

(ii) une seconde couche (3;6) d'un matériau possédant une structure à pores ouverts, et

dans lequel la seconde couche (3;6) du matériau est une structure non tissée.

40 45 50 55 2. Utilisation, comme matériau de construction sous la forme d'un tissu stratifié selon la revendication 1, dans lequel le diamètre moyen des pores du matériau de la première couche (4;7) se situe dans la

gamme comprise entre environ 2  $\mu\text{m}$  et 7  $\mu\text{m}$ .

3. Utilisation, comme matériau de construction sous la forme d'un tissu stratifié selon la revendication 2, dans lequel la taille moyenne des pores du matériau de la première couche (4;7) se situe dans la gamme comprise entre 2  $\mu\text{m}$  et 4  $\mu\text{m}$ .

4. Utilisation, comme matériau de construction sous la forme d'un tissu stratifié selon l'une quelconque des revendications précédentes, dans lequel le matériau de la couche (4;7) est un homopolymère de polyéthylène ou de polypropylène ou un copolymère de telles substances.

5. Utilisation, en tant que matériau de construction, d'un tissu stratifié selon l'une quelconque des revendications précédentes, dans lequel des additifs sont ajoutés aux matériaux de la première couche, lesquels additifs comprennent des additifs hydrophobes, des additifs absorbant le rayonnement ultraviolet, des agents de retardement de propagation de la flamme, des pigments et/ou des agents plastifiants.

6. Utilisation, en tant que matériau de construction, d'un tissu stratifié selon l'une quelconque des revendications précédentes, dans lequel la seconde couche (3;6) est réunie à une face de la première couche (4;7), et une troisième couche (5;8) possédant une structure à pores ouverts et reliée à la face opposée de la première couche.

7. Utilisation, en tant que matériau de construction, d'un tissu stratifié selon la revendication 6, dans lequel la troisième couche (5;8) possède une composition et une structure qui sont identiques ou très similaires à celles de la seconde couche.

8. Utilisation, en tant que matériau de construction, d'un tissu stratifié selon l'une quelconque des revendications précédentes, dans lequel les couches (3,4,5;6,7,8) constituant le tissu sont réunies selon une technique de liaison ponctuelle.

9. Utilisation, en tant que matériau de construction, d'un tissu stratifié selon la revendication 8, dans lequel la technique de liaison ponctuelle comprend un soudage ultrasonique par points.

10. Utilisation, en tant que matériau de construction, d'un tissu stratifié selon la revendication 8, dans lequel la technique de liaison par points comprend un traitement de calandrage.

11. Utilisation, en tant que matériau de construction, d'un tissu stratifié selon l'une quelconque des revendications 8 à 10, dans lequel la surface totale

desdits points est comprise entre 7 et 40 % de la surface du tissu et de préférence entre environ 19 % et 25 %.

5 12. Utilisation, en tant que matériau de construction, d'un tissu stratifié selon l'une quelconque des revendications précédentes, dans lequel le matériau fondu-soufflé comprimé est amené dans un état comprimé pendant la superposition des couches.

10 13. Utilisation, en tant que matériau de construction, d'un tissu stratifié selon l'une quelconque des revendications 1 à 11, dans lequel on applique une pré-compression au matériau fondu-soufflé pour réduire le diamètre moyen des pores de ce matériau, et on le comprime en outre pour obtenir la taille moyenne requise des pores pendant la superposition des couches.

15 20 14. Utilisation, en tant que matériau de construction, sous la forme d'un tissu stratifié selon l'une quelconque des revendications 1 à 13 pour un garnissage sous-jacent de toit.

25 15. Utilisation, en tant que matériau de construction, sous la forme d'un tissu stratifié selon l'une quelconque des revendications 1 à 13 pour une couverture de bâtiment.

30



35

40

45

50

55

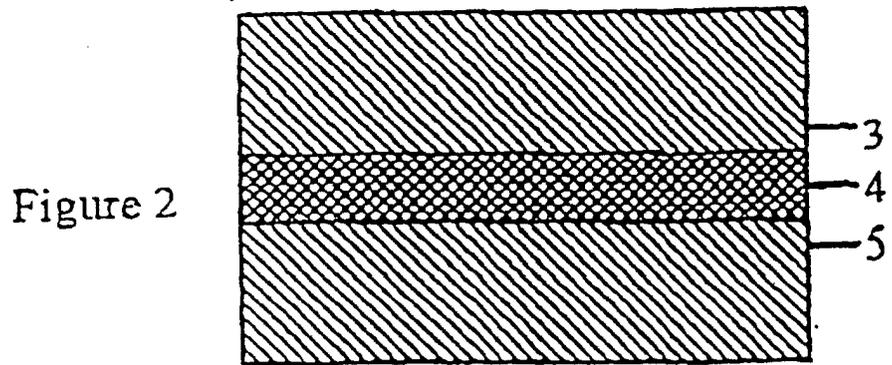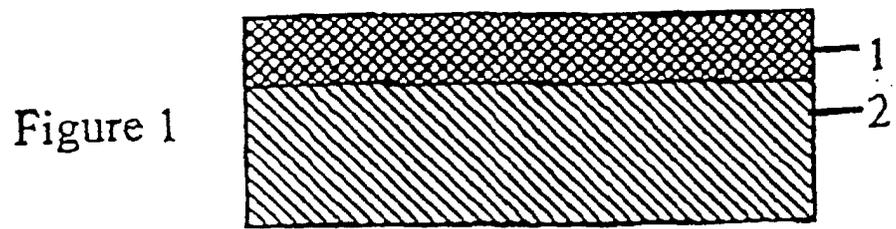

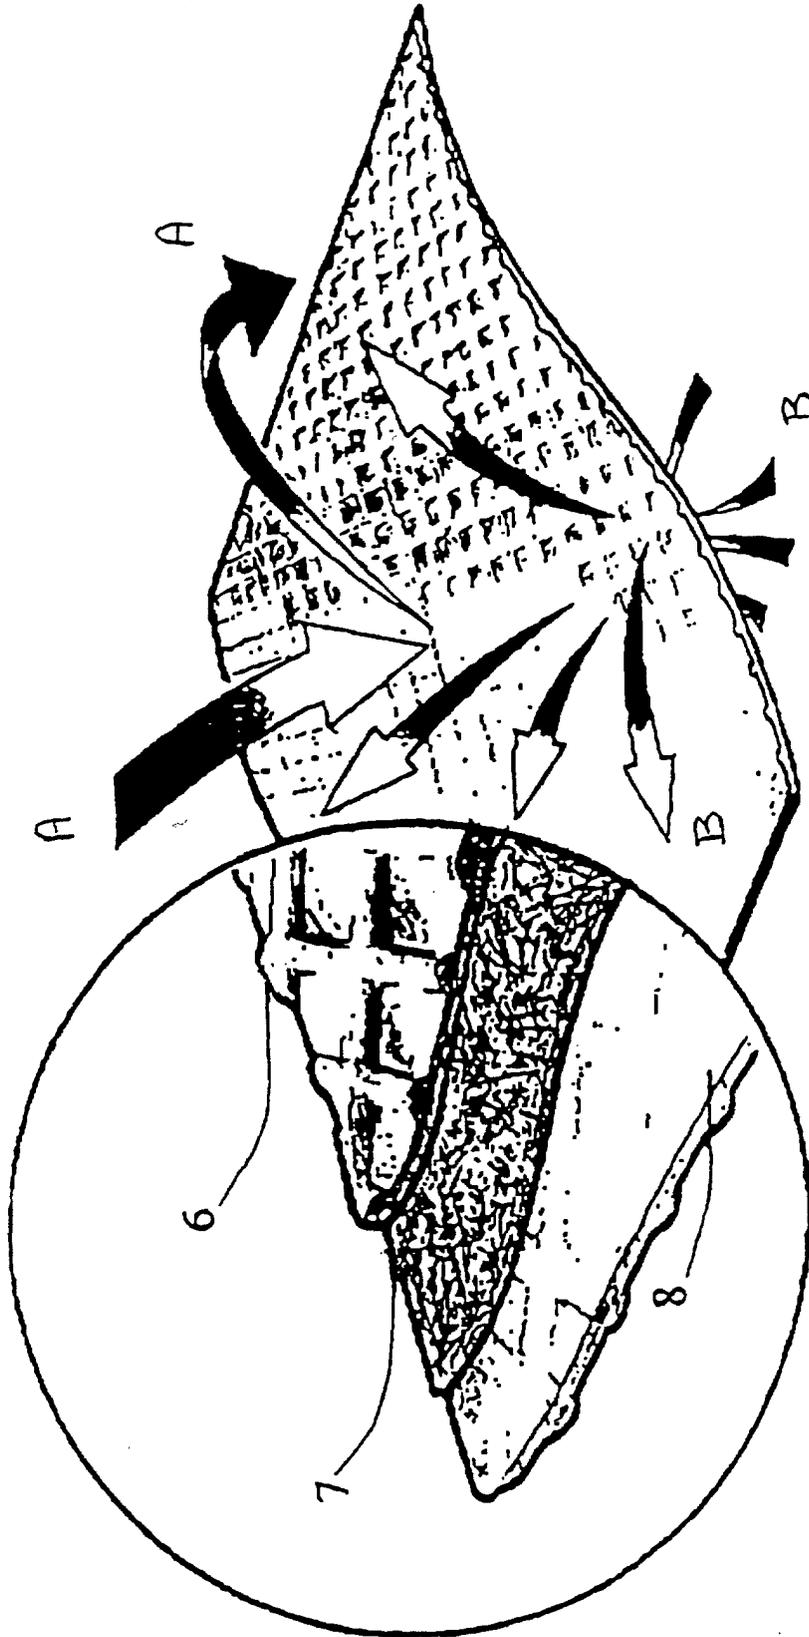


Figure 3