



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 744 232 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
18.06.2003 Bulletin 2003/25

(51) Int Cl.7: **B21D 51/52**

(21) Application number: **96302720.6**

(22) Date of filing: **18.04.1996**

(54) **Metal package and a method for making a metal package**

Blechverpackung und ihr Herstellungsverfahren

Boitier métallique et procédé de fabrication d'un boitier métallique

(84) Designated Contracting States:
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE**
Designated Extension States:
LT LV SI

(30) Priority: **18.04.1995 US 423717**

(43) Date of publication of application:
27.11.1996 Bulletin 1996/48

(73) Proprietor: **Philip Morris Products Inc.
Richmond Virginia 23234 (US)**

(72) Inventors:
• **Evers, Donald H.
Richmond, Virginia 23220 (US)**
• **Fleenor, John Jerome
Midlothian, Virginia 23113 (US)**
• **Gergely, Alex Sandor
Powhatan, Virginia 23139 (US)**

- **Gregory III, Joseph Lee
Richmond, Virginia 23235 (US)**
- **Hawkins, John
Midlothian, Virginia 23113 (US)**
- **Jeanrenaud, Guy J.
Richmond, Virginia 23236 (US)**
- **Newsome, Reginald W.
Richmond, Virginia 23236 (US)**
- **Wilder, Duane C.
Chesterfield, Virginia 23832 (US)**

(74) Representative: **Marlow, Nicholas Simon et al
Reddie & Grose
16, Theobalds Road
London WC1X 8PL (GB)**

(56) References cited:
EP-A- 0 326 390 EP-A- 0 676 342
DE-C- 840 386 US-A- 2 445 548
US-A- 4 771 882 US-A- 5 359 872

EP 0 744 232 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method for making a package from a metal material, such as aluminum. More particularly, the present invention relates to a method for making an aluminum package from a blank by preparing a blank from a sheet of metal, providing folding lines on the blank, pretreating the folding lines to prepare the metal for folding and folding the blank on the prepared folding lines.

[0002] Cigarette packages are typically made from paper or paperboard, and may include an inner foil liner and an outer film wrapper. Cigarette packages contain a preselected bundle of cigarettes and serve to protect the cigarettes from mechanical and environmental damage. In addition, a package maintains the freshness of the cigarettes, which deteriorates with exposure to air.

[0003] A serious problem with packaging of all kinds is in disposal. Landfills and other disposal sites are becoming overwhelmed by packaging materials, and alternatives, such as reusable or recyclable packaging are being sought. While paper-based cigarette packaging can be recycled, there are many practical impediments to paper recycling. For example, paper packages typically include paints, inks and coatings that are difficult and expensive to separate from the paper. In addition, packages are assembled of different materials, plastics, foils, and others, that must be separated before the individual materials can be recycled. Another difficulty is that paper can be recycled only a limited number of times before the recovered pulp becomes unusable.

US-A-2 445 548 discloses a method for making metal packages comprising cutting blanks from a sheet of metal. The blanks have fold lines on them enabling them to be erected into rectangular packages.

[0004] The present invention provides a method for making metal packages comprising providing a sheet of metal for forming a plurality of package blanks; defining individual package blanks on the sheet of metal with folding lines on each blank and separating lines between individual blanks; separating the individual pretreated package blanks from the sheet; and folding the blank along the folding lines to form a hollow, substantially rectangular shaped package, characterised in that the method further comprises: pretreating the sheet in narrowly confined regions around folding lines of the blank to facilitate folding of the metal by: preparing the said regions around the folding lines for heating by reducing light reflectance of the sheet in the region of the folding lines; and heating the sheet in the said narrowly confined regions, wherein the heating includes: directing a beam of laser light at the sheet in the region around the folding lines for a predetermined length of time; directing light from an infrared light source to the region of the folding lines; positioning a heated platen in contact with the sheet along the narrowly confined regions for a predetermined time and simultaneously tensioning the sheet to prevent distortion; contacting for a predeter-

mined time a surface of the sheet with a die plate carrying strip heaters heated to a predetermined temperature, the strip heaters being positioned to correspond with the narrowly confined regions; or positioning an inductive heat source in proximity to the narrowly confined regions of the sheet for a predetermined time:

[0005] According to a preferred embodiment of the invention, the blank has a lateral and a longitudinal direction. The blank is divided into segments and folded so that a package formed from the blank has at least a front panel, a rear panel and opposing side panels, the folding lines between adjacent panels being longitudinally oriented. The segments that become the panels are set out on the blank in relative lateral positions, the rear panel segment being adjacent a first side panel segment, which is adjacent to the front panel segment, and which is adjacent to a second side panel segment. The blank is formed from the sheet of aluminum so that, preferably, the longitudinal folding lines substantially align with the grain direction of the metal sheet to facilitate folding and forming the package.

[0006] Another preferred embodiment of the invention includes providing an inner frame, such as at an open edge of the body portion where the body portion and a lid portion of the package meet. The inner frame provides an engaging surface cooperating with the lid for retaining the lid in a closed position adjacent to the body. With the lid in a closed position, the inner frame also provides a barrier at a seam between the lid and body to help preserve freshness of the contents of the package.

[0007] The inner frame may be formed from a separate metal blank and attached to the package blank. Alternatively, the blank is shaped and cut so that an inner frame is formed as part of the package blank. In this embodiment, the blank is creased so that the segments forming the front and rear panels are positioned longitudinally relative to each other.

[0008] In another preferred embodiment of the invention, a blank is formed in separate body and lid portions which are folded into hollow, tubular shapes. Preferably, a top end cap, and a bottom end cap are provided to close the top of the lid portion and the bottom of the body portion, respectively. The body portion and the lid portion are fitted together and joined by a flexible adhesive tape that forms a hinge. Preferably the top end cap has an opening aperture which provides access to an interior of the tube, and reclosable sealing means is provided to selectively close the aperture.

[0009] In a preferred embodiment of the method of the invention, the pretreating step comprises localized heating of narrowly confined regions around the folding lines and is performed by directing a laser light beam at the predetermined regions. The focus of the light beam is positioned a predetermined distance from a surface of the blank so that a beam of predetermined width strikes the surface of the sheet. A shield having an aperture for the light beam is interposed between the blank and the

laser light to prevent reflected light from returning to and damaging the laser. Alternatively, an infrared light source is used to provide the energy to heat the blank, and is directed at the surface of the blank at the predetermined region around the folding lines. According to a further embodiment of the invention, the heating step may be performed by positioning a heated platen in contact with the sheet in proximity with the predetermined regions for conductive heating, while simultaneously tensioning the sheet to prevent distortion.

[0010] According to yet another embodiment, the heating step may be performed by positioning an inductive heat source, for example, an electromagnetic field, in proximity with the sheet at the predetermined areas to heat the predetermined areas.

[0011] A further aspect of the heating step includes preparing the surface of the blank to absorb light energy by reducing surface reflectance at the region around the folding lines. In this step, the surface may be darkened by roughening the surface of the sheet, or by application of coloring material. Other suitable means are also possible.

[0012] According to another preferred embodiment of the invention, printed material and a clear protective coating are applied to the blank after the blank is pretreated, but before it is folded. The printed material includes labelling, graphics and coloring. The printed material may be incorporated in the coating, preferably reverse printed on the underside of the coating, or directly printed on the surface of the blank, and the coating applied over the printed matter.

[0013] A metal lidded package manufactured with the method of the present invention is inherently air impermeable, except where the lid portion is joined to the body portion. Fusion of the coating or film assists in forming an impermeable seal when bonding folded flaps at a top and bottom of the package. The package thus eliminates the need for a total enclosure by an outer plastic film to seal the package to preserve freshness. A band of shrink film or an adhesive backed tape, removable by a consumer, is applied over the seam between the lid portion and the body portion of the package to close this zone of the mitered seam to the outside.

[0014] The present invention can be further understood with reference to the following description in conjunction with the appended drawings, wherein like elements are provided with the same reference numerals. In the drawings:

Fig. 1 is a perspective view of a metal cigarette package according to one aspect of the present invention;

Fig. 2 is a plan view of a cigarette package blank for forming the package of Fig. 1;

Fig. 3a is a schematic illustration of a heating step of the method of the present invention for softening the hard tempered aluminum along folding crease zones;

Fig. 3b is a schematic illustration of an alternative embodiment of a heating step incorporating conductive heating means;

Fig. 3c is a schematic illustration of another alternative embodiment of a heating step incorporating alternative conductive heating means;

Fig. 3d is a schematic illustration of a further alternative embodiment of a heating step using inductive heating means;

Fig. 4 is a plan view of an inner frame for the cigarette package formed from the blank of Fig. 2;

Fig. 5 is a plan view of an alternative embodiment of a cigarette package blank;

Fig. 6 is a plan view of a body portion blank of another alternative embodiment of a cigarette package;

Fig. 7 is a plan view of a lid portion blank for the body portion blank of Fig. 6;

Fig. 8 is a bottom view of a bottom cap for the body portion blank of Fig. 6;

Fig. 9 is a side view of the bottom cap of Fig. 8;

Fig. 10 is a top view of a top cap for the lid portion blank of Fig. 7;

Fig. 11 is a side view of the top cap of Fig. 10;

Fig. 12 is a perspective view of the body portion of Fig. 6 folded and assembled;

Fig. 13 is a perspective view of the lid portion of Fig. 7 folded and assembled;

Fig. 14 is a plan view of an alternative embodiment of a package blank;

Fig. 15 is a perspective view of a package formed from the blank of Fig. 14; and,

Fig. 16 is a bottom plan view of a top cap of the package of Fig. 15.

[0015] Fig. 1 is a perspective view of a cigarette package 10 of one aspect of the present invention. The package 10 comprises a body portion 20 and a lid portion 50. The body 20 and the lid 50 are joined at a hinge 25, so that the lid can pivot relative to the body to an open position, illustrated in Fig. 1, to provide access to contents (not illustrated) of the package 10. An inner frame 90 is provided in the package 10 at an upper end of the body 20. The inner frame 90 extends from the upper edges of the body 20 to frictionally engage the lid 50 when the lid is in a closed position to hold the lid in a closed position adjacent to the body.

[0016] The metal package 10 of the present invention eliminates the need for certain packaging materials found in conventional paper packages. The inner frame 90 is not necessary for structural integrity, and, therefore, is smaller and uses less material than the structural inserts of conventional paperboard packages. The metal package 10, once the seam between the lid 50 and the body 20 is sealed, is inherently air and moisture impermeable. The package 10 does not require an outer film wrapper, or an inner foil wrapper around the cigarettes, which may advantageously be omitted, saving

manufacturing time and material, and disposable waste.

[0017] A preferred embodiment of a package blank 80, illustrated in Fig. 2, is first described. The method of the present invention is described below in conjunction with the preferred embodiment as an illustrative example. The blank 80 is formed from a sheet of metal, preferably aluminum (not illustrated). Generally, the sheet is positioned and separating lines 82 are designated at predetermined locations to divide the sheet into package blanks 80. The separating lines 82 define an outer edge of the blank 80 that allow the blank to remain part of the sheet while subsequent operations are performed, and be easily separated from the metal sheet. The metal sheet is also provided with folding lines where the blank 80 is folded to form the package.

[0018] The folding and separating lines define segments of the body portion 20 and the lid portion 50 that form the finished package 10, as illustrated in Fig. 1. The body portion segments include a rear panel 22, a first side panel 24, a front panel 26, a second side panel 28 and a joining panel 30. As shown in Fig. 2, the panel segments are arranged adjacent to one another, and are separated by folding lines between the panels, a rear-first side folding line 32, a first side-front folding line 34, a second side-front folding line 36, and a second side-rear folding line 38.

[0019] The body portion 20 includes bottom segments, corresponding in relative location to the body segments, that are folded to form a bottom closure of the body. The segments include a rear flap 40, a first side flap 42, a front flap 44, and a second side flap 46. Because of the strength and stability of metal, the flaps forming the bottom closure need not overlap entirely, as is common in paperboard packages. The flaps can therefore be sized to overlap an amount sufficient for bonding and forming the closure, thus saving material.

[0020] The lid portion 50 folding lines define lid segments that are folded to form a rear part 52, a first side part 54, a front part 56, a second side part 58 and a rear joining part 59. As illustrated in Fig. 2, the lid segments are arranged on the blank 80 so that corresponding segments, for example, the rear panel 22 and the rear part 52, are adjacent to one another.

[0021] Between the lid segments and the body segments for the first and second sides and the front, the blank 80 is scored-to provide frangible separating lines, that is, locations at which the segments are separated by the consumer so that the lid 50 may be pivoted from the body 20 to open the completed and filled package 10. The frangible lines include a first side break 60, a front break 62, and a second side break 64. As illustrated in Fig. 1, the frangible lines allow the first 54 and second 58 side parts and the front part 52 of the lid portion 50 to separate from the first 24 and second 28 side panels and the front panel 26 for opening the package 10. A rear folding line 66 and joining part folding line 68 form a hinge in the folded package 10.

[0022] The lid portion 50 includes segments that are

folded to become top closure flaps in the folded package 10. These segments, corresponding in relative location to the lid segments, are the rear top flap 70, first side top flap 72, front to flap 74 and second side top flap 76. As described in connection with the bottom closure flaps, the top flaps may also be sized to overlap only an amount sufficient for bonding and forming the top closure, without entirely overlapping as is common in paper packages.

[0023] The blank 80 is preferably oriented on the sheet so that a grain direction of the metal is aligned substantially in the direction of arrow A in Fig. 2, although this is not required. In the preferred orientation, the relatively long folding lines 32, 34, 36 and 38 are aligned in parallel with the grain direction, which facilitates folding the blank along the folding lines.

[0024] The method for forming the blank 80 is described for the package blank 80 set forth above, but also applies to alternative embodiments of package blanks which are described below. Although the method is described herein for a single blank on the sheet, it is understood that providing separating lines, scoring, and pretreating the sheet provides a multiplicity of blanks that may be formed simultaneously for separation into individual packages of the present invention.

[0025] The method includes the steps of first, providing a metal material, preferably aluminum or another suitable material, in a coiled sheet. The metal sheet is generally hard tempered and is in an range of of about 0.1 to 0.3mm (0.005 to 0.012 inches) thick. The sheet is provided with registration holes in areas that are not used for forming blanks to assist in precise positioning of the sheet by the various apparatuses performing the steps described below.

[0026] The sheet is unwound from the coil and directed to a station where the sheet is positioned, and then provided with folding lines and separating lines. The sheet is also scored for the frangible lines described above in connection with Fig. 2. Scoring leaves a sufficient amount of material holding the metal segments together to remain intact until broken by a consumer.

[0027] The accurate folding of metal sheet typically involves overcoming the tendency of the metal to return elastically to its original flat shape, and of the hardened metal to crack while folding. To overcome this tendency, the sheet is pretreated in a narrowly confined region of the folding lines, illustrated by the cross hatched areas in Fig. 2, to facilitate the folding of the metal. In a preferred embodiment of the invention, pretreating is done by heating for localized stress relief annealing of the blank in the predetermined narrowly confined regions around the folding lines. It is not desired, however, to heat all of the metal. Excess pretreating would make the package blank difficult to form accurately along the folding lines. The major portions which form the panels and parts described above, remain hardened to provide strength and stability for the package. The blank 80 is therefore heated only in the cross hatched regions in

proximity to the folding lines, indicated in Fig. 2.

[0028] A method of pretreating by localized stress relief annealing of the folding lines is illustrated schematically in Fig. 3a. Lightsource 100 is positioned above the metal sheet 102. Light energy 104 from the light source 100 is directed to a predetermined area of the metal sheet 102 corresponding the folding lines of Fig. 2. The light energy 104 is precisely focused by a lens 106 so that a focal point 108 of the light is a predetermined distance from the sheet 102, resulting in a desired beam width 112 striking the sheet. Relative movement between the metal sheet 102 and the light source 100 is controlled so that an amount of energy sufficient for stress relief annealing is transferred to the sheet, that is, so that the metal may be bent without cracking. A shield 110 is interposed between the lens 106 and the metal sheet 102 so that light reflected from the sheet does not return to the light source 100, thus avoiding damage to the light means.

[0029] In a preferred embodiment of the method, the lightsource 100 is a laser. The output energy of the laser is controlled so that only a predetermined amount of heat is transferred to the sheet. Laser light advantageously provides a narrow beam that can be directed to the predetermined folding lines without also heating surrounding areas, which are to remain hardened.

[0030] To facilitate absorption of light energy by the metal sheet 102, the reflectance of the sheet is first reduced. The sheet 102 is darkened by mechanically roughening the surface. Alternatively, a coloring agent may be applied or other suitable means of reducing the reflectance employed.

[0031] Alternatively, an infrared light source may be employed as the heating means, with a suitable power control. A light shield having a slot of predetermined size is positioned between the infrared source and the sheet to limit the light to a narrowly confined area as previously described.

[0032] As an another alternative, shown schematically in Fig. 3b, the heating step may be performed by positioning at least one heated platen 113 in contact with the sheet 102 for a predetermined duration. The platens 113 are formed on an outer surface with raised areas 114 to contact the sheet 102 at the narrowly confined areas. The sheet 102 is passed between a platen 113 and a supporting surface, or between two platens as illustrated, at a predetermined rate. Contact with the heated, raised areas 114 heats the narrowly confined areas of the sheet. The temperature of the heated areas 114 is determined by the speed at which the sheet 102 is moved through the platens 113, that is, for the duration of contact between the platen and the sheet. Relatively higher temperatures being necessary for faster rates of travel. To prevent distortion of the sheet during heating, the sheet 102 is gripped and held in tension as it is moved between the platens 113.

[0033] An alternative method of contact heating illustrated schematically in Fig. 3c, employs strip heaters

115 mounted in a die plate 116 and connected to any suitable source of power. A bottom die plate 117 supports the sheet 102. The strip heaters 115 are located in the die plate 116 to contact the sheet 102 at the folding locations. The die plate 116 is moved in to contact with the sheet 102 for a limited duration, preferably about one second, and the strip heaters 115 heat the folding locations to a temperature in a range of 675°C to 750°C. The die plate 116 absorbs heat from the strip heaters 115 to prevent unwanted heating of adjacent areas of the sheet 102. It is advantageous if the bottom plate 117 is heated to approximately 500°C so that the sheet is heated before being contacted by the die plate 116 and strip heaters 115.

[0034] According to another alternative illustrated schematically in Fig. 3d, the heating step is performed by positioning an inductive heat source, for example, an electromagnetic field, in close proximity with the sheet 102 selectively at the narrowly confined areas. The inductive heat source is formed as a head 118 with a wire grid regions 119 arranged in a surface of the head to provide an electromagnetic field at selective areas. The sheet 102 is passed in proximity with the head 118 so that the inductive heat source areas 119 are selectively positioned in proximity with the narrowly confined regions of the sheet 102 to heat the narrowly confined areas. Because the heat energy source is an electromagnetic field, the head 118 does not make contact with the sheet as the sheet passes.

[0035] Non-contact heating means are preferred because of the heat conductive ability of aluminum. Conductive heating is difficult to limit to the narrowly confined areas because the aluminum sheet conducts so efficiently, acting as a heat sink when in contact with a heat source. Inductive heating, which does not require contact of the heat source with the sheet, allows better control of the heating of the sheet.

[0036] In a preferred embodiment of the method, the pretreating of the folding lines is done entirely by heating the sheet. Alternatively, mechanical stress may be applied in the regions around the folding lines to supplement heating to ensure good fold lines in the finished package. Mechanical stressing without heating may also be employed for pretreating the folding lines between the top flaps and the lid parts, and the bottom flaps and the body panels.

[0037] Alternatively, the package blank may be partially folded in a progressive series of steps to form the package. By partial, progressive folding cracking can be avoided because the stress applied to the metal in any single step is reduced and the metal material can recover between folding steps.

[0038] After the folding lines are prepared, the sheet is partially die cut to form the broken out spaces between the flaps. The outer edges 82 are not cut at this time, because the blank remains part of the sheet for handling in subsequent steps. The partial die cutting step creates gaps between rear top flap 70 and first side top flap 72,

between first side top flap 72 and front top flap 74, and between the front top flap 74 and the second side top flap 76. Similarly, the die cutting step forms the gaps between the first side bottom flap 42 and the rear bottom flap 40 and the front bottom flap 44, and between the front bottom flap 44 and the second side bottom flap 46.

[0039] In a subsequent step, the sheet is washed and etched to remove lubricating oil, dirt, and other impurities on the sheet. Etching also removes slivers of metal material that may remain from the partial die cutting step. Washing prepares the sheet for applying printed matter, such as labelling, graphics, and coloring.

[0040] The washed and etched sheet is then applied with printed matter, graphics and coloring. In a preferred embodiment of the invention, the printed matter is applied as a thin film of preprinted material bonded to the sheet by a suitable adhesive. Alternatively, the matter may be printed directly on the sheet. After the printed matter has been applied to the sheet, a coating of polymer or other suitable protective material is applied over the printed matter to protect it from scratches or other mechanical damage, and to provide a desired surface appearance. A heat activated adhesive is also applied to predetermined areas of the sheet, to the flaps and the rear joining panel, which are later overlapped and bonded to form the package. In addition, adhesive is applied to portions of the front panel 26 and the first and second side panels 24, 28, near the frangible lines 60, 62, and 64 for attaching an inner frame to the blank 80.

[0041] After the sheet has been coated, a second die cutting operation is performed to separate the blank from the sheet. In this step, the outer edges 82 of the blank 80, illustrated in Fig. 2, are cut, and the blank is removed from the sheet. Die cutting the metal sheet laminated with a coating renders exposed edges of the blank dull. The blanks 80 are then stacked for subsequent handling.

[0042] The completed cigarette package includes the inner frame 90 illustrated in Fig. 1. The inner frame 90 is formed in a separate series of steps, and is attached to the blank 80 prior to folding to form the package 10. Fig. 4 is a plan view of an inner frame blank 92. The inner frame blank 92 is a generally rectangular member that is creased into three segments, a first side 94, a center 96 and a second side 98. At an upper end of the center 96, a substantially rectangular gap 95 is provided. In the completed and filled package, the gap 95 facilitates a consumer's access to the contents of the package.

[0043] The method for forming the inner frame blank 92 is similar to the method for forming the package blank 80, and includes providing a coil of metal sheet, such as aluminum or another suitable material. Separating and folding lines are indicated on the blank to form the first 93 and second folding lines 97 and the outer separating edges of the blank 92. In a preferred embodiment of the invention, the sheet is pretreated by heating the sheet in the manner described above. Alternatively, the sheet

may be mechanically creased using a conventional creasing apparatus as is known in the art.

[0044] The inner frame blank 92 is separated from the sheet by die cutting or other suitable means, and the blank 92 is then washed and etched in preparation for being attached to the package blank 80. As mentioned, washing and etching cleans oil and dirt from the metal, and removes metal slivers or particles remaining from the die cutting step.

[0045] The inner frame blank 92 is attached to the package blank 80 so that the center 96 overlays the front panel 26 with the gap 95 positioned free of the front panel 26. In the completed package 10, as illustrated in Fig. 1, the inner frame 90 extends from an upper, open edge of the body 20.

[0046] The package 10 formed from the package blank 80 is formed by bending the blank 80 at the creases 32, 34, 36 and 38 so that a substantially rectangular tube is formed with the rear panel 22 substantially parallel to the front panel 26. The joining panel 30 and lid joining part 59 are overlapped on the rear panel 22 and rear part 52, respectively, and bonded so that rear joining panel and lid rear joining part are on the inside of the tube. The side bottom flaps 42, 46 and the side top flaps 72, 76 are folded to be substantially perpendicular with the sides of the body 20 and lid 50 portions. The rear bottom flap 40 is folded over the side bottom flaps 42, 46, and the rear top flap 70 is folded over the side top flaps 72, 76. The front top flap 74 is then folded over and bonded to the other flaps to close the lid portion 50 and the front bottom flap 44 is folded over and bonded to the other bottom flaps to close the body portion 20.

[0047] The package 10 formed by the method of the invention has rounded corners between the various panels as a result of bending the metal blank 80 along the pretreated folding lines.

[0048] To open the package 10, the frangible lines 60, 62 and 64 are broken by the consumer to separate the front 56 and sides 54, 58 of the lid 50 from the front 26, and sides 24, 28 of the body 20. The lid 50 may then be pivoted away from the body 20, to the open position shown in Fig. 1. The hinge 68 may be reinforced with a flexible tape or label adhered to the rear panel 22 and the lid rear part 52 to prevent cracking with repeated opening and closing of the lid 50.

[0049] Fig. 5 is a plan view of an alternative embodiment of a package blank 120 of the invention. The method of the invention, described above, is applied to form the alternative package blank illustrated in Fig. 5, with the exception of the steps for forming the inner frame blank 92 of Fig. 4. The package blank 120 of Fig. 5 includes an inner frame formed as part of the blank. The other steps of the method remain substantially the same.

[0050] The sheet is divided to define the blank 120 having a body 121 and a lid 160 portion. The body portion 121 includes segments that, when the blank 120 is folded, form a front panel 122, a bottom panel 124, and

a rear panel 126. Front side panels 130, 132 depend laterally from the front panel 122. Bottom side flaps 134, 136 depend from the bottom panel, and rear side panels 138, 140 depend laterally from the rear panel 126.

[0051] At a free end of the front panel 122, the sheet is creased to form the inner frame 150. Creasing the sheet offsets the inner frame 150 from the plane of the body segments. The crease 144 between the body portion segments forms a step from the front body segments to the inner frame segments. When the blank 120 is folded into a package, the inner frame 150 is offset toward the interior of the package, which allows sufficient clearance so that the lid portion 160 closes over the inner frame.

[0052] The lid portion 160 includes a rear part 162 with depending rear flaps 164, 166. A top part 168 extends from the rear part 162, and a front part 170 from the top part. Top sides 172, 174 extend from the front part 170, and top flaps 176, 178 depend from the top sides 172, 174. The crease 180 between the rear panel 126 and the lid rear part 162 becomes the hinge in the completed package.

[0053] To accommodate the inner frame 150 as part of the blank 120, the body and lid segments are laid out in a longitudinal pattern, rather than the lateral pattern of the blank 80 described above. The blank 120 is folded to form the package by folding the front panel 122 and the rear panel 126 to be perpendicular with the bottom panel 124. The bottom flaps 134, 136 are folded perpendicular to the bottom panel 126 and the rear side panels 138 and 140 are folded to overlap the bottom flaps. The front side panels 130, 132 are then folded to overlap the rear side panels 138, 140. The side panels are bonded together by suitable means, such as a heat activated bonding agent that may be applied during the coating step.

[0054] The lid portion 160 is formed by folding the rear side flaps 164, 166 perpendicular to the rear part 162, folding the top flaps 176, 178 perpendicular to the top sides 172, 174, and folding the top sides 172, 174 perpendicular to the front part 170. The front part 170 is folded perpendicular to the top part 168, and the top flaps 176, 178 overlap the top part. The top part 168 is folded perpendicular to the rear part 162, and the rear flaps 164, 166 overlap the top sides 172, 174. The rear sides 164, 166 are bonded in place by suitable means, such as heat activated bonding agents that may be applied during the coating step. In the completed package, the front 170 overlaps the inner frame 150 at the center part 154, and the top sides 172, 174 overlap the inner frame sides 152, 156, respectively.

[0055] According to another embodiment of the present invention, a body portion and a lid portion are formed as separate blanks and then joined to complete the package. Fig. 6 is a plan view of a body portion blank 210 and Fig. 7. is a plan view of a lid portion blank 270. The blanks 210, 270 are formed from a sheet of metal material by the method as described above.

[0056] The body blank 210 includes a rear panel 212, a first side panel 214, a front panel 216, a second side panel 218 and a rear joining panel 220. An inner frame portion 230 is formed integrally as part of the body blank 210. The inner frame 230 includes a rear 232, a first side 234, a front 236, a second side 238 and a rear joining part 240. The front 236 of the inner frame 230 includes a gap portion 235 for facilitating access to the contents of the completed package. The inner frame 230 is formed in the blank 210 so that it is on a different plane than the body portion segments.

[0057] The lid portion 270 is formed with segments that become in the completed package a rear part 272, a first side part 274, a front part 276, second side part 278, and a rear joining part 280.

[0058] After the body portion 210 and the lid portion 270 are separated from the sheet, the portions are folded to form substantially rectangular tubes. The rear joining panel 220 and the rear panel 212 of the body portion 210 are overlapped and bonded, and the rear joining part 280 and the rear 272 of the lid portion 270 are overlapped and bonded. A bottom cap 250, illustrated in Fig. 8 and Fig. 9, is attached to the open bottom end of the folded body portion 210. A top cap 260, illustrated in Fig. 10 and Fig. 11 is attached to the open top end of the folded lid portion 270. The body portion 210 with the attached bottom cap 250 is illustrated in Fig. 12. The folded lid portion 270 with attached top cap 260 is illustrated in Fig. 13.

[0059] The bottom cap 250 and top cap 260 are formed in separate steps from a metal material, such as aluminum or another suitable material, by a stamping or press forming operation. Fig. 8 is a bottom plan view, and Fig. 9 is a side view, of the bottom cap 250. The bottom cap 250 includes a base portion 252 having a hollowed central area 253. Upstanding ribs 254 extend from the base portion 252 and define an inner hollow area 256 and an outer shoulder area 258. The bottom cap 250 is attached to the body portion 210 by fitting the ribs 254 inside the folded body with the end of the panels forming the front 216, sides 214, 216 and rear 212 resting on the shoulders 258. The bottom cap 250 is bonded to the body portion by any suitable means, such as heat activated adhesive.

[0060] Fig. 10 is a top plan view, and Fig. 11 is a side view, of the top cap 260. The top cap 260 includes a base portion 262, and ribs 264 that extend from the base portion to define an inner central hollow area 266 and outer shoulder 268. The top cap 260 is attached to the folded lid portion 270 by fitting the ribs 264 inside the tube formed by the lid portion, with the edges of the rear part 272, side parts 274, 278 and front part 276 resting on the shoulder 268. The top cap is bonded to the lid portion 270 by any suitable means.

[0061] The completed lid portion 270 and body portion 210, illustrated in Fig. 13 and Fig. 12, respectively, are fitted together so that the open end of the lid portion 270 fits over the recessed inner frame segments, front 236,

sides 234, 238, and rear 232. The rear part 272 of the lid portion 270 is fastened to the rear panel 212 of the body portion 210 to form a hinge, similar to that illustrated in Fig. 1, to allow the lid to selectively pivot to open and closed positions. A flexible adhesive backed tape may be applied across the joint between the rear panel 212 and the rear part 272. Alternatively, an adhesive backed label may be attached to at least the rear panel 212 and the rear part 272 to form the hinge.

[0062] According to yet another embodiment of the invention, the body portion is formed from a blank into a hollow rectangular tube and, rather than a lid, a flat top cap member is provided. Fig. 14 is a plan view of a package blank 300. The blank 300 is a substantially rectangular element that is pretreated by the method described above to provide folding lines defining segments that form a rear panel 310, a first side panel 312, and front panel 314, a second side panel 316, and a joining panel 318. The blank 300 is treated and formed into a hollow, rectangular tube, with the rear panel 310 being lapped over and bonded to the joining panel 318. Corners between adjacent panels are rounded, as described above. The rear panel 310 and the joining panel 318 are bonded by any suitable means, for example, a heat activated adhesive applied to a predetermined area of at least one of the panels during a coating step.

[0063] Fig. 15 is a perspective view of a completed package 330 using the package blank 300. After the blank 300 is folded and formed into the hollow, tubular shape, a bottom cap 250 is attached to an open bottom end of the tube. The bottom cap 250 is substantially the same as the member described in Fig. 8 and Fig. 9. The bottom cap 250 closes the bottom end of the package 330 and provides structural stability to the tube.

[0064] Fig. 16 is a bottom view of a top cap 350 for the package 330. The top cap 350 is a substantially flat member having a downwardly extending rib 352 and an outer peripheral shoulder 354. In attaching the top cap 350 to the package 330, the rib 352 is inserted into an upper end of the package and the shoulder 354 abuts the end of the panels. The top cap 350 is bonded to the package 330 by any suitable means.

[0065] The top cap 350 includes an aperture 356 located in a corner area. The aperture 356 provides access to contents of the fully formed package 330. As shown in Fig. 15, a closure 360 is attached to the top of the top cap 350. The closure 360 covers the aperture 356, and may be selectively peeled away from the top cap 350 by pulling tab member 362 to uncover the aperture. The closure 360 has a resealable adhesive that permits it to be reattached to the top cap 350 to selectively close the aperture.

Claims

1. A method for making metal packages (10) (210) (330) comprising:

providing a sheet (102) of metal for forming a plurality of package blanks (80) (120) (210,270) (300) ;

defining individual package blanks on the sheet of metal with folding lines (32,34,36,38,66,68) on each blank and separating lines (82) between individual blanks;

separating the individual pretreated package blanks from the sheet; and

folding the blank along the folding lines to form a hollow, substantially rectangular shaped package (10)(210)(330),

characterised in that the method further comprises:

pretreating the sheet in narrowly confined regions around folding lines (32,34,36,38,66,68) of the blank to facilitate folding of the metal by:

preparing the said regions around the folding lines (32,34,36,38,66,68) for heating by reducing light reflectance of the sheet in the region of the folding lines; and heating the sheet in the said narrowly confined regions, wherein the heating includes:

directing a beam (104) of laser light at the sheet (102) in the region around the folding lines (32,34,36,38,66,68) for a predetermined length of time;

directing light (104) from an infrared light source (100) to the region of the folding lines (32,34,36,38,66,68);

positioning a heated platen (113) in contact with the sheet (102) along the narrowly confined regions for a predetermined time and simultaneously tensioning the sheet to prevent distortion;

contacting for a predetermined time a surface of the sheet with a die plate (116) carrying strip heaters (115) heated to a predetermined temperature, the strip heaters being positioned to correspond with the narrowly confined regions; or

positioning an inductive heat source (119) in proximity to the narrowly confined regions of the sheet (102) for a predetermined time.

2. A method according to claim 1 in which the said folding lines between the regions of the blank which be-

- come the top flaps and the lid parts in the package erected from the blank are pretreated by applying a mechanical stress to the regions around the said folding lines to facilitate folding of the metal along the folding lines.
- 5
3. A method according to claim 1 or 2 in which the pretreatment by heating is supplemented by further pretreatment by applying a mechanical stress to the regions around the folding lines.
- 10
4. A method according to any preceding claim further comprising bonding predetermined portions of the blank (80) (120) (210,270) (300) after folding to form the package (10) (210) (330).
- 15
5. A method according to any preceding claim further comprising securing a lid (260) (350) to the formed package (210) (330).
- 20
6. A method according to any preceding claim in which the pretreatment step includes heating by laser light, further comprising directing the beam (104) of laser light at the sheet so that a focus point (108) of the beam is a predetermined distance from the surface of the sheet (102) providing a predetermined width (112) beam where the light contacts the sheet (102).
- 25
7. A method according to preceding claim in which the pretreatment step includes heating by laser light, further comprising positioning a shield (110) between the source (100) of laser light and the sheet (102) to prevent light reflected from the sheet from striking the source.
- 30
8. A method according any of claims 1 to 5 in which the pretreatment step includes heating by infrared light, further comprising directing the infrared light (104) through an opening in a light shield (110) positioned a predetermined distance from the sheet (102) so that a predetermined area of the sheet is exposed to light.
- 35
9. A method according to any of claims 1 to 5 in which the pretreatment step includes heating by contacting a surface of the sheet with a die plate (116) carrying strip heaters (115), further comprising contacting a surface of the sheet (102) opposite the surface contacted with the die plate (116) with a heated plate (117), the heated plate being at a temperature below the temperature of the strip heaters (115).
- 40
10. A method according to any preceding claim further comprising partially folding the blank (80)(120) (210,270)(300) along the folding lines (32,34,36,38,66,68) prior to folding the blank to form the package (10) (210) (330).
- 45
11. A method according to any preceding claim further comprising applying printed matter to the sheet (102) before separating the package blanks (80) (120)(210,270)(300) from the sheet.
- 50
12. A method according to claim 11 further comprising etching and washing the sheet (102) before applying the printed matter.
- 55
13. A method according to any preceding claim further comprising applying a coating of protective material to the sheet (102) before the blank (80) (120) (210,280) (300) is separated from the sheet so that exposed edges of the blank are coated by the protective material.
14. A method according to any preceding claim further comprising applying a coating of protective material to the sheet (120) and applying an adhesive to predetermined areas on the sheet before forming package blanks (80)(120)(210,270)(300) from the sheet.
15. A method according to any preceding claim further comprising providing an inner frame (90) and attaching the inner frame to the blank (80) before the blank is folded to form the package (10).
16. A method according to any preceding claim wherein the sheet (102) of metal material provided is aluminum.
17. A method according to any preceding claim further comprising providing a bundle of cigarettes and folding the blank (80) (120) (210) (300) around the bundle to form the package.
18. A method according to any preceding claim wherein the blanks have a longitudinal direction and a lateral direction, the longitudinal direction substantially coinciding with a grain direction of the metal sheet (102) material.
19. A method according to any preceding claim wherein defining the individual package blanks (210,270) comprises:
- defining a body portion blank (210) having segments which are folded to become a back panel (212), a first side panel (214), a front panel (216), a second side panel (218), and a rear joining panel (220), and creasing the panels at a first end to form an inner frame portion (230), the inner frame portion of the front panel segment being larger than the inner frame portion of the rear panel segment and having a mouth (235), the inner frame portions (234)(238) of the side panel segments (214)(218) being substantially trapezoidal shaped; and

defining a lid portion blank (270) having segments that are folded to become a rear part (272), a first side part (274), a front part (276) a second side part (278), and a rear joining part (280), the front part segment being larger than the rear part segment. 5

20. A method according to claim 19 further comprising:

providing a top end cap (260), having a substantially flat rectangular top and downwardly projecting ribs (264) ; 10
 providing a bottom end cap (250), having a substantially flat rectangular top and upwardly projecting ribs (254); 15
 folding the lid portion (270) into a hollow, tubular shape, joining the rear joining part (280) to the rear part (272);
 attaching the top end cap (260) to a top edge of the formed lid portion, the ribs (264) extending into and being bonded to the lid portion; 20
 folding the body portion (210) into a hollow, tubular shape, joining the rear joining panel (220) to the rear panel (212);
 attaching the bottom end cap (250) to a bottom edge of the formed body portion, the ribs (254) extending into and being bonded to the body portion; and 25
 joining the rear part (272) of the lid portion to the rear panel (212) of the body portion to form a hinge. 30

21. A method according to any preceding claim wherein dividing the sheet (102) to form a package blank includes providing a body portion blank (300) having segments that are folded to become a back panel (310), a first side panel (312), a front panel (314), a second side panel (316) and a rear joining panel (318), and wherein folding the body portion into a hollow, tubular shape, includes joining the rear joining panel to the rear panel. 35 40

22. A method according to claim 21 further comprising:

providing a top end cap (350), having a substantially flat rectangular top, an opening aperture (356) and downwardly projecting ribs (352) ; 45
 providing a bottom end cap (250), having a substantially flat rectangular top and upwardly projecting ribs (254); 50
 attaching the top end cap (350) to a top edge of the formed body portion, the ribs (352) extending into and being bonded to the top edge of the body portion; 55
 attaching the bottom end cap (250) to a bottom edge of the formed body portion, the ribs (254) extending into and being bonded to the body

portion; and
 attaching a resealable closure (360) to the top end cap (350) for selectively sealing the opening aperture (356).

Patentansprüche

1. Verfahren zum Herstellen von Metallpackungen (10) (210) (330), umfassend:

Bereitstellen einer Metalltafel (102) zum Herstellen einer Mehrzahl von Packungszuschnitten (80) (120) (210, 270) (300),
 Definieren einzelner Packungszuschnitte auf der Metalltafel mit Falzlinien (32, 34, 36, 38, 66, 68) auf jedem Zuschnitt und Trennlinien (82) zwischen einzelnen Zuschnitten,
 Heraustrennen der einzelnen vorbehandelten Packungszuschnitte aus der Tafel und Falten des Zuschnitts entlang der Falzlinien zum Bilden einer hohlen, im Wesentlichen rechteckförmigen Packung (10) (210) (330),

dadurch gekennzeichnet, dass das Verfahren ferner Folgendes umfasst:

Vorbehandeln der Tafel in eng begrenzten Bereichen um Falzlinien (32, 34, 36, 38, 66, 68) des Zuschnitts zum Erleichtern des Falzens des Metalls durch:

Vorbereiten der genannten Bereiche um die Falzlinien (32, 34, 36, 38, 66, 68) herum zum Erwärmen durch Verringern des Lichtreflexionsgrades der Tafel in dem Bereich der Falzlinien, und
 Erwärmen der Tafel in den genannten eng begrenzten Bereichen, wobei das Erwärmen Folgendes aufweist:

Richten eines Strahls (104) Laserlicht auf die Tafel (102) in dem Bereich um die Falzlinien (32, 34, 36, 38, 66, 68) herum für eine vorbestimmte Zeitspanne,
 Richten von Licht (104) aus einer Infrarotlichtquelle (100) auf den Bereich der Falzlinien (32, 34, 36, 38, 66, 68),
 Positionieren einer Heizplatte (113) in Kontakt mit der Tafel (102) an den eng begrenzten Bereichen entlang für eine vorbestimmte Zeitspanne und gleichzeitiges Spannen der Tafel zum Verhindern einer Verformung,
 Inberührungbringen für eine vorbestimmte Zeitspanne von einer Oberfläche der Tafel mit einer Stempelplatte

- (116), die auf eine vorbestimmte Temperatur erwärmte Heizbänder (115) trägt, wobei die Heizbänder positioniert sind, um den eng begrenzten Bereichen zu entsprechen, oder Positionieren einer Induktionswärmequelle (119) in der Nähe der eng begrenzten Bereiche der Tafel (102) für eine vorbestimmte Zeit.
2. Verfahren nach Anspruch 1, bei dem die genannten Falzlinien zwischen den Bereichen des Zuschnitts, die die oberen Klappen und die Deckelteile in der Packung werden, die aus dem Zuschnitt hergestellt wird, werden durch Ausüben einer mechanischen Spannung auf die Bereiche um die genannten Falzlinien herum vorbehandelt, um das Falten des Metalls entlang der Falzlinien zu erleichtern.
 3. Verfahren nach Anspruch 1 oder 2, bei dem die Vorbehandlung durch Erwärmen durch weitere Vorbehandlung durch Ausüben einer mechanischen Spannung auf die Bereiche um die Falzlinien herum ergänzt wird.
 4. Verfahren nach einem der vorhergehenden Ansprüche, ferner umfassend das Kleben vorbestimmter Teile des Zuschnitts (80) (120) (210, 270) (300) nach dem Falten zum Bilden einer Packung (10) (210) (330).
 5. Verfahren nach einem der vorhergehenden Ansprüche, ferner umfassend das Befestigen eines Deckels (260) (350) an der gebildeten Packung (210) (330).
 6. Verfahren nach einem der vorhergehenden Ansprüche, bei dem der Vorbehandlungsschritt das Erwärmen mit Laserlicht aufweist, ferner umfassend das Richten des Laserlichtstrahls (104) auf die Tafel, so dass ein Brennpunkt (108) des Strahls eine vorbestimmte Entfernung zu der Oberfläche der Tafel (102) hat, was einen Strahl vorbestimmter Breite (112) ergibt, wo das Licht die Tafel (102) berührt.
 7. Verfahren nach einem der vorhergehenden Ansprüche, bei dem der Vorbehandlungsschritt das Erwärmen mit Laserlicht aufweist, ferner umfassend das Positionieren eines Schildes (110) zwischen der Laserlichtquelle (100) und der Tafel (102), um zu verhindern, dass von der Tafel reflektiertes Licht auf die Quelle auftrifft.
 8. Verfahren nach einem der Ansprüche 1 bis 5, bei dem der Vorbehandlungsschritt das Erwärmen mit Infrarotlicht aufweist, ferner umfassend das Richten des Infrarotlichts (104) durch eine Öffnung in einem Lichtschild (110), der in einer vorbestimmten Entfernung zu der Tafel (102) positioniert ist, so dass ein vorbestimmter Bereich der Tafel belichtet wird.
 9. Verfahren nach einem der Ansprüche 1 bis 5, bei dem der Vorbehandlungsschritt das Erwärmen durch Berühren einer Oberfläche der Tafel mit einer Heizbänder (115) tragenden Stempelplatte (116) aufweist, ferner umfassend das Berühren einer Oberfläche der Tafel (102), die der mit der Stempelplatte (116) berührten Oberfläche gegenüberliegt, mit einer Heizplatte (117), wobei die Heizplatte eine Temperatur unter der Temperatur der Heizbänder (115) hat.
 10. Verfahren nach einem der vorhergehenden Ansprüche, ferner umfassend teilweises Falten des Zuschnitts (80) (120) (210, 270) (300) entlang der Falzlinien (32, 34, 36, 38, 66, 68) vor dem Falten des Zuschnitts zum Bilden der Packung (10) (210) (330).
 11. Verfahren nach einem der vorhergehenden Ansprüche, ferner umfassend das Aufbringen einer Drucksache auf die Tafel (102) vor dem Trennen der Packungszuschnitte (80) (120) (210, 270) (300) aus der Tafel.
 12. Verfahren nach Anspruch 11, ferner umfassend Ätzen und Waschen der Tafel (102) vor dem Aufbringen der Drucksache.
 13. Verfahren nach einem der vorhergehenden Ansprüche, ferner umfassend das Auftragen einer Schutzmaterialbeschichtung auf die Tafel (102), bevor der Zuschnitt (80) (120) (210, 270) (300) aus der Tafel herausgetrennt wird, so dass die freigelegten Ränder des Zuschnitts mit dem Schutzmaterial beschichtet werden.
 14. Verfahren nach einem der vorhergehenden Ansprüche, ferner umfassend das Auftragen einer Schutzmaterialbeschichtung auf die Tafel (120) und das Auftragen eines Klebstoffs auf vorbestimmte Bereiche der Tafel vor dem Bilden von Packungszuschnitten (80) (120) (210, 270) (300) aus der Tafel.
 15. Verfahren nach einem der vorhergehenden Ansprüche, ferner umfassend das Bereitstellen eines Innenrahmens (90) und das Anbringen des Innenrahmens am Zuschnitt (80), bevor der Zuschnitt zum Bilden einer Packung (10) gefaltet wird.
 16. Verfahren nach einem der vorhergehenden Ansprüche, bei dem die vorgesehene Tafel (102) aus Metallmaterial Aluminium ist.
 17. Verfahren nach einem der vorhergehenden Ansprüche, ferner umfassend das Bereitstellen eines Bün-

dels Zigaretten und das Falten des Zuschnitts (80) (120) (210) (300) um das Bündel herum zum Bilden einer Packung.

18. Verfahren nach einem der vorhergehenden Ansprüche, bei dem die Zuschnitte eine Längsrichtung und eine Querrichtung haben, wobei die Längsrichtung im Wesentlichen mit einer Kornrichtung des Metalltafel-(102)-Materials zusammenfällt.

19. Verfahren nach einem der vorhergehenden Ansprüche, bei dem das Definieren der einzelnen Packungszuschnitte (210, 270) Folgendes umfasst:

Definieren eines Zuschnitts eines Körper-Teils (210) mit Segmenten, die gefaltet werden, um ein Rückseitenfeld (212), ein erstes Seitenfeld (214), ein Vorderseitenfeld (216), ein zweites Seitenfeld (218) und ein hinteres Verbindungsfeld (220) zu werden, und Abkanten der Felder an einem ersten Ende, um einen Innenrahmenteil (230) zu bilden, wobei der Innenrahmenteil des Vorderseitenfeldsegments größer ist als der Innenrahmenteil des Rückseitenfeldsegments und eine Aussparung (235) hat, wobei die Innenrahmenteile (234, 238) der Seitenfeldsegmente (214) (218) weitgehend trapezförmig sind, und
Definieren eines Deckelteilzuschnitts (270) mit Segmenten, die gefaltet werden, um ein hinteres Teil (272), ein erstes Seitenteil (274), ein vorderes Teil (276), ein zweites Seitenteil (278) und ein hinteres Verbindungsteil (280) zu werden, wobei das Segment des vorderen Teils größer ist als das Segment des hinteren Teils.

20. Verfahren nach Anspruch 19, ferner umfassend:

Bereitstellen eines Aufsatzes für das obere Ende (260), der eine im Wesentlichen flache rechteckige Oberseite und abwärts vorspringende Rippen (264) hat,
Bereitstellen eines Aufsatzes für das untere Ende (250), der eine im Wesentlichen flache rechteckige Oberseite und nach oben vorspringende Rippen (254) hat,
Falten des Deckelteils (270) zu einer hohlen Röhrenform, Verbinden des hinteren Verbindungsteils (280) mit dem hinteren Teil (272),
Anbringen des Aufsatzes für das obere Ende (260) an einem oberen Rand des geformten Deckelteils, wobei die Rippen (264) sich in den Deckelteil hinein erstrecken und am ihm festgeklebt werden,
Falten des Körper-Teils (210) zu einer hohlen Röhrenform, Verbinden des hinteren Verbindungsfeldes (220) mit dem Rückseitenfeld (212),

Anbringen des Aufsatzes für das untere Ende (250) an einem unteren Rand des geformten Körper-Teils, wobei die Rippen (254) sich in das Körper-Teil hinein erstrecken und an ihm festgeklebt werden, und

Verbinden des hinteren Teils (272) des Deckelteils mit dem Rückseitenfeld (212) des Körper-Teils zum Bilden eines Gelenks.

21. Verfahren nach einem der vorhergehenden Ansprüche, bei dem das Unterteilen der Tafel (102) zum Bilden eines Packungszuschnitts das Bereitstellen eines Zuschnitts eines Körper-Teils (300) aufweist, das Segmente hat, die gefaltet werden, um ein Rückseitenfeld (310), ein erstes Seitenfeld (312), ein Vorderseitenfeld (314), ein zweites Seitenfeld (316) und ein hinteres Verbindungsfeld (318) zu werden, und bei dem das Falten des Körper-Teils zu einer hohlen Röhrenform das Verbinden des hinteren Verbindungsfeldes mit dem Rückseitenfeld aufweist.

22. Verfahren nach Anspruch 21, ferner umfassend:

Bereitstellen eines Aufsatzes für das obere Ende (350), der eine im Wesentlichen flache rechteckige Oberseite, ein Öffnungsloch (356) und abwärts vorspringende Rippen (352) hat,
Bereitstellen eines Aufsatzes für das untere Ende (250), der eine im Wesentlichen flache rechteckige Oberseite und nach oben vorspringende Rippen (254) hat,

Anbringen des Aufsatzes für das obere Ende (350) an einem oberen Rand des geformten Körper-Teils, wobei die Rippen (352) sich in den oberen Rand des Körper-Teils hinein erstrecken und am ihm festgeklebt werden,
Anbringen des Aufsatzes für das untere Ende (250) an einem unteren Rand des geformten Körper-Teils, wobei die Rippen (254) sich in das Körper-Teil hinein erstrecken und an ihm festgeklebt werden, und
Anbringen eines wiederverschließbaren Verschlusses (360) an dem Aufsatz für das obere Ende (350) zum selektiven Dichtverschließen des Öffnungsloches (356).

Revendications

1. Procédé de fabrication de paquets métalliques (10) (210) (330) comprenant:

la fourniture d'une feuille (102) de métal pour former une pluralité de flans de paquets (80) (120) (210, 270) (300) ;
la définition de flans de paquets individuels sur la feuille de métal avec des lignes de pliage (32,

34, 36, 38, 66, 68) sur chaque flan et des lignes de séparation (82) entre des flans individuels ; la séparation des flans de paquets prétraités individuels d'avec la feuille ; et le pliage du flan le long des lignes de pliage en vue de former un paquet de forme substantiellement rectangulaire creux (10) (210) (330), **caractérisé en ce que** le procédé comprend en outre :

le prétraitement de la feuille dans des régions étroitement confinées autour des lignes de pliage (32, 34, 36, 38, 66, 68) du flan afin de faciliter le pliage du métal en :

préparant lesdites régions autour des lignes de pliage (32, 34, 36, 38, 66, 68) pour leur chauffage en réduisant la réflectance lumineuse de la feuille dans la région des lignes de pliage ; et chauffant la feuille dans lesdites régions étroitement confinées, où le chauffage comporte :

l'orientation d'un faisceau (104) de lumière laser vers la feuille (102) dans la région autour des lignes de pliage (32, 34, 36, 38, 66, 68) pendant une longueur de temps prédéterminée ;

l'orientation d'une lumière (104) depuis une source de lumière infrarouge (100) vers la région des lignes de pliage (32, 34, 36, 38, 66, 68) ;

le positionnement d'un plateau chauffé (113) en contact avec la feuille (102) le long des régions étroitement

confinées pendant une durée prédéterminée et la tension simultanée de la feuille pour empêcher sa distorsion ;

la mise en contact pendant une durée prédéterminée d'une surface de la feuille avec une plaque d'estampage (116) portant des bandes d'éléments chauffants (115) chauffés à une température prédéterminée, les bandes d'éléments chauffants étant positionnées pour correspondre aux régions étroitement confinées ; ou

le positionnement d'une source de chaleur inductive (119) à proximité des régions étroitement confinées de la feuille (102) pendant une durée prédéterminée.

2. Procédé selon la revendication 1, dans lequel lesdites lignes de pliage entre les régions du flan qui deviennent les rabats supérieurs et les parties de couvercle dans le paquet érigé à partir du flan sont prétraitées en appliquant une contrainte mécanique aux régions autour desdites lignes de pliage afin de faciliter le pliage du métal le long des lignes de pliage.
3. Procédé selon la revendication 1 ou 2, dans lequel le prétraitement par chauffage est complété par un autre prétraitement en appliquant une contrainte mécanique aux régions autour des lignes de pliage.
4. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre le collage de parties prédéterminées du flan (80) (120) (210, 270) (300) après le pliage afin de former le paquet (10) (210) (330).
5. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre la fixation d'un couvercle (260) (350) sur le paquet formé (210) (330).
6. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'étape de prétraitement comporte un chauffage par une lumière laser, comprenant en outre l'orientation du faisceau (104) de lumière laser vers la feuille de telle sorte qu'un point focalisé (108) du faisceau se trouve à une distance prédéterminée de la surface de la feuille (102) donnant un faisceau d'une largeur prédéterminée (112) là où la lumière est en contact avec la feuille (102).
7. Procédé selon la revendication précédente, dans lequel l'étape de prétraitement comporte un chauffage par une lumière laser, comprenant en outre le positionnement d'un bouclier (110) entre la source (100) de lumière laser et la feuille (102) afin d'empêcher la lumière réfléchie par la feuille de frapper la source.
8. Procédé selon l'une quelconque des revendications 1 à 5, dans lequel l'étape de prétraitement comporte un chauffage par une lumière infrarouge, comprenant en outre l'orientation de la lumière infrarouge (104) à travers une ouverture dans un bouclier de lumière (110) positionné à une distance prédéterminée de la feuille (102) de telle sorte qu'une zone prédéterminée de la feuille soit exposée à la lumière.

9. Procédé selon l'une quelconque des revendications 1 à 5, dans lequel l'étape de prétraitement comporte un chauffage en mettant en contact une surface de la feuille avec une plaque d'estampage (166) portant des bandes d'éléments chauffants (115), comprenant en outre la mise en contact d'une surface de la feuille (102) opposée à la surface contactée par la plaque d'estampage (116) avec une plaque chauffée (117), la plaque chauffée étant à une température inférieure à la température des bandes d'éléments chauffants (115). 5
10. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre le pliage partiel du flan (80) (120) (210, 270) (300) le long des lignes de pliage (32, 34, 36, 38, 66, 68) avant le pliage du flan afin de former le paquet (10) (210) (330). 10
11. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre l'application d'une matière imprimée sur la feuille (102) avant la séparation des flans de paquets (80) (120) (210, 270) (300) d'avec la feuille. 15
12. Procédé selon la revendication 11, comprenant en outre la gravure et le nettoyage de la feuille (102) avant d'appliquer la matière imprimée. 20
13. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre l'application d'un revêtement de matière protectrice sur la feuille (102) avant que le flan (80) (120) (210, 280) (300) ne soit séparé de la feuille de telle sorte que les bords exposés du flan soient revêtus par la matière protectrice. 25
14. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre l'application d'un revêtement de matière protectrice sur la feuille (120) et l'application d'un adhésif sur des zones prédéterminées sur la feuille avant la formation des flans de paquets (80) (120) (210, 270) (300) à partir de la feuille. 30
15. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre la fourniture d'une structure interne (90) et la fixation de la structure interne au flan (80) avant le pliage du flan pour former le paquet (10). 35
16. Procédé selon l'une quelconque des revendications précédentes, dans lequel la feuille (102) de matière métallique fournie est en aluminium. 40
17. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre la fourniture d'une botte de cigarettes et le pliage du flan (80) (120) (210) (300) autour de la botte afin de former le paquet. 45
18. Procédé selon l'une quelconque des revendications précédentes, dans lequel les flans ont un sens longitudinal et un sens latéral, le sens longitudinal coïncidant substantiellement avec un sens de grain de la matière de feuille métallique (102). 50
19. Procédé selon l'une quelconque des revendications précédentes, dans lequel la définition des flans de paquets individuels (210, 270) comprend : 55
- la définition d'un flan de partie de corps (210) ayant des segments qui sont pliés afin de devenir un panneau arrière (212), un premier panneau latéral (214), un panneau avant (216), un deuxième panneau latéral (218), et un panneau de jointure arrière (220), et le pliage des panneaux au niveau d'une première extrémité afin de former la partie de structure interne (230), la partie de structure interne du segment de panneau avant étant plus grande que la partie de structure interne du segment de panneau arrière et ayant une embouchure (235), les parties de structure interne (234) (238) des segments de panneaux latéraux (214) (218) étant d'une forme substantiellement trapézoïdale ; et la définition d'un flan de partie de couvercle (270) ayant des segments qui sont pliés afin de devenir une partie arrière (272), une première partie latérale (274), une partie avant (276), une deuxième partie latérale (278), et une partie de jointure arrière (280), le segment de partie avant étant plus grand que le segment de partie arrière.
20. Procédé selon la revendication 19, comprenant en outre:
- la fourniture d'un capuchon d'extrémité supérieure (260), ayant un haut rectangulaire substantiellement plat et des nervures vers le bas (264) ;
- la fourniture d'un capuchon d'extrémité inférieure (250), ayant un haut rectangulaire substantiellement plat et des nervures vers le haut (254) ;
- le pliage de la partie de couvercle (270) en une forme tubulaire creuse, joignant la partie de jointure arrière (280) à la partie arrière (272) ;
- la fixation du capuchon d'extrémité supérieure (260) à un bord supérieur de la partie de couvercle formée, les nervures (264) s'étendant jusque dans et étant collées à la partie de couvercle ;
- le pliage de la partie de corps (210) en une forme tubulaire creuse, joignant le panneau de jointure arrière (220) au panneau arrière (212) ;

la fixation du capuchon d'extrémité inférieure (250) à un bord inférieur de la partie de corps formée, les nervures (254) s'étendant jusque dans et étant collées à la partie de corps ; et la jointure de la partie arrière (272) de la partie de couvercle au panneau arrière (212) de la partie de corps afin de former une charnière. 5

21. Procédé selon l'une quelconque des revendications précédentes, dans lequel la division de la feuille (102) afin de former un flan de paquet comporte la fourniture d'un flan de partie de corps (300) ayant des segments qui sont pliés afin de devenir un panneau arrière (310), un premier panneau latéral (312), un panneau avant (314), un deuxième panneau latéral (316) et un panneau de jointure arrière (318), et dans lequel le pliage de la partie de corps en une forme tubulaire creuse comporte la jointure du panneau de jointure arrière avec le panneau arrière. 10
15
20

22. Procédé selon la revendication 21, comprenant en outre:

la fourniture d'un capuchon d'extrémité supérieure (350), ayant un haut rectangulaire substantiellement plat, une ouverture (356) et des nervures vers le bas (352) ; 25
la fourniture d'un capuchon d'extrémité inférieure (250), ayant un haut rectangulaire substantiellement plat et des nervures vers le haut (254) ; 30
la fixation du capuchon d'extrémité supérieure (350) à un bord supérieur de la partie de corps formée, les nervures (352) s'étendant jusque dans le et étant collées au bord supérieur de la partie de corps ; 35
la fixation du capuchon d'extrémité inférieure (250) à un bord inférieur de la partie de corps formée, les nervures (254) s'étendant jusque dans et étant collées à la partie de corps ; et 40
la fixation d'une fermeture détachable (360) au capuchon d'extrémité supérieure (350) pour fermer sélectivement l'ouverture (356). 45

50

55

FIG. 1

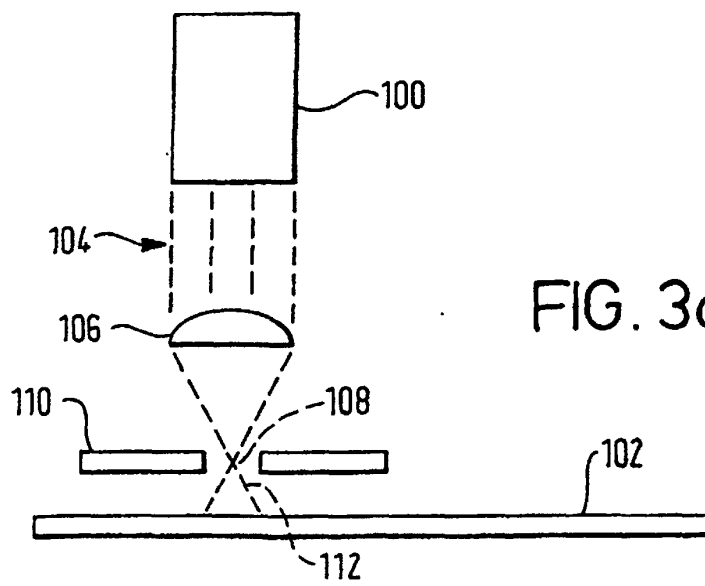
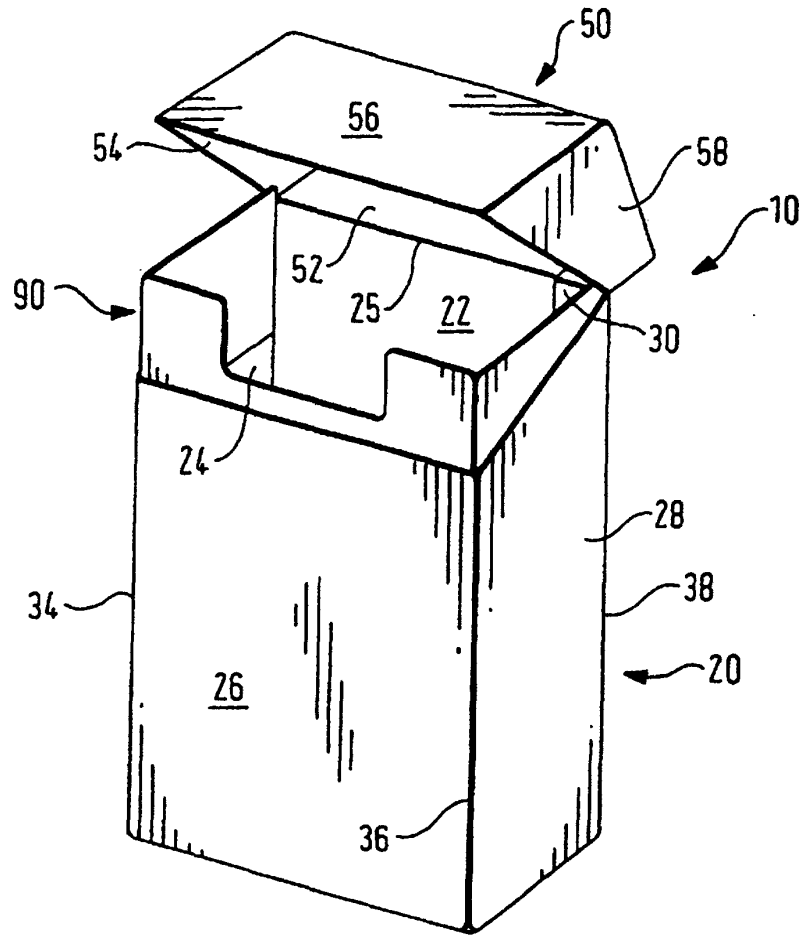


FIG. 3a

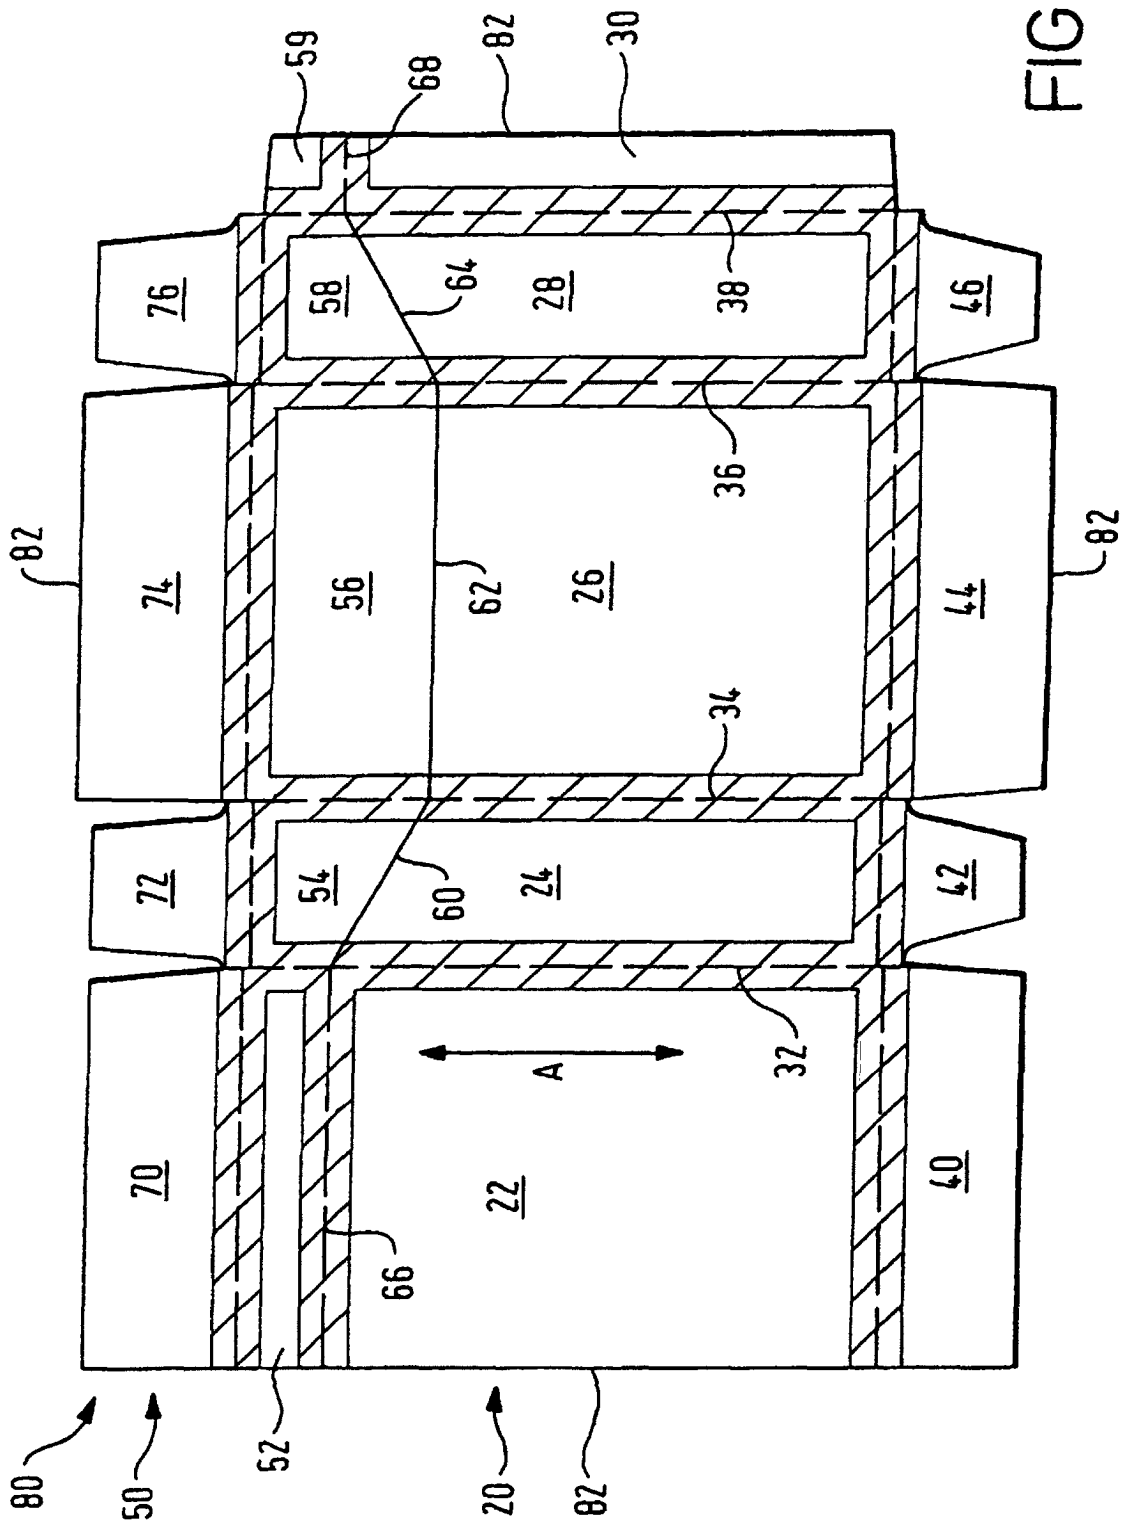


FIG. 2

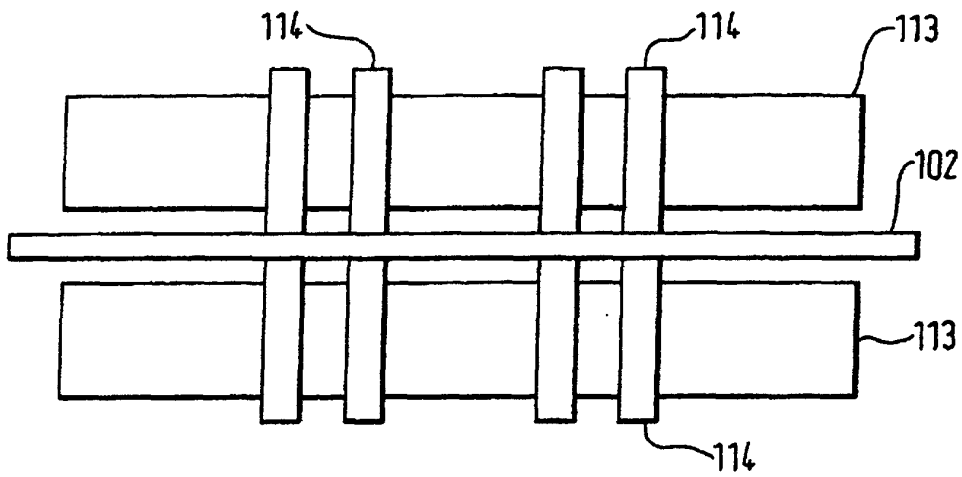


FIG. 3b

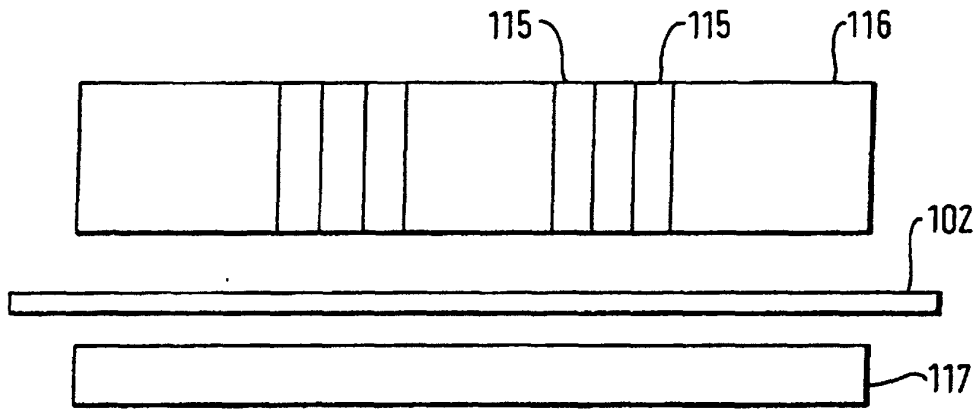


FIG. 3c

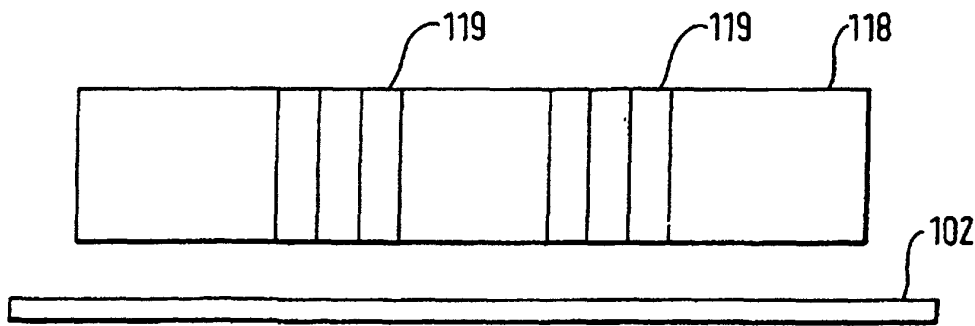


FIG. 3d

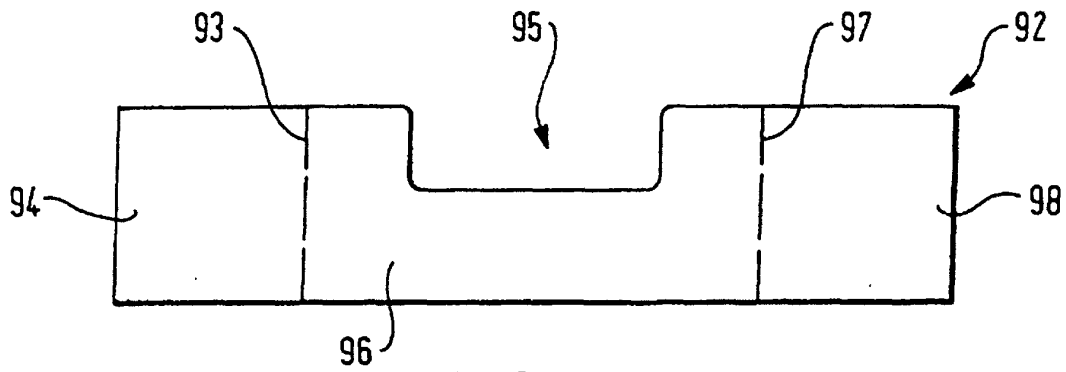


FIG. 4

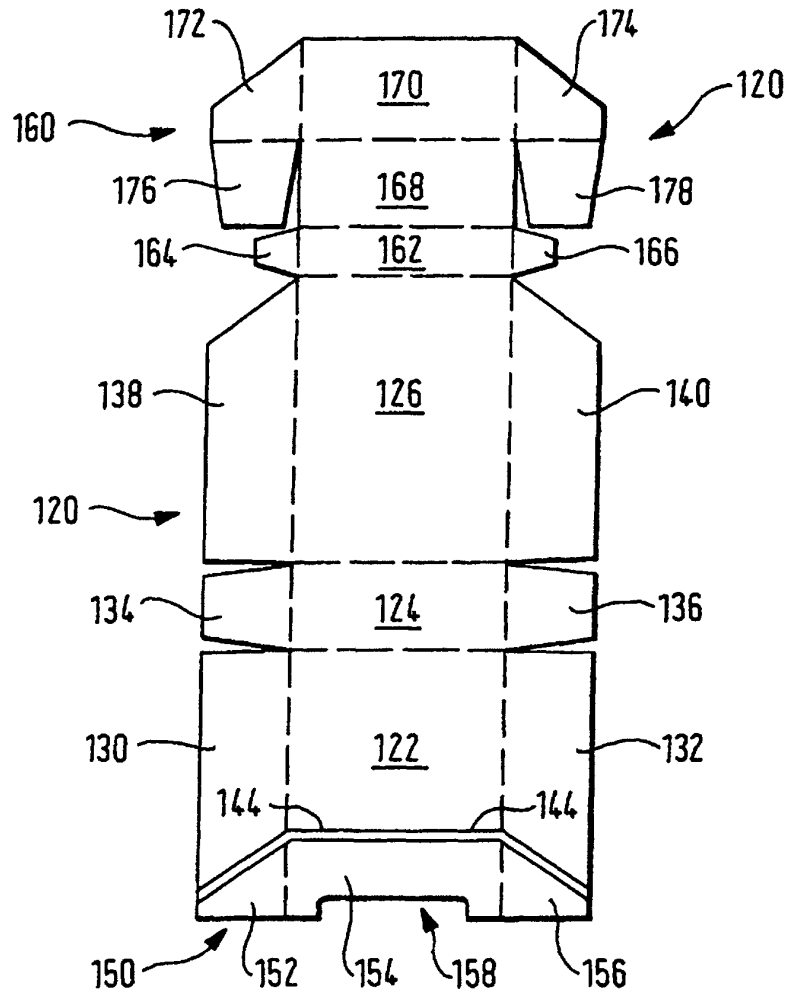


FIG. 5

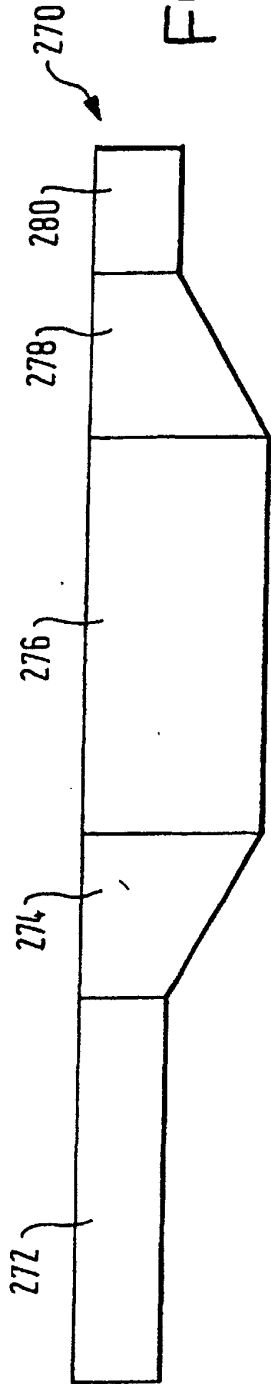


FIG. 7

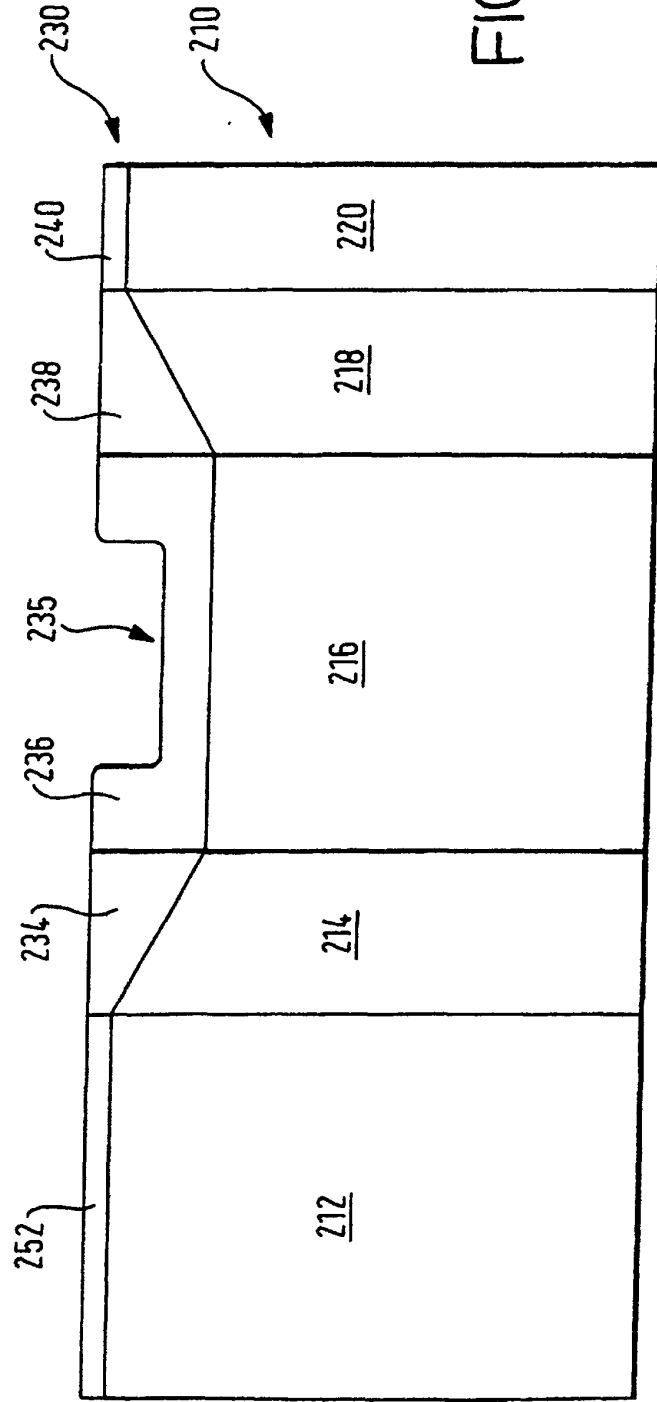


FIG. 6

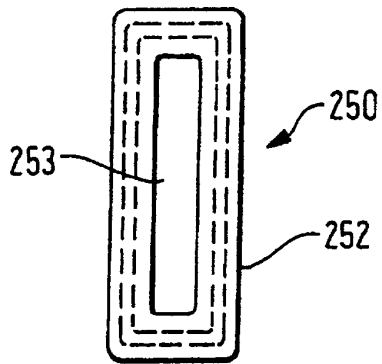


FIG. 8

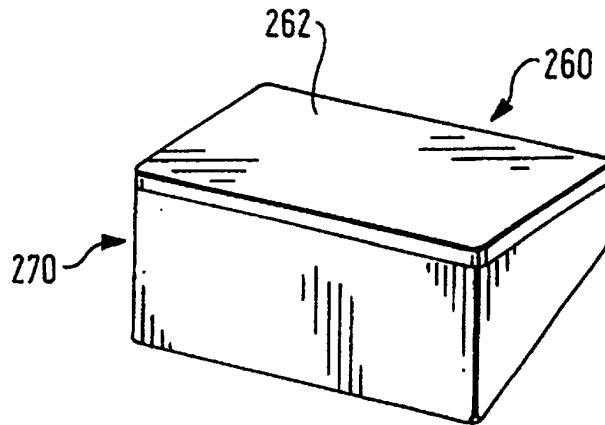


FIG. 13




FIG. 9

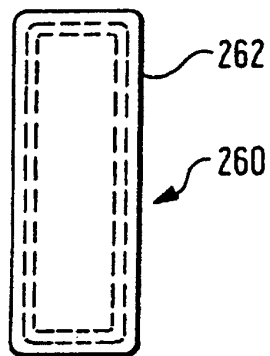


FIG. 10

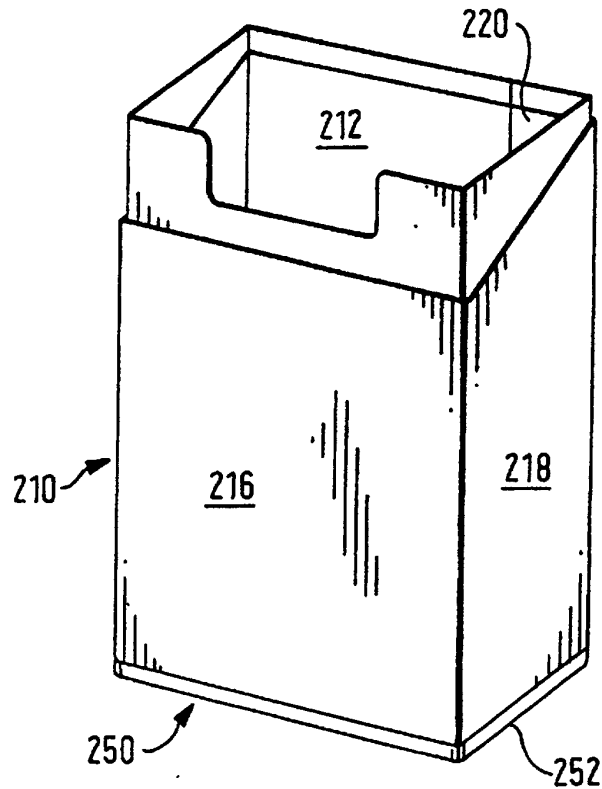


FIG. 12




FIG. 11

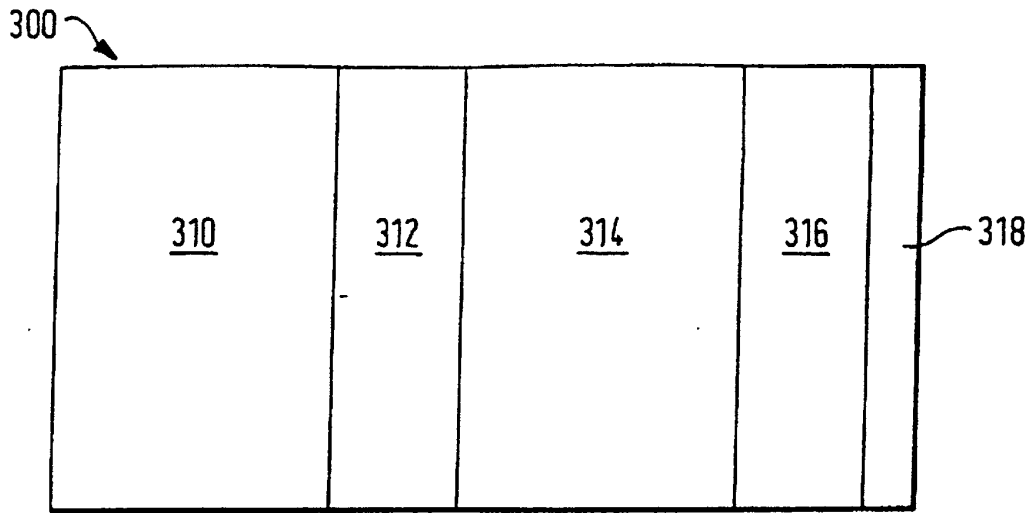


FIG. 14

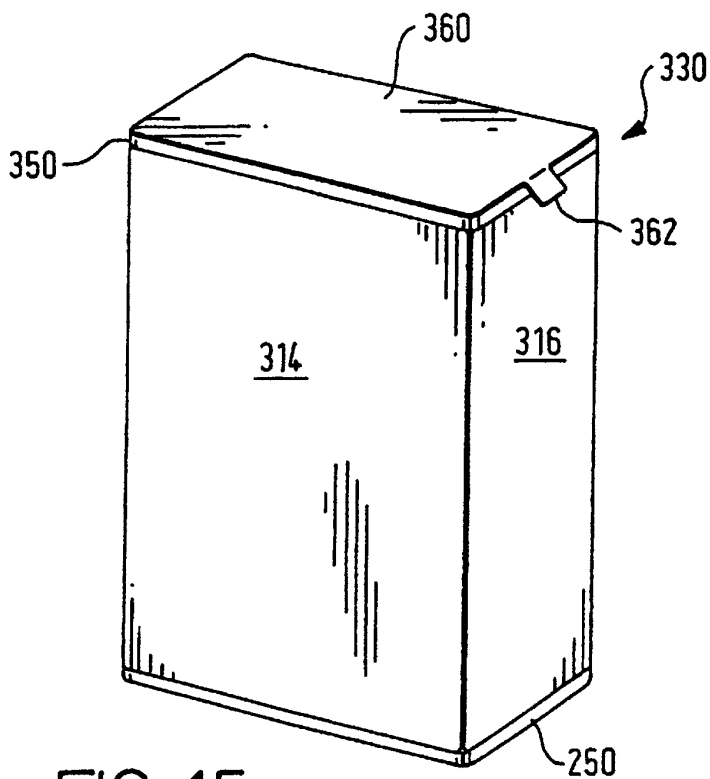


FIG. 15

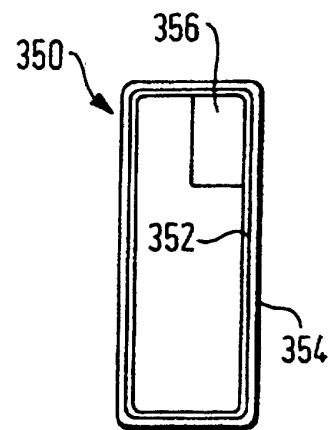


FIG. 16