

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 753 467 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

08.12.2004 Bulletin 2004/50

(21) Application number: **96902437.1**

(22) Date of filing: **14.02.1996**

(51) Int Cl.7: **B65D 77/06**

(86) International application number:
PCT/JP1996/000317

(87) International publication number:
WO 1996/025346 (22.08.1996 Gazette 1996/38)

(54) **BAG-IN-CARTON AND METHOD OF MANUFACTURING THE SAME**

VERPACKUNGSBEHÄLTER MIT INNENBEUTEL SOWIE VERFAHREN ZU DESSEN
HERSTELLUNG

SACS ENCARTONNES ET PROCEDES POUR LEUR FABRICATION

(84) Designated Contracting States:
DE FR GB

(30) Priority: **15.02.1995 JP 2675095**
15.02.1995 JP 2682295
15.02.1995 JP 2682995
29.05.1995 JP 13077595
29.05.1995 JP 13080295

(43) Date of publication of application:
15.01.1997 Bulletin 1997/03

(73) Proprietors:
• **Riso Kagaku Corporation**
Tokyo 105 (JP)
• **DAI NIPPON PRINTING CO., LTD.**
Tokyo 162-01 (JP)

(72) Inventors:
• **TAKEMURA, Toru**
Minato-ku, Tokyo 105 (JP)
• **MORISAKO, Takeshi,**
Dai Nippon Printing Co., Ltd.
Shinjuku-ku, Tokyo 162-01 (JP)

(74) Representative: **Müller-Boré & Partner**
Patentanwälte
Grafinger Strasse 2
81671 München (DE)

(56) References cited:
JP-A- 5 008 329 **JP-A- 5 229 571**
JP-A- 6 001 305 **JP-A- 6 270 964**
JP-A- 7 257 645 **JP-A- 57 137 140**
JP-U- 4 135 449 **JP-U- 5 022 363**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 753 467 B1

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a bag-in-carton with a flexible inner bag adhered to inside surfaces of a substantially rectangular parallelepiped carton, and a method for forming the bag-in-carton.

[0002] As a liquid packaging container bag-in-cartons have been conventionally used. The bag-in-carton usually has a rectangular parallelepiped form having a flat bottom panel, a top panel, and four flat side panels between the bottom and the top panels. The inner bag is adhered to the inside surfaces of the four side panels. The bag-in-carton is generally used in packaging liquids of low viscosities, such as juice, liquor, etc. Practically when a content is discharged from the bag-in-carton, air corresponding to a discharged amount of the content enters the bag-in-carton.

[0003] When the bag-in-carton is used in packaging a liquid of high viscosity, such as ink, or others, it is necessary to draw the liquid through the pouring spout when the liquid is discharged from the bag-in-carton. But it is difficult to let air in the inner bag. Accordingly it is necessary to deform the inner bag to decrease its volume corresponding to a discharge of the content in the inner bag. The conventional bag-in-carton whose inner bag is adhered to the four inside surfaces of the carton cannot have the inner bag deformed when a content thereof is discharged, which makes it impossible to use the bag-in-carton as it is in packaging a liquid of high viscosity.

[0004] Furthermore, in using the bag-in-carton in packaging ink for printing machines, the pouring spout of the bag-in-carton is connected to the connector of a printing machine to discharge the content of the bag-in-carton.

[0005] To meet the purpose of feeding a constant amount of ink to a printing machine, it is necessary that an ink feed amount per a unit hour is stably constant.

[0006] JP 7-257645 A discloses a bag-in-box in which a bag body made of a flexible resin film is contained in a rigid card board box. The bag body and the box body are stuck at the whole area or a partial area of a zone containing a triangle including the right end and the bottom of the left side plate, at least the upper end part of the front plate and a triangle including the left end part and the bottom of the right side plate. Thus, the bag is adhered to one half of the side plates. In this embodiment the half of the bag body which is not stuck with the box body moves inside the part of the bag body stuck with the box body during discharging the content of the bag body. However, it is difficult to control the deformation of the bag body during discharging the content and to realise a feeding of a constant amount of content out of the bag body.

[0007] JP-6 1305 A discloses a method for producing a bag-in-carton comprising the following steps after setting up a carton blank including an inner flexible bag into

a rectangular parallelepiped form: A bottom portion of the inner bag is heat sealed and forced into the carton. Then the bottom panels of the carton are folded to form one-side closed portion of the carton. Then the top portion of the inner bag is heat-sealed and forced into the carton by a pressing-up-plate. Then the top panels of the carton are folded to form the other closed side portion of the carton. This method does not allow to precisely arrange the inner bag inside the carton to ensure a controlled deformation of the inner bag during discharge of the content of the inner bag and to ensure a constant feeding amount of the content.

[0008] It is object of the invention to provide an improved bag-in-carton which can ensure a controlled deformation of the inner bag during discharging the content and a constant feed amount during discharging the content, and a method for forming such bag-in-carton.

[0009] This object is achieved by a bag-in-carton having the features defined in claim 1 or 5 and a method having the features defined in claim 9.

[0010] Preferred embodiments are defined in the dependent claims.

[0011] According to the characteristic features of the present invention, when the content is drawn out through the pouring spout, the inner bag starts being released from the inner-bag adhering regions provided partially on the surfaces remote from the pouring spout attaching panel, and from the inner-bag adhering regions provided on the substantially entire inside surfaces of a pair of side panels opposed to each other. As the content is drawn, the inner bag is deformed and is moved to the pouring spout. The releasable part of the inner bag is withdrawn into the unreleasable part thereof to thereby discharge substantially all the content through the pouring spout. During this operation, the inner bag is uniformly deformed, with a result that the content is supplied stably and constantly.

[0012] According to the first preferred embodiment, one seal-closed end of the inner bag is in agreement with one tight closed end of the carton, whereby the shape and a volume of the inner bag can be retained constant.

[0013] According to the second preferred embodiment the back sealed portion of the tubular film is relatively hard. Because of the back sealed portion located on the inside surface of the panel opposed to the pouring spout attaching panel of, the carton, when the content is drawn out through the pouring spout, the inner bag can be deformed horizontally symmetrically with respect to the pouring spout.

[0014] According to one alternative of claim 5 when the content is drawn out through the pouring spout, the inner bag starts being released from the inner-bag adhering regions provided on the inside surfaces of a pair of side panels of the carton opposed to each other. As the content is drawn out, the released part of the inner bag is deformed and moved to the pouring spout to be withdrawn into the unreleasable part of the inner bag

which is adhered to the carton to thereby drive out substantially all the content through the pouring spout. In this operation, on the pair of the opposed side panels the release of the inner bag starts on the side of the remote end part and finishes at the strips, whereby the inner bag is uniformly deformed, and accordingly the content can be supplied stably and constantly.

[0015] According to another alternative of claim 5 the inner bag is adhered to the inside surfaces of a pair of side panels except cuts extended substantially parallel with a straight line interconnecting the pouring spout and the remote end part of the carton which is remotest from the pouring spout, the inner bag can be readily released on the side of the remote end part on the pair of side panels when the inner bag is released from the inside surfaces of the carton as the content of the inner bag is decreased.

[0016] According to a further alternative defined in claim 5 the inner bag is adhered to the substantially entire parts of the inside surfaces of the pair of opposed side panels which (parts) are nearer to the pouring spout with respect to the substantial middle of a straight line interconnecting the pouring spout and the remote end part of the carton which is remotest from the pouring spout, and are partially adhered on the side of the remote end part. Accordingly when the inner bag is released from the inside surfaces of the carton as the content of the inner bag is decreased, the inner bag can be readily released from the pair of side panels first on the side of the remote end part.

[0017] According to a further alternative defined in claim 5 the inner bag is adhered to the inside surfaces of the pair of opposed side panels so that the inner-bag adhering regions decrease in area gradually from the side of the pouring spout to the side of the remote end part, whereby the inner bag can be readily released from the pair of side panels first on the side of the remote end part when the inner bag is released from the inside surfaces of the carton.

[0018] According to the method of the present invention, one side seal-closed portion of the inner bag is pressed against one side closed portion of the carton by a having a jig, whereby a bag-in-carton having the one side-closed portion of the inner bag formed in accordance with the one side closed portion of the carton can be formed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019]

FIG. 1A is a side sectional view of the bag-in-carton according to a first embodiment of the present invention in its state where the bag-in-carton is filled with a content.

FIG. 1B is a side sectional view of the bag-in-carton according to the first embodiment of the present invention in its state where the content is drawn out.

FIG. 2 is a diagrammatic perspective view of the bag-in-carton.

FIG. 3 is a diagrammatic plan view of a carton blank for the bag-in-carton, and a tubular film.

FIG. 4 is a diagrammatic plan view of the tubular film to be adhered to the bag-in-carton.

FIG. 5A is a view of the tubular film in its sealed state.

FIG. 5B is a view of the tubular film in its sealed state.

FIG. 5C is a view of the tubular film in its sealed state.

FIG. 5D is a view of the tubular film in its sealed state.

FIG. 6 is the same view of bag-in-carton according to another embodiment of the present invention as FIG. 3.

FIG. 7A is a view of the bag-in-carton according to a second embodiment set up in a forming step of the bag-in-carton.

FIG. 7B is a view of the bag-in-carton according to the second embodiment set up in a forming step of the bag-in-carton.

FIG. 7C is a view of the bag-in-carton according to the second embodiment set up in a forming step of the bag-in-carton.

FIG. 7D is a view of the bag-in-carton according to the second embodiment set up in a forming step of the bag-in-carton.

FIG. 8A is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which the pouring spout is attached.

FIG. 8B is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which the pouring spout is attached.

FIG. 8C is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which the pouring spout is attached.

FIG. 8D is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which the pouring spout is attached.

FIG. 9A is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which one seal-closed end is formed.

FIG. 9B is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which one seal-closed end is formed.

FIG. 9C is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which one seal-closed end is formed.

FIG. 9D is a view of the bag-in-carton according to

the second embodiment in a forming step of the bag-in-carton in which one seal-closed end is formed.

FIG. 9E is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which one seal-closed end is formed.

FIG. 10A is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which one tight-closed end is formed.

FIG. 10B is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which one tight-closed end is formed.

FIG. 10C is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which one tight-closed end is formed.

FIG. 10D is a view of the bag-in-carton according to the second embodiment in a forming step of the bag-in-carton in which one tight-closed end is formed.

FIG. 11A is a side sectional view of the bag-in-carton according to a third embodiment of the present invention in its state where the bag-in-carton is filled with a content.

FIG. 11B is a side sectional view of the bag-in-carton according to the third embodiment of the present invention in its state where the content is drawn out.

FIG. 12 is a diagrammatic perspective view of the bag-in-carton.

FIG. 13 is a diagrammatic plan view of a carton blank for the bag-in-carton, and a tubular film.

FIG. 14 a diagrammatic perspective view of the bag-in-carton according to a fourth embodiment of the present invention.

FIG. 15 is a diagrammatic plan view of a carton blank for the bag-in-carton, and a tubular film.

FIG. 16 is the same view of bag-in-carton according to another embodiment of the present invention as FIG. 15.

FIG. 17A is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 17B is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 17C is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 17D is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only

a side panel for convenience.

FIG. 17E is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 17F is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 18A is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 18B is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 18C is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 18D is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 18E is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 18F is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 19A is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 19B is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

FIG. 19C is a view of inner-bag adhering regions of the bag-in-carton according to further another embodiment of the present invention and shows only a side panel for convenience.

PREFERRED EMBODIMENTS OF THE INVENTION

A First Embodiment

[0020] The bag-in-carton according to a first embodiment of the present invention will be explained with reference to drawings attached hereto.

[0021] FIGs. 1 to 5 are views of the bag-in-carton according to the first embodiment of the present invention. FIG. 1A shows the bag-in-carton according to the first embodiment which is filled with a content, and FIG. 1B shows the bag-in-carton according to the first embodi-

ment with the content drawn out. FIG. 2 is a diagrammatic perspective view of the bag-in-carton according to the first embodiment. In FIGs. 1A, 1B and 2, the bag-in-carton 1 comprises a substantially parallelepiped box-shaped carton 2 as an outer container, and a flexible inner bag 3 housed inside the carton 2. A content 4, such as ink, is held in the inner bag 3. The carton 2 includes an inclined panel between two panels of the rectangular parallelepiped and comprises four flat side panels 2a, 2b, 2c, 2d, a top and a bottom panels 2f, 2e, and the inclined panel 2g formed between the side panel 2a and the top panel 2f.

[0022] A pouring spout 5 is attached to the inclined panel 2g of the carton 2 in communication with the inner bag 3 and is closed by a cap 6. The pouring spout 5 has a tubular portion 5a extended in the inner bag 3 and has grooved passages 5b for passing the liquid formed in the end part of the tubular portion 5a on the side of the inner bag 3. Because of the passages 5b, even when, for example, the end of the tubular portion 5a in the inner bag 3 is blocked by the inner bag 3, the content 4 can be drawn out into the pouring spout 5 through the passages 5b. A projection height of the pouring spout 5 beyond the carton 2 is so set that the cap 6 put on the pouring spout 5 is within a region defined by an extension of the side panel 2a and an extension of the top panel 2f. This arrangement permits a number of the bag-in-cartons to be laid one on another and side by side in rows and columns.

[0023] The inner bag 3 is adhered fixedly to parts of the inside surfaces of the carton 2.

[0024] That is, as shown in FIGs. 1A to 3, the inner bag 3 is adhered to the substantially entire inside surfaces of the inclined panel (pouring spout attached panel) 2g, the pair of the opposed side panels 2b, 2d which are adjacent to the inclined panel 2g and the side panel 2a adjacent to the lower edge of the inclined panel 2g. The inner bag 3 may be adhered to the substantially entire inside surfaces of the inclined panel 2g and the side panel 2a at spots by an adhesive. The inner bag 3 is adhered to the four corners of the side panel 2c of the panels which are not adjacent to but remote from the inclined panel 2g. FIG. 2 shows the inner-bag adhering regions 9. FIG. 3 shows a carton blank 2' for the carton. In FIG. 3, the cross-hatched region of the inner-bag adhering regions 9 is a non-releasable region 9a, and the parallel hatched regions of the inner-bag adhering regions 9 are releasable regions 9b.

[0025] The inner bag 3 is thus adhered to the substantially entire inside surfaces of the inclined panel 2g, a pair of the side panels 2b, 2d and the side panel 2a below the inclined panel 2g, and partially to the inside surface of the side panel 2c, whereby the inner bag 3 can be firmly fixed in the carton 2. The inner bag 3 is adhered to the inside surfaces of the carton 2 by a releasable adhesive. As a result, as the content is discharged and decreased, the inner bag 3 is shrunk and easily released from the carton 2.

[0026] The inner bag 3 is spot-adhered to the inside surface of the side panel 2c at inner-bag adhered regions 9 provided on the four corners thereof. When the content 4 is discharged through the pouring spout 5, the inner bag 3 is gradually deformed to move toward the pouring spout 5. At this time, the inner bag 3 is released first from the side panel 2c, which is remote from the pouring spout 5, and the spot-adhesion of the inner bag 3 to the inside surface of the side panel 2c facilitates easy release of the inner bag 3 off the side panel 2c. The inner-bag adhering regions 9 on the side panel 2c may be square as shown in FIG. 2 or rectangular.

[0027] Then, a method for forming the bag-in-carton 1 having the above-described structure will be explained. First, a cardboard is punched in a prescribed shape as shown in FIG. 3 to prepare a carton blank 2' having panels 2a'-2h' to be set up into the carton. The inner-bag adhering regions 9 are formed on the inside surface of the panels 2a', 2b', 2c', 2d', 2g' (which are to be the side panels 2a, 2b, 2c, 2d and the inclined panel 2g). While the carton blank 2' is being formed, as shown in FIG. 4, a sheet film is folded into a tubular shape and back-sealed at end portions to form a back sealed portion 16. The folded film is cut into tubular films 3' of a required length (whose top and bottom ends will be sealed in a later step into the inner bags).

[0028] Then, an adhesive, e.g., an emulsion-type adhesive, as of vinyl acetate group, acryl copolymer group, vinyl acetate-acryl copolymer group, modified ester acrylate copolymer group, etc., is applied to the inner-bag adhering regions 9 which are formed on the substantially entire inside surfaces of the panels 2a', 2b', 2d' and 2g' of the carton blank 2'. The adhesive is applied to the inner-bag adhering regions 9 formed partially on the side panel 2c' and a glue margin 2h' of the carton blank 2'. A glue margin 2i' of the carton blank 2' is folded inside when the carton blank 2' is set up, and a hot-melt adhesive, as of ethylene-vinyl acetate copolymer group, polyvinyl acetate group, polyamide group, polyethylene group, styrene-butadiene copolymer group, styrene-isobutylene copolymer group, polyisobutylene group, polyester group, etc., is also applied to the glue margin 2i'. The emulsion-type adhesive is also applied to the back surface of the glue margin 2h'.

[0029] Then, as shown in FIG. 3, the tubular film 3' is adhered to the panels 2a', 2d', 2g' of the carton blank 2' by means of an adhesive. The tubular film 3' is so arranged that the back-sealed portion 16 is in abutment on the side panel 2c and is opposed to the pouring spout 5 when the carton blank 2' is set up. Then, the side panels 2b', 2c' are folded on the tubular film 3' and barrel-sealed. The panels 2b', 2c' and the glue margin are adhered to the tubular film 3', and the panels 2b' are adhered. Thus flat bag-in-carton before set up is formed.

[0030] Then, the flat bag-in-carton 1 is fed to the setting-up step portion and the loading step portion, and is set up there into a rectangular parallelepiped and completed. Then, a pouring spout attached portion 15 (FIG.

3) of the carton blank 27 is punched, and the pouring spout 5 is attached. Then, the upper end of the tubular film 3' is seal-closed.

[0031] This seal closing operation is conducted as shown in FIGs. 5A to 5D (in FIGs. 5A to 5D the carton is shown simplified for easy understanding). That is, as shown in FIG. 5A, the end of the tubular film 3' opened in a rectangular parallelepiped is closed as shown in FIG. 5B, and the end is sealed horizontally to form a first seal 10. Then, the first seal 10 is pressed flat as shown in FIG. 5C to form triangular flaps 11 on both sides. The bottom sides of the triangular flaps 11 are sealed to form second seals 12, and the triangular flaps 11 are folded inward as shown in FIG. 5D, whereby the tubular film 3' is set up with the end of the tubular film 3' are sealed. Because of the second seals 12 on the bottom sides of the triangular flaps 11, the inner bag 3 is free from its content entering the triangular flaps 11 and trapped there with a result that a large amount of the content resides. The second seals 12 have reinforcing effect, and also functions to retain the inner bag 3 substantially rectangular parallelepiped. It is possible to deform entirely the inner bag 3 in good shape when a content is drawn out.

[0032] After the tubular film 3' is set up with the upper end of the tubular film 3' sealed, the top of the carton blank 2' is set up.

[0033] Then, the lower end of the tubular film 3' is sealed in the same way as the upper end thereof, and then the bottom of the carton blank 2' is set up. And the bag-in-carton 1 accommodating the inner bag 3 in the carton 2 is set up. This process can be conducted by the conventional bag-in-carton forming technique, and the forming equipments, etc. are not explained. Finally a content 4, such as ink or others, is loaded in the bag-in-carton 1, and the bag-in-carton 1 has the state shown in FIG. 1A.

[0034] In using the bag-in-carton filled with a content 4, as shown in FIGs. 1A and 1B, the bag-in-carton is set on a machine, such as a printing machine or others, with the pouring spout directed downward, and the pouring spout is connected to a connector (not shown) of drawing means belonging to the machine. The content 4 is drawn and discharged through the pouring spout 5. At this time, the inner bag 3 starts being released from the inner-bag adhering regions 9 on the side panel 2c, which are spot-adhesions, and then from the pair of opposed side panels 2b, 2d. As the content 4 is drawn, the released parts of the inner bag 2 is deformed as shown by the two-dot lines 21a, 21b in FIG. 1B and is displaced to the pouring spout 5, whereby the content 4 can be discharged in a stably constant amount without letting air into the inner bag 3. Finally the released part of the inner bag 3 is withdrawn into the unreleasable part thereof, which is fixed to the inside surfaces of the carton 2 and are substantially a rest half of the inner bag 3, and almost all the content is discharged.

[0035] Next, the adhesive strength of the releasable

part 9a and the unreleasable part 9a will be explained.

[0036] Adhesive strengths of the releasable part 9b and the unreleasable part 9a are substantially as follows.

[0037] An adhesive strength (a force (gf) 15 mm-width samples required to be released when subjected to a tensile test at the room temperature) is

a strength of the unreleasable part 9a at the start of the release: about 4.6 N (470 gf)

an adhesive strength of the releasable part 9b: about 2.1 N (210 gf).

[0038] It is preferable that the unreleasable part 9a has a higher adhesive strength than that of the releasable part 9b.

[0039] As described above, according to the present embodiment, when the content 4 is drawn out through the pouring spout 5, the inner bag 3 starts being released first from the inner-bag adhering regions 9, to which the inner bag 3 is spot adhered, and then from the inside surfaces of the one pair of the side panels 2b, 2d, and is gradually deformed and displaced to the pouring spout 5. Then, the released part of the inner bag 3 is withdrawn into the unreleasable part thereof, whereby substantially all the content 4 can be drawn out through the pouring spout 5.

[0040] The inner bag 3 is gradually released from the inside surfaces of the carton 2 as the content 4 is decreased, whereby the inner bag 3 is kept from being excessively released to adversely contact tightly the unreleasable part thereof, confining the content 4.

[0041] The pouring spout 5 is located substantially at the center of the inclined panel 2g. The back sealed portion 16 on the inner bag 3 is located at a position where the portion 16 abuts on the side panel 2c, and is opposed to the pouring spout 5, i.e., is located substantially at the center of the side panel 2c. This arrangement enables the content 4 of the inner bag 3 to be driven to the pouring spout without failure when the inner bag 3 is deformed, displaced to the pouring spout 5 as the content 4 is drawn out.

[0042] That is, the back sealed portion 16 of the inner bag 3, which is harder than the rest part of the inner bag 3, tends to hinder the deformation when the inner bag 3 is deformed. Accordingly in a case where the back sealed portion 16 abuts on, e.g., the side panel 2b, which is adjacent to the inclined panel 2g (the pouring spout attached panel), the back sealed portion 16 hinders the deformation of the inner bag 3 as a result the inner bag 3 may be deformed horizontally unsymmetrically with respect to the pouring spout 5.

[0043] According to the present invention, because the back sealed portion 16 is located opposed to the pouring spout 5, the inner bag 3 can be deformed horizontally symmetrically with respect to the pouring spout 5 as the center, whereby the content 4 of the inner bag 3 can be smoothly sent out to the pouring spout without unsymmetrical deformation.

[0044] Next, another embodiment of the present in-

vention will be explained with reference to FIG. 6. The embodiment shown in FIG. 6 is substantially the same as the embodiment shown in FIGs. 1A to 5D except that the inner-bag adhering regions have different shapes from those of the embodiment shown in FIGs. 1A to 5D.

[0045] As shown in FIG. 6, on the panels 2b', 2d' (which are to be a pair of side panels 2b, 2d) of a carton blank 2', inner-bag adhering regions 9 have concavities 23a and convexities 23b on the boundaries, and the boundaries of the inner-bag adhering regions 9 on the panels 2b', 2d' are concave and convex.

[0046] It is preferred that the convexities and concavities 23a, 23b of the inner-bag adhering regions 9 on the panels 2b', 2d' are formed in parts which are remotest from a pouring spout 5. When the content 4 is drawn out through the pouring spout 5, the inner bag 3 starts being released from the parts of the pair of side panels 2b, 2d which are remotest from the pouring spout 6, and the concavities and convexities 23a, 23b formed in the remotest parts of the inner-bag adhering regions 9 from the pouring spout 5 enables the inner bag 3 to smoothly start the release.

[0047] In the above-described embodiments, the pouring spout 5 has the cylindrical portion 5a extended in the inner bag 3, but the pouring spout 5 is not limited to this structure. The pouring spout 5 may be a usual one without the cylindrical portion 5a. It is possible that a suitable passage member (e.g., a rod-shaped member or others of H-shaped section) which can ensure a passage for a content to pass through when the releasable part of the inner bag 3 is withdrawn into the unreleasable part thereof is provided in the bottom of the inner bag 3.

[0048] In taking out the content 4, the case that the bag-in-carton 1 is set on a machine with the pouring spout 5 faced downward has been explained, but the state is not essential. Depending on machines, the bag-in-carton 1 may be set suitably with the pouring spout 5 faced upward or sidewise. By setting the bag-in-carton 1 on a machine with the pouring spout 5 faced upward, run of the content from the pouring spout 5 can be prevented.

[0049] As described above, according to the present invention, the inner bag 3 can be firmly fixed inside the carton 2 before the content 4 is drawn out, and as the content 4 is drawn out, the inner bag 3 can be released from the inside surfaces of the carton to be deformed to the pouring spout 5. The releasable part of the inner bag 3 is withdrawn into the unreleasable part thereof, whereby substantially all the content 4 can be drawn out through the pouring spout 5 without failure. The inner bag 3 is gradually released from the inside surfaces of the carton 2, whereby the releasable part of the inner bag 3 is brought into tight contact with the unreleasable part thereof, confining the content.

A Second Embodiment

[0050] A second embodiment of the present invention will be explained with reference to the drawings.

[0051] FIGs. 7A to 10D show the second embodiment. The bag-in-carton according to the second embodiment is substantially the same as the bag-in-carton according to the first embodiment shown in FIGs. 1A to 3, and the same members are represented by the same reference numerals to omit their detailed description.

[0052] Then, a method for forming the bag-in-carton according to the second embodiment will be explained with reference to FIGs. 3, 4 and FIGs. 7A to 10D. First, as shown in FIG. 3, a cardboard is punched into a required shape to prepare a carton blank 2' to be set up into a carton 2. Inner-bag adhering regions 9 are provided on the inside surfaces of panels 2a', 2b', 2c', 2d', 2g' of the carton blank 2' (which are to be side panels 2a, 2b, 2c, 2d and the inclined panel 2g of the carton 2). While the carton blank 2' is being formed, as shown in FIG. 4, a sheet film is folded into a tubular shape and back-sealed at end portions to form a back-sealed portion 16. The folded film is cut into a tubular film 3' of a required length (whose top and bottom ends will be sealed in a later step into the inner bag).

[0053] Then, an adhesive, e.g., an emulsion-type adhesive, as of vinyl acetate group, acryl copolymer group, vinyl acetate-acryl copolymer group, modified ester acrylate copolymer group, etc., is applied to the inner-bag adhering regions 9 which are formed on the substantially entire inside surfaces of the panels 2a', 2b', 2d' and 2g' of the carton blank 2'. The adhesive is applied to the inner-bag adhering regions 9 formed partially on the side panel 2c' and a glue margin 2h' of the carton blank 2'. A glue margin 2i' of the carton blank 2' is folded inside when the carton blank 2' is set up, and a hot-melt adhesive, as of ethylene-vinyl acetate copolymer group, polyvinyl acetate group, polyamide group, polyethylene group, styrene-butadiene copolymer group, styrene-isobutylene copolymer group, polyisobutylene group, polyester group, etc., is also applied to the glue margin 2h'. The emulsion-type adhesive is also applied to the back surface of the glue margin 2h'.

[0054] Then, as shown in FIG. 3, the tubular film 3' is adhered to the panels 2a', 2d', 2g' of the carton blank 2' by means of an adhesive. The tubular film 3' is so arranged that the back-sealed portion 16 is in abutment on the side panel 2c and is opposed to the pouring spout 5 when the carton blank 2' is set up. Then, the side panels 2b', 2c' are folded on the tubular film 3' and body-sealed. The panels 2b', 2c' and the glue margin are adhered to the tubular film 3', and the panels 2b' are adhered. Thus flat bag-in-carton before set up is formed. Then, the flat bag-in-carton 1 is sent to the setting up and charging step portion to be set up and charged with a content. The bag-in-carton setting up step will be explained with reference to FIGs. 7A to 10D.

[0055] First as shown in FIG. 7A, the bag-in-carton 1

is set up into a rectangular parallelepiped one, supported by a support 27. At this time, openings are formed on both sides of the bag-in-carton 1 (both the upper and the lower sides), and openings are formed in both sides of the inner bag 3. In FIG. 7A, the carton 2 has a plurality of side panels 24 on one side opening and a plurality of side panels 25 on the other side opening.

[0056] Then, as shown in FIG. 7B, a pair of arms 28 is lowered through the upper opening (one side opening) of the carton 2. Then, the pair of arms 28 is advanced into the inner bag 3 to expand the inner bag 3. Next, the other side panels 25 are expanded by arms not shown (FIG. 7C).

[0057] Next, as shown in FIG. 7D, a female die 29 is lowered through the one side opening of the carton 2 and is advanced into the inner bag 3. Then, a male die 30 is brought near the female die 29, and a pouring spout attached portion 15 (see FIG. 3) is punched between the female die 29 and the male die 30 in an inclined panel 2g of the carton 2.

[0058] Then, as shown in FIG. 8A, photoelectric tube 31 is brought near the punched pouring spout portion 15 to detect whether or not the pouring spout portion 15 has been punched. Next, as shown in FIG. 8B, a pouring spout holding unit 32 holding a pouring spout 5 is lowered into the inner bag 3 through the one side opening and is further moved to the pouring spout attached portion 15 to mount the pouring spout 5.

[0059] Next, as shown in FIG. 8C, it is detected by the photoelectric tube 33 whether or not the pouring spout 5 has been attached. Next, as shown in FIG. 8D, a supersonic wave oscillator 34 is brought near to the pouring spout 5. Simultaneously therewith a supersonic wave receiver 35 is lowered into the inner bag 3 through the one side opening of the carton 2. In this state, supersonic waves are outputted by the supersonic wave oscillator 34 to supersonic wave-seal the pouring spout 5 to the inside surface of the inner bag 3 to be secured to the carton 2.

[0060] Then, as shown in FIG. 9A, a pair of arms 41 is lowered through one side opening of the carton 2 and is advanced into the inner bag 3 to expand the inner bag 3. Simultaneously therewith, a pawl unit 42 is brought near the carton 2 to expand the respective panels 24 on one side of the carton 2.

[0061] Then, as shown in FIG. 9B, a pair of seal arms 44 is lowered through one side opening of the carton 2 and is advanced into the inner bag 3 to expand one side opening thereof. Simultaneously therewith, a pair of press levers 46 and a pair of seal bars 47 as shown in FIG. 9E are brought near one end opening of the inner bag 3, and one end opening of the inner bag 3 expanded by the pair of seal arms 44 is pressed first by the pair of press bars 46. Next, the pair of seal bars 47 seal one end opening of the inner bag 3. A first sealed portion 10 is formed in one end opening of the inner bag 3. FIG. 9E shows the inner bag as viewed in the direction of the arrow E in FIG. 9B.

[0062] Next, as shown in FIG. 9C, the first sealed portion 10 formed in one end opening of the inner bag 3 is cooled by a cooling bar (not shown). Then, as shown in FIG. 9D, a holding plate 48 having a pair of side plates is disposed on the upper surface of the first sealed portion 10.

[0063] Then, a pair of presser plates 49, 49 are pressed against the pair of side plates to press a pair of triangular flaps formed on one side of the inner bag 3. Air in the triangular flaps 11 is thus exhausted.

[0064] Next, as shown in FIG. 10A, a pair of seal bars 51 are brought near the triangular flaps 11, and then bottoms of the triangular flaps 11 are sealed by the seal bars 51 to form second sealed portions 12 which are perpendicular to the first sealed portions 10. Thus, one side seal-closed portion 3a of the inner bag 3 is formed at one end of the inner bag 3.

[0065] Next, as shown in FIG. 10B, the pair of triangular flaps 11 and the respective panels 24 on one side of the inner bag 3 are sequentially folded, and the respective panels 24 are adhered and the shape thereof is formed between the presser plate 54 disposed above the carton 2 and a forming carrier 53 advanced into the inner bag 3 through the lower opening (the other end opening).

[0066] Then, as shown in FIG. 10C, all the panels 24 on one end are folded, and one end of the carton 2 is adhered and the shape thereof is formed between a presser plate 56 disposed above the carton 2 and a forcing carrier 55 advanced into the carton 2 through the other end opening. The one end of the carton 2 is thus tight closed to form one side closed portion. In this case, the one side closed portion of the carton 2 has a top panel 2f, and an inclined panel 2g which is inclined to the top panel 2f and having the pouring spout 5 attached to.

[0067] Next, as shown in FIG. 10D, a presser plate 58 is disposed above the one side closed portion of the carton 2. On the other hand, a forming jig 57 having a top panel presser surface 57f corresponding to the top panel 2f, and an inclined panel presser surface 57f corresponding to the inclined panel 2g is advanced into the inner bag 3 sequentially through the other end opening of the carton 2 and then through the other end opening of the inner bag 3. In this state, the forming jig 57 presses the one side seal-closed end 3a of the inner bag 3 closed by the first and the second sealed portions 10, 12 against the one side closed portion of the carton 2. A pressing force of the forming jig 57 at this time is born by the presser plate 58.

[0068] By thus pressing the one side seal-closed portion 3a of the inner bag 3 against the one side seal-closed portion of the carton 2 by the forming jig 57, the one side seal-closed portion 3a of the inner bag 3 can be formed in a uniform, constantly stable shape in accordance with a shape of the one side closed portion (corresponding to the top panel 2f and the inclined panel 2g).

[0069] Generally only sealing one end of the flexible

inner bag 3 and accommodating the one side seal-closed portion 3a of the inner bag 3 in the carton 2 adversely permits the one seal-closed portion 3a to take various shapes with a result that the inner bag 3 have various capacities.

[0070] Unless the inner 3 bag is accommodated in a constantly stable shape, after a content of the inner bag 3 is discharged, the inner bag 3 has much residue of the content. As a result, the inner bag 3 adversely has various volumes.

[0071] In the present invention, the one side seal-closed portion 3a of the inner bag 3 is formed by the forming jig 57 in accordance with a shape of the one side closed portion 2f, 2g of the carton 2, whereby the one side seal-closed portion 3a of the inner bag 3 can be formed with good precision, and accordingly the inner bag 3 can have a constant volume. On the other hand, the inner bag 3 is accommodated in a regular, constantly stable shape, whereby the inner bag can have less residual content. Accordingly a certain amount of content can be held in the inner bag with good precision. Furthermore, the pouring spout 5 is attached to the inclined panel 2g of the carton 2, and the part of the one side seal-closed portion 3a of the inner bag 3 corresponding to the inclined panel 2g of the carton 2 can be formed in a uniform, constantly stable shape in accordance with a shape of the inclined panel 2g by the inclined presser plate 57g of the forming jig 57. Next, the other end opening of the inner bag 3 is sealed in the same way as the seal-closed portion 3a, and the other side seal-closed portion (having the same structure as the one side seal-closed portion 3a) is formed, and then the other end of the carton 2 is tight-closed to form the other side closed portion 2e. The bag-in-carton 1 comprising the carton 2 accommodating the inner bag therein is thus set up.

[0072] These steps can be carried out by the conventional bag-in-carton forming technique, and the detailed description of the forming equipment is omitted. Finally a content, the bag-in-carton 1 is charged with a content, such as ink, and has a state shown in FIG. 1A.

[0073] In using the bag-in-carton filled with a content 4, as shown in FIGs. 1A and B, the bag-in-carton is set on a machine, such as a printing machine or others, with the pouring spout directed downward, and the pouring spout is connected to a connector (not shown) of drawing means belonging to the machine. The content 4 is drawn and discharged through the pouring spout 5. At this time, the inner bag 3 starts being released from the inner-bag adhering regions 9 on the side panel 2c, which are spot-adhesions, and then from the pair of opposed side panels 2b, 2d. As the content 4 is drawn, the released parts of the inner bag 2 is deformed as shown by the two-dot lines 21a, 21b in FIG. 1B and is displaced to the pouring spout 5, whereby the content 4 can be discharged without letting air into the inner bag 3. Finally the released part of the inner bag 3 is withdrawn into the unreleasable part thereof, which is fixed to the inside

surfaces of the carton 2 and are substantially a rest half of the inner bag 3, and almost all the content is discharged.

[0074] Next, the adhesive strength of the releasable part 9a and the unreleasable part 9a will be explained.

[0075] Adhesive strengths of the releasable part 9b and the unreleasable part 9a are substantially as follows.

[0076] An adhesive strength (a force (gf) 15 mm-width samples required to be released when subjected to a tensile test at the room temperature) is

a strength of the unreleasable part 9a at the start of the release: about 4.6 N (470 gf)

an adhesive strength of the releasable part 9b about 2.1 N (210 gf).

[0077] It is preferable that the unreleasable part 9a has a higher adhesive strength than that of the releasable part 9b.

[0078] As described above, according to the present embodiment, the one side seal-closed portion 3a of the inner bag 3 is formed by means of the forming jig 57 having the top panel presser surface 57f and the inclined panel presser surface 57g in accordance with a shape of the one side closed portion defined by the inclined panel 2g and the top panel 2f, whereby the one side seal-closed portion 3a of the inner bag 3 can be formed with high precision, and accordingly the inner bag 3 can have a constant volume. Because of the second sealed portion 12 provided on the proximal ends of the triangular flaps 11, which are normal thereto, the content is prevented from being confined in the triangular flaps 11, without a result that more of the content resides. The second sealed-portion 12 has a function of reinforcement, whereby the inner bag 3 can be retained substantially rectangular parallelepiped. When a content is drawn out, the inner bag can be generally deformed in good shape.

[0079] In the above-described embodiments, the pouring spout 5 has the cylindrical portion 5a extended in the inner bag 3, but the pouring spout 5 is not limited to this structure. The pouring spout 5 may be a usual one without the cylindrical portion 5a. It is possible that a suitable passage member (e.g., a rod-shaped member or others of H-shaped section) which can ensure a passage for a content to pass through when the releasable part of the inner bag 3 is withdrawn into the unreleasable part thereof is provided in the bottom of the inner bag 3.

[0080] In taking out the content 4, the case that the bag-in-carton 1 is set on a machine with the pouring spout 5 faced downward has been explained, but the state is not essential. Depending on machines, the bag-in-carton 1 may be set suitably with the pouring spout 5 faced upward or sidewise. By setting the bag-in-carton 1 on a machine with the pouring spout 5 faced upward, run of the content from the pouring spout 5 can be prevented.

[0081] Furthermore, the inner bag 3 can be accom-

modated in a constantly stable shape, whereby less of the content resides after discharged.

[0082] According to the present invention, the one side seal-closed portion 3a of the inner bag 3 can be formed by the forming jig 57 in accordance with the one side closed portion defined by the top panel 2f and the inclined panel 2g of the carton 2, whereby the inner bag 3 can have a substantially constant volume with high precision.

[0083] The inner bag 3 can be accommodated constantly stable. When the content 4 is drawn out, the inner bag 3 can be generally deformed in good shape, and less of the content resides.

A Third Embodiment

[0084] Next, a third embodiment of the present invention will be explained with reference to the drawings.

[0085] FIGs. 11A to 13 show the bag-in-carton according to the third embodiment of the present invention. FIG. 11 shows the bag-in-carton in a state where the bag-in-carton is filled with a content, and FIG. 11B shows the bag-in-carton in a state where the content is drawn out. FIG. 12 is a diagrammatic perspective view of the bag-in-carton. In FIGs. 11A, 11B and 12, the bag-in-carton 1 comprises a substantially rectangular parallelepiped box-shaped carton 2 which provides an outer container, and a flexible inner bag 3 accommodated in the outer container. The inner bag 3 holds a liquid content 4, such as ink or others. The carton 2 has an inclined panel between two adjacent panels of the rectangular parallelepiped, and has four flat side panels 2a, 2b, 2c, 2d, a top and a bottom panels 2e, 2f, and the inclined panels 2g formed between the side panels 2f, 2a.

[0086] A pouring spout 5 is attached to the inclined panel 2g of the carton 2 in communication with the inner bag 3, and the pouring spout 5 is closed with a cap 6. The pouring spout 5 has a tubular portion 5a which is extended into the inner bag through the inclined panel 2g and the inner bag 3, and has grooved passages 5b for passing the liquid formed in the end part of the tubular portion 5a on the side of the inner bag 3. Because of the passages 5b, even when, for example, the end of the tubular portion 5a in the inner bag 3 is blocked by the inner bag 3, the content 4 can be drawn out into the pouring spout 5 through the passages 5b. A projection height of the pouring spout 5 beyond the carton 2 is so set that the cap 6 put on the pouring spout 5 is within a region defined by an extension of the side panel 2a and an extension of the top panel 2f. This arrangement permits a number of the bag-in-cartons to be laid one on another and side by side in rows and columns.

[0087] The inner bag 3 is adhered fixedly to parts of the inside surfaces of the carton 2.

[0088] That is, as shown in FIGs. 11A to 13, the inner bag 3 is adhered to the substantially entire inside surfaces of the inclined panel (pouring spout attached panel) 2g, the pair of the opposed side panels 2b, 2d which

are adjacent to the inclined panel 2g and the side panel 2a adjacent to the lower edge of the inclined panel 2g. The inner bag 3 may be adhered to the substantially entire inside surfaces of the inclined panel 2g and the side panel 2a at spots by an adhesive.

[0089] As shown in FIGs. 12 and 13, the inner bag 3 is also adhered to the regions of one pair of the side panels 2b, 2d opposed to each other and adjacent to the inclined panel 2g, which (regions) exclude strips 18. The strips 18 on the pair of the side panels 2b, 2d are regions formed substantially at the middle of a straight line 21 (see FIGs. 11A and 11B) interconnecting the pouring spout 5 and the remotest end part 20 of the carton 2, which is remotest from the pouring spout 5 and are formed substantially normal to the straight line 21. The strips 18 thus formed on the pair of the side panels 2b, 2d permit the inner bag 3 to start being released at the side of the remotest end part 20 on the pair of the side panels 2b, 2d as will be described later, when the inner bag 3 is released from the inside surfaces of the carton 2 and finish the release.

[0090] The inner bag 3 is also adhered partially (to the four corners) to the side panel 2c of the side panels which are not adjacent to the inclined panel 2g but remote from the same. FIG. 12 shows the inner-bag adhering regions 9. FIG. 13 shows a carton blank 2' for forming the carton. In FIGs. 12 and 13, parts of the inner-bag adhering regions 9 on the pair of side panels 2b, 2d, which are on the upper side of the strips 18 and are nearer to the pouring spout 5 are unreleasable regions 9a, and the rest parts are releasable regions 9b. The inner-bag adhering region on the side panel 2c is a releasable region 9b.

[0091] As described above, the inner bag 3 is adhered to all the inside surface of the inclined panel 2g and substantially all the entire inside surface of the side panel 2a below the inclined panel 2g, to the inside surfaces of the pair of side panels 2b, 2d except the strips 18, and partially to the inside surface of the side panel 2c, whereby the inner bag 3 can be firmly fixed inside the carton 2. The inner bag 3 is adhered to the carton 2 releasably by an adhesive. Accordingly as the content 4 is decreased, the inner bag 3 can be readily released from the carton 2, withdrawn into itself.

[0092] When the content 4 is discharged through the pouring spout 5, the inner bag 3 is gradually deformed and moved to the pouring spout 5. At this time, the inner bag 3 starts being released first from the side panel 2c. The spot adhesion of the inner bag 3 to the side panel 2c allows the inner bag 3 to be readily released from the side panel 2c. The inner-bag adhering region 9 of the inner bag 3 to the inside surface of the side panel 2c may be square or rectangular.

[0093] Then, a method for forming the bag-in-carton 1 having the above-described structure will be explained. First, a cardboard is punched in a prescribed shape as shown in FIG. 13 to prepare a carton blank 2' to be set up into the carton. The inner-bag adhering re-

gions 9 are formed on the inside surface of the panels 2a', 2b', 2c', 2d', 2g' of the carton blank 2' (which are to be the side panels 2a, 2b, 2c, 2d and the inclined panel 2g). While the carton blank 2' is being formed, as shown in FIG. 4, a sheet film is folded into a tubular shape and back-sealed at end portions to form a back-sealed portion 16. The folded film is cut into a tubular film 3' of a required length (whose top and bottom ends will be sealed in a later step into the inner bags).

[0094] Then, an adhesive, e.g., an emulsion-type adhesive, as of vinyl acetate group, acryl copolymer group, vinyl acetate-acryl copolymer group, modified ester acrylate copolymer group, etc., is applied to the inner-bag adhering regions 9 which are formed on the substantially entire inside surfaces of the panels 2a', 2b', 2d' and 2g' of the carton blank 2'. The adhesive is applied to the inner-bag adhering regions 9 formed partially on the side panel 2c' and a glue margin of the carton blank 2'. The glue margin 2h' is a part forming the side panel 2b of the carton 2 and has an inner-bag adhering region 9 including the unreleasable region 9a and the releasable region 9b formed on both sides of the strip 19. The emulsion-type adhesive is also applied to the back surface of the glue margin 2h'.

[0095] The glue margin 2i' of the carton blank 2' is folded inside when the carton blank 2' is set up into the carton 2. A hot-melt adhesive, as of ethylene-vinyl acetate copolymer group, polyvinyl acetate group, polyamide group, polyethylene group, styrene-butadiene copolymer group, styrene-isobutylene copolymer group, polyisobutylene group, polyester group, etc., is also applied to the glue margin 2i'.

[0096] Then, as shown in FIG. 13, the tubular film 3' is adhered to the panels 2a', 2d', 2g' of the carton blank 2' by means of an adhesive. The tubular film 3' is so arranged that the back-sealed portion 16 is in abutment on the side panel 2c and is to be opposed to the pouring spout 5 when the carton blank 2' is set up. Then, the side panels 2b', 2c' are folded on the tubular film 3' and body-sealed. The panels 2b', 2c' and the glue margin 2h' are adhered to the tubular film 3', and the panels 2b' are adhered. Thus flat bag-in-carton before set up is formed.

[0097] Then, the flat bag-in-carton 1 is fed to the setting-up step portion and the loading step portion, and is set up there into a rectangular parallelepiped and completed. Then, a pouring spout attached portion 15 (FIG. 13) of the carton blank 2' is punched, and the pouring spout 5 is attached. Then, the upper end of the tubular film 3' is seal-closed.

[0098] After the carton blank is set up with the upper end of the tubular film 3' sealed, the top of the carton blank 2 is set up.

[0099] Then, the lower end of the tubular film 3' is sealed in the same way as the upper end thereof, and then the bottom of the carton blank 2' is set up. And the bag-in-carton 1 accommodating the inner bag 3 in the carton 2 is set up. This process can be conducted by

the conventional bag-in-carton forming technique, and the forming equipments, etc. are not explained. Finally a content 4, such as ink or others, is loaded in the bag-in-carton 1, and the bag-in-carton 1 has the state shown in FIG. 11A.

[0100] In using the bag-in-carton filled with a content 4, as shown in FIGs. 11A and 11B, the bag-in-carton is set on a machine, such as a printing machine or others, with the pouring spout directed downward, and the pouring spout is connected to a connector (not shown) of drawing means belonging to the machine. The content 4 is drawn and discharged through the pouring spout 5. At this time, the inner bag 3 starts being released from the inner-bag adhering regions 9 on the side panel 2c, which are spot-adhesions, and then from the pair of opposed side panels 2b, 2d. As the content 4 is drawn out, the releasable part of the inner bag 2 is deformed as indicated by the two-dot lines 21a, 21b in FIG. 11B and is moved along the straight line 21 interconnecting the pouring spout 5 and the remotest end part 20, whereby the content 4 can be discharged in a constant discharge amount without letting air in the inner bag 3. Finally the released part of the inner bag 3 is withdrawn into the rest half unreleasable part of the inner bag 3, and substantially all the content is discharged.

[0101] At this time, on the pair of side panels 2b, 2d, the inner bag 3 starts being released on the side of the remotest end part of the carton 2, and the end of the release of the inner bag 3 can be exactly determined by the strips 18 formed substantially crossing the straight line 21 at the substantial middle thereof, whereby the inner bag can be uniformly deformed. Accordingly the content of the inner bag 3 can be supplied stably in a constant amount.

[0102] Next, the adhesive strength of the releasable part 9a and the unreleasable part 9a will be explained.

[0103] Adhesive strengths of the releasable part 9b and the unreleasable part 9a are substantially as follows.

[0104] An adhesive strength (a force (gf) 15 mm-width samples required to be released when subjected to a tensile test at the room temperature) is

a strength of the unreleasable part 9a at the start of the release: about 4.6 N (470 gf)

an adhesive strength of the releasable part 9b: about 2.1 N (210 gf).

[0105] It is preferable that the unreleasable part 9a has a higher adhesive strength than that of the releasable part 9b.

[0106] As described above, according to the present embodiment, when the content 4 is drawn out through the pouring spout 5, the inner bag 3 starts being released first from the inner-bag adhering regions 9, to which the inner bag 3 is spot adhered, and then from the inside surfaces of the one pair of the side panels 2b, 2d, and is gradually deformed and displaced to the pouring spout 5. Then, the released part of the inner bag 3 is withdrawn into the unreleasable part thereof, whereby

substantially all the content 4 can be drawn out through the pouring spout 5. At this time, on the pair of side panels 2b, 2d, the release of the inner bag 3 can be stopped at the strips 18, whereby the inner bag 3 can be uniformly deformed, and accordingly the content 4 of the inner bag can be fed in a stably constant amount.

[0107] The back sealed portion 16 formed on the inner bag 3 is in abutment on the side panel 2c and is opposed to the pouring spout 5. Accordingly as the content 4 is drawn out, the inner bag 3 is deformed and moved to the pouring spout 5, whereby the content 4 of the inner bag 3 is discharged to the pouring spout 4 without failure.

[0108] That is, the back sealed portion 16 of the inner bag 3, which is harder than the rest part of the inner bag 3, tends to hinder the deformation when the inner bag 3 is deformed. Accordingly in a case that the back sealed portion 16 abuts on, e.g., the side panel 2b, which is adjacent to the inclined panel 2g (the pouring spout attached panel), the back sealed portion 16 hinders the deformation of the inner bag 3 with a possible result that the inner bag 3 may be deformed horizontally unsymmetrically with respect to the pouring spout 5.

[0109] According to the present invention, because the back sealed portion 16 is located opposed to the pouring spout 5, the inner bag 3 can be deformed horizontally symmetrically with respect to the pouring spout 5 as the center, whereby the content 4 of the inner bag 3 can be smoothly sent out to the pouring spout without unsymmetrical deformation.

[0110] In the above-described embodiments, the pouring spout 5 has the cylindrical portion 5a extended in the inner bag 3, but the pouring spout 5 is not limited to this structure. The pouring spout 5 may be a usual one without the cylindrical portion 5a. It is possible that a suitable passage member (e.g., a rod-shaped member or others of H-shaped section) which can ensure a passage for a content to pass through when the releasable part of the inner bag 3 is withdrawn into the unreleasable part thereof is provided in the bottom of the inner bag 3.

[0111] In taking out the content 4, the case that the bag-in-carton 1 is set on a machine with the pouring spout 5 faced downward has been explained, but the state is not essential. Depending on machines, the bag-in-carton 1 may be set suitably with the pouring spout 5 faced upward or sidewise. By setting the bag-in-carton 1 on a machine with the pouring spout 5 faced upward, run of the content from the pouring spout 5 can be prevented.

[0112] As described above, according to the present invention, the inner bag 3 can be firmly fixed inside the carton 2 before the content 4 is drawn out, and as the content 4 is drawn out, the inner bag 3 can be released from the inside surfaces of the carton to be deformed to the pouring spout 5. The releasable part of the inner bag 3 is withdrawn into the unreleasable part thereof, whereby substantially all the content 4 can be drawn out

through the pouring spout 5 without failure. At this time, on the pair of side panels 2b, 2d the release of the inner bag 3 starts on the side of the remotest end part 20 and stops at the strips 18, whereby the end position of the release of the inner bag 3 can be exactly determined, and accordingly the inner bag 3 can be uniformly deformed. As a result, the content 4 of the inner bag 3 can be supplied in a stably constant amount.

10 A fourth Embodiment

[0113] A fourth embodiment of the present invention will be explained with reference to the drawings.

[0114] FIGs. 14 to 19C are views of the fourth embodiment of the present invention. In FIG. 14, the bag-in-carton 1 comprises a substantially parallelepiped box-shaped carton 2 which provides an outer container, and a flexible inner bag 3 housed inside the carton 2. A content 4, such as ink, is held in the inner bag 3. The carton 2 includes an inclined panel between two panels of the rectangular parallelepiped one, that is, the carton 2 comprises four flat side panels 2a, 2b, 2c, 2d, a top and a bottom panels 2f, 2e, and the inclined panel 2g formed between the side panel 2a and the top panel 2f.

[0115] A pouring spout 5 is attached to the inclined panel 2g of the carton 2 in communication with the inner bag 3 and is closed by a cap 6. The pouring spout 5 has a tubular portion 5a extended in the inner bag 3 through the inclined panel 2g and the inner bag 3 (see FIG. 1) and has grooved passages 5b for passing the liquid formed in the end part of the tubular portion 5a on the side of the inner bag 3. Because of the passages 5b, even when, for example, the end of the tubular portion 5a in the inner bag 3 is blocked by the inner bag 3, the content 4 can be drawn out into the pouring spout 5 through the passages 5b. A projection height of the pouring spout 5 beyond the carton 2 is so set that the cap 6 put on the pouring spout 5 is within a region defined by an extension of the side panel 2a and an extension of the top panel 2f. This arrangement permits a number of the bag-in-cartons to be laid one on another and side by side in rows and columns.

[0116] The inner bag 3 is adhered fixedly to parts of the inside surfaces of the carton 2.

[0117] As shown in FIGs. 14 and 15, the inner bag 3 is adhered to substantially all the inside surfaces of the inclined panel (pouring spout attaching panel) 2g and the side panel 2a adjacent to the lower side of the inclined panel 2g. It is possible that an adhesive is spotted on the inside surfaces of the inclined panel 2g and the side panel 2a to spot-adhere the inner bag 3 to substantially all the inside surfaces of the inclined panel 2g and the side panel 2a.

[0118] As shown in FIGs. 14 and 15, the inner bag 3 is adhered to the inside surfaces of one pair of opposed side panels 2b, 2d adjacent to the inclined panel 2g except a plurality of regions in the shape of recesses 19. The recesses 19 on the pair of side panels 2b, 2d are

extended substantially parallel with a straight line 21 (see FIGs. 11A and 11B) interconnecting the pouring spout 5 and a remote end part 20 of the carton 2 which is remotest from the pouring spout 5.

[0119] The plural recesses 19 are located on parts of the pair of side panels 2b, 2d which are on the side of the remote end part of the carton 2, and the openings 19 are directed to the remote end part 20. The inner bag 3 is adhered to substantially all parts of the pair of side panels 2b, 2d which are on the side of the pouring spout 5.

[0120] The recesses 19 having the openings 19a directed to the remote end part 20 are thus provided in the parts of the pair of side panels 2b, 2d on the side of the remote end part 20, whereby the inner bag can be readily released from the pair of side panels 2b, 2d first on the side of the remote end part 20 (see FIGs. 11A and 11B) when the inner bag is released from the inside surfaces of the carton as will be described later. That is, the inner bag 3 can more readily be released in comparison with the case where the inner-bag adhering regions 9 are formed on the entire inside surfaces of the pair of side panels 2b, 2d.

[0121] The inner bag 3 is adhered to the inside surface partially (the four corners) of the side panel 2c of the side panels which are not adjacent to but remote from the inclined panel 2g. FIG. 14 shows the inner-bag adhering regions 9 of the inner bag 3. FIG. 15 shows a carton blank 2' for forming the carton 2. In FIG. 15, the cross-hatched part of the inner-bag adhering regions 9 are unreleasable regions 9a, and the line-hatched regions are releasable region 9b.

[0122] The inner bag 3 is thus adhered to the substantially entire inside surfaces of the inclined panel 2g and the side panel 2a adjacent to the lower side of the inclined panel 2g, to the inside surfaces of the pair of side panels 2b, 2d except the recesses 19, and partially to the inside surface of the side panel 2c, whereby the inner bag 3 can be firmly fixed in the carton 2. The inner bag 3 is adhered to the carton by means of a releasable adhesive. Accordingly, as the content is discharged, the inner bag 3 is deformed to readily release the inner bag from the carton 2.

[0123] The inner bag 3 is spot-adhered to the side panel 2c at the releasable regions 9b. When the content 4 is discharged through the pouring spout 5, the inner bag 3 is gradually deformed and moved to the pouring spout 5. At this time, the inner bag 3 starts being released first from the side panel 2c, which is remote from the pouring spout 5. The spot-adhesion of the inner bag 3 to the side panel 2c facilitates the release of the inner bag 3 from the side panel 2c. The inner-bag adhering regions 9 on the side panel 2c may be square as shown in FIG. 15 or may be rectangular.

[0124] Then, a method for forming the bag-in-carton 1 having the above-described structure will be explained. First, a cardboard is punched in a prescribed shape as shown in FIG. 15 to prepare a carton blank 2'

to be set up into the carton. The inner-bag adhering regions 9 are formed on the inside surface of the panels of the carton blank 2' 2a', 2b', 2c', 2d', 2g' (which are to be the side panels 2a, 2b, 2c, 2d and the inclined panel 2g). While the carton blank 2' is being formed, as shown in FIG. 4, a sheet film is folded into a tubular shape and back-sealed at end portions to form a back-sealed portion 16. The folded film is cut into tubular films 3' of a required length (whose top and bottom ends will be sealed in a later step into the inner bags).

[0125] Then, an adhesive, e.g., an emulsion-type adhesive, as of vinyl acetate group, acryl copolymer group, vinyl acetate-acryl copolymer group, modified ester acrylate copolymer group, etc., is applied to the inner-bag adhering regions 9 which are formed on the substantially entire inside surfaces of the panels 2a', 2b', 2d' and 2g' of the carton blank 2'. The adhesive is applied to the inner-bag adhering regions 9 formed partially on the side panel 2c' and a glue margin 2h' of the carton blank 2'. The glue margin 2h' is a part forming the side panel 2b of the carton 2, and the inner-bag adhering regions 9 on the glue margin 2h' includes an unreleasable region 9a and a releasable region 9b. The emulsion-type adhesive is also applied to the back side of the glue margin 2h'.

[0126] A glue margin 2i' of the carton blank 2' is folded inside when the carton blank 2' is set up, and a hot-melt adhesive, as of ethylene-vinyl acetate copolymer group, polyvinyl acetate group, polyamide group, polyethylene group, styrene-butadiene copolymer group, styrene-isobutylene copolymer group, polyisobutylene group, polyester group, etc., is also applied to the glue margin 2i'.

[0127] Then, as shown in FIG. 15, the tubular film 3' is adhered to the panels 2a', 2d', 2g' of the carton blank 2' by means of an adhesive. The tubular film 3' is so arranged that the back-sealed portion 16 is in abutment on the side panel 2c and is opposed to the pouring spout 5 when the carton blank 2' is set up. Then, the side panels 2b', 2c' are folded on the tubular film 3' and barrel-sealed. The panels 2b', 2c' and the glue margin are adhered to the tubular film 3', and the panels 2b' are adhered. Thus a flat bag-in-carton before being set up is formed.

[0128] Then, the flat bag-in-carton 1 is fed to the setting-up step portion and the loading step portion, and is set up there into a rectangular parallelepiped and completed one. Then, a pouring spout attached portion 15 (FIG. 15) of the carton blank 27 is punched, and the pouring spout 5 is attached. Then, the upper end of the tubular film 3' is seal-closed.

[0129] After the upper end of the tubular film 3' is sealed, the top of the carton blank 2' is set up.

[0130] Then, the lower end of the tubular film 3' is sealed in the same way as the upper end thereof, and then the bottom of the carton blank 2' is set up. And the bag-in-carton 1 accommodating the inner bag 3 in the carton 2 is set up. This process can be conducted by

the conventional bag-in-carton forming technique, and the forming equipments, etc. are not explained. Finally a content 4, such as ink or others, is loaded in the bag-in-carton 1, and the bag-in-carton 1 has the state shown in FIG. 14.

[0131] In using the bag-in-carton filled with a content 4, as shown in FIGs. 11A and 11B, the bag-in-carton is set on a machine, such as a printing machine or others, with the pouring spout directed downward, and the pouring spout is connected to a connector (not shown) of drawing means belonging to the machine. The content 4 is drawn and discharged through the pouring spout 5. At this time, the inner bag 3 starts being released from the inner-bag adhering regions 9 on the side panel 2c, which are spot-adhesions, and then from the pair of opposed side panels 2b, 2d. As the content 4 is drawn, the released parts of the inner bag 2 is deformed as shown by the two-dot lines 21a, 21b in FIG. 11B and is displaced to the pouring spout 5, whereby the content 4 can be discharged in a stably constant amount without letting air into the inner bag 3. Finally the released part of the inner bag 3 is withdrawn into the unreleasable part thereof, which is fixed to the inside surfaces of the carton 2 and are substantially a rest half of the inner bag 3, and almost all the content is discharged.

[0132] Next, the adhesive strength of the releasable part 9a and the unreleasable part 9a will be explained.

[0133] Adhesive strengths of the releasable part 9b and the unreleasable part 9a are substantially as follows.

[0134] An adhesive strength (a force (gf) 15 mm-width samples required to be released when subjected to a tensile test at the room temperature) is

a strength of the unreleasable part 9a at the start of the release: about 4.6 N (470 gf)

an adhesive strength of the releasable part 9b: about 2.1 N (210 gf).

[0135] It is preferable that the unreleasable part 9a has a higher adhesive strength than that of the releasable part 9b.

[0136] As described above, according to the present embodiment, when the content 4 is drawn out through the pouring spout 5, the inner bag 3 starts being released first from the inner-bag adhering regions 93, to which the inner bag 3 is spot adhered, and then from the inside surfaces of the one pair of the side panels 2b, 2d, and is gradually deformed and displaced to the pouring spout 5. Then, the released part of the inner bag 3 is withdrawn into the unreleasable part thereof, whereby substantially all the content 4 can be drawn out through the pouring spout 5.

[0137] Because of the recesses 19 having the openings 19a directed to the remote end part 20 (see FIGs. 11A and 11B) provided on the parts of the inner-bag adhering regions 9 on the pair of side panels 2b, 2d, which (parts) are on the side of the remote end part 20, the inner bag 3 can be readily released from the pair of side panels 2b, 2d first on the side of the remote part 20 when

the inner bag 3 is released from the inside surfaces of the carton 2.

[0138] The back sealed portion 16 on the inner bag 3 abuts on the side panel 2c and is opposed to the pouring spout 5. This arrangement enables the content 4 of the inner bag 3 to be driven to the pouring spout without failure when the inner bag 3 is deformed, displaced to the pouring spout 5 as the content 4 is drawn out.

[0139] That is, the back sealed portion 16 of the inner bag 3, which is harder than the rest part of the inner bag 3, tends to hinder the deformation when the inner bag 3 is deformed. Accordingly in a case where the back sealed portion 16 abuts on, e.g., the side panel 2b, which is adjacent to the inclined panel 2g (the pouring spout attached panel), the back sealed portion 16 hinders the deformation of the inner bag 3 with a possible result where the inner bag 3 may be deformed horizontally unsymmetrically with respect to the pouring spout 5.

[0140] According to the present invention, because the back sealed portion 16 is located opposed to the pouring spout 5, the inner bag 3 can be deformed horizontally symmetrically with respect to the pouring spout 5 as a center, whereby the content 4 of the inner bag 3 can be smoothly sent out to the pouring spout without unsymmetrical deformation.

[0141] Next, another embodiment of the present invention will be explained with reference to FIG. 16. The embodiment shown in FIG. 16 is substantially the same as the embodiment shown in FIGs. 14 and 15 except that the inner-bag adhering regions have different shapes from those of the embodiment shown in FIGs. 14 and 15.

[0142] As shown in FIG. 16, a tubular film 3' (to be the inner bag 3) is adhered to the substantially entire parts of side panels 2b', 2d' (to be one pair of side panels 2b, 2d), which (parts) are on the side of a pouring spout 5 with respect to an middle part 22 which is formed on the substantially middle of a straight line 21 (FIGs. 11A and 11B) interconnecting the pouring spout 5 and a remote end part 20 of the carton 2 and is normal to the straight line 21. The tubular film 3' is spot-adhered to a plurality of spots 14 on the parts of the side panels 2b', 2d' which (parts) are on the side of the remote end part 20 with respect to the middle part 22.

[0143] In FIG. 16, the inner-bag adhering regions provided on the substantially entire parts of the side panels 2b', 2d' on the side of the pouring spout 5 are unreleasable regions 9a. The plural spotted inner-bag adhering regions 14 provided on the part of the side panels 2b', 2d' on the remote end part 20 are releasable regions 9b. The inner-bag adhering regions 9 include a releasable region 9a and an unreleasable region 9b.

[0144] As shown in FIG. 16, the tubular film 3' is spot-adhered to plural spots 14 on the parts of the side panels 2b', 2d' on the side of the remote end part 20 with respect to the middle part 22, whereby the inner bag can be readily released from the pair of side panels 2b, 2d first

from the side of the remote end part when the inner bag 3 is released from the inside surfaces of the carton 2.

[0145] Then further another embodiment of the present invention will be explained with reference to FIGs. 17A to 19D. The embodiment shown in FIGs. 17A to 19C is substantially the same as the embodiment shown in FIGs. 14 and 15 except that the inner-bag adhering regions on the pair of side panels 2b', 2d' (to be the pair of side panels 2b, 2d opposed to each other) have different shapes from those of the embodiment shown in FIGs. 14 to 15.

[0146] In FIGs. 17A to 19C, for simplification of explanation, only the side panel 2b' of the pair of side panels 2b', 2d' will be explained, but shapes of inner-bag adhering region on the side panel 2d' are symmetrical with those of the inner-bag adhering region on the side panel 2b'.

[0147] As shown in FIG. 17A, a tubular film 3' (see FIG. 15) is adhered to the substantially entire part of the inside surface of the side panel 2b', which (part) is on the side of a middle part 22 which is formed on the substantially middle part of a straight line 21 interconnecting the pouring spout 5 and a carton 2 (FIGs. 11A and 11B) and is normal to the straight line 21. The tubular film 3' is spot-adhered to a plurality of spots 14 on the part of the side panel 2b' on the side of the remote end part 30 with respect to the middle part 22.

[0148] In FIG. 17A, the inner-bag adhering regions provided on the substantially entire part of the side panel 2b' on the side of the pouring spout 5 are an unreleasable region 9a, and the inner-bag adhering regions of the side panel 2b' on the side of the remote end part 20 in the form of the plural spots are releasable regions 9b. As shown in FIG. 17A, the plural spot regions are respectively rectangular.

[0149] The plural spots 14 may be formed in a shape of strips each having the same width and their areas may be decreased toward the side of the remote end part 20 (FIG. 17B). The decrease of areas toward the side of the remote end part 20 facilitates the release of the inner bag 3 first from the side of the remote end part 20.

[0150] It is also possible that the plural spots 14 are formed in rectangles of the same size and decrease their number toward the remote end part 20 (to lower right side) (FIG. 17C).

[0151] It is also possible that the plural spots 14 may be formed in rectangles and gradually decrease their areas toward the remote end part 20 (lower right side) (FIG. 17D).

[0152] As shown in FIG. 17E, the plural spots 14 may be formed in a shape of strips, and their widths and areas may be decreased toward the side of the remote end part (lower right side).

[0153] As shown in FIG. 17F, the plural spots 14 may be respectively formed in a round shape.

[0154] As shown in FIG. 18A, the tubular film 3' is adhered to the substantially entire part of the inside surface

of the side panel 2b' which (part) is on the side of the pouring spout 5 with respect to the middle part 22, and is adhered to a plurality of spots 14 of the part of the inside surface on the side of the remote end part 20. In FIG. 18A, the inner-bag adhering region provided on the substantially entire part of the side panel 2b' on the side of the pouring spout 5 is an unreleasable region 9a and has the edge on the side of the middle part 22 which is bent. The plural spots 14 on the side of the side panel 2b' on the side of the remote end part 20 are releasable regions 9b, and each has a rectangular shape.

[0155] The plural spots 14 may be a rectangle of the same size or may gradually decrease their number toward the side of the remote end part 20 (lower right side) (FIG. 18B).

[0156] The plural spots 14 may be formed in rectangles and gradually decrease their areas toward the side of the remote end part 20 (lower right side) (FIG. 18C).

[0157] As shown in FIG. 18D, the plural spots 14 may be formed in a shape of strips, each having the same width and gradually decrease their areas toward the side of the remote end part 20 (lower right side).

[0158] As shown in FIG. 18E, the plural spots 14 may be formed respectively in a shape of strips and decrease their widths and areas toward the side of the remote end part 20 (lower right side).

[0159] As shown in FIG. 18F, the plural spots 14 may be formed respectively in a round shape and gradually decrease their areas toward the side of the remote end part 20.

[0160] As shown in FIG. 19A, the tubular film 3' is adhered to the inside surface of the panel 2b' in the inner-bag adhering regions 9. The inner-bag adhering regions 9 are in a form of a plurality of spots 14. The respective spots 14 are formed respectively in rectangles and gradually decrease their areas toward the side of the remote end part 20 (lower right side). Those of the inner-bag adhering regions 9 on the side of the pouring spout 5 (upper left side) are unreleasable regions, and those of the inner-bag adhering regions 9 on the side of the remote end part 20 (lower right side) are releasable regions.

[0161] As shown in FIG. 19B, the plural spots 14 may be formed respectively rectangles of the same size and gradually decrease their numbers toward the side of the remote end part (lower right side).

[0162] As shown in FIG. 19C, the plural spots 14 may be formed respectively in a form of strips and decrease their widths toward the side of the remote end part 20 (lower right side).

[0163] As shown in FIG. 19C, the plural spots 14 are formed in a form of strips and decrease their widths toward the side of the remote end part 20 (lower right side).

[0164] In the above-described embodiments, the pouring spout 5 unessentially has the tubular portion 5a which is extended into the inner bag 3, and may be a usual one without the tubular portion. It is possible that

a suitable passage member (e.g., a rod member of H-section or others) which ensures flow passage of the content even when the releasable part of the inner bag 3 is withdrawn in the unreleasable part thereof is provided on the bottom of the inner bag 3.

[0165] In the above-described embodiments, the bag-in-carton 1 is set on a machine with the pouring spout 5 faced downward, but this state is not essential to discharge the content of the bag-in-carton 1. Depending on machines on which the bag-in-carton 1 is set, the pouring spout 5 may be faced suitably sideways or upward. In a case that the bag-in-carton 1 is set on a machine with the pouring spout 5 faced upward, run of the content at the pouring spout can be prevented.

[0166] As described above, according to the present invention, when the inner bag 2 is released from the inside surfaces of the carton 2 as the content decreases, the inner bag 3 can be readily released from the pair of side panels 2a, 2d first from the side of the remote end part 20. Accordingly the inner bag 3 can be deformed in the carton 2.

Claims

1. A bag-in-carton (1) comprising:

a substantially rectangular parallelepiped carton (2) having a pouring spout mounting panel (2g);

a flexible inner bag (3) being adhered to insides of the carton (2), for holding a content (4); and a pouring spout (5) mounted on the pouring spout mounting panel (2g) of the carton (2) and passed through the inner bag (3) and the pouring spout mounting panel (2g), **characterized in that**

the inner bag (3) is at least in a plurality of adhering regions adhered by an adhesive to an entire surface of the inside of the pouring spout mounting panel (2g) of the carton (2) and entire surfaces of the insides of a pair of opposed side panels (2b, 2d) which are adjacent to the pouring spout mounting panel (2g), so that the inner bag (3) being gradually released off the insides of the carton (2) as the content (4) is discharged out of the inner bag (3).

2. The bag-in-carton (1) according to claim 1, wherein the carton has one closed side portion and an other closed side portion which are opposed to each other; the inner bag (3) has one seal-closed side portion and an other seal-closed side portion which correspond respectively to said one closed side portion of the carton (2) and said other closed side portion thereof; and said one seal-closed side portion of the inner bag (3) has a shape corresponding to that of said one closed side portion of the carton (2).

3. The bag-in-carton (1) according to claim 1 or 2, wherein the inner bag (3) is formed of a tubular film which is prepared by folding a sheet of film into a tubular shape and sealing end edges thereof into a back sealed portion (16), the back sealed portion (16) of the tubular film is disposed inside a panel of the carton (2) opposed to the pouring spout mounting panel (2g).

4. The bag-in-carton (1) according to claim 3, wherein the pouring spout (5) is disposed substantially at the center of the pouring spout mounting panel (2g), and the back sealed portion (16) is disposed substantially at the center of a panel opposed to the pouring spout mounting panel (2g).

5. A bag-in-carton (1) comprising:

a substantially rectangular parallelepiped carton (2) having a pouring spout mounting panel (2g);

a flexible inner bag (3) being adhered to insides of the carton (2), for holding a content (4); and a pouring spout (5) mounted on the pouring spout mounting panel (2g) of the carton (2) and passed through the inner bag (3) and the pouring spout mounting panel (2g),

characterized in that the inner bag (3) is at least in a plurality of adhering regions adhered by an adhesive to a substantially entire surface of the inside of the pouring spout mounting panel (2g) of the carton (2) and substantially entire surfaces of the insides of a pair of opposed side panels (2b, 2d) which are adjacent to the pouring spout mounting panel (2g), so that the inner bag (3) being gradually released off the insides of the carton (2) as the content (4) is discharged out of the inner bag (3), and

- wherein the inner bag (3) is adhered to surfaces of a pair of opposed side panels (2b, 2d) of the carton (2), except strips (18) of the surfaces which are substantially normal to a straight line (21) interconnecting the pouring spout (5) and a remotest end part (20) of the carton (2) which is remotest from the pouring spout (5), and which strips are located at a middle of the straight line (21), or

- wherein the inner bag (3) is adhered to surfaces of a pair of opposed side panels (2b, 2d) of the carton (2), except recesses (19) in the surfaces which are extended substantially parallel with a straight line (21) interconnecting the pouring spout (5) and a remotest end part (20) of the carton (2) from the pouring spout (5), preferably the recesses (19) formed in the pair of opposed side panels (2b, 2d) are disposed in regions of the pair of opposed side panels (2b, 2d) which

- are near the remote end portion (20), or
 - wherein the inner bag (3) is adhered to the substantially entire surface of the insides of a pair of opposed side panels (2b, 2d) on the side of the pouring spout (5) with respect to a substantial middle of a straight line (21) interconnecting the pouring spout (5) and a remotest end part (20) of the carton (2), and partially to surfaces of the side panels (2b, 2d) on the side of the remotest end part (20), and the inner-bag adhering surfaces (9) on the side of the remotest side panel or end part, have respective areas gradually decreased from the pouring spout (5) to the remote end part (20), or
 - wherein the inner-bag adhering surfaces (9) of the insides of the pair of opposed sides or side panels (2b, 2d), on the side of the remotest end part (20) have parts or are constituted by a plurality of parts, the areas or numbers of the respective parts being gradually decreased from the pouring spout (5) to the remotest end part (20).
6. The bag-in-carton (1) according to any of claims 1 to 5, wherein the inner bag (3) is adhered partially to an inside of a side panel (2e, 2c) which is not adjacent to but remote from the pouring spout mounting panel (2g), in particular to four corners of the inside of the side panel (2c, 2e) which is not adjacent to but remote from the pouring spout mounting panel.
7. The bag-in-carton (1) according to any of claims 1 to 6, wherein an inclined side panel (2g) is formed between a pair of adjacent side panels (2b, 2d) of the substantially rectangular, in particular substantially square parallelepiped carton (2), and the inclined panel (2g) is the pouring spout mounting panel (2g).
8. The bag-in-carton (1) according to any of claims 1 to 7, wherein boundaries of inner-bag adhering regions (9) on the pair of opposed side panels (2b, 2d), in particular parts of the boundaries of the inner-bag adhering regions (9), which are remote from the pouring spout (5) are formed in concavities (23a) and convexities (23b).
9. A method for forming a bag-in-carton (1) comprising the steps of:
- adhering a flexible tubular film (3') having openings on both ends to a carton blank for a carton (2) at a set position so that the tubular film (3') is at least in a plurality of adhering regions adhered by an adhesive to an entire surface of the inside of a pouring spout mounting panel (2g) of the carton (2) and entire surfaces of the insides of a pair of opposed side panels (2b, 2d) which are adjacent to the pouring spout mounting panel (2g);
- setting up the carton blank into a rectangular parallelepiped carton (2) so that the carton (2) has openings on both ends thereof;
- sealing one side opening of said tubular film (3') arranged in correspondence with one side opening of the carton (2) to form an inner bag with a one side seal-closed portion (3a);
- closing the one side opening of the carton (2) to form one side closed portion; and
- inserting a forming jig (57) into the inner bag (3) through the other side opening of the carton (2) and through the other side opening of the inner bag (3), pressing said one side seal-closed portion (3a) of the inner bag (3) against said one side closed portion of the carton (2) by the forming jig (57), and forming the shape of said one side seal-closed portion (3a) of the inner bag (3) in accordance with that of said one side closed portion of the carton (2).
10. The method for forming a bag-in carton (1) according to claim 9, further comprising, after the step of setting up the carton blank into a rectangular parallelepiped carton (2) to set up the carton having openings on both ends thereof, the step of punching the carton (2) and the inner bag (3) in one side of the carton (2) to form a pouring spout mounting portion passing through the carton (2) and the inner bag (3), and mounting a pouring spout (5) in the pouring spout mounting portion.

Patentansprüche

1. Verpackungsbehälter mit Innenbeutel (1), umfassend:

einen im wesentlichen rechteckigen bzw. rechtwinkligen, parallelepipedischen Karton (2), der eine Ausgußstülen-Montageplatte bzw. -tafel (2g) aufweist;

einen flexiblen Innenbeutel (3), der an Innenseiten des Kartons (2) zum Halten bzw. Aufnehmen eines Inhalts (4) angeheftet bzw. angeklebt ist bzw. an diesem anhaftet; und

eine Ausgußstülle (5), die an der Ausgußstülen-Montageplatte (2g) des Kartons (2) festgelegt ist und durch den Innenbeutel (3) und die Ausgußstülen-Montageplatte (2g) hindurchtritt, **dadurch gekennzeichnet, daß**

der Innenbeutel (3) wenigstens in einer Mehrzahl von anhaftenden Bereichen durch einen Kleber an eine gesamte Oberfläche bzw. Fläche der Innenseite der Ausgußstülen-Montageplatte (2g) des Kartons (2) und gesamte Ober-

flächen bzw. Flächen der Innenseiten eines Paares von gegenüberliegenden bzw. entgegengesetzten Seitenplatten (2b, 2d) angeklebt ist, welche benachbart der Ausgußtüllen-Montageplatte (2g) sind, so daß der Innenbeutel (3) stufenweise bzw. zunehmend von den Innenseiten des Kartons (2) gelöst wird, wenn der Inhalt (4) aus dem Innenbeutel (3) ausgetragen wird.

2. Verpackungsbehälter mit Innenbeutel (1) nach Anspruch 1, wobei der Karton einen geschlossenen Seitenabschnitt und einen weiteren geschlossenen Seitenabschnitt aufweist, welche einander gegenüberliegend bzw. entgegengesetzt sind; der Innenbeutel (3) einen mit einer Abdichtung bzw. Verschweißung geschlossenen Seitenabschnitt und einen weiteren mit Abdichtung bzw. Verschweißung geschlossenen Seitenabschnitt aufweist, welche dem einen geschlossenen Seitenabschnitt des Kartons (2) und dem anderen geschlossenen Seitenabschnitt desselben entsprechen; und der mit Abdichtung bzw. Verschweißung geschlossene Seitenabschnitt des Innenbeutels (3) eine Form aufweist, die jener des einen geschlossenen Seitenabschnitts des Kartons (2) entspricht.
3. Verpackungsbehälter mit Innenbeutel (1) nach Anspruch 1 oder 2, wobei der Innenbeutel (3) aus einer rohrförmigen Folie gefertigt ist, welche durch Falten eines Film- bzw. Folienblatts in eine rohrförmige Form und Versiegeln bzw. Verschweißen von Endkanten bzw. -rändern davon in einen rückwärts versiegelten bzw. verschweißten Abschnitt (16) hergestellt ist, wobei der rückwärts verschweißte Abschnitt (16) der rohrförmigen Folie im Inneren einer Kartonplatte (2) angeordnet ist, die der Ausgußtüllen-Montageplatte (2g) gegenüberliegend ist.
4. Verpackungsbehälter mit Innenbeutel (1) nach Anspruch 3, wobei die Ausgußtülle (5) im wesentlichen an dem Zentrum der Ausgußtüllen-Montageplatte (2g) angeordnet ist und der rückwärts verschweißte Abschnitt (16) im wesentlichen in der Mitte einer Platte bzw. Tafel gegenüberliegend bzw. entgegengesetzt der Ausgußtüllen-Montageplatte (2g) angeordnet ist.
5. Verpackungsbehälter mit Innenbeutel (1), umfassend:

einen im wesentlichen rechteckigen parallelepipedischen Karton (2), der eine Ausgußtüllen-Montageplatte bzw. -tafel (2g) aufweist; einen flexiblen Innenbeutel (3), der an Innenseiten des Kartons (2) zum Halten bzw. Aufnehmen eines Inhalts (4) angeheftet bzw. angeklebt ist bzw. an diesem anhaftet; und

eine Ausgußtülle (5), die an der Ausgußtüllen-Montageplatte (2g) des Kartons (2) festgelegt ist und durch den Innenbeutel (3) und die Ausgußtüllen-Montageplatte (2g) hindurchtritt;

dadurch gekennzeichnet, daß der Innenbeutel (3) wenigstens an einer Mehrzahl von anhaftenden bzw. angeklebten Bereichen durch einen Kleber an eine im wesentlichen vollständige Fläche bzw. Oberfläche der Innenseite der Ausgußtüllen-Montageplatte (2g) des Kartons (2) und im wesentlichen gesamte Flächen bzw. Oberflächen der Innenseiten eines Paares von gegenüberliegenden bzw. entgegengesetzten Seitenplatten (2b, 2d) angeklebt ist, welche der Ausgußtüllen-Montageplatte (2g) benachbart sind, so daß der Innenbeutel (3) stufenweise bzw. zunehmend von den Innenseiten des Kartons (2) gelöst wird, wenn der Inhalt (4) auf dem Innenbeutel (3) ausgetragen wird, und

- wobei der Innenbeutel (3) an Flächen bzw. Oberflächen eines Paares von gegenüberliegenden bzw. entgegengesetzten Seitenplatten (2b, 2d) des Kartons (2) mit Ausnahme von Streifen bzw. Bändern (18) der Flächen bzw. Oberflächen angeklebt ist, welche im wesentlichen normal zu einer geraden Linie (21) sind, die die Ausgußtülle (5) mit einem entferntesten Endteil (20) des Kartons (2) verbindet, welcher von der Ausgußtülle (5) am weitesten entfernt ist, und wobei die Streifen an einer Mitte der geraden Linie (21) angeordnet sind, oder
- wobei der Innenbeutel (3) an Flächen bzw. Oberflächen eines Paares von gegenüberliegenden bzw. entgegengesetzten Seitenplatten (2b, 2d) des Kartons (2) mit Ausnahme von Ausnehmungen bzw. Vertiefungen (19) in den Flächen bzw. Oberflächen angeheftet ist, welche sich im wesentlichen parallel zu einer geraden Linie (21) erstrecken, die die Ausgußtülle (5) mit einem entferntesten Endteil (20) des Kartons (2) von der Ausgußtülle (5) verbindet, wobei vorzugsweise die Ausnehmungen (19) in dem Paar von gegenüberliegenden Seitenplatten (2b, 2d) in Bereichen des Paares von gegenüberliegenden Seitenplatten (2b, 2d) ausgebildet sind, welche nahe dem entfernten Endabschnitt (20) angeordnet sind, oder
- wobei der Innenbeutel (3) an die im wesentlichen gesamte Oberfläche der Innenseiten eines Paares von gegenüberliegenden Seitenplatten (2b, 2d) an der Seite der Ausgußtülle (5) in bezug auf eine im wesentliche Mitte einer geraden Linie (21) angeklebt ist, die die Ausgußtülle (5) mit einem entferntesten Endteil (20) des Kartons (2) und teilweise mit Flächen bzw. Oberflächen der Seitenplatten (2b, 2d) an der Seite des entferntesten Endteils (20) ver-

- bindet, und die anhaftenden Oberflächen des Innenbeutels (9) an der Seite der entferntesten Seitenplatte oder des Endteils entsprechende Flächen bzw. Bereiche aufweisen, die stufenweise bzw. zunehmend von der Ausgußtülle (5) zu dem entferntesten Endteil (20) abnehmen, oder
- wobei die an dem Innenbeutel anhaftenden Oberflächen bzw. Flächen (9) der Innenseiten des Paares von gegenüberliegenden Seiten oder Seitenplatten (2b, 2d) an der Seite des entferntesten Endteils (20) Teile aufweisen oder aus einer Mehrzahl von Teilen zusammengesetzt sind, wobei die Flächen oder Anzahlen von entsprechenden Teilen stufenweise von der Ausgußtülle (5) zu dem entferntesten Endteil (20) abnehmen.
6. Verpackungsbehälter mit Innenbeutel (1) nach einem der Ansprüche 1 bis 5, wobei der Innenbeutel (3) teilweise an eine Innenseite einer Seitenplatte (2e, 2c) angeklebt ist, welche nicht benachbart zu, jedoch entfernt von der Ausgußtüllen-Montageplatte (2g) vorgesehen ist, insbesondere an vier Ecken der Innenseite der Seitenplatte (2c, 2e), welche nicht der Ausgußtüllen-Montageplatte benachbart, sondern entfernt von derselben ist.
7. Verpackungsbehälter mit Innenbeutel (1) nach einem der Ansprüche 1 bis 6, wobei eine geneigte Seitenplatte (2g) zwischen einem Paar von benachbarten Seitenplatten (2b, 2d) des im wesentlichen rechteckigen, insbesondere im wesentlichen quadratischen, parallelepipedischen Kartons (2) ausgebildet ist und die geneigte Platte (2g) die Ausgußtüllen-Montageplatte (2g) ist.
8. Verpackungsbehälter mit Innenbeutel (1) nach einem der Ansprüche 1 bis 7, wobei Grenzen der Innenbeutel-Anklebebereiche (9) auf dem Paar von gegenüberliegenden Seitenplatten (2b, 2d), insbesondere Teile der Grenzen der Innenbeutel-Anklebebereiche (9), welche von der Ausgußtülle (5) entfernt sind, in Konkavitäten (23a) und Konvexitäten (23b) ausgebildet sind.
9. Verfahren zum Ausbilden eines Verpackungsbehälters mit Innenbeutel (1), umfassend die Schritte:
- Ankleben bzw. Anhaften eines flexiblen, rohrförmigen Films (3'), der an beiden Enden Öffnungen aufweist, an einen Kartonzuschnitt bzw. -rohling für einen Karton (2) an einer festgelegten Position, so daß der rohrförmige Film (3') in wenigstens einer Mehrzahl von Anklebe- bzw. Anhaftbereichen durch einen Kleber an die gesamte Fläche bzw. Oberfläche der Innenseite einer Ausgußtüllen-Montageplatte bzw. -tafel (2g) des Kartons (2) und gesamte Flächen bzw. Oberflächen der Innenseiten eines Paares von gegenüberliegenden Seitenplatten (2b, 2d) angeklebt wird, welche der Ausgußtüllen-Montageplatte (2g) benachbart sind;
- Aufrichten des Kartonzuschnitts in einen rechteckigen, parallelepipedischen Karton (2), so daß der Karton (2) an beiden Enden Öffnungen aufweist;
- Dichten bzw. Verschweißen einer Seitenöffnung des rohrförmigen Films bzw. der Folie (3), der bzw. die in Übereinstimmung mit einer Seitenöffnung des Kartons (2) angeordnet wird, um einen Innenbeutel mit einem an einer Seite durch Verschweißen bzw. Abdichtung geschlossenen Abschnitt (3a) auszubilden;
- Schließen der einen Seitenöffnung des Kartons (2), um einen an einer Seite geschlossenen Abschnitt auszubilden; und
- Einsetzen eines Formwerkzeugs (57) in den Innenbeutel (3) durch die andere Seitenöffnung des Kartons (2) und durch die andere Seitenöffnung des Innenbeutels (3), Pressen des einen durch Verschweißen verschlossenen Abschnitts (3a) des Innenbeutels (3) gegen den an einer Seite verschlossenen Abschnitt des Kartons (2) durch das Formwerkzeug (57), und Ausbilden der Form des an einer Seite durch Verschweißen geschlossenen Abschnitts (3a) des Innenbeutels (3) in Übereinstimmung mit dem einen an einer Seite geschlossenen Abschnitt des Kartons (2).
10. Verfahren zum Ausbilden eines Verpackungsbehälters mit Innenbeutel (1) nach Anspruch 9, weiters umfassend nach dem Schritt eines Aufrichtens des Kartonzuschnitts in einen rechteckigen, parallelepipedischen Karton (2), um den Karton aufzurichten, der Öffnungen an beiden Enden desselben aufweist, den Schritt eines Stanzens des Kartons (2) und des Innenbeutels (3) in einer Seite des Kartons (2), um einen Ausgußtüllen-Montageabschnitt auszubilden, der durch den Karton (2) und den Innenbeutel (3) hindurchtritt, und eines Festlegens einer Ausgußtülle (5) in dem Ausgußtüllen-Montageabschnitt.

Revendications

1. Sac encartonné (1) comprenant :

un carton parallélépipédique essentiellement rectangulaire (2) ayant un panneau de montage de bec verseur (2g) ;
un sac interne souple (3) collé aux intérieurs du carton (2), permettant de contenir un contenu (4) ; et

un bec verseur (5) monté sur le panneau de montage de bec verseur (2g) du carton (2) et traversant le sac interne (3) et le panneau de montage de bec verseur (2g) ;

caractérisé en ce que

le sac interne (3) est, au moins dans une pluralité de zones d'adhérence, collé par un adhésif sur toute une surface de l'intérieur du panneau de montage de bec verseur (2g) du carton (2) et toutes les surfaces des intérieurs d'une paire de panneaux latéraux opposés (2b, 2d) qui sont adjacents au panneau de montage de bec verseur (2g), de telle sorte que le sac interne (3) soit peu à peu libéré des intérieurs du carton (2) à mesure que le contenu (4) est déchargé du sac interne (3).

2. Sac encartonné (1) selon la revendication 1, dans lequel le carton a une partie latérale fermée et une autre partie latérale fermée, lesquelles sont opposées l'une par rapport à l'autre ; le sac interne (3) a une partie latérale fermée par scellement et une autre partie latérale fermée par scellement qui correspondent respectivement à ladite partie latérale fermée du carton (2) et à ladite autre partie latérale fermée de celui-ci ; et ladite partie latérale fermée par scellement du sac interne (3) a une forme correspondant à celle de ladite partie latérale fermée du carton (2).
3. Sac encartonné (1) selon la revendication 1 ou 2, dans lequel le sac interne (3) est formé d'un film tubulaire qui est préparé en pliant une feuille de film pour obtenir une forme tubulaire et en scellant ses arêtes d'extrémité dans une partie arrière scellée (16), la partie arrière scellée (16) du film tubulaire étant disposée à l'intérieur d'un panneau du carton (2) opposé au panneau de montage de bec verseur (2g).
4. Sac encartonné (1) selon la revendication 3, dans lequel le bec verseur (5) est disposé essentiellement au centre du panneau de montage de bec verseur (2g), et la partie arrière scellée (16) est disposée essentiellement au centre d'un panneau opposé au panneau de montage de bec verseur (2g).

5. Sac encartonné (1) comprenant :

un carton parallélépipédique essentiellement rectangulaire (2) ayant un panneau de montage de bec verseur (2g) ;
un sac interne souple (3) collé aux intérieurs du carton (2), permettant de contenir un contenu (4) ; et
un bec verseur (5) monté sur le panneau de montage de bec verseur (2g) du carton (2) et traversant le sac interne (3) et le panneau de

montage de bec verseur (2g) ;

caractérisé en ce que

le sac interne (3) est, au moins dans une pluralité de zones d'adhérence, collé par un adhésif sur essentiellement toute une surface de l'intérieur du panneau de montage de bec verseur (2g) du carton (2) et essentiellement toutes les surfaces des intérieurs d'une paire de panneaux latéraux opposés (2b, 2d) qui sont adjacents au panneau de montage de bec verseur (2g), de telle sorte que le sac interne (3) soit peu à peu libéré des intérieurs du carton (2) à mesure que le contenu (4) est déchargé du sac interne (3), et

- dans lequel le sac interne (3) est collé aux surfaces d'une paire de panneaux latéraux opposés (2b, 2d) du carton (2), à l'exception de bandes (18) des surfaces qui sont essentiellement normales par rapport à une ligne droite (21) interconnectant le bec verseur (5) et une partie d'extrémité la plus éloignée (20) du carton (2) qui est la plus éloignée du bec verseur (5), lesquelles bandes sont situées en un milieu de la ligne droite (21), ou
- dans lequel le sac interne (3) est collé aux surfaces d'une paire de panneaux latéraux opposés (2b, 2d) du carton (2), à l'exception d'évidements (19) dans les surfaces qui s'étendent essentiellement parallèlement à une ligne droite (21) interconnectant le bec verseur (5) et une partie d'extrémité la plus éloignée (20) du carton (2) par rapport au bec verseur (5), de préférence les évidements (19) formés dans la paire de panneaux latéraux opposés (2b, 2d) étant disposés dans des zones de la paire de panneaux latéraux opposés (2b, 2d) qui sont proches de la partie d'extrémité éloignée (20), ou
- dans lequel le sac interne (3) est collé sur essentiellement toute la surface des intérieurs d'une paire de panneaux latéraux opposés (2b, 2d) sur la face du bec verseur (5) essentiellement par rapport à un milieu d'une ligne droite (21) interconnectant le bec verseur (5) et une partie d'extrémité la plus éloignée (20) du carton (2) et partiellement aux surfaces des panneaux latéraux (2b, 2d) sur la face de la partie d'extrémité la plus éloignée (20), et les surfaces d'adhérence de sac interne (9) sur la face de la partie d'extrémité ou du panneau latéral la (le) plus éloigné(e) ont des zones respectives qui diminuent peu à peu depuis la bec verseur (5) vers la partie d'extrémité éloignée (20), ou
- dans lequel les surfaces d'adhérence de sac interne (9) des intérieurs de la paire de côtés ou de panneaux latéraux opposés (2b, 2d), sur la face de la partie d'extrémité la plus éloignée (20) ont des parties ou sont constituées par une

pluralité de parties, les zones ou quantités des parties respectives étant peu à peu réduites depuis le bec verseur (5) vers la partie d'extrémité la plus éloignée (20).

6. Sac encartonné (1) selon l'une des revendications 1 à 5, dans lequel le sac interne (3) est collé partiellement à un intérieur d'un panneau latéral (2e, 2c) qui n'est pas adjacent mais distant du panneau de montage de bec verseur (2g), en particulier aux quatre coins de l'intérieur du panneau latéral (2c, 2e) qui n'est pas adjacent mais distant du panneau de montage de bec verseur.

7. Sac encartonné (1) selon l'une des revendications 1 à 6, dans lequel un panneau latéral incliné (2g) est formé entre une paire de panneaux latéraux adjacents (2b, 2d) du carton parallélépipédique essentiellement rectangulaire (2), en particulier essentiellement carré, et le panneau incliné (2g) est le panneau de montage de bec verseur (2g).

8. Sac encartonné (1) selon l'une des revendications 1 à 7, dans lequel des frontières des zones d'adhérence de sac interne (9) sur la paire de panneaux latéraux opposés (2b, 2d), en particulier des parties des frontières des zones d'adhérence de sac interne (9) qui sont distantes du bec verseur (5) sont formées en concavités (23a) et convexités (23b).

9. Procédé de formation d'un sac encartonné (1) comprenant les étapes consistant à :

coller un film tubulaire souple (3') ayant des ouvertures aux deux extrémités sur une découpe de carton pour un carton (2) en une position prédéfinie de telle sorte que le film tubulaire (3') soit, au moins dans une pluralité de zones d'adhérence, collé par un adhésif sur toute une surface de l'intérieur d'un panneau de montage de bec verseur (2g) du carton (2) et toutes les surfaces des intérieurs d'une paire de panneaux latéraux opposés (2b, 2d) qui sont adjacents au panneau de montage de bec verseur (2g) ;
monter la découpe de carton pour former un carton parallélépipédique rectangulaire (2) de telle sorte que le carton (2) ait des ouvertures à ses deux extrémités ;
sceller une ouverture latérale dudit film tubulaire (3') agencée en correspondance avec une ouverture latérale du carton (2) pour former un sac interne avec une partie latérale fermée par scellement (3a) ;
fermer l'ouverture latérale du carton (2) pour former une partie latérale fermée ; et
insérer un serre-joint de formage (57) dans le sac interne (3) à travers l'autre ouverture latérale du carton (2) et à travers l'autre ouverture

latérale du sac interne (3), en comprimant ladite partie latérale fermée par scellement (3a) du sac interne (3) contre ladite partie latérale fermée du carton (2) au moyen du serre-joint de formage (57), et en donnant la forme de ladite partie latérale fermée par scellement (3a) du sac interne (3) conformément à celle de ladite partie latérale fermée du carton (2).

10. Procédé de formation d'un sac encartonné (1) selon la revendication 9, comprenant en outre, après l'étape consistant à monter la découpe de carton pour former un carton parallélépipédique rectangulaire (2) pour monter le carton ayant des ouvertures à ses deux extrémités, l'étape consistant à perforer le carton (2) et le sac interne (3) dans une face du carton (2) pour former une partie de montage de bec verseur traversant le carton (2) et le sac interne (3), et à monter un bec verseur (5) dans la partie de montage de bec verseur.

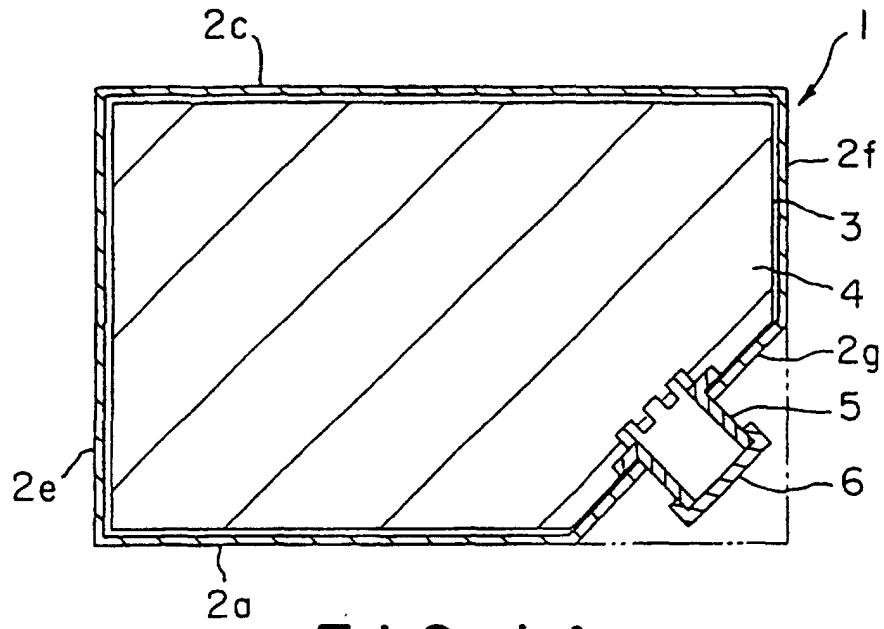


FIG. 1A

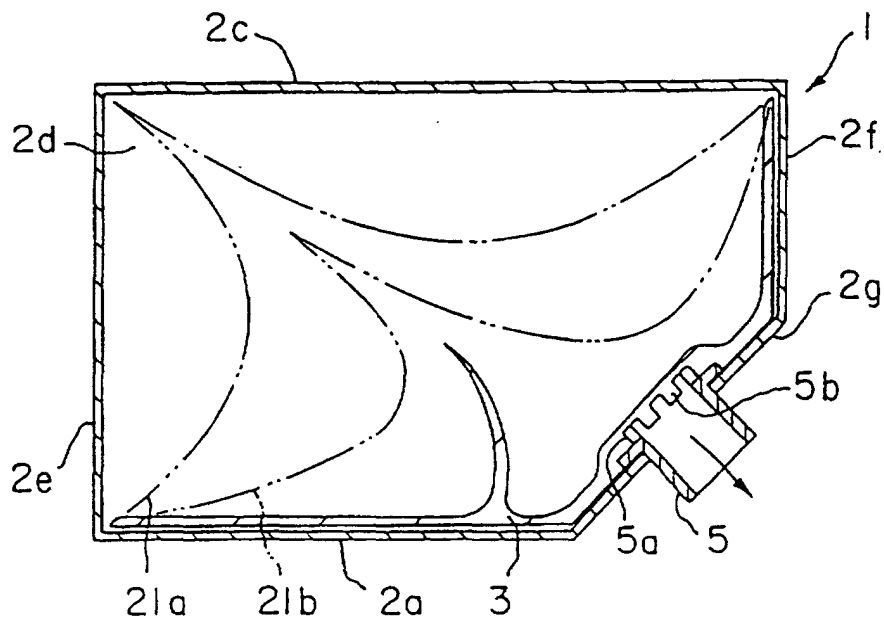


FIG. 1B

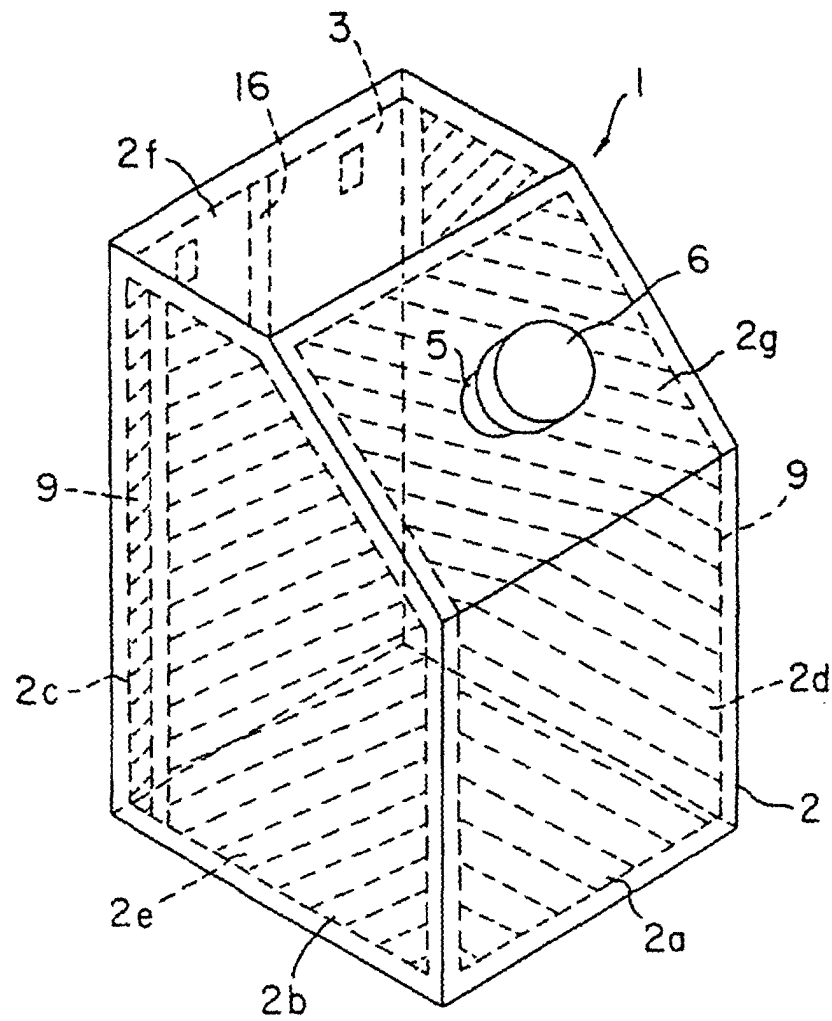


FIG. 2

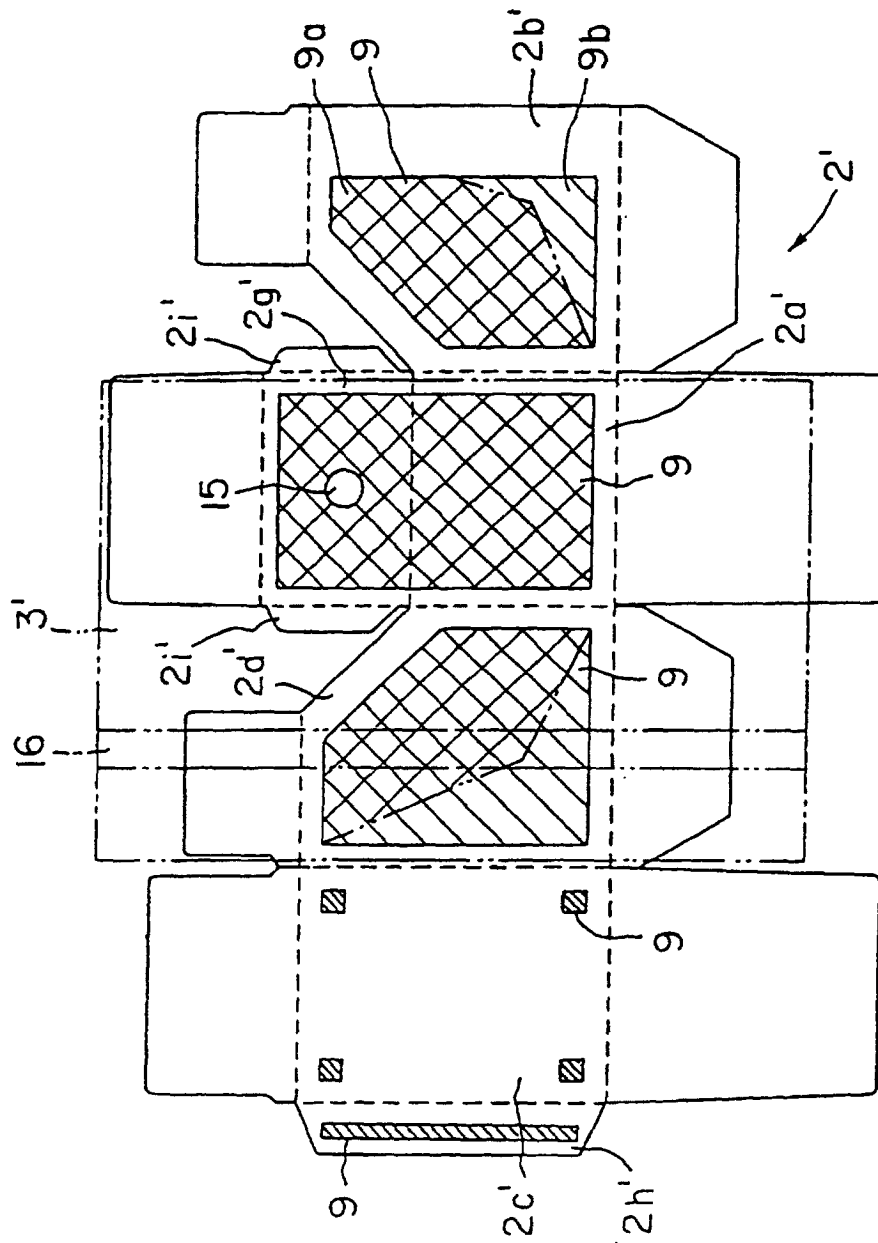


FIG. 3

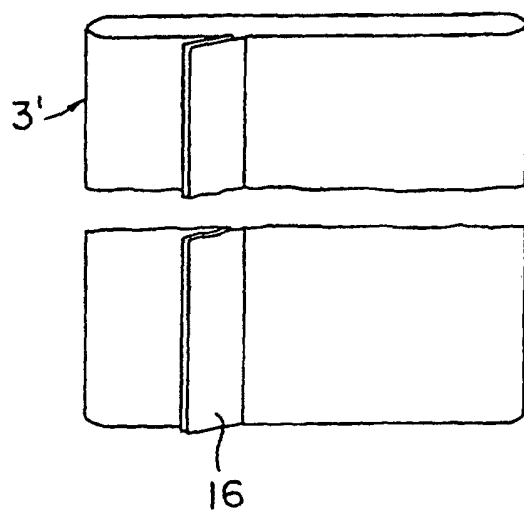


FIG. 4

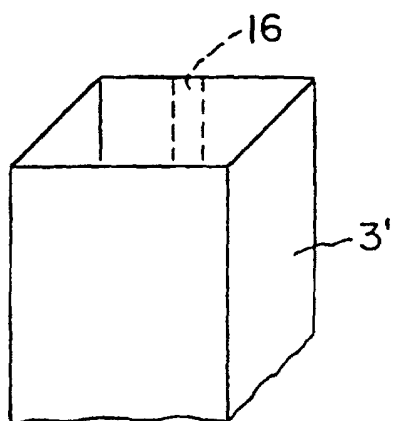


FIG. 5A

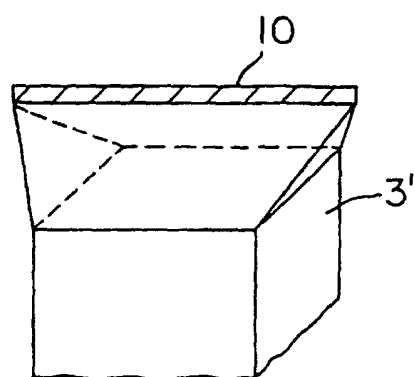


FIG. 5B

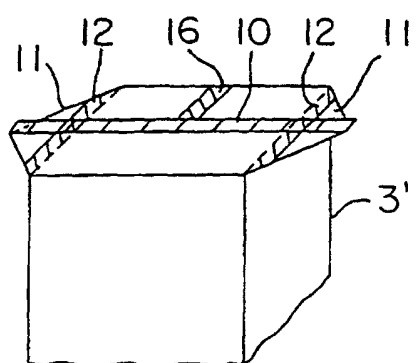


FIG. 5C


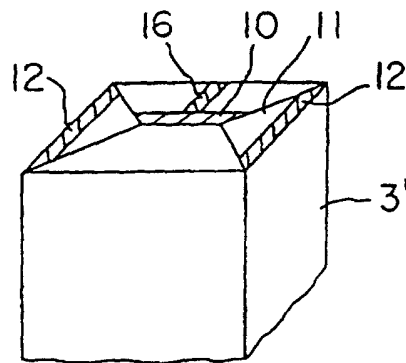


FIG. 5D

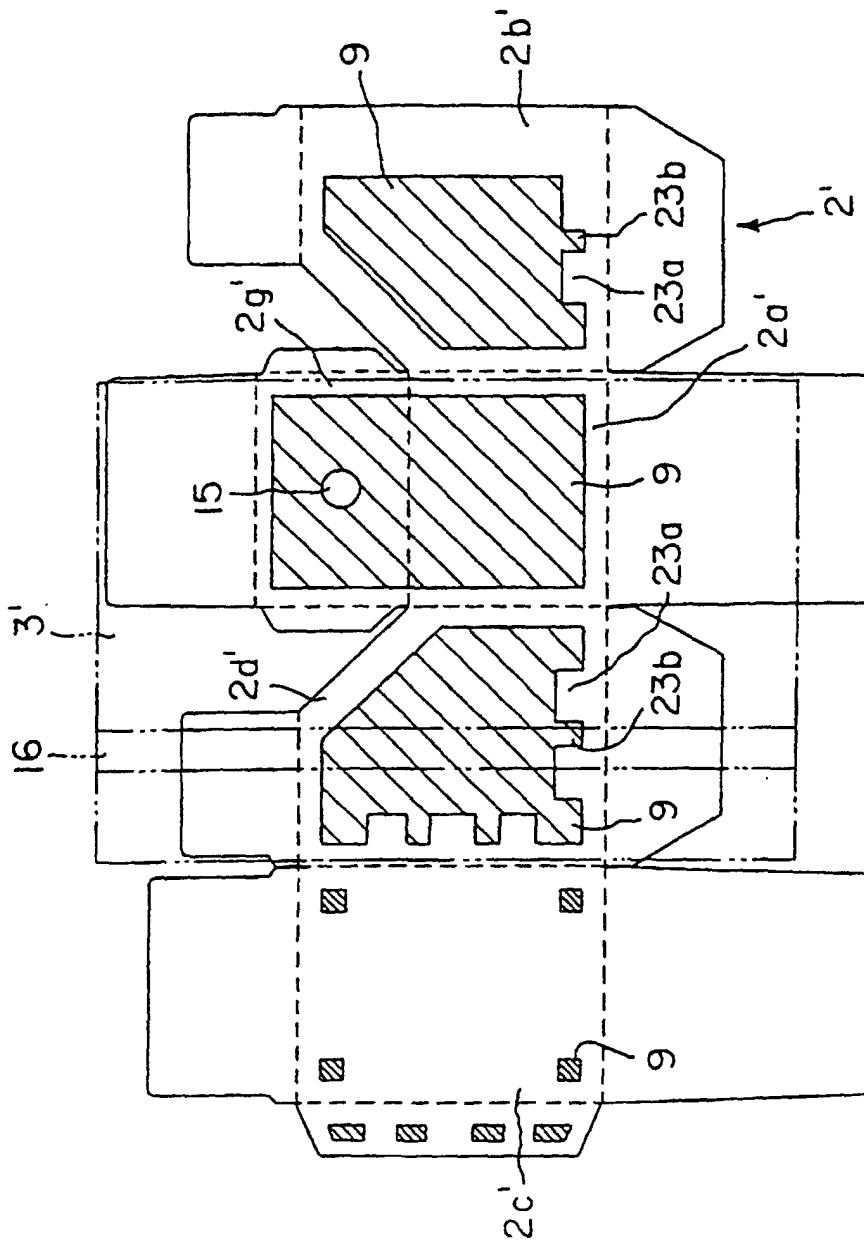

91 G. 6

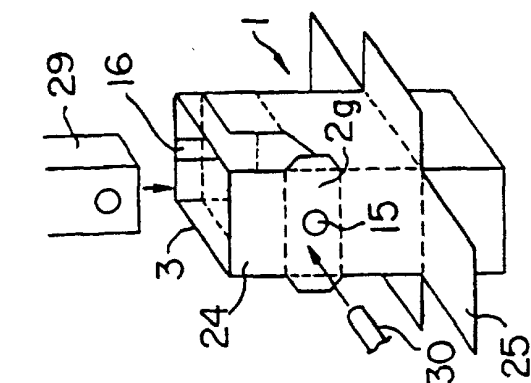


FIG. 7D

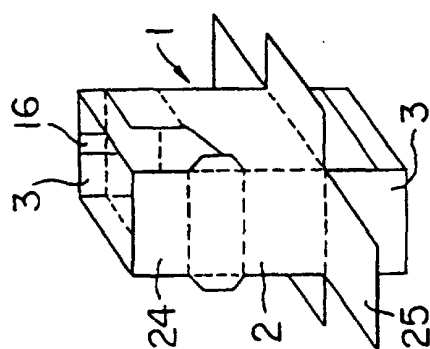


FIG. 7C

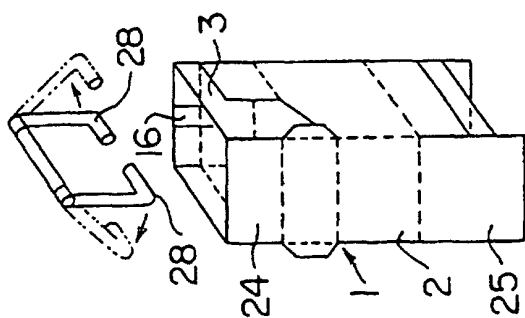


FIG. 7B

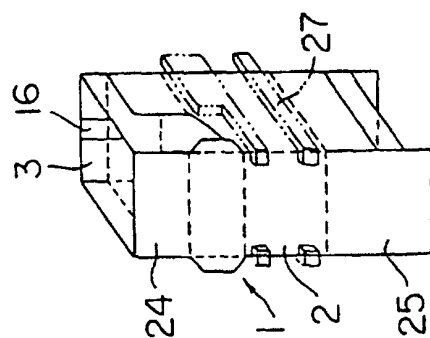


FIG. 7A

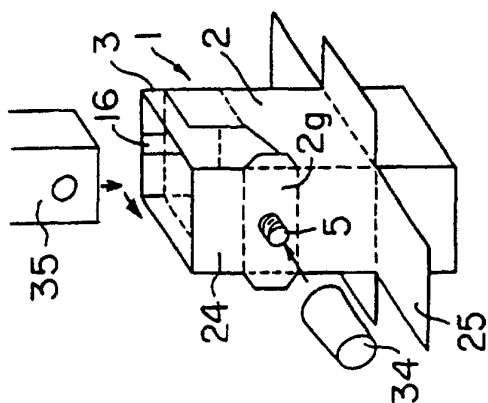


FIG. 8D

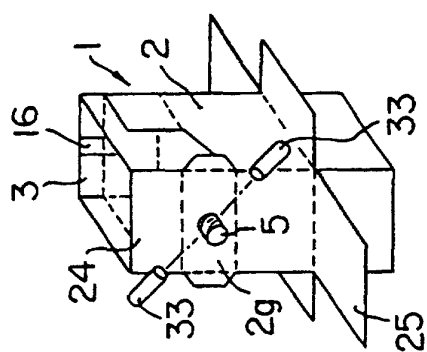


FIG. 8C

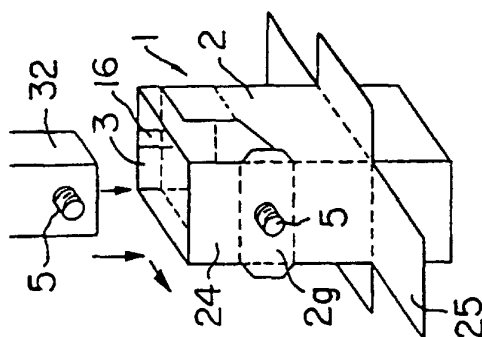


FIG. 8B

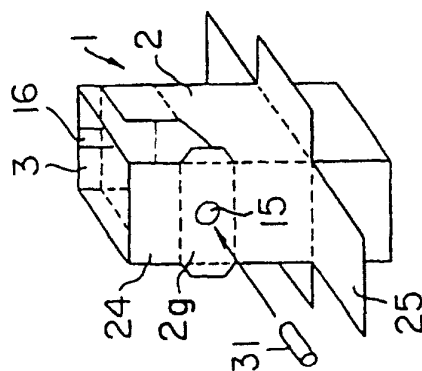


FIG. 8A



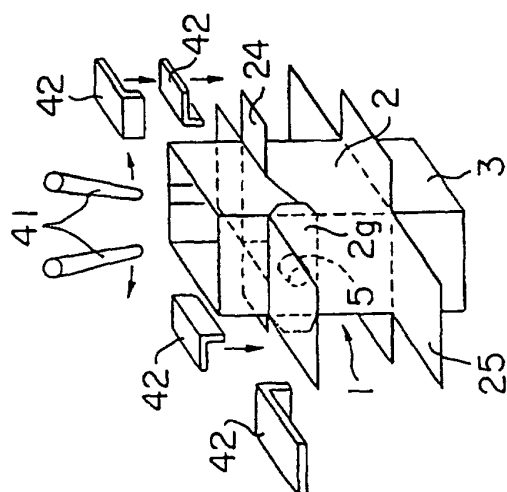


FIG. 9A

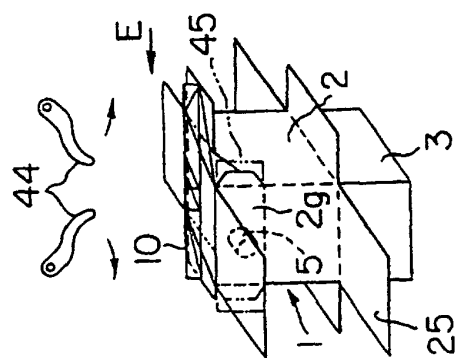

16.9.88

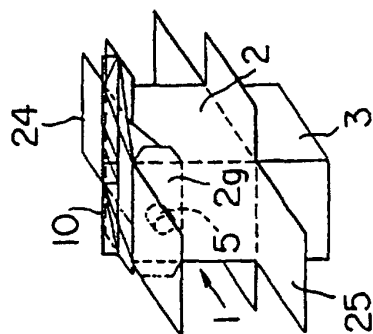

U.S. 916


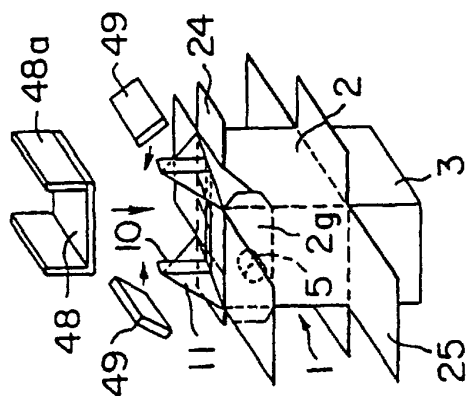


FIG. 9D



பெ.உ.

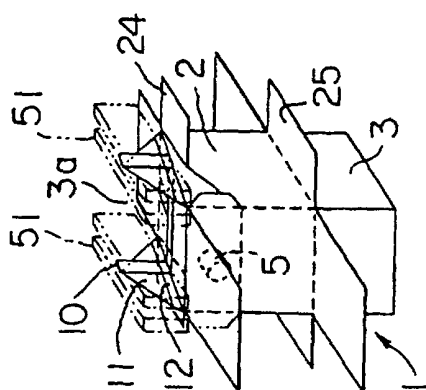


FIG. 10A

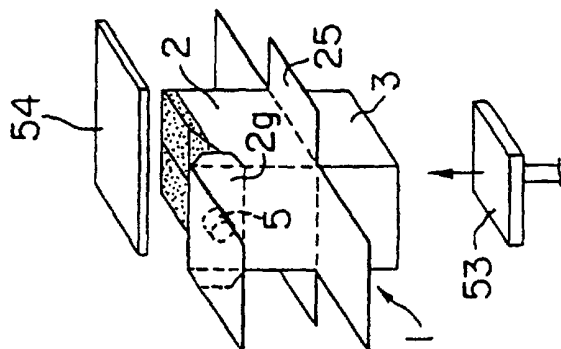


FIG. 10B

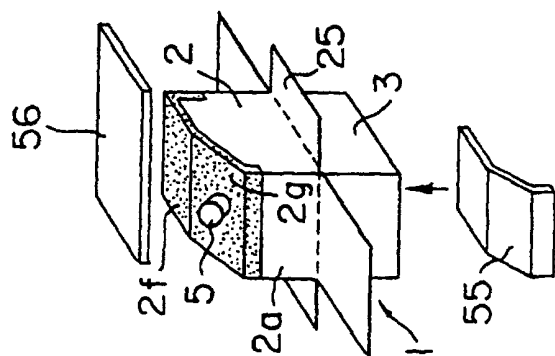


FIG. 10C

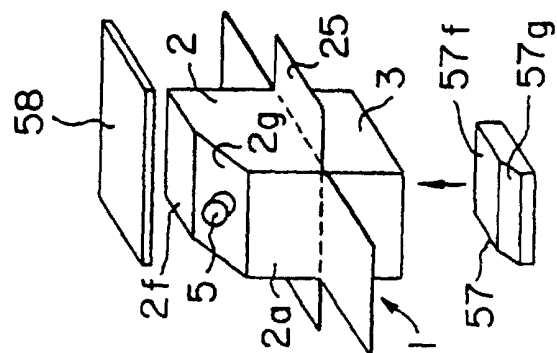
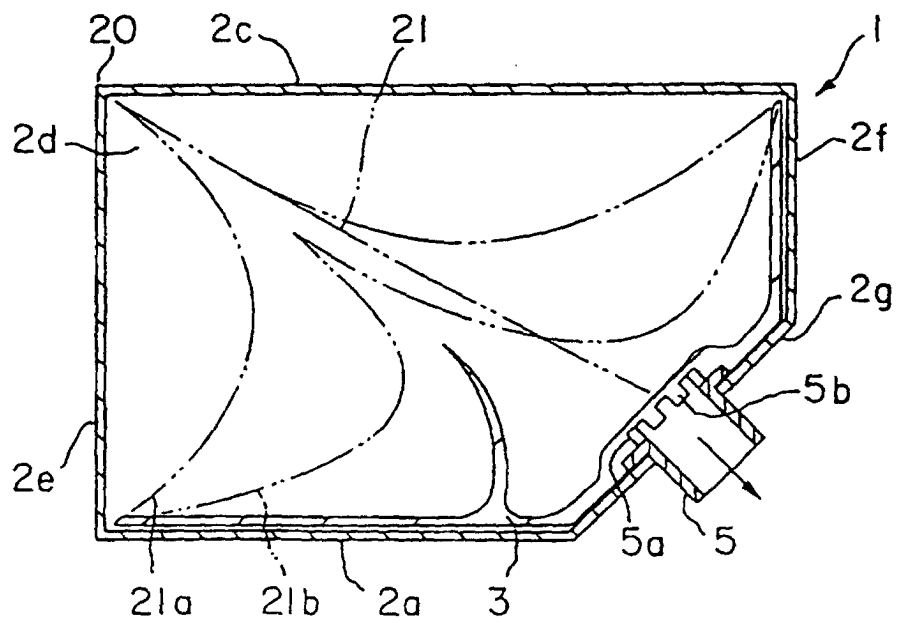
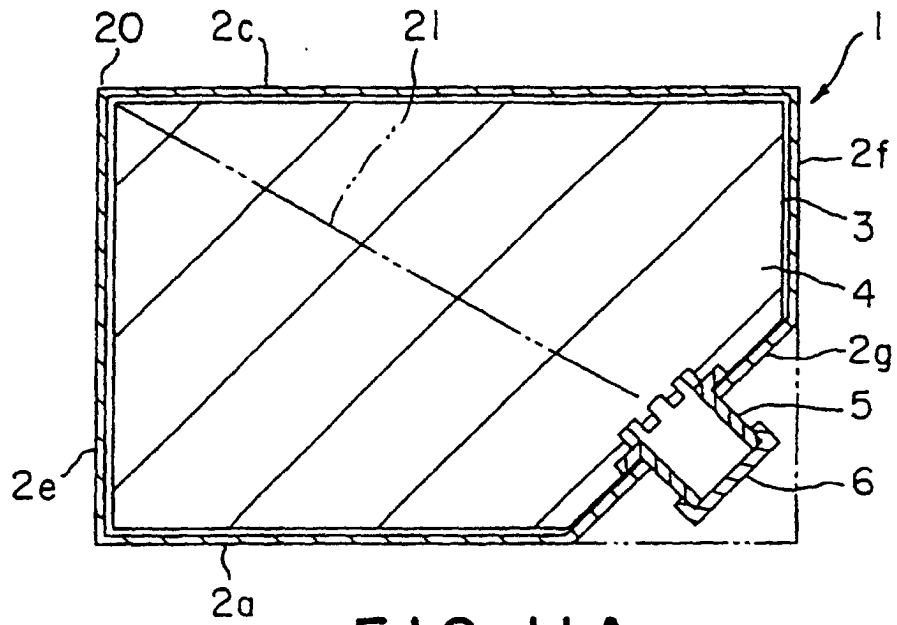


FIG. 10D



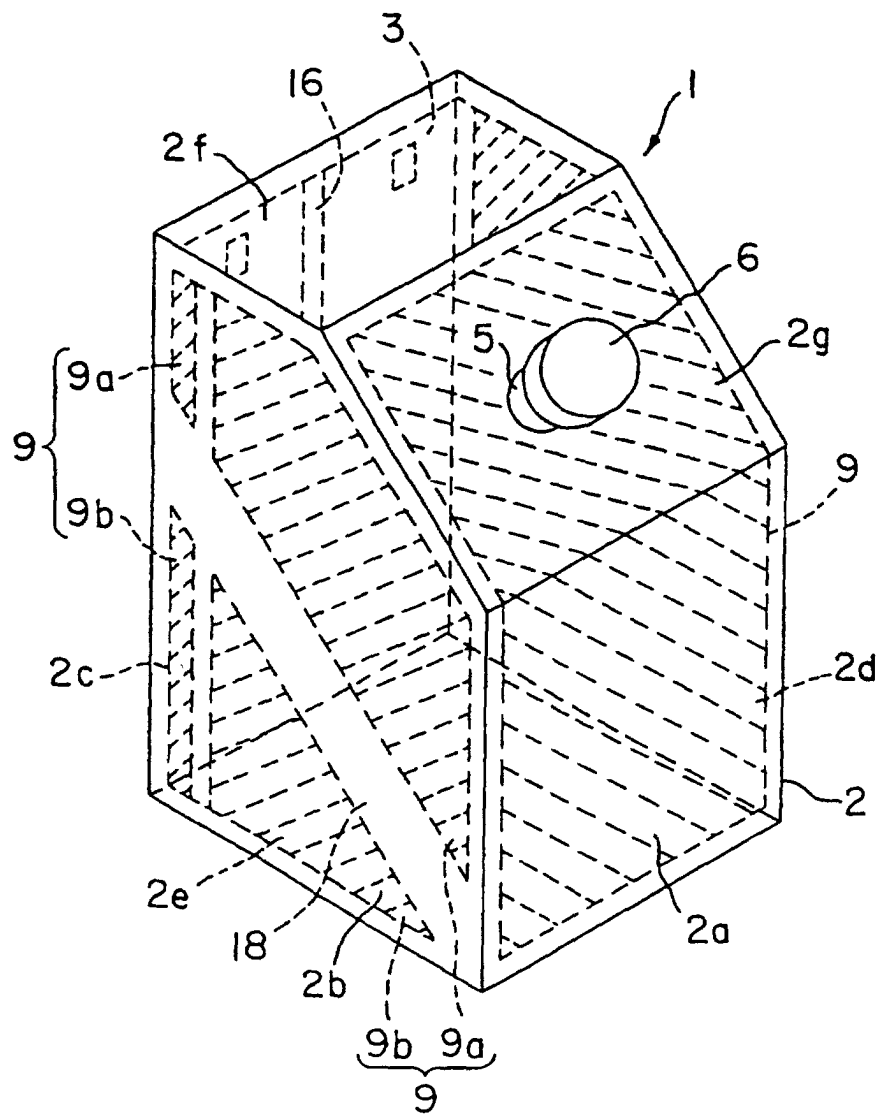


FIG. 12

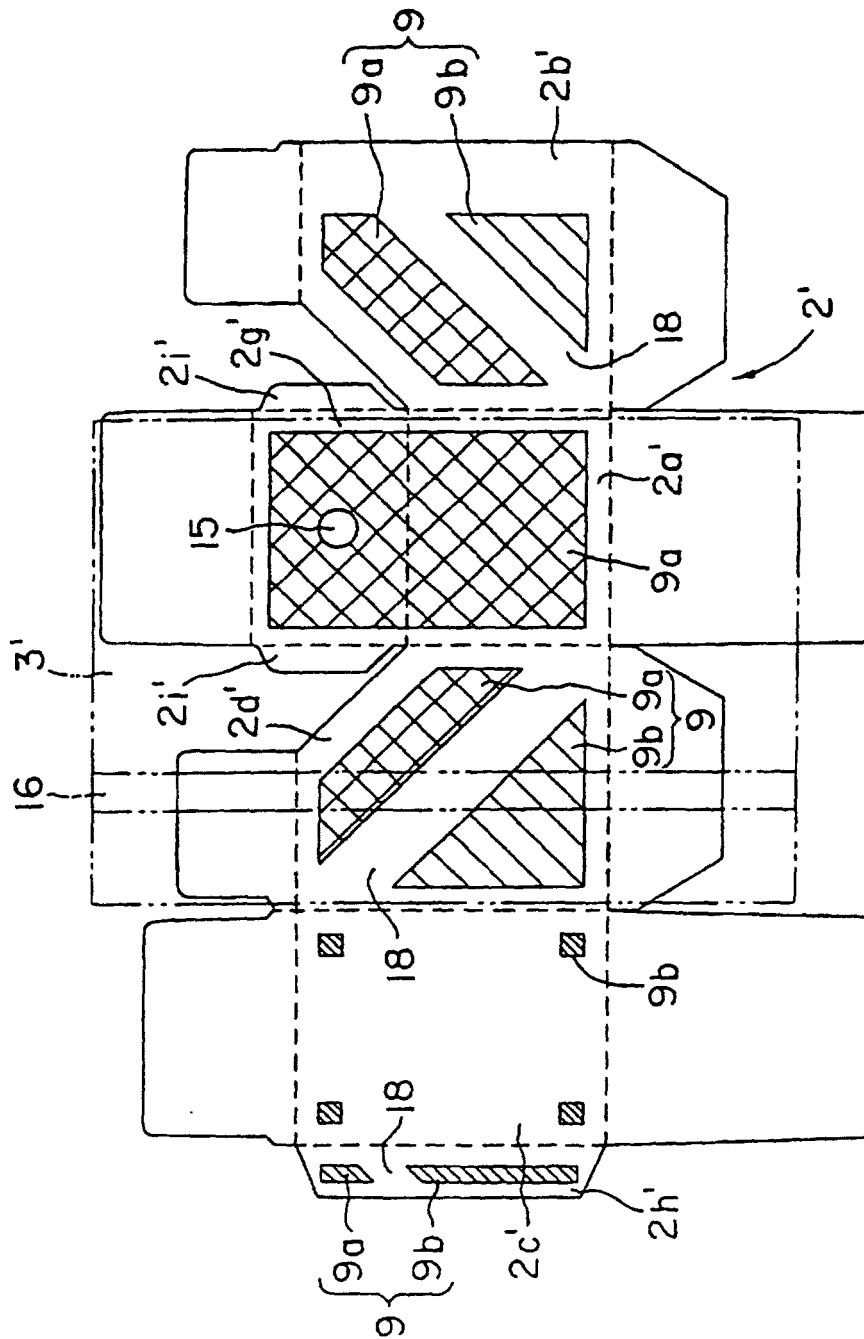


Fig. 13

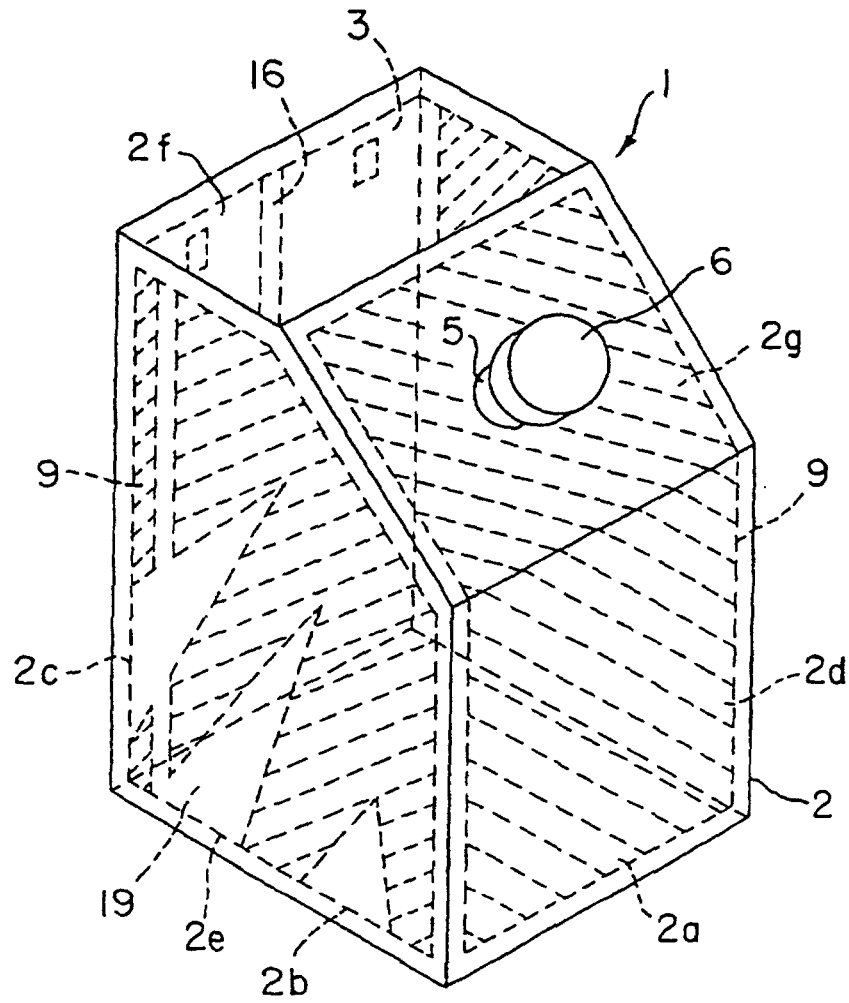


FIG. 14

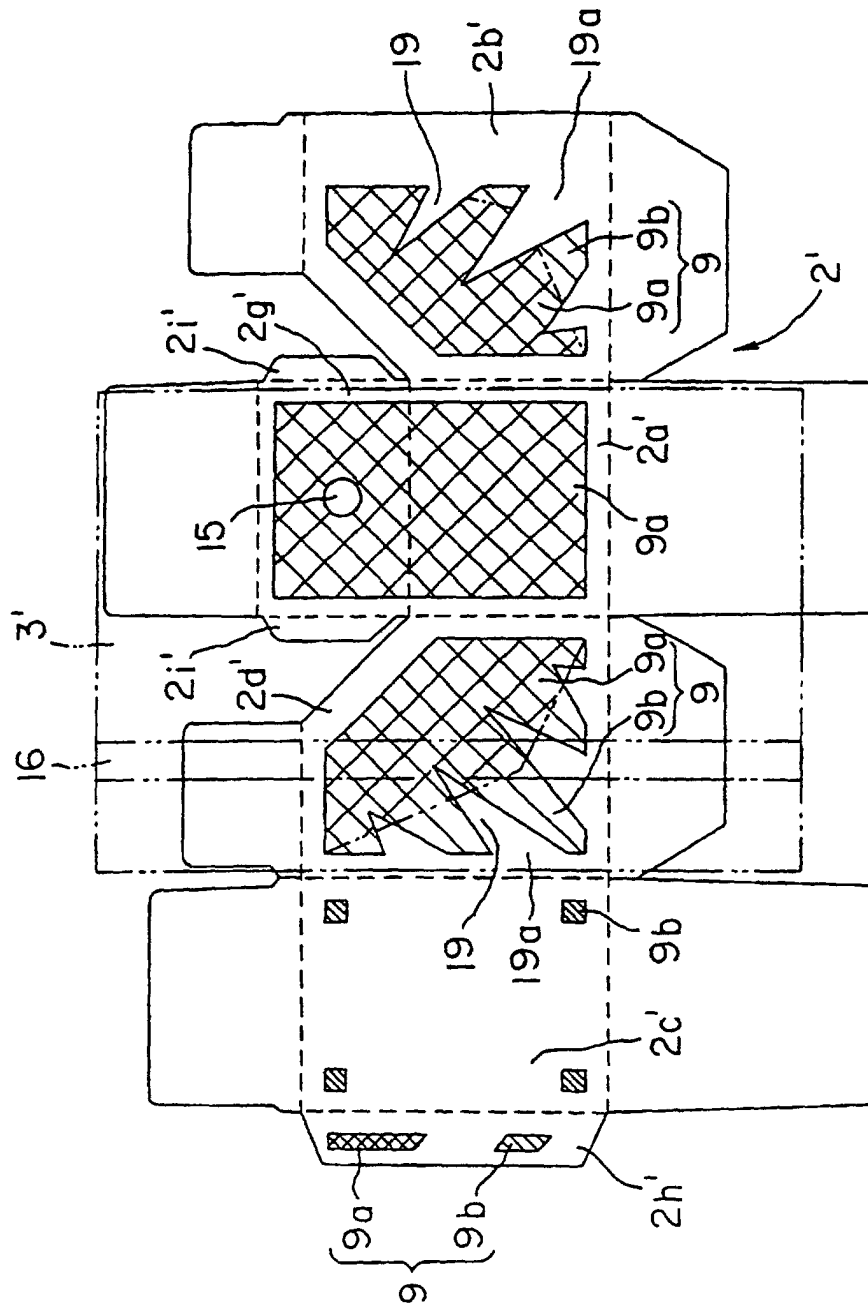


FIG. 15

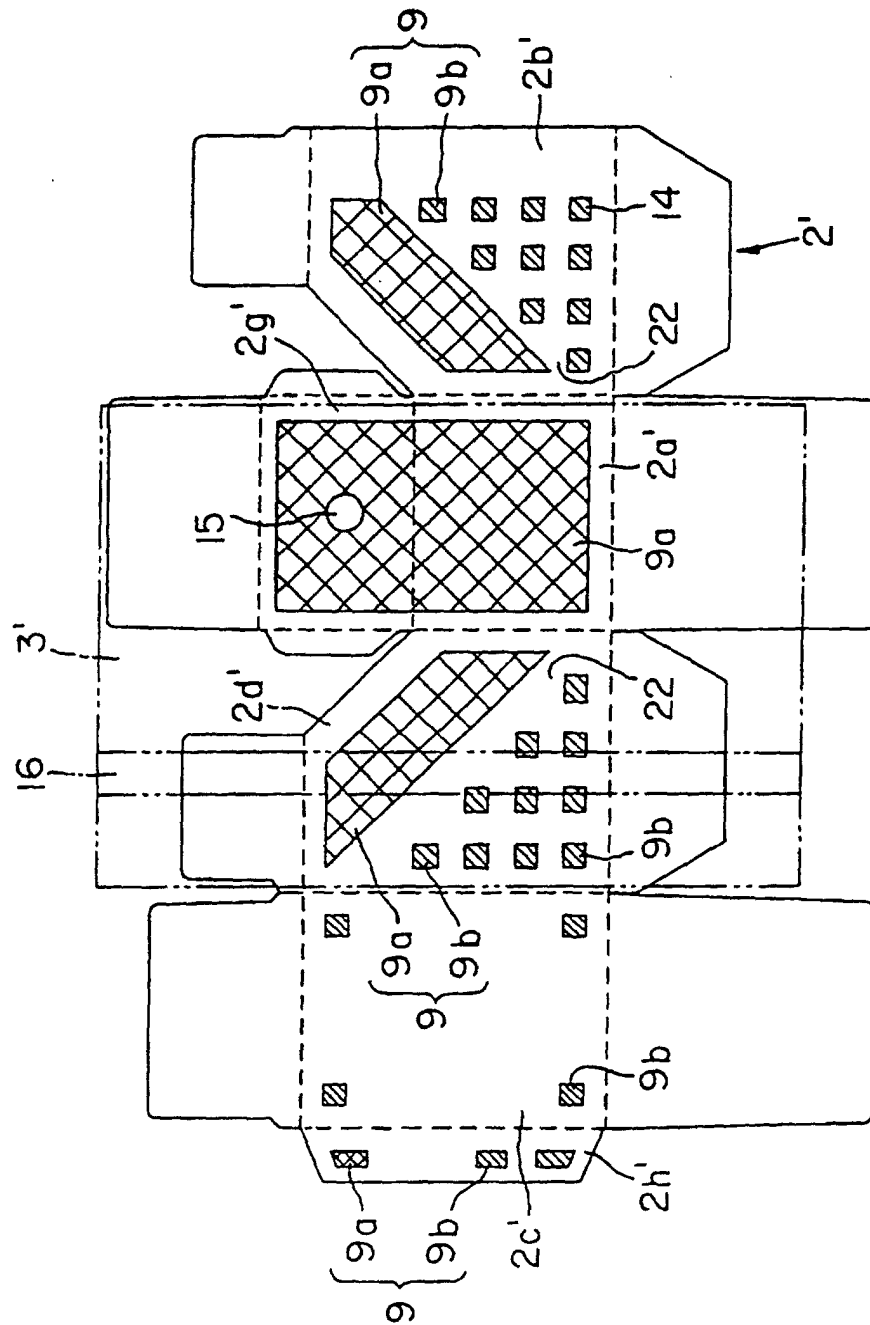


FIG. 16

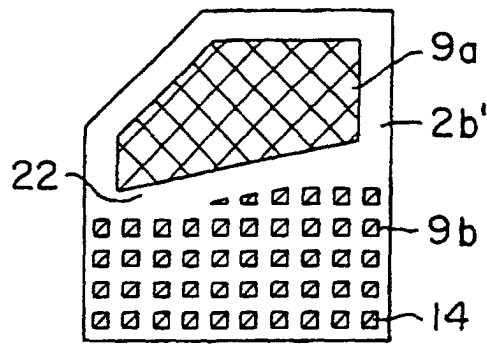


FIG. 17A

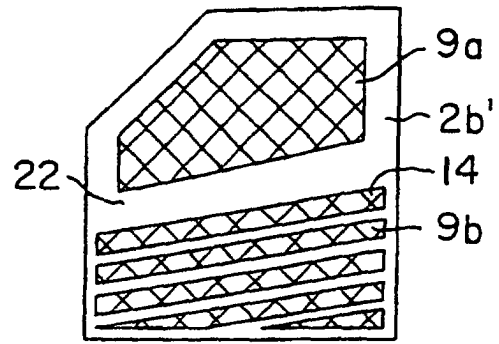


FIG. 17B

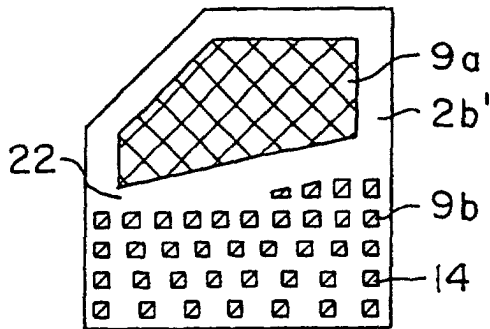


FIG. 17C

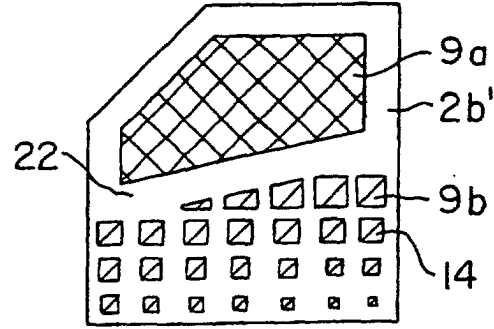


FIG. 17D

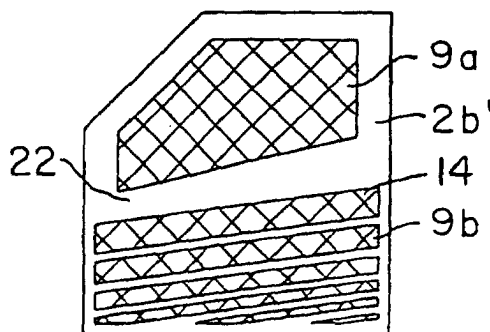


FIG. 17E

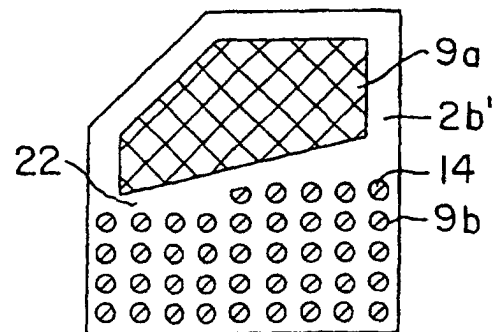


FIG. 17F

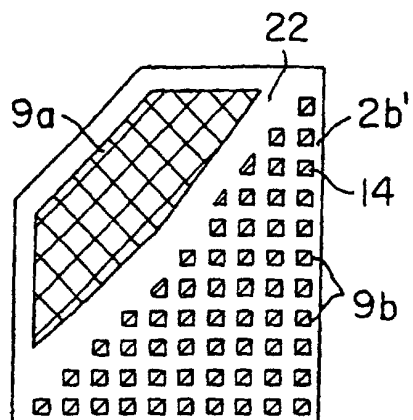


FIG. 18 A

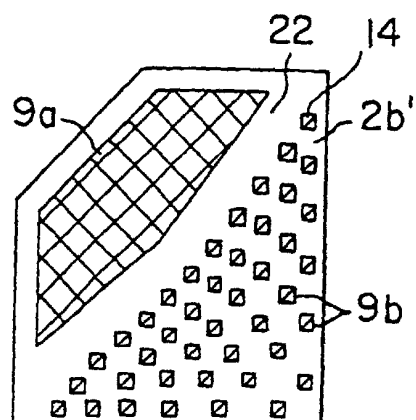


FIG. 18 B

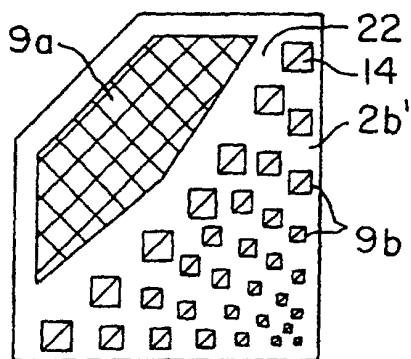


FIG. 18 C

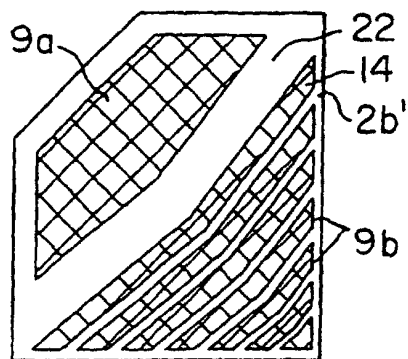


FIG. 18 D

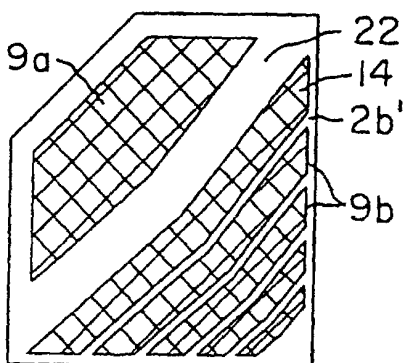


FIG. 18 E

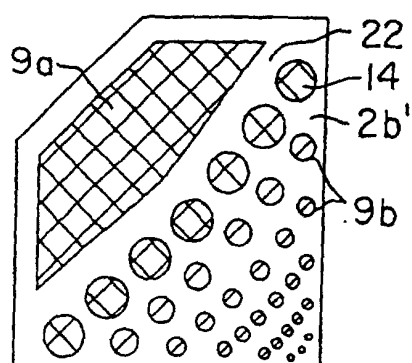


FIG. 18 F

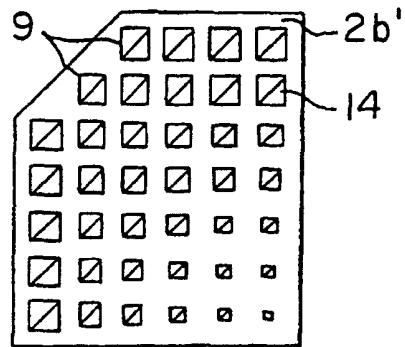


FIG. 19A

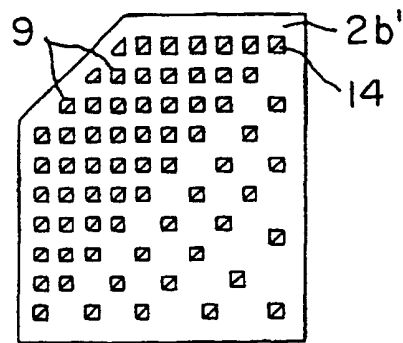


FIG. 19B

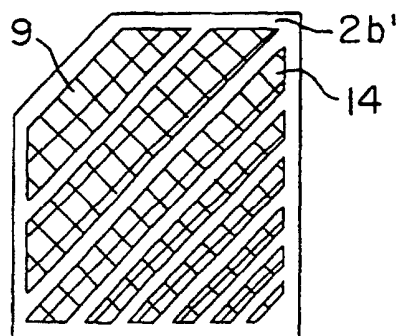


FIG. 19C