



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 756 998 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
05.02.1997 Bulletin 1997/06

(51) Int. Cl.⁶: B65D 3/26, B31C 3/00

(21) Application number: 95305375.8

(22) Date of filing: 01.08.1995

(84) Designated Contracting States:
DE FR GB

(71) Applicant: SONOCO PRODUCTS COMPANY
Hartsville South Carolina 29550 (US)


(72) Inventors:
• Drummond, Michael T.
Florence, South Carolina 29501 (US)
• Suski, William C.
Hartsville, South Carolina 29550 (US)
• Hill, Calvin G.
Hartsville, South Carolina 29550 (US)

• Roberts, Rodney W.
Otisco, Indiana 47163 (US)
• Lowman, Richard M., Jr.
Hartsville, South Carolina 29551 (US)
• Lowry, James W.
Florence, South Carolina 29501 (US)

(74) Representative: Linn, Samuel Jonathan et al
MEWBURN ELLIS
York House
23 Kingsway
London WC2B 6HP (GB)

(54) Easy-open container having an improved reinforcing and tear strip

(57) An easy-open container (10) has a spirally-wound bodywall layer (17), interior barrier liner layer (22) and outer label layer (25) forming an easy-open seam (20) extending spirally between the ends (14,16) of the container (10) and which is provided with an improved reinforcing and tear strip (35) extending along the easy open spiral seam (20). This reinforcing and tear strip (35) is formed by overlapped edge portions (25a) of the label layer (25) extending through and out of the spiral seam (20) of the container (10) and being folded-over onto the outside of the bodywall layer (17) and under the label layer (25). Low strength bonding (30) is provided between the overlapped label layer edge portions (25a) and high strength bonding (32) is positioned between the superimposed label layer (25) and folded-over a liner layer edge portion (22a;22b) and between the superimposed label layer (25) and body-wall layer (17) for allowing easy starting and stripping of the reinforcing and tear strip (35) along the spiral easy-open seam (20) without the necessity of removing the entire label layer (25).

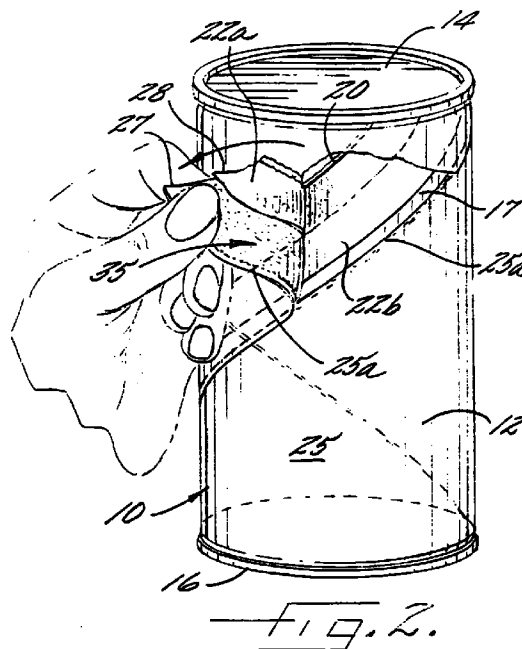

EP 0 756 998 A1

Description

This invention relates to easy-open containers for packaging products under pressure, such as biscuit and bread dough and the like. More specifically, this invention relates to an easy-open container having a spirally-wound bodywall layer, interior barrier liner layer and outer label layer forming an easy-open seam extending spirally between the ends of the container and being provided with a reinforcing and tear strip extending along the easy-open spiral seam.

Easy-open composite containers for packaging products under pressure, particularly, refrigerated dough products and the like, constitute a significant commercial consumer product. Typically, these containers are formed of a spirally-wound paperboard or board stock bodywall layer and an interior liner layer which may be a laminate including craft paper, foil and/or polymer plys, and exterior label layer. The spirally-wound bodywall layer usually includes a butt joint formed by the adjacent edges of the bodywall layer and forming a spiral seam extending from one end of the container to the other. The exterior label layer surrounds the bodywall layer and covers or bridges the spiral seam to reinforce such seam and prevent premature opening along the spiral seam.

Commercially significant containers of this type are disclosed in commonly assigned U.S. Patent No. 3,981,433 which is directed to a one-step easy-open container including an inner liner layer having a pleat positioned opposite the spiral butt joint. When the outer label layer is removed, the dough and liner expand outwardly together as the liner layer pleat begins to unfold and the result of pressure on the container body causes the butt joint to open. This in turn automatically allows the inner liner to expand further and automatically open by the rapidly expanding dough thereby allowing access to the dough in the interior of the container through the spirally easy-open seam of the container.

The outer label layer surrounding the spiral seam in containers of this type is an important structural component of the container because the outer label layer bridges the butt joint of the spiral seam and maintains it in closed position. Accordingly, the label layer must utilize materials which are strong enough to prevent premature opening of the container. Such structural requirements for the label layer prevent the use of more economical low strength sheet materials for construction of the label layer.

An additional problem which is present in containers of this type having easy-open spiral seams is removal of the portion of the label layer bridging such spiral seam so as to allow easy-opening thereof. Various mechanisms have been provided for removing the label layer from its bridging relationship with such easy-open spiral seam including providing a "collar cut" through the label layer and a weak adhesive between the label layer and the bodywall layer so that the label layer may be removed circumferentially around the con-

tainer and totally off of the bodywall layer. This type of opening feature is shown in U.S. Patent No. 3,241,739 which also discloses extending the liner layer through the easy-open seam and tearing such extending portion of the liner layer away as the entire label layer is removed around a collar cut to effect easy-opening.

More recently, an overlapped edge joint in the bodywall layer for the spiral seam has been proposed in commonly assigned U.S. Patent No. 5,251,809 to provide reinforcement to the easy-open spiral seam and to allow the use of lower quality label layers. In addition, it has also been proposed in commonly assigned U.S. Patent No. 5,076,440 to provide a folded-over portion in the label layer to extend along the butt joint of the easy-open spiral seam to reinforce such spiral seam and allow the use of generally lower quality materials in the label layer. Other devices have been proposed to assist in tearing of the label layer along the easy-open spiral seam only without removal of the entire label layer.

It is the object of this invention to provide an easy-open container for packaging products under pressure and which provide an improved reinforcing and tear strip feature along the easy-open spiral seam to allow for the use of lower quality materials in the label layer and which reinforces such easy-open seam and enhances opening of the easy-open container through the tear strip which tears along the spiral seam and does not require removal of the entire label layer.

It has been found by this invention that the above object may be accomplished by providing an easy-open container particularly adapted for packaging products under pressure and which includes generally the following.

A paperboard bodywall layer in strip form is spirally-wound and defines a substantially cylindrical container having opposed ends. The bodywall layer has longitudinal edges lying adjacent each other and forming a butt joint or an overlapped skived edge joint to thereby define an easy-open spiral seam extending between the opposed ends of the container. A flexible barrier liner layer in strip form is spirally-wound inside the bodywall layer in superimposed position therewith and is wider than the bodywall layer to define longitudinal edge portions on each side thereof which extends transversely beyond the bodywall layer side edges. The liner edge portions extend through and out of the butt joint or at least one of the liner edge portions extends through a skived overlapped edge joint and is positioned on the outside of the bodywall layer in folded-over superimposed position therewith.

A flexible label layer in strip form is spirally-wound outside the bodywall layer and the folded-over liner edge portions in superimposed position therewith and has longitudinal edges overlapped with each other. The label layer is positioned in bridging relation to the easy-open spiral seam and the folded-over liner edge portions. A tab cut extends through the uppermost of the overlapped label layer edge portions and inwardly from the outer edge thereof to generally the outer edge of the

folded-over liner layer edge portions to define a tear tab to be used in easy-opening of the container.

Low strength bonding means, preferably in the form of a frangible adhesive, is positioned between the overlapped label layer edge portions. High strength bonding means, preferable in the form of a permanent adhesive, is positioned between the superimposed label layer and the folded-over liner layer edge portion and between the superimposed label layer and bodywall layer for creating a reinforcing and tear strip extending from the tear tab along the easy-open spiral seam and between the outer edge of the uppermost of the overlapped label layer edge portions and the easy-open spiral seam and which includes the portion of the uppermost of the overlapped label layer edge portions and folded-over liner edge portion bonded thereto by the high strength bonding means.

Thus, an easy-open container is formed which has an improved reinforcing and tear strip extending along a spiral easy-open seam which strip reinforces such spiral seam to allow the use of lower quality materials in the label layer and which provide a tear strip which will tear through the label layer without a necessity to remove the entire label layer and expose the spiral seam for easy-opening by the pressure of the dough or other products in the container. A preferred method of manufacturing this improved easy-open container will be described in the detailed description set forth below.

Preferred embodiments of the various aspects of the invention will now be described in detail, with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of an easy-open container provided according to a preferred embodiment of the invention;

Figure 2 is a perspective view of the easy-open container of Figure 1 illustrating functioning of the reinforcing and tear strip as the container is being easy-opened along the spiral seam;

Figure 3 is a view, like Figure 2, illustrating a further progression in the easy-opening of the container;

Figure 4 is a greatly enlarged fragmentary sectional view taken generally along the Line 4-4 of Figure 1 and illustrates the construction of the easy-open seam of the bodywall of the container together with a preferred construction of the improved reinforcing and tear strip;

Figures 5 and 6 are cross-sectional views, like Figure 4, illustrating the banner in which the container is easy-opened by tearing of the tear strip and the automatic opening of the spiral seam following removal of the tear strip and the outer label layer bridging such spiral seam;

Figure 7 diagrammatically illustrates a preferred method and apparatus for producing the easy-open container of Figures 1-6;

Figure 8 is an enlarged fragmentary sectional view taken generally along the Line 8-8 of Figure 7;

Figure 9 is an enlarged fragmentary sectional view

taken generally along the Line 9-9 of Figure 7;

Figure 10 is a greatly enlarged fragmentary sectional view, like Figure 4, of a modified embodiment; and

Figure 11 is a greatly enlarged fragmentary sectional view, like Figure 4, of an alternative embodiment.

In the following detailed description various preferred embodiments of the invention are described. It will be understood, however, that the invention is not to be limited to its preferred embodiments and although specific terms are employed in describing the preferred embodiments, these are for the purposes of illustration only and not for purposes of limitation. It will thus be apparent that the invention includes various alternatives, modifications and equivalents within the scope of the appended claims, as will be apparent to the skilled artisan.

Figures 1-6 illustrate a preferred embodiment of an easy-open container **10** constructed in accordance with the present invention. The container **10** includes a generally cylindrical body portion **12**, a top end closure **14** and a bottom end closure **16**. The container further includes a spirally-wound paperboard bodywall layer **17** in strip form which forms the basic shape of the cylindrical body portion **12** of the container. The bodywall layer **17** has longitudinal edges **17a** lying adjacent each other and defining an easy-open spiral seam **20** extending between opposed ends of the body **12** and between end closures **14** and **16** of the container **10**. In accordance with the embodiment of Figs. 1-6, the longitudinal edges **17a** of the bodywall layer **17** abut each other to form a butt joint to in turn define the spiral seam **20**.

This bodywall layer **17** is advantageously composed of conventional spiral-winding paperboard or board stock having a thickness of between 0.10 and about 0.35 inch, preferably between about 0.15 and 0.30 inch, for example 0.021 inch. Board stock conventionally used in the manufacture of spirally-wound containers is commercially available from various manufacturers including Sonoco Products Company, Republic Paperboard Corporation and Middletown Board Corporation. In order to function advantageously as the spirally-wound bodywall layer **17**, the board stock typically is composed of kraft or recycled paper or recycled corrugated. The board stock can typically range from, e.g. a weight of 35 to 97 pounds per 1000 square feet and a thickness of .010 to .026 inch. In some instances the board stock can include a weak exterior layer, e.g. a 0.003 inch exterior news.

The easy-open container **10** further includes a flexible barrier liner layer **22** in strip form spirally-wound inside the bodywall layer **17** in superimposed position therewith. The liner layer **22** is wider than the bodywall layers to define longitudinal edge portion **22a** and **22b** on each side thereof which extend transversely beyond the bodywall layer side edges **17a**. Each of the liner layer edge portions **22a**, **22b** extend through the butt

joint and out of the easy-open spiral seam **20** and are positioned on the outside of the bodywall layer **17** in folded-over superimposed position with each other and with the bodywall layer **17**. The liner layer **22** is advantageously a barrier type, flexible sheet material, such as a polymer/foil, a kraft/foil/polymer, a polymer/polymer, or a kraft/foil laminate. The barrier layer **22** prevents the escape of liquids, oils and, preferably, gases into and out of the container bodywall **17** from the interior of the container **10**.

The container **10** further includes a flexible label layer **25** in strip form spirally-wound outside the bodywall layer **17** and the folded-over liner layer edge portions **22a**, **22b** in superimposed position therewith and having longitudinal edge portions **25a** overlapped with each other. The label layer **25** is positioned in bridging relationship to the easy-open spiral seam **20** and the folded-over liner layer edge portions **22a**, **22b**. Label layer **25** can be made of any suitable material, such as kraft paper, a polymer/foil laminate, a kraft paper/foil laminate, or the like.

The easy-open container **10** further includes a tab cut **27** extending through the upper overlapped label layer edge portion and inwardly from the outer edge thereof to generally the outer edge of the folded-over liner layer edge portion **22a**, **22b** to define a tear tab which can be easily lifted open and pulled by the user to initiate easy-opening of the container **10** in a manner to be described below.

Low strength bonding means **30** is positioned between the overlapped label layer edge portions **25a** and between the folded-over liner layer edge portions **22a**, **22b**. High strength bonding means **32** is positioned between the superimposed label layer **25** and the upper folded-over liner layer edge portion **22a** and between the superimposed label layer **25** and bodywall layer **17** for creating a reinforcing and tear strip **35** extending from the tear tab formed by the tear cut **27** along the easy-open spiral seam **20** and between the outer edge of the uppermost of the overlapped label layer edge portions **25a** and the easy-open spiral seam **20** and which includes the portion of the uppermost of the overlapped label layer edge portions **25a** and the upper of the folded-over liner layer edge portion **22a** bonded thereto by high strength bonding means **32**.

In a preferred form of this embodiment, the lowermost of the folded-over liner edge portions **22b** is wider than the uppermost of the folded-over liner edge portion **22a** and extends beyond the outer edge thereof. Low strength bonding means **30** is positioned between the label layer **25** and the portion of the lowermost of the folded-over liner edge portions **22b** extending beyond the outer edge of the uppermost of the folded-over liner edge portions **22a**. The low strength bonding means **30** positioned between the overlapped label layer edge portions and between the label layer and the portion of the lowermost of the folded-over liner edge portions **22b** comprises a frangible adhesive. The low strength bonding means positioned between the folded-over liner

edge portions **22a**, **22b** comprises heat sealing, and the high strength bonding means comprises a permanent adhesive.

Various adhesives can be employed as the frangible adhesive forming the low strength bonding means **30**. The tear or peel strength of this frangible adhesive will vary depending on the materials used in the component layers of the container **10**. The peel strength must be weak or less than the tear strength of the liner layer **22** and the label layer **25** so that the layers will peel rather than tear. With current material used, it has been found that a peel strength of 0.42 to 1.99 pounds per square inch is preferred. The frangible adhesive may include a high initial tack dextrine based adhesive commercially available from National Starch and Chemical Corporation, Grand Prairie, Texas as "71-5626B". This is a high solids (about 64%), high viscosity (about 2100 cps) acid modified (about 2.5 Ph) dextrine adhesive. Other frangible adhesives which can be successfully used include heavily filled, resinous, aqueous emulsion type adhesives such as, for example polyvinylacetate dispersed in water together with a tackifying alcohol and an inert filler such as clay, silicon dioxide calcium carbonate, talc and the like. The inert filler can insure that a weak discrete layer of adhesive remains between the superimposed components of the container to thereby provide for the fracture or breaking of the adhesive. Weak latex can be used on some films. In the alternative, a release coating, such as a microcrystalline wax, silicone or the like can be provided on the inner surface on either or both of the superimposed components of the container so that the adhesive layer is readily released upon drying.

It is important that the frangible adhesive used for the low strength bonding means **30** have a high initial tack or adhesive so that the overlapped components between which it is positioned are held together during, and immediately following, manufacture of the container **10**. It is also important that this frangible adhesive be capable of readily allowing peeling or separating of the superimposed components between which it is positioned upon easy opening of the container **10** by tearing the tear strip **35** along the easy-open seam **20**. It has been found that heat sealing also accomplishes the purposes of a low strength bonding means and may be conveniently formed between the overlapped liner layer edge portions **22a**, **22b** during manufacture of the container **10**.

Various adhesives may be employed to provide the permanent adhesive utilized for the high strength bonding means **32**. The tear or peel strength of this permanent adhesive will vary depending upon the materials used in the component layers of the container **10**. The tear or peel strength must be greater than the tear strength of the liner layer **22** and the label layer **25** so that these layers will tear when the tear strip **35** is torn along the easy-open spiral seam. With current materials used for these component layers, it has been found that a peel strength greater than 2.20 lbs. per square inch is

necessary. The permanent adhesive may include polyvinyl alcohol with or without clay mix, blended or reactor resins, special additives, such as manufactured by H.B. Fuller and identified as A1940 having 4000 CPS viscosity, 55% solids and 5.0 pH, K6030 having 3050 CPS viscosity, 55% solids and 5.0 pH, H3935 having 5500 CPS viscosity, 52% solids and 5.0 pH, and by National Starch and identified as 32-1984 having 5400 CPS viscosity, 56% solids and 4.5 pH, and 32-0215 having 4500 CPS viscosity, 55% solids and 4.0 pH.

Referring now to Figure 10, the construction of the container 10 described above with respect to Figures 1-6 may further include a flexible expansion joint 40 positioned in the region of the easy-open spiral seam 20 and comprised of a portion of one of the liner layer edge portions 22b being folded back on itself and heat sealed to the other of the liner layer edge portions 22a. Upon opening of the easy-open seam 20, the expansion joint 40 will expand prior to breaking to expose the contents of the container, in a manner well understood by those with ordinary skill in the art.

Referring now to Figure 11, an alternative embodiment of the container 10 is illustrated. Like reference numerals are used in this embodiment where the components of this alternative embodiment of the container 10 are the same and will not be further described with respect to this embodiment.

In this embodiment of the container 10 of Figure 11, the longitudinal edges 17a' and 17b' of the bodywall layer 17 are in the form of longitudinal skived edges and are overlapped with each other. Skived edges, as is well understood by those with ordinary skill in the art, may be formed by compressing the edges or by grinding away or cutting away a portion of the material of the edges. The skived edges illustrated in Figure 11 are compression skived. This embodiment also has only one of the liner layer edge portions 22a' extending through and out of the easy-open spiral seam 20 and positioned on the outside of the bodywall layer 17 in folded-over superimposed position therewith. The other of the liner layer edge portions 22b' is positioned in overlapping relationship with the other of the liner layer edge portions 22a on the inside of the bodywall layer 17 and may be folded back on itself to provide an expansion joint 40' and has a low strength bonding means 30 therebetween which may be in the form of heat sealing having a tear or peel strength of 3.00 to 5.00 pounds per square inch. Otherwise, this embodiment is the same and operates the same as the embodiment of Figures 1-6 and the embodiment of Figure 10.

Any of the above described embodiments of this invention may also preferably include a second tab cut 28 aligned with the other tab cut 27 and extending through the uppermost of the label layer edge portions 22a to aid in initiating easy opening of the container 10 by tearing of the reinforcing and tear strip 35 along the spiral seam 20.

As may be seen particularly in Figures 4-6, the container 10 of this invention may be easy-opened by

grasping the tear tab formed by the tab cut 27 and 28 which in turn initiates separation of the overlapped label edge portions 25a through the low strength bonding means 30 or frangible adhesive and separation of the overlapped liner layer edge portions 22a, 22b by fracturing the low strength bonding means 30 in the form of a heat seal. This will in turn cause tearing of the upper of the folded-over liner layer edge portions 22a at the spiral seam 20 along with the uppermost label layer edge portion 25a because of the strength of the high strength bonding means 32 or permanent adhesive holding the upper label layer edge portion to the upper liner layer edge portion 22a, holding the label layer 25 to the body layer 17 and holding the lowermost of the folded-over liner layer edge portions 22b to the bodywall layer 17. This causes the reinforcing and tear strip 35 to tear down along the spiral seam 20, as shown particularly in Figures 2 and 3. This causes the pressurized product or dough within the container 10 to expand through the spiral seam 20, as shown in Figures 3 and 6, to self-open the spiral seam 20 and the container 10 in a manner well understood by users of these types of containers for pressurized products.

Thus, a reinforcing and tear strip 35 has been provided in the container 10 which will initially reinforce the easy-open spiral seam 20, and which will easily separate from the components to which it is attached by fracture of the low strength bonding means 30 to tear along the spiral seam 20 for easy opening thereof without the necessity of removal of the entire label layer 25. This also allows the advantage of the use of weaker or more economical materials in the label layer than would be possible without the use of such reinforcing and tear strip 35.

Referring now to Figures 7-9, a preferred method and apparatus for producing the easy-open container of Figures 1-6 is diagrammatically illustrated.

As may be seen, a flexible barrier liner layer 22 in strip form is provided from any suitable liner supply. A paperboard bodywall layer 17 in strip form is also provided from any suitable source. The bodywall layer 17 is of a width narrower than the liner layer 22 and is positioned on top of the liner layer 22 in superimposed position so as to define longitudinal edge portions 22a and 22b on each side of the wider liner layer 22 and which extend transversely beyond the bodywall side edge portions 17a when in superimposed position. Preferably, the edge portion 22b is wider than the edge portion 22a.

A high strength bonding means 32 in the form of a permanent adhesive, as described above, is applied across the central portion of the upper surface of the liner layer 22 and of a width generally the same as the width of the narrower bodywall layer 17 by a suitable roller applicator device 50 or other suitable means. The superimposed bodywall layer 17 and liner layer 22 are fed longitudinally at a desired angle to a stationary mandrel 52 and are spirally wound thereon in a manner well understood by those with ordinary skill in the art.

While the superimposed bodywall layer 17 and liner

layer 22 are being fed to the mandrel 52, a high strength bonding means 32, preferably in the form of a permanent adhesive, is applied along the bodywall edge portion 17a adjacent to the wider liner layer edge portion 22b by a suitable roller adhesive applicator 53 or other suitable device and this wider liner layer edge portion 22b is folded over onto the adjacent bodywall edge portion 17a by suitable folder device 54 so that the permanent adhesive is positioned therebetween to form a high strength bond 32. A tab cut 28 is also formed in the narrower liner layer edge portion 22a during feeding of the superimposed bodywall layer 17 and liner layer 22 to the mandrel 52 by a suitable tab cut device 55.

As the superimposed bodywall layer 17 and liner layer 22 with folded-over liner layer edge portion 22b are wound onto the mandrel 52, the narrower liner layer edge portion 22a will overlap the folded-over liner layer edge portion 22b on the previous revolution of the superimposed bodywall layer 17 and liner layer 22 on the mandrel 52 so that such liner layer edge portions 22a and 22b are overlapped and superimposed with each other. A low strength bond 30 is formed between these overlapped liner layer edge portions 22a and 22b by heat sealing through a suitable heat sealer device 56. This spiral winding also forms a butt joint relationship of the edge portions 17a of the bodywall layer 17 to form a continuous tube having a spiral seam 20 therein and wherein each of the liner layer edge portions 22a and 22b extend through such butt joint and out of the spiral seam 20.

The thus formed continuous tube is fed forwardly along the mandrel 52 in a manner well understood by those with ordinary skill in the art by a belt device 60. During such forward feeding of the continuous tube, a flexible label layer 25 is provided from a suitable supply and is fed longitudinally at a desired angle to the mandrel 52. While the label layer 25 is being fed to the mandrel 52, a tab cut 27 is preferably cut into one of the label layer edge portions 25a by a suitable tab cutting device 62.

A high strength bonding means 32 in the form of a permanent adhesive is applied along the bottom surface of the label layer 25 to extend from the outer edge of one longitudinal edge portion 25a toward the other longitudinal edge portion 25a having the tab cut 27 therein, but leaving this label layer outer edge portion 25a uncoated with the permanent adhesive. Thereafter, a low strength bonding means 30 in the form of a frangible adhesive is applied along the bottom surface of the liner layer edge portion 25a which was not coated with the permanent adhesive. The label layer 25 is spirally-wound in superimposed position onto the continuous tube formed by the superimposed bodywall layer 17 and liner layer 22 in the manner discussed above so that the label layer edge portions 25a are in overlapped relationship with each other and have the frangible adhesive positioned therebetween for forming a low strength bonding means 30.

The label layer 25 is positioned in bridging relation-

ship to the spiral seam 20 and the superimposed liner layer edge portions 22a, 22b on the outside of the bodywall layer 17 and in superimposed position to the remainder of the bodywall layer 17 so that the overlapped label layer edge portions 25a are adjacent to but not directly superimposed thereon and so that a low strength bonding means 30 is formed between the overlapped label layer edge portions 22a and a high strength bonding means 32 is formed between the superimposed label layer 25 and the other of the liner layer edge portions 22a and the superimposed label layer 25 and bodywall layer 17. The tab cuts 27 and 28 are also positioned in alignment with each other by this spiral winding.

Thereafter, the thus spirally-wound continuous tube having bodywall layer 17, liner layer 22 and label layer 25 are fed forwardly on the mandrel 52 to a cutting station where suitable cutting devices 65 cut the continuous tube into individual lengths for containers 10. These individual container lengths may then be fed to a suitable end applying mechanisms while being filled with dough or other products under pressure so as to form filled easy-open containers 10.

Thus, it may be seen, that this invention has provided an improved easy-open container 10 which has an improved reinforcing and tear strip 35 extending along a spiral easy-open seam 20 which strip 35 reinforces the spiral seam 20 to allow the use of lower quality or lower strength materials in a label layer 25 and which provides a tear strip 35 which will tear through the label layer 25 and expose the spiral seam 20 for easy-opening by the pressure of the dough or other products in the container. A method has also been provided which may be utilized on conventional spiral winding equipment without substantial modifications or new devices therein.

Claims

1. An easy-open container particularly adapted for packaging products under pressure and comprising:

a spirally-wound paperboard bodywall layer in strip form defining a substantially cylindrical container having opposed ends, said bodywall layer having longitudinal edges lying adjacent each other to thereby define an easy-open spiral seam extending between said opposed ends;

a flexible barrier liner layer in strip form spirally-wound inside said bodywall layer in superimposed position therewith and being wider than said bodywall layer to define longitudinal edge portion means on each side thereof which extend transversely beyond said bodywall layer side edges; said liner edge portion means extending through and out of said easy-open spiral seam and positioned on the outside of

said bodywall layer in folded-over superimposed position therewith;

a flexible label layer in strip form spirally-wound outside said bodywall layer and said folded-over liner edge portion means in superimposed position therewith and having longitudinal edge portions overlapped with each other, said label layer being positioned in bridging relation to said easy-open spiral seam and said folded-over liner layer edge portion means;

a tab cut extending through the upper of said label layer edge portions and inwardly thereof to generally the outer edge of said folded-over liner layer edge portion mean to define a tear tab to be used in easy-opening of said container; and

low strength bonding means positioned between said overlapped label layer edge portions, and high strength bonding means positioned between said superimposed label layer and folded-over liner layer edge portion means and between said superimposed label layer and bodywall layer for creating a reinforcing and tear strip extending from said tear tab along said easy-open spiral seam and between the outer edge of the uppermost of said overlapped label layer edge portions and said easy-open spiral seam and which includes the portion of the uppermost of said overlapped label layer edge portions and said folded-over liner layer edge portion means bonded thereto by said high strength bonding means.

2. An easy-open container, as set forth in Claim 1, in which said low strength bonding means comprises a frangible adhesive, and in which said high strength bonding means comprises a permanent adhesive.
3. An easy-open container particularly adapted for packaging products under pressure and comprising:

a spirally-wound paperboard bodywall layer in strip form defining a substantially cylindrical container having opposed ends, said bodywall layer having longitudinal edges lying adjacent each other and defining an easy-open spiral seam having a butt joint and extending between said opposed ends;

a flexible barrier liner layer in strip form spirally-wound inside said bodywall layer in superimposed position therewith and being wider than said bodywall layer to define longitudinal edge portions on each side thereof which extend transversely beyond said bodywall layer side edges each of said liner layer edge portions extending through said butt joint and out of said easy-open spiral seam and positioned on the

outside of said bodywall layer in folded-over superimposed position with each other and with said bodywall layer;

a flexible label layer in strip form spirally-wound outside said bodywall layer and said folded-over liner layer edge portions in superimposed position therewith and having longitudinal edge portions overlapped with each other, said label layer being positioned in bridging relation to said easy-open spiral seam and said folded-over liner layer edge portions;

a tab cut extending through the upper of said label layer edge portions and inwardly from the outer edge thereof to generally the outer edge of said folded-over liner layer edge portions to define a tear tab to be used in easy-opening of said container; and

low strength bonding means positioned between said overlapped label layer edge portions and between said folded-over liner layer edge portions, and high strength bonding means positioned between said superimposed label layer and the upper folded-over liner layer edge portion and between said superimposed label layer and bodywall layer for creating a reinforcing and tear strip extending from said tear tab along said easy-open spiral seam and between the outer edge of the uppermost of said overlapped label layer edge portions and said easy-open spiral seam and which includes the portion of the uppermost of said overlapped label layer edge portions and the upper of said folded-over liner layer edge portions bonded thereto by said high strength bonding means.

4. An easy-open container, as set forth in Claim 3, wherein the lowermost of said folded-over liner edge portions is wider than the uppermost of said folded-over liner edge portions and extends beyond the outer edge thereof, and wherein low strength bonding means is positioned between said label layer and the portion of the lowermost of said folded-over liner edge portions extending beyond the outer edge of the uppermost of said folded-over liner edge portions.
5. An easy-open container, as set forth in Claim 4, in which said low strength bonding means positioned between said overlapped label layer edge portions and between said label layer and the portion of the lowermost of said folded-over liner edge portions comprises a frangible adhesive, said low strength bonding means positioned between said folded-over liner edge portions comprises heat sealing, and said high strength bonding means comprising a permanent adhesive.
6. An easy-open container particularly adapted for packaging products under pressure and compris-

ing:

a spirally-wound paperboard bodywall layer in strip form defining a substantially cylindrical container having opposed ends, said bodywall layer having longitudinal skied edges overlapped with each other to thereby define an easy-open spiral seam extending between said opposed ends;

a flexible barrier liner layer in strip form spirally-wound inside said bodywall layer in superimposed position therewith and being wider than said bodywall layer to define a longitudinal edge portion on each side thereof which extend transversely beyond said bodywall layer side edges; one of said liner layer edge portions extending through and out of said easy-open spiral seam and positioned on the outside of said bodywall layer in folded-over superimposed position therewith and the other of said liner layer edge portions being positioned in overlapping relation with the one of said liner layer edge portions on the inside of said bodywall layer;

a flexible label layer in strip form spirally-wound outside said bodywall layer and said folded-over liner layer edge portion in superimposed position therewith and having longitudinal edge portions overlapped with each other, said label layer being positioned in bridging relation to said easy-open spiral seam and said folded-over liner layer edge portion means;

a tab cut extending through the upper of said label layer edge portions and inwardly from the outer edge thereof to generally the outer edge of said folded-over liner layer edge portion mean to define a tear tab to be used in easy-opening of said container; and

low strength bonding means positioned between said overlapped label layer edge portions and between said superimposed folded-over liner layer edge portion and bodywall layer and between said overlapped liner layer edge portions, and high strength bonding means positioned between said superimposed label layer and folded-over liner layer edge portion and between said superimposed label layer and body layer for creating a reinforcing and tear strip extending from said tear tab along said easy-open spiral seam and between the outer edge of the uppermost of said overlapped label layer edge portions and said easy-open spiral seam and which includes the portion of the uppermost of said overlapped label layer edge portions and said folded-over liner layer edge portion bonded thereto by said high strength bonding means.

7. An easy-open container, as set forth in Claim 6, in

which said overlapped skied edges of said bodywall layer comprise edges which have been compressed.

8. An easy-open container, as set forth in Claim 6, in which said low strength bonding means positioned between said overlapped label layer edge portions and between said superimposed folded-over liner layer edge portion and bodywall layer comprises frangible adhesive, said low strength bonding means positioned between said overlapped liner layer edge portions comprises heat sealing, and said high strength bonding means comprises permanent adhesive.

9. An easy-open container as set forth in Claim 1 or 3, including a second tab cut aligned with the other said tab cut and extending through the upper of said folded-over liner layer edge portion toward said easy-open spiral seam.

10. An easy-open container, as set forth in Claim 1, 3 or 6, in which one of said liner layer edge portions is folded back on itself and heat sealed to the other of said liner layer edge portions to define an expansion joint positioned in the region of said easy-open spiral seam.

11. An easy-open container, as set forth in Claim 2, 5 or 8, in which said frangible adhesive comprises an adhesive having a peel strength less than the tear strength of said liner layer and said label layer.

12. An easy-open container, as set forth in Claim 2, 5 or 8, in which said permanent adhesive comprises an adhesive having a peel strength greater than the tear strength of said liner layer and said label layer.

13. An easy-open container, as set forth in Claim 2, 5 or 8, in which said frangible adhesive comprises an adhesive having a peel strength less than the tear strength of said liner layer and said label layer, and said permanent adhesive comprises an adhesive having a peel strength greater than the tear strength of said liner layer and said label layer.

14. A method of manufacturing an easy-open container comprising the steps of:

providing a flexible barrier liner layer in strip form and a paperboard bodywall layer in strip form and of a width narrower than the liner layer;

positioning the bodywall layer in superimposed position on the liner layer so as to define longitudinal edge portions on each side of the wider liner layer which extend transversely beyond the bodywall layer side edges;

feeding the superimposed liner layer and body-

wall layer to a mandrel, while folding-over one of the liner layer edge portions onto the body-wall layer and forming a high strength bond therebetween;

spirally-winding the superimposed liner layer and bodywall layer with the folded-over liner layer edge portion on the mandrel in butt joint edge relationship of the bodywall layer to form a continuous tube having a spiral seam and with each of the liner layer edge portions extending through the butt joint and out of the spiral seam, while positioning the other of the liner layer edge portions in superimposed position on the folded-over liner layer edge and forming a low strength bond therebetween; spirally-winding a flexible label layer in strip form onto the continuous tube on the mandrel with the longitudinal edges in overlapped relationship and positioning the label layer in superimposed bridging relation to the spiral seam and the superimposed liner layer edge portions on the outside of the bodywall layer and in superimposed relation to the remainder of the bodywall layer so that the overlapped label layer edges are adjacent to but not directly superimposed thereon, while forming a low strength bond between the overlapped label layer edges and a high strength bond between the superimposed label layer and the other of the liner layer edge portions and the superimposed label layer and bodywall layer; and cutting the thus wound continuous tube into individual container lengths.

15. A method of manufacturing an easy-open container comprising the steps of:

providing a flexible barrier liner layer in strip form and a paperboard bodywall layer in strip form and of a width narrower than the liner layer; positioning the bodywall layer in superimposed position on the liner layer so as to define longitudinal edge portions on each side of the wider liner layer which extend transversely beyond the bodywall side edges and so that one of the liner layer edge portions is wider than the other of the liner layer edge portions, while applying a permanent adhesive between the superimposed bodywall layer and liner layer to form a high strength bond therebetween; feeding the superimposed liner layer and body-wall layer to a mandrel, while folding-over the wider one of the liner layer edge portions onto the bodywall layer, while applying a permanent adhesive between the folded-over portion of the one liner layer edge portion and the body-wall layer to form a high strength bond therebe-

tween;

spirally-winding the resulting liner layer and bodywall layer onto the mandrel in butt joint edge relationship of the bodywall layer to form a continuous tube having a spiral seam and with each of the liner layer edge portions extending through the butt joint and out of the spiral seam, while positioning the other narrower of the liner layer edge portions in superimposed position over the folded-over liner layer edge portion and heat sealing the thus superimposed liner layer edge portions to form a low strength bond therebetween;

spirally-winding a flexible label layer in strip form onto the continuous tube on the mandrel with the longitudinal edges in overlapped relationship and positioning the label layer in superimposed bridging relation to the spiral seam and the superimposed liner layer edge portions on the outside of the bodywall layer and in superimposed relation to the remainder of the bodywall layer so that the overlapped label layer edges are adjacent to but not directly superimposed thereon, while applying a frangible adhesive along one edge portion of the label layer to position the frangible adhesive between the overlapped label layer edges and the superimposed label layer and wider liner layer edge portion extending beyond the narrower label layer edge portion to form a low strength bond therebetween, and applying a permanent adhesive along the remainder of the label layer to position the permanent adhesive between the superimposed label layer and the narrower of the liner layer edge portions and the superimposed label layer and bodywall layer to form a high strength bond therebetween; and cutting the thus wound tube into individual container lengths.

16. A method of manufacturing an easy-open container, as set forth in claim 14 or 15, including the additional step of

forming a tab cut through the one of the label layer edges which is overlapped on top of the other of the label layer edges so as to form a tab cut extending through the label layer and inwardly from the outer edge of the uppermost of the overlapped label layer edges to generally the outer edge of the folded-over liner layer edge portion to define a tear tab to be used in opening of the container.

17. A method of manufacturing an easy-open container, as set forth in claim 16, including the further step of

forming a tab cut through the narrower of the liner layer edge portions in a position to mate with the tab cut formed in the top label layer edge when all of the layers are spirally wound so that the tear tab extends through the upper 5 of the superimposed liner layer edge portions.

10

15

20

25

30




35

40

45

50

55

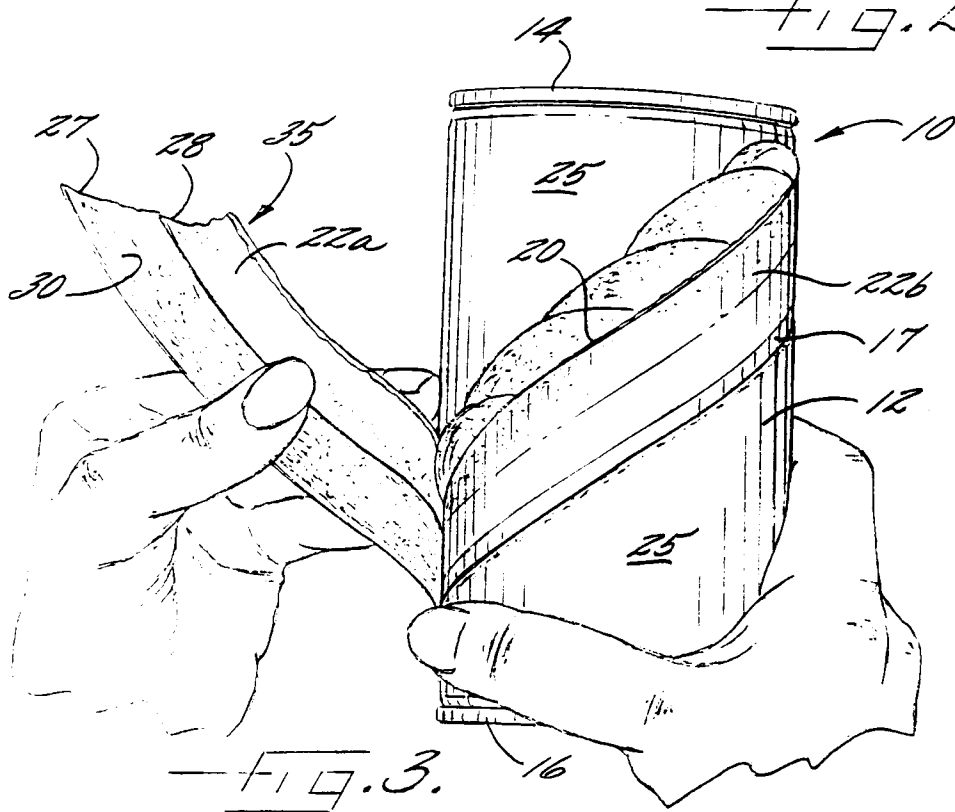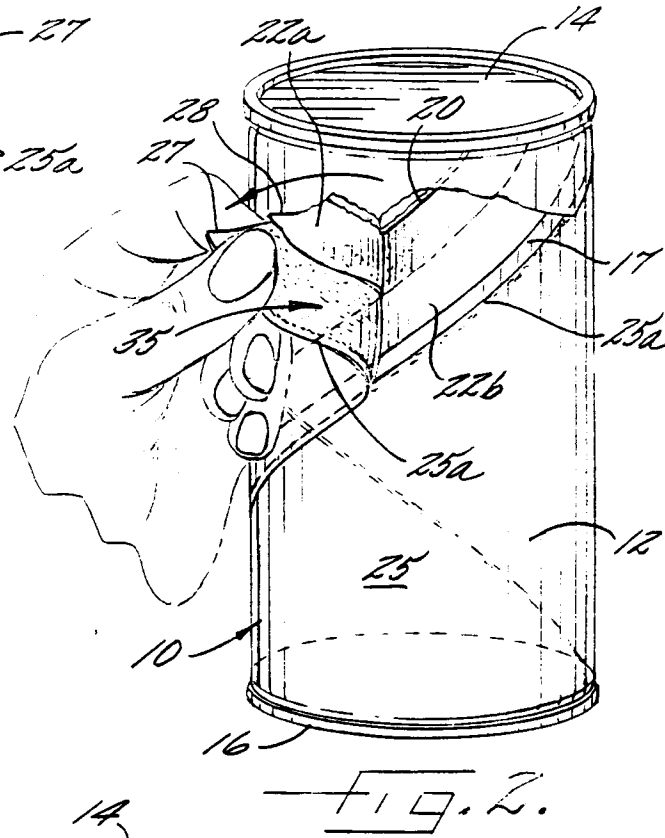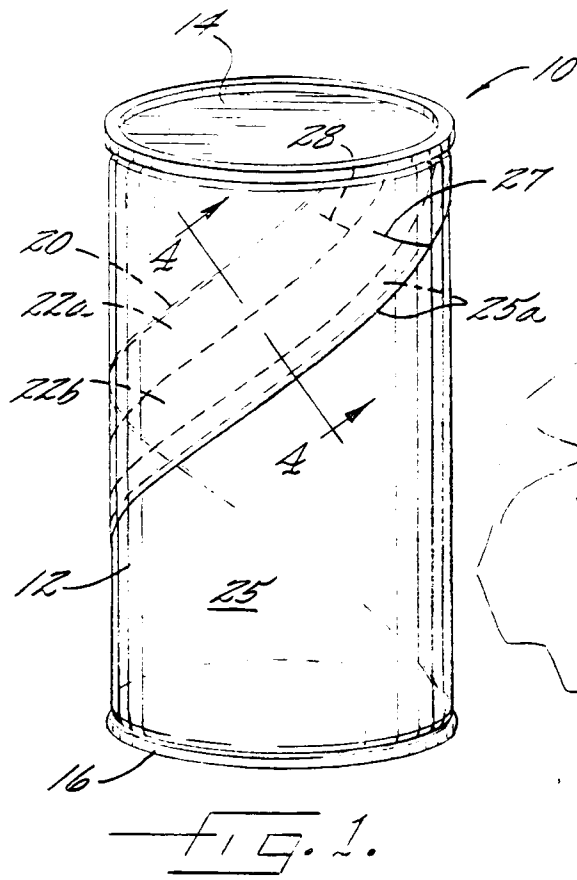

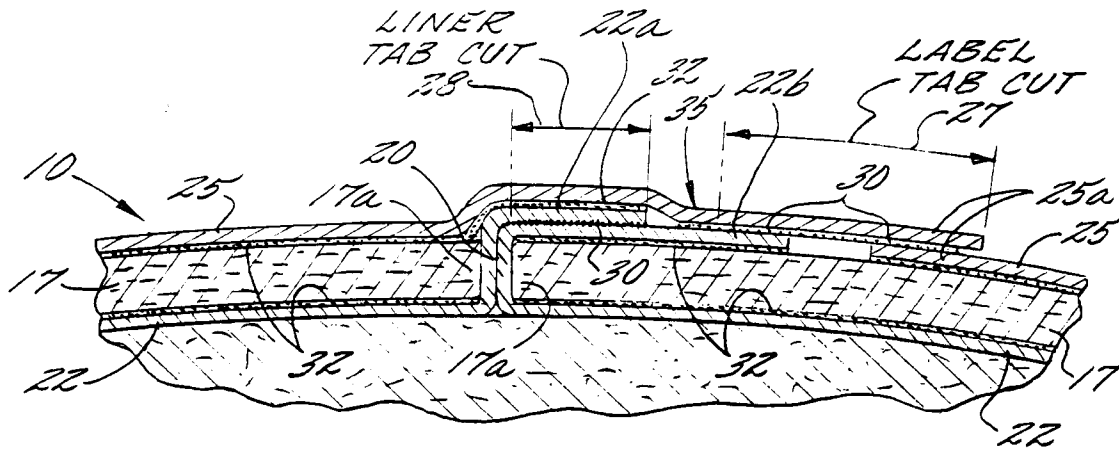


FIG. 4.

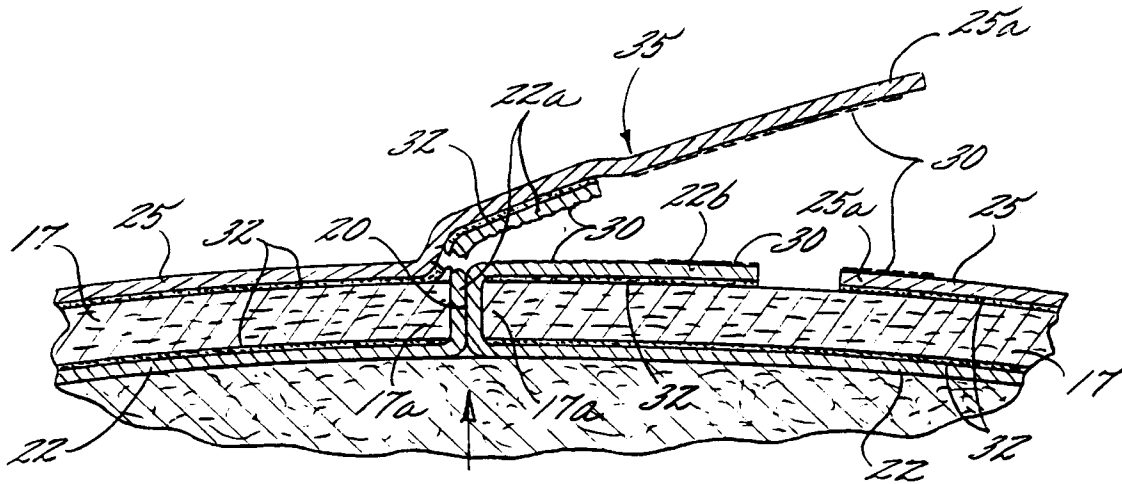


FIG. 5.

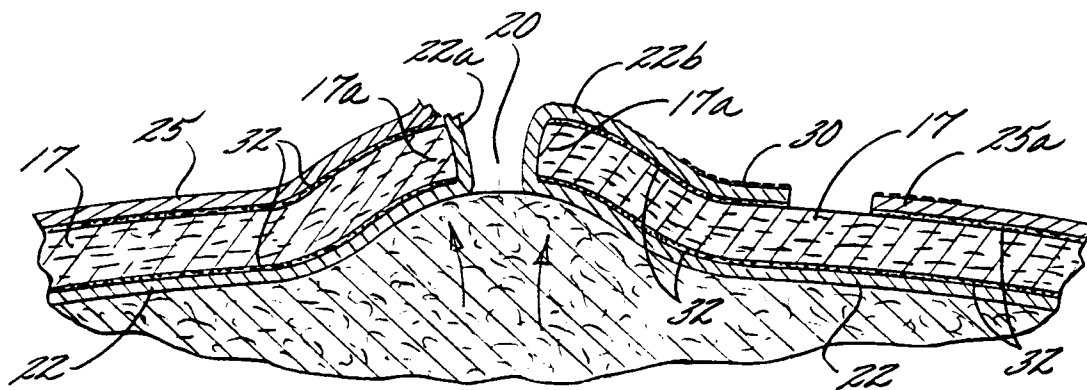
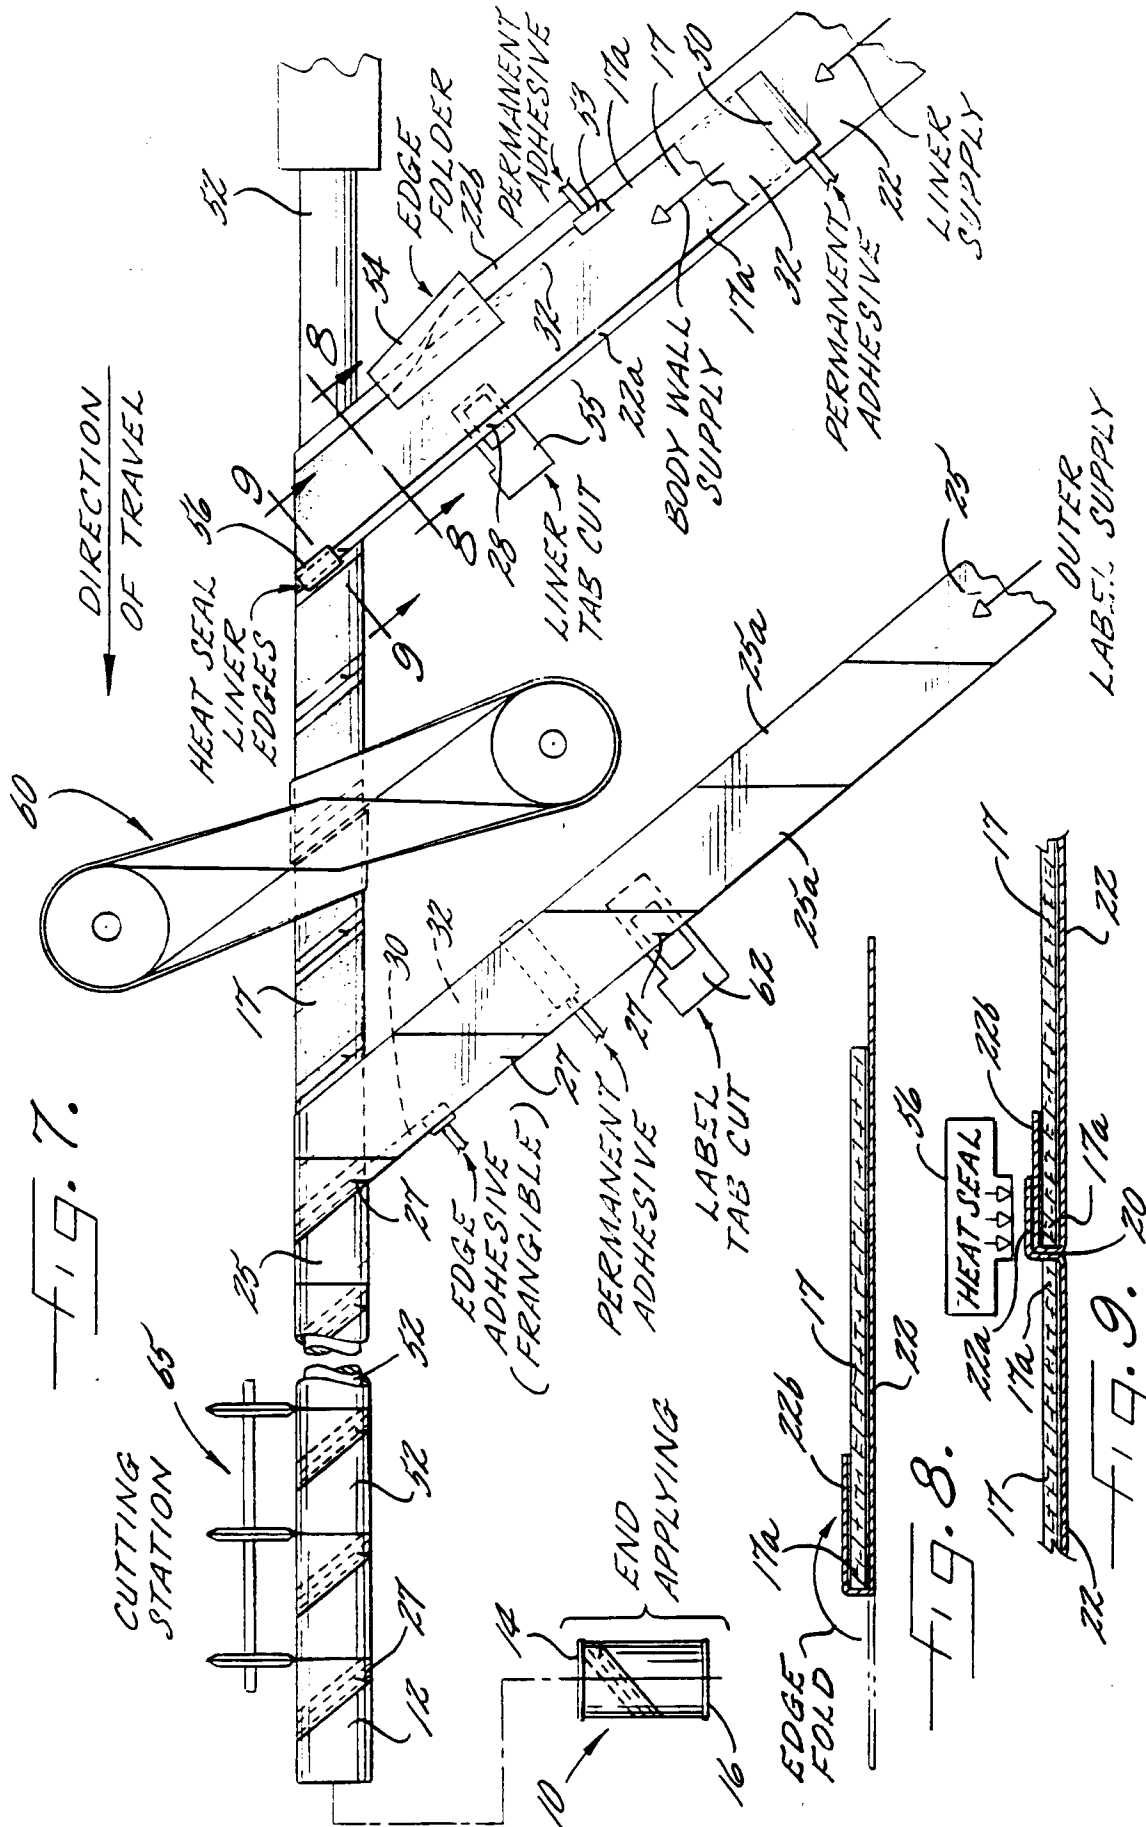


FIG. 6.



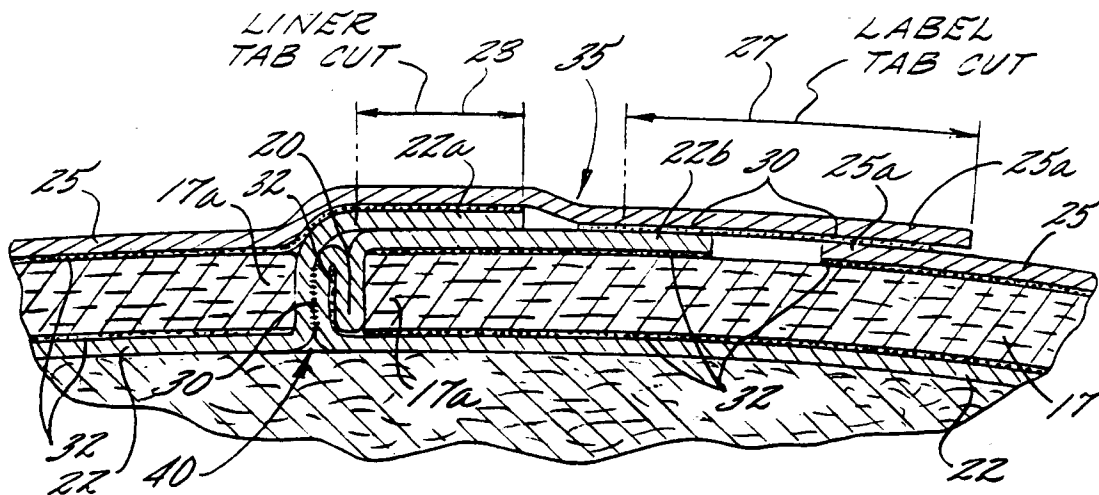


FIG. 10.

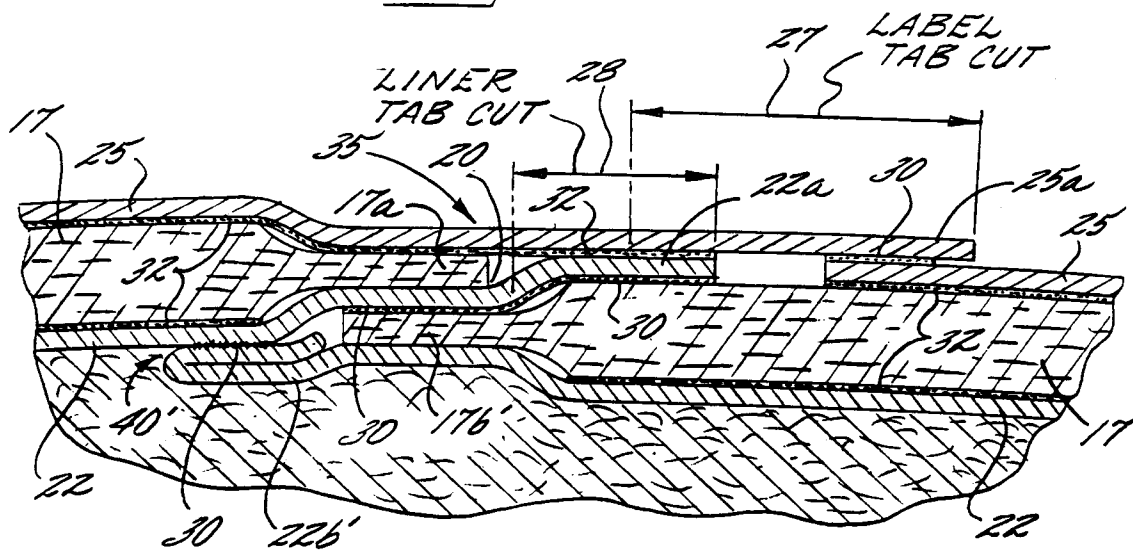


FIG. 11.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 30 5375

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A,D	US-A-3 241 739 (AHLEMEYER) * the whole document * ---	1-3,6,9, 11-17	B65D3/26 B31C3/00
A,D	US-A-5 076 440 (DRUMMOND) * the whole document * -----	2,6,7, 11-13	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			B65D B31C
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 24 January 1996	Examiner Leong, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)