



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 757 400 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
05.02.1997 Bulletin 1997/06

(51) Int. Cl.⁶: **H01P 1/161**

(21) Application number: **96111886.6**

(22) Date of filing: **24.07.1996**

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **03.08.1995 EP 95401826**

(71) Applicant: **THOMSON multimedia S.A.**
92400 Courbevoie (FR)

(72) Inventors:
• **Harrison, David Mark**
67000 Strasbourg (FR)

• **Guo, Chaoying**
67400 Illkirch (FR)

(74) Representative: **Kurth, Dieter, Dipl.-Ing. et al**
Deutsche Thomson-Brandt GmbH,
Patent- und Lizenzabteilung,
Göttinger Chaussee 76
30453 Hannover (DE)

(54) **Microwave polariser**

(57) The invention relates to a microwave polariser and in particular to a microwave polariser used in a system for coupling energy between a waveguide (6) and a transmission line (3, 4) or vice versa.

Conventional polarisers for circular polarised microwaves use two mutually orthogonal probes (1, 2), which penetrate into the waveguide. These probes are adjusted normally to an input impedance of 50 ohms, which is a function of the penetration depth.

In order to improve the cross polarisation of such a polariser the probes are adjusted to an input impedance of less than 50 ohms, in particular to 20 ohms, which results in a smaller penetration depth. This smaller penetration depth increases the distance between the two probes and in turn reduces the cross polarisation.

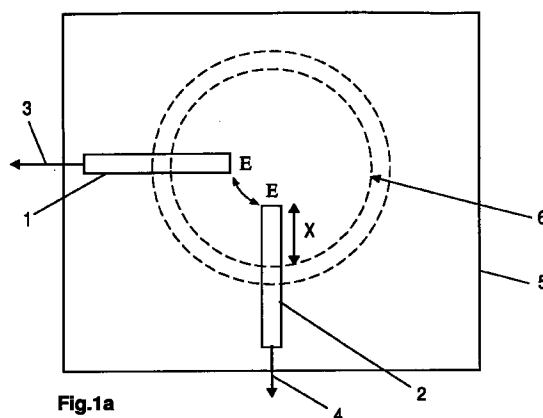


Fig.1a

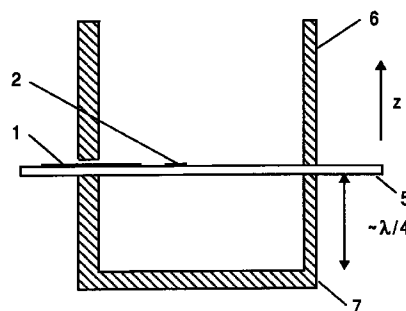


Fig.1b

EP 0 757 400 A1

Description

This invention relates to a microwave polariser and particularly to a microwave polariser for coupling energy between a waveguide and a transmission line or vice versa.

Coupling of energy between a waveguide and a transmission line leading to an amplifier is usually achieved by the use of one or more wire probes inserted into the waveguide cavity through the wall of the waveguide, so that the probes are lying transverse to its axis. In the case of a waveguide accommodating circular polarisation two such probes are required to be mutually orthogonal within the cavity. Those probes can be spaced from one another a prescribed distance, normally one wavelength, in the direction of the axis or can be arranged in a common plane orthogonal to the waveguide axis. These polarisers for circular polarisation are often used for receiving of television signals by satellites where often different polarisations for different channels are employed. This means that at the receiver channels with the same frequency but different circular polarisations can be selected. Therefore, one frequency of transmission can be used for a number of different channels. This means in a microwave polariser, for example known from EP-A-0350324, one circular polarisation will appear only at the output of probe 1 wherein the other polarisation will appear only at the output of probe 2. In practice, however, due to the coupling between the probes, a small amount of the received signal at one probe will also appear at the output of the other probe. In other words, the cross polarisation performance of the known polarisers is poor and a matching circuit is needed between the probes and the low noise amplifier, wherein the probes normally are adjusted to an impedance of 50 ohms.

It is therefore an object of the present invention to provide a microwave polariser for coupling energy between a waveguide and a transmission line, wherein the cross polarisation is improved and matching circuits are simplified or become unnecessary.

This object is solved by the features of the independent claim.

Further preferred embodiments of the invention are given in the dependent claims.

To improve the cross polarisation of the microwave polariser the length of the probes x , penetrating into the waveguide, are reduced to reduce the coupling between the probes. This also has the effect of reducing their input impedance. Normally the signal collected by the probes is amplified using a low noise HEMT amplifier. To optimise the performance of this amplifier it is necessary to terminate its input with a certain impedance level. Fortunately for HEMT amplifiers the resistive part of the impedance is less than 50 ohms, typically 20 ohms. This can be achieved by shortening the length of the probes, penetrating into the waveguide. This has the further advantage, that normally no matching network is necessary between the probes and the input of the

amplifier to optimise the noise performance of the amplifier, which was the case in the previous state of the art.

The microwave polariser according to the invention for coupling energy between a waveguide and a transmission line connected to an amplifier, especially a low noise amplifier, comprises two orthogonal probes arranged in a plane orthogonal to the axis of the waveguide and penetrating a length x into the waveguide, wherein the penetration depth x of the probes is set to a value corresponding to an impedance value smaller than 50 ohms, in particular to an impedance value corresponding to 20 ohms.

Further the two mutually orthogonal probes are mounted on a common microwave substrate and are etched on the surface of said microwave substrate

Further the microwave receiving/sending arrangement of this invention uses a polariser according to the invention and this microwave polariser is sandwiched between a circular waveguide and a circular $\lambda/4$ short circuit cavity. The microwave travelling in the waveguide is supplied by the feed of the antenna. The probe signals picked up by the polariser are then amplified by a HEMT amplifier.

To further improve the performance of the amplifier and to achieve the necessary resistive part of the impedance at the input of the amplifier, the length of the short circuit cavity can be adjusted properly.

An embodiment of the microwave polariser according to the invention will now be described by way of example with reference to the accompanying drawing, in which:

Fig. 1a shows a cross section of the polariser according to the invention, and
Fig. 1b shows an elevational cross section of a polariser mounted between a waveguide and a short circuit cavity.



Fig. 1a shows an end view of the microwave polariser according to the invention. Two probes 1 and 2 are provided mutually orthogonal to each other on a microwave substrate 5. The probes 1 and 2 are connected via, for example, microwave stripes 3, 4 to an amplifier (not shown). The probes 1, 2 penetrate a depth x into the space provided by a waveguide 6. The two end points of the probes E-E are spaced by a distance, wherein the cross polarisation (i.e. cross talk) increases when the distance between the two tips of the probes decreases. The penetration depth x according to the invention is chosen so that the input impedance of the respective probe is smaller than 50 ohms, preferably 20 ohms.

Fig. 1b shows a sectional plane view of the receiving/sending arrangement, with a polariser comprising probes 1, 2 and a substrate 5, which is sandwiched between a waveguide 6 and a short circuit cavity 7. This short circuit cavity 7 is preferably approximately a quarter of a wavelength long. In particularly the length of the

short circuit cavity is optimized according to the input impedance of the probes 1, 2. The amplifier used is preferably of HEMT type. For example, in the usual case of the TE_{11} mode propagating in the waveguide, where it can be assumed that the signal arriving from the satellite via the feed is polarised such that its electric field is perpendicular to probe 1, ideally the signal will appear only at the output of probe 2. In practice, however, if in conventional systems the depth of penetration of the probes 1, 2 is set to provide a 50 ohms output impedance, the distance of the two points E is so close, that due to the coupling between the probes a small amount of the signal will also appear at the output of probe 1. This coupling degrades the cross polarisation of the system. In order to improve the cross polarisation of this system, the penetration depth x is shortened so that the distance between the end points E of the two probes is increased, which reduces the coupling between the probes. This also has the effect of reducing the input impedance of the probes 1, 2. Normally, the signal collected by the probes 1, 2 is amplified using a low noise HEMT amplifier (not shown). To optimise the performance of this amplifier it is necessary to terminate its input with a certain impedance level. For HEMT amplifiers the resistive part of the impedance is less than 50 ohms, typically 20 ohms. This input impedance can be achieved by shortening the penetration depth x of the probes. For this reason a matching network between the probes and the input of the amplifier to optimise the noise performance of the amplifier is not necessary. This has the advantage that the network loss is omitted and the noise of the receiver is decreased. Further to improve the performance of the amplifier the length of the short circuit cavity should be properly adjusted. The probes are not restricted to probes etched on a microwave substrate, but any type of probe system in a circular waveguide is possible.

Claims

1. Microwave polariser for coupling energy between a waveguide (6) and a transmission line (3, 4) connected to an amplifier, especially a low noise amplifier, comprising two orthogonal probes (1, 2) arranged in a plane orthogonal to the axis of the waveguide (6) and penetrating a length x into the waveguide (6), **characterized** in that the penetration depth x of the probes (1, 2) is set to a value corresponding to an impedance value smaller than 50 ohms.
2. Waveguide polariser according to claim 1, wherein the penetration depth x of the probes (1, 2) is set to an impedance value corresponding to 20 ohms.
3. Microwave polariser according to claim 1 or 2, wherein the two mutually orthogonal probes (1, 2) are mounted on a common microwave substrate (5).
4. Microwave polariser according to claim 3, wherein the two probes (1, 2) are etched on the surface of said microwave substrate (5).
5. Microwave receiving/sending arrangement using a polariser according to one of the claims 1 to 4, **characterized** in that the microwave polariser is sandwiched between a circular waveguide (6) and a circular $\lambda/4$ short circuit cavity (7).
6. Arrangement according to claim 5, wherein the waveguide (6) is supplied by the feed of the antenna.
7. Arrangement according to claim 5 or 6, wherein the probe signals are amplified by a HEMT amplifier.

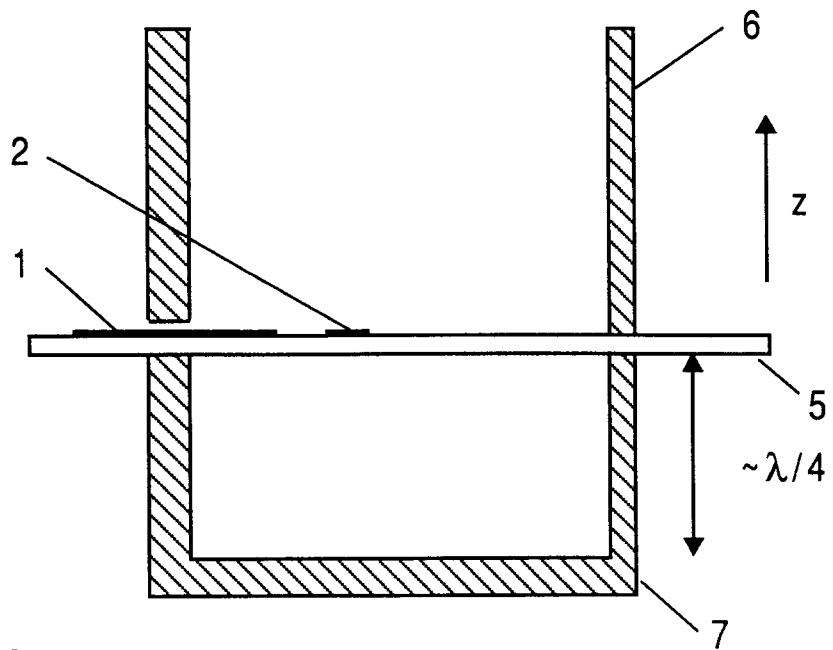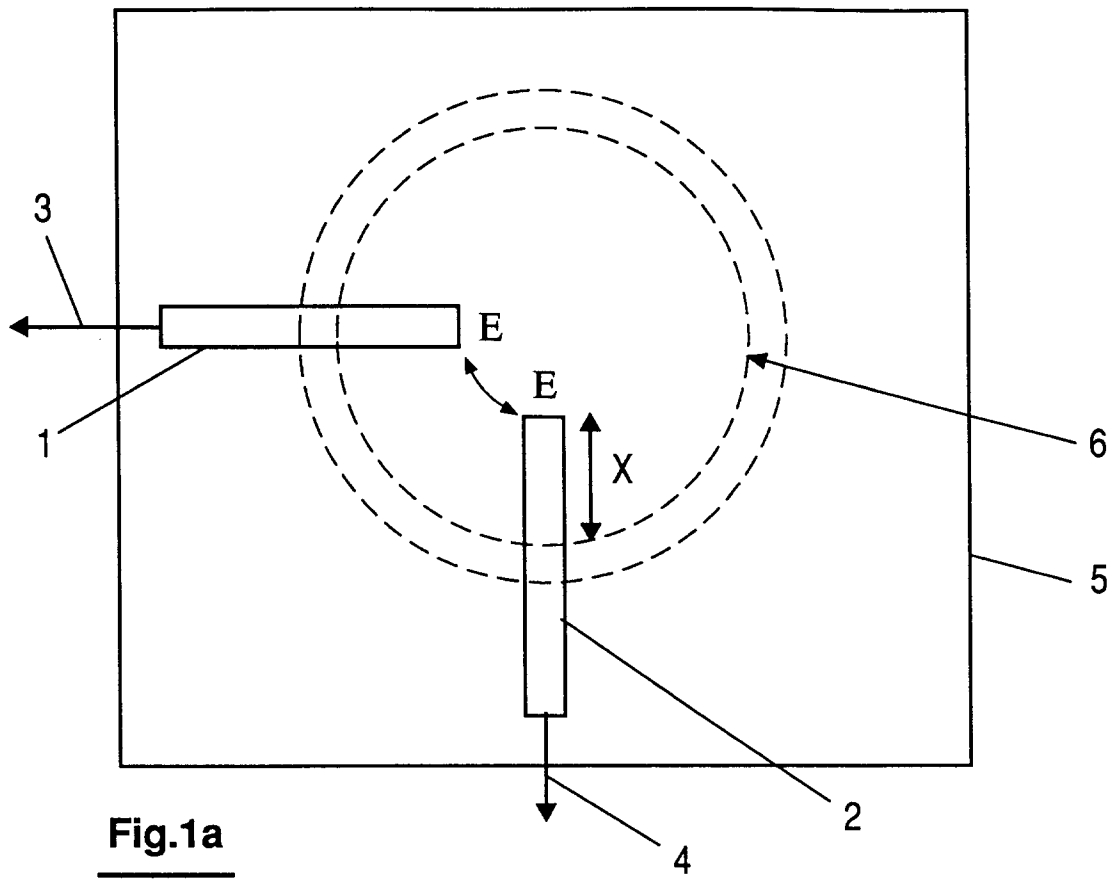



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 96 11 1886

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	DE-A-43 05 906 (PHILIPS PATENTVERWALTUNG GMBH) * column 3, line 56 - column 4, line 38 * * column 5, line 56 - column 6, line 29; figures 1A,1B,4A,4B * ---	1,3,5,6	H01P1/161
A	US-A-4 158 183 (WONG ET AL.) * column 1, line 12 - line 30; figure 1 * ---	1	
A	INTERNATIONAL JOURNAL OF ELECTRONICS, vol. 47, no. 5, LONDON GB, pages 525-527, XP002015654 H.P. JOGLEKAR ET AL.: "A rectangular waveguide orthomode transducer" * the whole document * ---	1	
A	19TH EUROPEAN MICROWAVE CONFERENCE, 4 - 7 September 1989, LONDON(GB), pages 543-548, XP002015655 J. MODELSKI ET AL.: "Integrated input circuit for satellite converter" * page 544, line 3 - line 49; figures 1,2A * ---	1	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H01P
A	GB-A-2 235 340 (FUNAL ELECTRIC ENGINEERING COMP LTD) * page 4, line 16 - page 5, line 21; figures 1-4 * --- -/--	1,7	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 11 October 1996	Examiner Den Otter, A
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 01.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 96 11 1886

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	<p>IEEE MTT-S INTERNATIONAL MICROWAVE SYMPOSIUM DIGEST, ORLANDO, MAY 16 - 20, 1995, vol. 3, 16 May 1995, KIRBY L (ED), pages 1403-1406, XP000552971</p> <p>GRABHERR W ET AL: "ACTIVE LOW NOISE TRANSITION FROM RECTANGULAR WAVEGUIDE TO MICROSTRIP LINE"</p> <p>* page 1403, right-hand column, line 30 - line 34 *</p> <p>* page 1404, left-hand column, line 1 - line 4 *</p> <p>-----</p>	1	
			<p>TECHNICAL FIELDS SEARCHED (Int.Cl.6)</p>
<p>The present search report has been drawn up for all claims</p>			
Place of search		Date of completion of the search	Examiner
THE HAGUE		11 October 1996	Den Otter, A
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>..... & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P0403)