



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 761 144 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
16.04.2003 Bulletin 2003/16

(51) Int Cl.7: **A47F 5/11**

(21) Application number: **96850144.5**

(22) Date of filing: **05.09.1996**

(54) **Folded cardboard element as a shelf, support or the like in a display stand or the like**

Gefaltetes Pappelement wie Regal, Träger oder dergleichen für einen Schaustand oder dergleichen

Élément en carton plié pouvant servir d'étagère, de support ou analogue dans un présentoir ou analogue

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IE IT LI NL PT SE

(72) Inventor: **Alden, Kurt**
616 30 Aby (SE)

(30) Priority: **08.09.1995 SE 9503088**

(74) Representative: **Bergquist, Kjell Gunnar et al**
Albihns Göteborg AB,
Box 142
401 22 Göteborg (SE)

(43) Date of publication of application:
12.03.1997 Bulletin 1997/11

(73) Proprietor: **SCA Packaging Sweden AB**
331 27 Värnamo (SE)

(56) References cited:
EP-A- 0 316 529 **US-A- 5 183 166**
US-A- 5 253 769

EP 0 761 144 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD:**

[0001] The present invention relates to a folded cardboard element which is intended to be a shelf, a load-bearing support or the like in a display stand or the like which shall display different objects or special-line articles for the public.

PRIOR ART:

[0002] Display stands are well-known constructions. They can be produced from different materials, such as wood, plastics and even concrete, but preferably and during recent decades from cardboard or corrugated cardboard. An advantage with this material is that it is lightweight and it can be transported in a folded state and easily be unfolded to the position which the display stand shall have. Besides these advantages, cardboard has been commonly used also due to the fact that it can be provided with text and also decorated in a desired way by the application of printing ink. A great number of constructions of such display stands made from cardboard is known. They also vary much in size, from small display stands to those which have a height of in the order of 2 metres.

TECHNICAL PROBLEM:

[0003] Display stands usually comprise a number of shelves or shelf-like protrusions made from cardboard or they may even have vertical supporting parts made from the same material. A problem with such shelves and the supporting parts is that the inherent strength of the material with regard to bending is not great. Shelves made of this material will therefore have a strong tendency to bend downwardly at the middle parts of the shelf and a load-bearing vertical part may bend outwardly or inwardly. To remedy this, shelves have, for example, been made of stronger material than in the other parts of the construction or the material has been folded so that the shelf, for example, will consist of three layers of material. This means of course a great material consumption. To reinforce the shelf, it has been proposed in US 5,253,769 to fold the shelf up along one or two folding lines at the front side in the form of a border or edging, but this will hide the articles which are to be displayed, which of course is a bad solution. The shelf may also be reinforced by giving it a shorter depth but this will result in a smaller displaying surface.

[0004] Therefore, during a very long number of years it has been a problem to be able reinforce the shelf element or corresponding constructions in a simpler and more reliable way which does not incur extra costs.

THE SOLUTION:

[0005] According to the present invention the above problem is solved in that a folded cardboard element constituting a shelf, load-bearing support, or the like in a display stand or the like has been brought about, which cardboard element is folded along two parallel folding lines characterized in that the folding lines towards each other at the ends converge.

10 [0006] According to the invention, the folding lines at the end should have an angle of 4-20° in relation to each other.

[0007] According to the invention, the converging ends of the folding lines can be directed in the same direction in relation to the parallel parts.

15 [0008] According to the invention, one of the folding lines may be straight all the way out to the ends whereas the second folding line converges toward the completely straight folding line at its ends.

20 [0009] According to the invention, it is suitable that the converging part of the folding lines has a length of 2-10 cm, preferably 5 cm, and that the distance between the parallel folding lines is 1-5 cm.

DESCRIPTION OF THE FIGURES:

[0010] The invention will now be described more in detail with reference to the accompanying drawings, where

30

Fig. 1 shows in perspective an exploded view of a display stand of known kind on which the present invention is applicable, where

35

Fig. 2 shows an unfolded sheet having folding lines according to present invention, which sheet is intended to constitute a shelf in the display stand according to Fig. 1, where

40

Fig. 3 shows in perspective another embodiment of a display stand on which the present invention has been applied, and where

45

Fig. 4 shows an unfolded sheet having folding lines according to the present invention, which sheet is intended to be one of the load-bearing walls in the display stand according to Fig. 3.

50

PREFERRED EMBODIMENTS:

50

[0011] Fig. 1 shows a display stand of known kind made of corrugated cardboard and before mounting. It consists of a lower part 1, an upper shelf part 2 intended to be mounted on the lower supporting part 1 and an uppermost part 3 which is intended to be mounted on the shelf part 2. To reinforce the parts and mount them to each other, tabs 4 are arranged at suitable positions. These tabs 4 shall partly be folded into the sections and

55

partly be inserted into suitable recesses for connecting the parts to each other. These stands are known and are therefore not described more closely here. To the right in Fig. 1 a shelf is shown separated before mounting but in a folded state. This shelf 5 has been folded once and it will consequently have the double thickness of corrugated cardboard which suitably is 3-5 mm. The problem with these shelves 5 is, as stated above, that with a moderate load they have a tendency to bend downwardly in time. These display stands are usually used during a period of a week to a month and it is therefore important that the load does not force the shelf down during this time. The present invention relates to the folded edge 6 on the shelf 5.

[0012] Fig. 2 shows in detail a punched corrugated cardboard sheet which shall constitute the shelf 5. This sheet is punched and provided with tabs 4 of known kind. However, the folding edge 6 has been drastically changed. It consists now of two parallel folding lines 7 at a certain distance from each other, which parallel lines 7 at their ends 8 converge towards each other and meet approximately in the punched side edge. When the sheet is folded around these lines 7, which suitably have a distance of 1-5 cm from each other, the folded shelf parts lying on each other will be at a certain distance from each other at the edge 6. This edge 6 will therefore be very strong with regard to bending stresses and will have a strength 5-6 times greater than when only one folding line is made, such as is the case with earlier known constructions. In this way a front edge of the shelf 5 is obtained which is sufficiently strong without any tendency to bending downward and without the use of any concealing border or the like.

[0013] The distance between parallel folding lines 7 depends on the length of the shelf. The longer the shelf the longer the distance between the folding lines 7 must be.

[0014] Neither is it necessary that the ends 8 of the folding lines converge in the way shown in the figure. They may be directed in the same direction or one of the folding lines 7 may be completely straight all the way and only one of these lines may have end parts 8 converging towards the straight line. Neither is it necessary in all circumstances that the converging end parts 8 are on both sides of the lines.

[0015] The front edge 6 of the shelf, which now may have a width of 1-5 cm, is also suitable for printing or gluing on of a decoration or information.

[0016] The angle between the converging end parts may be in the range of 4-20° and the length of these end parts may be in the range of 5 cm.

[0017] Fig. 3 shows a display stand 9 of corrugated cardboard having vertical load-bearing walls 10. These walls have been provided at their upper edge with tabs 4 for insertion into holes on shelves 11. The actual construction of this display stand is previously known but it has been changed radically at its front edges 12 where the present invention has been applied. It can be seen

from the figure that the side edges 10 have been folded at the front edge 12 with the intention that the walls 10 made from corrugated cardboard shall obtain the proper rigidity so that the shelves 11 which are put on them can be loaded.

[0018] Fig. 4 shows in detail how one of the walls 10 has been punched out and the figure accordingly shows a wall in a non-mounted stage. Two parallel folding lines 7 have been made on the sheet which lines according to the invention have end parts converging towards each other. After folding and mounting of the sheet making the side wall 10 and the front wall, a wide front edge 12 (Fig. 3) is therefore obtained, which with regard to strength substantially exceeds an edge which has been folded around one single straight folding line. The strength in this length loading is about 5-6 times greater than that of the conventional edge. With a certain load it took 20 minutes before the conventional edge started bending outwardly whereas the edge 12 according to the present invention did not show any sign of bending out after two weeks with the same load.

[0019] By means of the present invention, one has accordingly with very simple means brought about a substantial improvement in the strength of such constructions as, for example, display stands. These improvements have not resulted in higher production costs but costs will be the same as those for the production of the conventional constructions. Besides solving the old problem of achieving this greater strength, a further decoration surface has also been obtained.

[0020] The invention is not limited to the embodiments above but it can be varied in different ways within the scope of the claims and accordingly also include other constructions and display stands.

Claims

1. Folded cardboard element constituting a shelf, load-bearing support or the like in a display stand or the like, the element (5, 10) being folded along two parallel folding lines (7), **characterized in that** the folding lines (7) converge towards each other at their ends (8).
2. Folded cardboard element according to claim 1, **characterized in that** the folding lines (7) at the ends (8) have an angle of 4-20° in relation to each other.
3. Folded cardboard element according to of claim 1 or 2, **characterized in that** one of the folding lines (7) is straight all the way to the ends whereas the other folding line (7) converges towards the completely straight folding line (7) at its ends (8).
4. Folded cardboard element according to any of claims 1-3, **characterized in that** the converging

part (8) of the folding lines (7) has a length of 2-10 cm, preferably 5 cm.

5. Folded cardboard element according to any of claims 1-4, **characterized in that** the distance between the parallel folding lines (7) is 1-5 cm.

Patentansprüche

1. Gefaltetes Kartonelement, das ein Regal, einen lasttragenden Träger oder ähnliches in einen Ausstellstander oder ähnlichem bildet, wobei das Element (5, 10) entlang zweier paralleler Faltlinien (7) gefaltet ist, **dadurch gekennzeichnet, dass** die Faltlinien (7) an ihren Enden (8) zueinander zusammenlaufen.

2. Gefaltetes Kartonelement nach Anspruch 1, **dadurch gekennzeichnet, dass** die Faltlinien (7) an den Enden (8) einen Winkel von 4-20° bzgl. einander aufweisen.

3. Gefaltetes Kartonelement nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** eine der Faltlinien (7) die gesamte Strecke zu den Enden gerade ist, während die andere Faltlinie (7) zu der vollständig geraden Faltlinie (7) an ihren Enden (8) zusammenläuft.

4. Gefaltetes Kartonelement nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** der zusammenlaufende Teil (8) der Faltlinien (7) eine Länge von 2-10 cm, vorzugsweise 5 cm aufweist.

5. Gefaltetes Kartonelement nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** der Abstand zwischen den parallelen Faltlinien (7) 1-5 cm ist.

Revendications

1. Élément en carton plié constituant une étagère, un support ou similaire dans un présentoir ou similaire, l'élément (5, 10) étant plié le long de deux lignes de pliage parallèles (7), **caractérisé en ce que** les lignes de pliage (7) convergent l'une vers l'autre en leurs extrémités (8).

2. Élément en carton plié selon la revendication 1, **caractérisé en ce que** les lignes de pliage (7) forment un angle de 4 à 20° l'une par rapport à l'autre en leurs extrémités (8).

3. Élément en carton plié selon la revendication 1 ou 2, **caractérisé en ce que** l'une des lignes de pliage (7) est droite jusqu'aux extrémités tandis que l'autre

ligne de pliage (7) converge vers la ligne de pliage complètement droite (7) en ses extrémités (8).

4. Élément en carton plié selon l'une quelconque des revendications 1 à 3, **caractérisé en ce que** la partie convergente (8) des lignes de pliage (7) a une longueur de 2 à 10 cm, de préférence 5 cm.

5. Élément en carton plié selon l'une quelconque des revendications 1 à 4, **caractérisé en ce que** la distance entre les lignes de pliage parallèles (7) vaut de 1 à 5 cm.

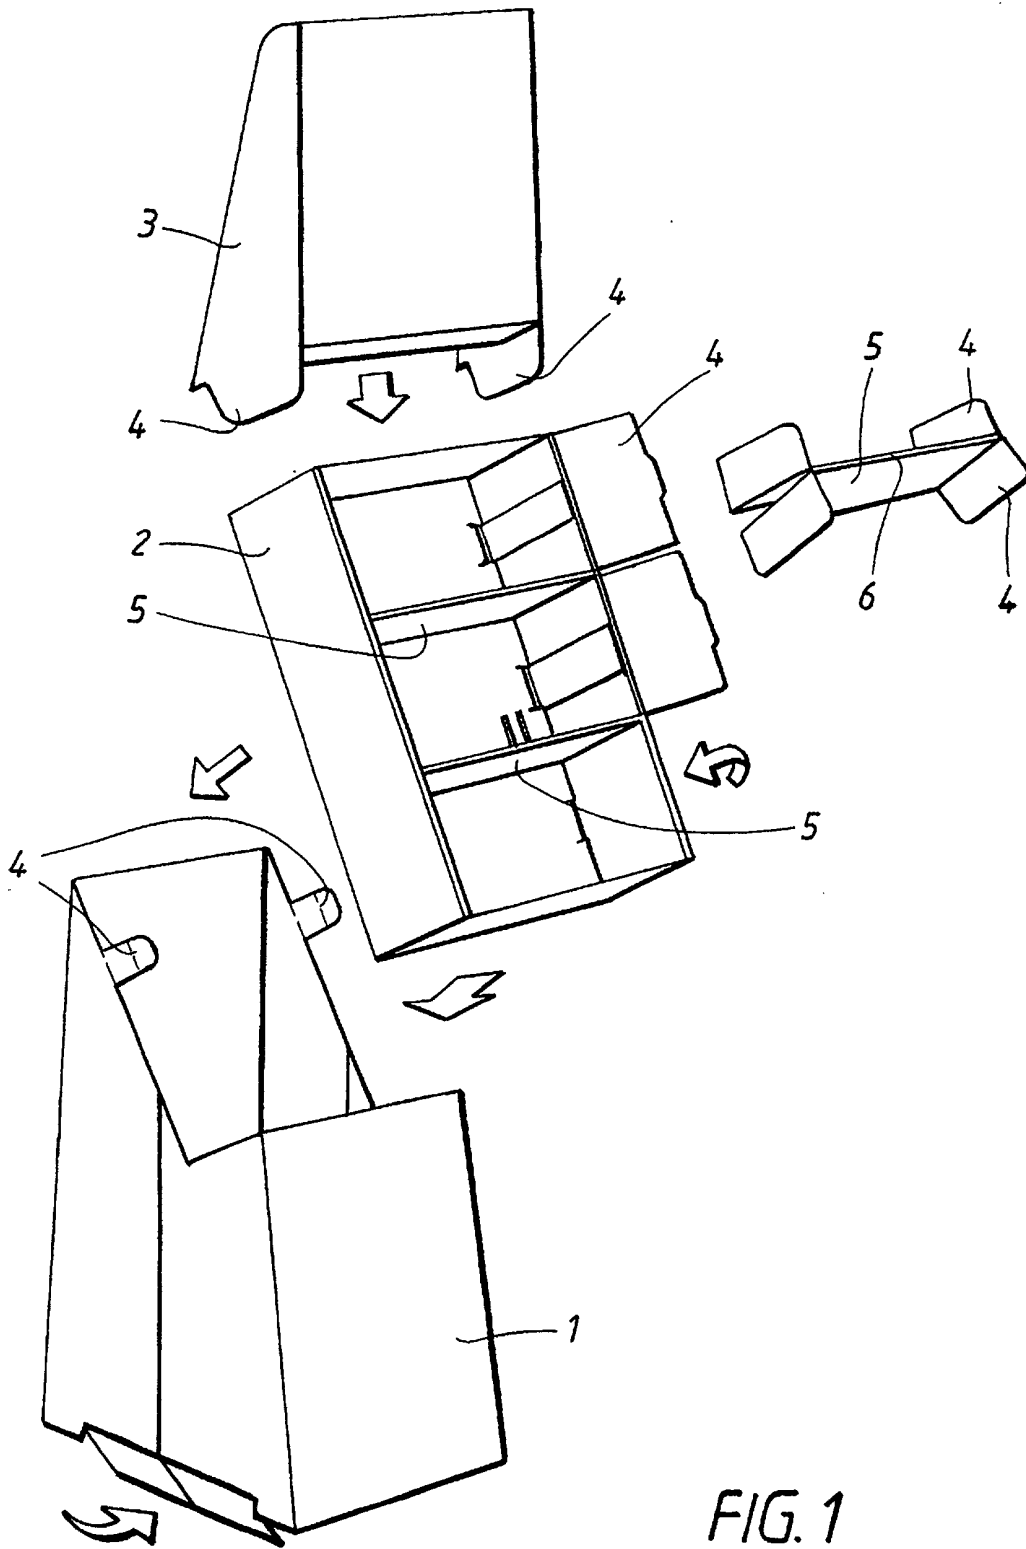


FIG. 1

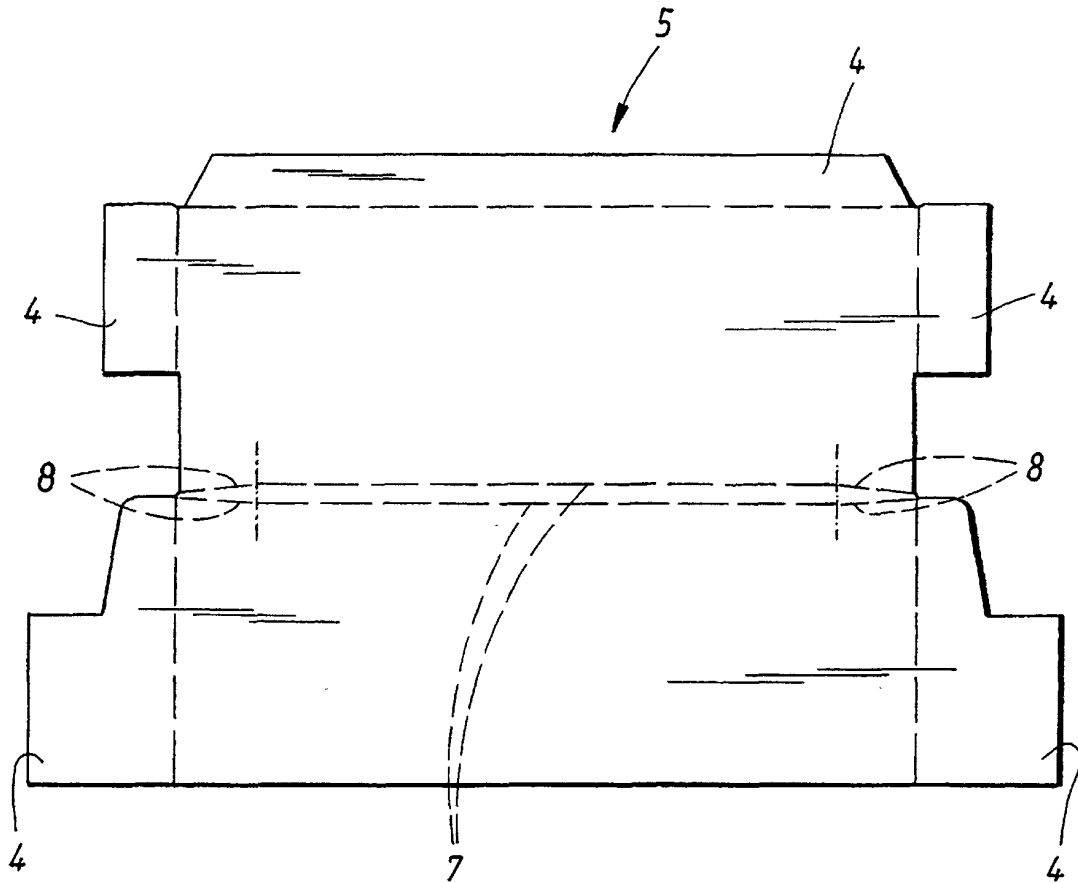


FIG. 2

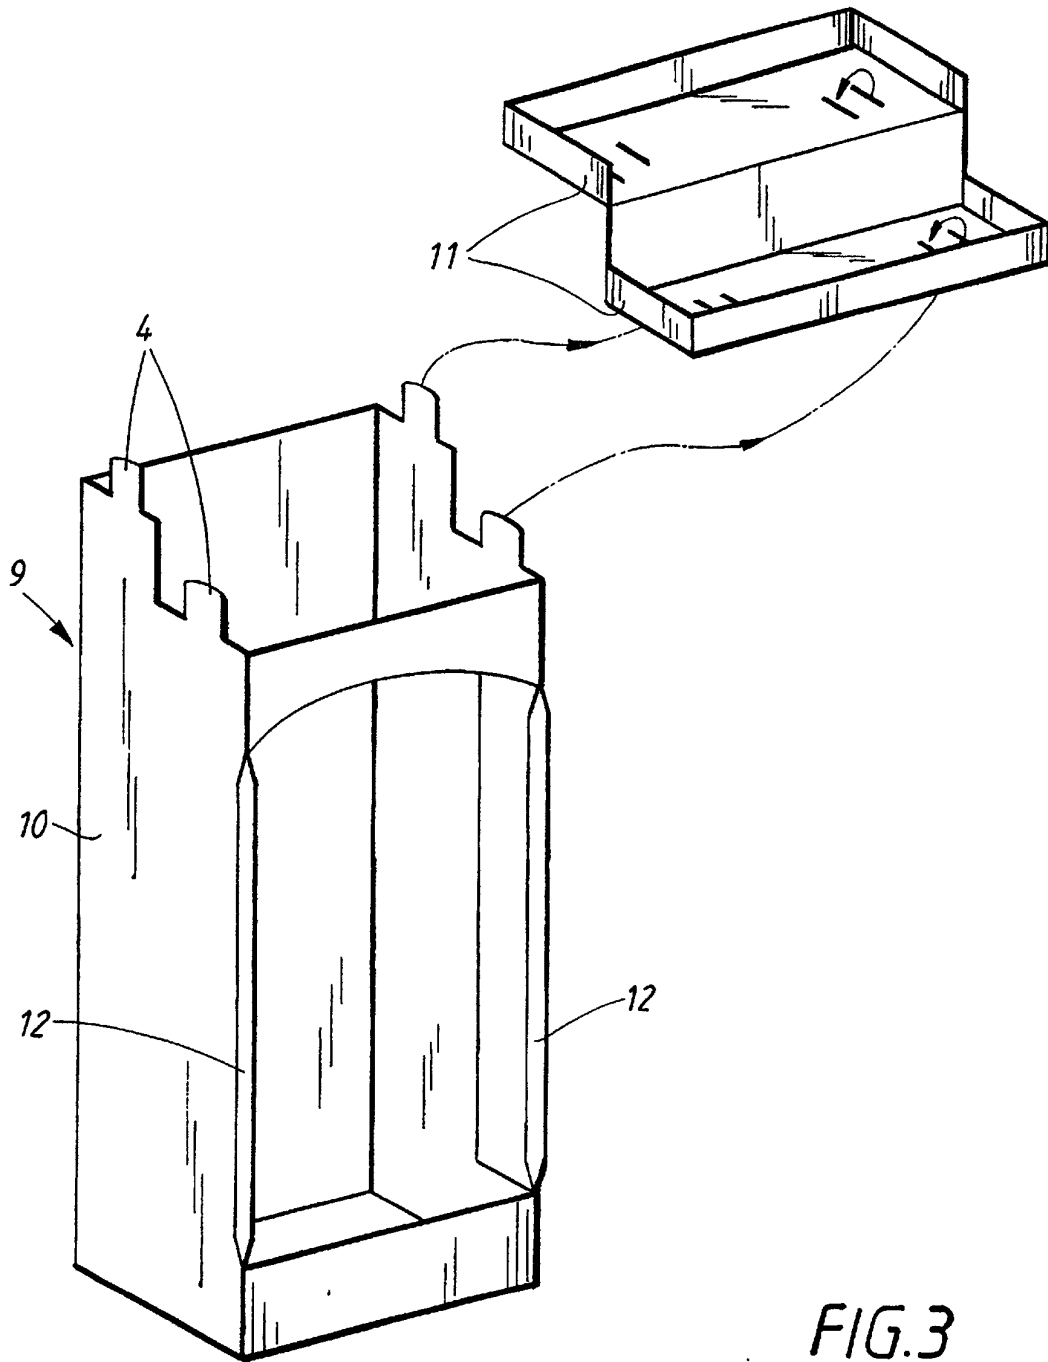


FIG. 3

