

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 774 698 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
25.07.2001 Bulletin 2001/30

(51) Int Cl.7: **G03G 15/01**, G03G 15/04,
G03G 15/32, B41J 2/45

(21) Application number: **97100597.0**

(22) Date of filing: **06.05.1994**

(54) **Image forming apparatus with exposure through a web type image member**

Bilderzeugungsapparat mit Belichtung durch bandförmigen Bildträger

Dispositif de formation d'image avec exposition à travers un support d'image en forme de bande

(84) Designated Contracting States:
DE FR GB

(30) Priority: **20.05.1993 US 65246**
20.05.1993 US 65248

(43) Date of publication of application:
21.05.1997 Bulletin 1997/21

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
94107101.1 / 0 625 730

(73) Proprietor: **NexPress Solutions LLC**
Rochester, NY 14653-7103 (US)

(72) Inventors:

- **Guth, Joseph Edward, Eastman Kodak Company**
Rochester, New York 14650-2201 (US)
- **Kasiske, W. Charles, Eastman Kodak Company**
Rochester, New York 14650-2201 (US)
- **Stelter, Eric Carl, Eastman Kodak Company**
Rochester, New York 14650-2201 (US)

• **Ng, Yee Seung, Eastman Kodak Company**
Rochester, New York 14650-2201 (US)

• **Koetter, Frank Joseph,**
Eastman Kodak Company
Rochester, New York 14650-2201 (US)

(74) Representative: **Franzen, Peter et al**
Heidelberger Druckmaschinen AG,
Kurfürsten-Anlage 52-60
69115 Heidelberg (DE)

(56) References cited:
US-A- 4 703 334 **US-A- 4 928 139**

- **PATENT ABSTRACTS OF JAPAN vol. 009, no.**
292 (P-406), 19 November 1985 & JP 60 130728
A (MATSUSHITA DENKI SANGYO KK), 12 July
1985,
- **PATENT ABSTRACTS OF JAPAN vol. 012, no.**
264 (P-734), 23 July 1988 & JP 63 049780 A (NEC
CORP), 2 March 1988,

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 774 698 B1

Description

[0001] This invention relates to the formation of two or more toner images in a single frame or area of an image member. Although not limited thereto, it is particularly usable in an apparatus which forms accent color images on a single frame of an image member in a single pass.

[0002] US-A-5,001,028 is representative of a number of references describing a process in which a photoconductive image member is uniformly charged and image-wise exposed to create an electrostatic image. Toner is applied to the electrostatic image to create a toner image. Usually, in this process, discharged area development is used. Thus, the toner applied is of the same polarity as the electrostatic image. It deposits in the areas of lowest charge (the discharged areas) to form a toner image having a density which is greatest in the portions of the image receiving the greatest exposure.

[0003] US-A-4 703 334 discloses a printhead with a positioning bar to keep the distance between source and webtype image member constant.

[0004] Although the process is not necessarily limited to such applications, it is most commonly used to provide accent color prints or copies with laser or LED printhead electronic exposure.

[0005] It is an object of the invention to provide a printhead writer assembly readily mounted for exposure through a web support.

[0006] Thus it is also an object of the invention to provide at least first and second toner images on an image member with less tendency of one of the images to move into adjacent portions of the image member not intended to be part of that toner image. Additionally, the printhead used in the apparatus should be so that it is less likely to become dirty from airborne toner.

[0007] This and other objects are accomplished by an apparatus according to claim 1.

[0008] In a preferred embodiment of the invention, the feature of exposure through the support can be used in process color imaging as well as accent color imaging. Exposure through the support has many advantages other than avoiding the earlier images. For example, there is often more room for a printhead writer assembly on the side of the image member opposite the toning station. The printhead is less likely to become dirty from airborne toner. Charged area development is easier to use.

[0009] Another advantage of exposure through the support is that a simple and accurate mount can be designed for the printhead writer assembly. This assembly can be used in other applications as well.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 is a side schematic of an image forming apparatus.

[0011] FIGS. 2, 6, 7 and 8 are perspective views of

portions of an LED printhead writer assembly.

[0012] FIGS. 3-5 and 8 are side views of an LED printhead writer assembly with FIG. 4 showing an alternative embodiment to FIGS. 3 and 8.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0013] FIG. 1 shows an apparatus for producing two color images in which the second exposure is through the base. According to FIG. 1, an image member 1 is in the form of an endless belt trained about a series of rollers, including a tension roller 16 and a drive roller 18, to continuously move through a series of electrophotographic stations well known in the art. Image member 1 is charged by a charging device 10 to uniform potential, for example, a negative potential. It is imagewise exposed by an exposure device, for example, LED printhead 7 to create a first electrostatic image. The first electrostatic image is toned at a first toning station 15 by the application of toner having a polarity the same as the original charging station 10, for example, a negative polarity and having a small particle size, for example, 8 microns. Toner is, thus, applied to the areas discharged by exposure station 7.

[0014] The image member is recharged by an additional charging station 20 which evens up the charge of the first polarity on the image member at a predetermined level. This level need not be the same as the charge applied by station 10. However, before recharging, the image member is exposed to overall blanket radiation through its support by erase lamp 19. As described above, this causes the toner to be more firmly held to the image member, despite charge from the charging station 20. A magnetic scavenger 27 is positioned to attract any carrier inadvertently picked up by the image member in the first toning step. The position of scavenger 27 before toning station 25 is to prevent carrier used in station 15 from carrying dark toner into station 25.

[0015] The image member 1 is then imagewise exposed by a second exposure station, for example, a second LED printhead 17 which is positioned inside image member 1 and exposes image member 1 through its transparent support to create a second electrostatic image. The second electrostatic image is toned by a second toning station 25 which applies toner preferably of a color different than that applied by station 15 to create a second toner image on the image member, preferably with toner of a larger particle size, for example, 12 microns, thereby forming a two color or multicolor image on the image member.

[0016] A receiving sheet is fed from a receiving sheet supply 29 into overlying contact with the two color toner image. The two color toner image is transferred to the receiving sheet at a conventional biased roller electrostatic transfer station 31 and the receiving sheet separates from the image member as the image member

goes around a small roller 24. The receiving sheet is transported by a vacuum transport 33 to a fuser 35 where the two color image is fixed to the receiving sheet. The receiving sheet is ultimately deposited in an output tray 37. The image member is cleaned by cleaning device 39 so that the process can be continued.

[0017] This apparatus doubles the speed of forming two color images, compared to conventional approaches in which the images are formed on separate frames and transferred in registration. It also avoids the complexity of registering two image transfers with the attendant complex receiver handling.

[0018] Toning stations 15 and 25 are preferably constructed as in US-A-5,001,028,. For highest quality, the first toning station 15 is spaced from the image member 1 by an amount less than the nap of the magnetic brush. The brush, thus, directly contacts the image member, providing a high quality dense image. The second toning station 25 is spaced from image member 1 by enough that the nap does not directly contact image member 1. An AC component on the bias on station 25 helps provide the density desired in the second image despite the gap between the nap and the image member.

[0019] FIGS. 2-9 show the details of a linear printhead writer assembly 50 suitable for use as either printhead 7 or printhead 17 in FIG. 1. However, its construction makes it particularly adaptable to backside location and is, therefore, particularly usable as printhead 17 in FIG. 1.

[0020] Referring especially to FIGS. 2, 3 and 7, linear printhead writer assembly 50 includes a linear source of radiation, for example, a linear LED array 52 (Fig. 9), a linear focusing means, for example, a linear lens 54 such as a conventional Selfocâ (trademark of Hitachi, Ltd.) lens and a suitable support housing. The LED array is supported on support tiles 64 (FIG. 2) which, in turn, are supported on a mother board 62 which, in turn, is supported on a baseplate 60. The baseplate 60 is fixed with respect to a pair of support or datum plates 56 and 58 which are positioned at each of the baseplate ends.

[0021] As shown in FIG. 7, the lens 54 is fixed to a lens support 55 to which is affixed a pair of end supports 67 and 69 using a thermal compensating means which will be described below.

[0022] End supports 67 and 69 each contain screw holes 76 which are positioned in alignment with oversized holes 66 in support plates 56 and 58 (FIG. 2). Screws 65, each with an oversized washer 68 (FIGS. 3 and 9) are inserted through holes 66 and into screw holes 76. The screws 65 can be moved within holes 66 to position lens 54 with respect to LED array 52 for final factory adjustment of those two components.

[0023] According to FIGS. 2 and 3 a single positioning bar 70 is mounted between support plates 56 and 58. The LED array 52, the lens 54 and the positioning bar 70 are all elongated parallel to a Z axis. (Orthogonal X, Y and Z axes are shown in FIG. 2.) The upper surface of positioning bar 70 contacts image member 1, as

shown in FIGS. 3 and 9, to control the distance (in a Y direction) between image member 1 and lens 54 and LED array 52.

[0024] Both factory and field adjustment of positioning bar 70 is accomplished by mounting positioning bar 70 eccentrically on a shaft 74. Shaft 74 is mounted on support plates 56 and 58. A knob 72 is used to rotate shaft 74 to rotate bar 70. Because of the eccentric mounting of bar 70 with respect to shaft 74, the top surface of bar 70 moves toward and away from LED array 52 as bar 70 is rotated.

[0025] Focusing of lens 54 with respect to both conjugates is best shown by reference to FIG. 9, in which unnecessary details are eliminated. In the factory, writer assembly 50 is mounted in a suitable fixture for adjusting focus (see, for example, US-A-4,928,139). Lens 54 is moved in the fixture until LED array 52 is imaged, by lens 54, at a desired linear exposure locus 78, which locus is also parallel to the Z axis. This movement is accomplished by movement of screws 65 within oversized holes 66 in plates 56 and 58. When the proper focus is obtained, the screws 65 are tightened to fix lens 54 with respect to LED array 52 and plates 56 and 58. Factory adjustment of positioning bar 70 can be accomplished at the same time by rotating knob 72 to rotate positioning bar 70 around eccentric shaft 74. A length of web, for example, a web having the same thickness as the proposed image member 1, can be tensioned across bar 70 to help in determining whether the appropriate side of the web is positioned in exposure locus 78 as the knob 72 is rotated. Determination of focus can also be done with appropriate instrumentation, known in the art.

[0026] When the assembly 50 is inserted in the image forming apparatus shown in FIG. 1, assembly 50 is fixed to the mechanism plates of the apparatus. As shown in FIG. 9, assembly 50 is positioned so that the positioning bar 70 intersects the path of image member 1 and, thus, lightly pushes the image member away from its normal path, for example, its path between rollers 16 and 18 in FIG. 1. If toning stations 15 and 25 have parts which control the position of image member 1, then bar 70 would intersect the path of image member 1 between the developing stations. Thus, the positioning bar 70 partially defines the path of image member 1.

[0027] During setup, copies or prints are run and the resolution of the image measured or observed. At this point, knob 72 can be rotated to move image member 1 toward or away from lens 54. This movement, using the backside location shown, would move the first side 77 of image member 1 having the radiation-sensitive layer associated with it into the exposure locus 78. The exposure locus 78, of course, is fixed with the fixing of assembly 50 in the apparatus. Positioning bar 70 has the function of moving the lateral position of image member 1 to assure proper location of the sensitive part of image member 1 with respect to the exposure locus 78. Note that this positioning structure is not dependent upon the

use of springs to urge the printhead assembly against backing members or the image member itself. The printhead assembly is fixed with respect to the mechanism plates of the apparatus. Extremely accurate positioning of the printhead in the apparatus is also not critical providing bar 70 intersects the path of image member 1.

[0028] Positioning bar 70 is shown in the FIGS. as adjustable as a unit from one end by rotation as described. Alternatively, eccentric mounts at each end can be provided which would allow field adjustment of each end of bar 70 with respect to the exposure locus. This is ordinarily not necessary, since skew adjustment of lens 54 in the factory (using screws 65) assures a parallel relation between the exposure locus 78 and bar 70.

[0029] FIG. 4 illustrates an alternative embodiment in which two positioning bars 70 and 80 are positioned on opposite sides of lens 54 and both contact image member 1. This structure is very similar to the embodiment shown in FIGS. 2, 3 and 9. It has the advantage of precisely determining the location of image member 1 without regard to orientation of the assembly 50 in the apparatus. The embodiments shown in FIGS. 2, 3 and 9, however, have the advantage of simplicity and also have no danger of being overconstrained, a condition that can occur with two positioning bars. Note that either of the positioning bars can be adjustable, or both can be adjustable, depending upon the amount of adjustment desired.

[0030] Note also that image member 1, when in contact with positioning bar 70, will have a slight break to it because the direct mounting for assembly 50 assumes intersection by positioning bar 70 with the path of image member 1 so that the path of image member 1 can be controlled by positioning bar 70.

[0031] Positioning bar 70 is shown as being rotatable only to adjust its spacing from lens 54. However, it could also be a roller rotatable with the image member 1. This has the advantage of reducing friction between the bar 70 and the image member 1, but it makes the eccentric mount of the bar somewhat more complicated.

[0032] FIGS. 5-8 illustrate a thermal compensation device for lens 54. As described above, lens 54 is fixed to lens support 55 which, in turn, is secured to end supports 67 and 69. As the LED array is used, it gradually heats up the lens and the lens support. The lens and lens support can be made of similar materials and expand together. However, the housing, for example, baseplate 60, does not necessarily expand at the same rate. Thus, it is conventional to provide a thermal compensation coupling between the housing and the lens support.

[0033] As shown in FIG. 8, lens support 55 has a pair of pins 82 at each end. The pins have an axis oriented in the X direction (FIG. 2) and generally transverse to the longitudinal orientation of the lens support 55 (Z direction). The pins are inserted in oversized holes 84 in end supports 67 and 69, as best seen in FIG. 5. Thermal expansion in the Z direction would cause a buckling of

lens support 55 if not compensated for. Such thermal expansion is permitted by the looseness of fit between pins 82 and oversized holes 84. Actual location of pins 82 within oversized holes 84 is controlled by suitable a dampener 90, for example, a spring or elastomer, which is positioned to resiliently resist movement of pins 82 in the Z direction away from the center of the lens support 55. The dampeners 90 are held in end supports 67 and 69 by spring loaded shoulder screws 86. Preferably, they are rubber shock absorbers which can be loosened or tightened by screws 86 to vary their force on pins 82.

[0034] This approach to thermal compensation has the distinct advantage over prior approaches of also dampening vibration in the Z direction. The vibration to lens 54 will cause slight movements of the image. The extent to which such movements cause noticeable defects in the final image depends on the extent of the vibration. Prior thermal compensating devices that secured the lens support at one end have no dampening effect on such vibrations. However, the approach shown in FIGS. 5-8, in addition to allowing for thermal expansion, dampens vibrations. Notice that both ends of the lens support are isolated from the housing by the dampening structure 86. Further, the dampening structure itself absorbs much of any vibration without it getting to the lens support 55. If one end of the lens support were fixed and the other one allowed to move, as in conventional thermal expansion approaches, the vibration would be transmitted completely to the lens support through the fixed end. In this instance, by providing resilient dampening structures as well providing them at both ends, vibrations from other parts of the machine that are transmitted to the housing are, at least to some extent, not passed on to the lens. Further, using the preferred rubber shock absorbers for dampeners 90, an adjustment can be made to the dampening force which allows it to be tuned to dampen particular frequencies that are more troublesome in the particular unit.

[0035] Lens support 55 is secured to each of end supports 67 and 69 using a shoulder screw, not shown, secured in a hole 96 in lens support 55 through an oversized hole 98 in the end support. The shoulder screw is tightened against a spring that fits between it and a shoulder of the end support.

[0036] The invention has been described in detail with particular reference to a preferred embodiment thereof, but it will be understood that variations and modifications can be effected within the scope of the invention as described hereinabove and as defined in the appended claims.

Claims

1. An image forming apparatus, comprising:

a web type image member (1) that is movable in a path having at least one radiation-sensitive

layer on a first side (77) and a transparent base (3); and
a linear printhead writer assembly for recording an image on said radiation-sensitive layer, said writer assembly including:

an elongated linear source of radiation (52),
an elongated linear focusing device (54) for focusing radiation from said linear source of radiation at an elongated exposure locus (78),
a support housing (56) for supporting both said source of radiation (52) and focusing device (54) in a fixed relation to each other and to the exposure locus (78) with said source of radiation (52), said focusing device (54) and said exposure locus (78) being elongated in a direction across the track with respect to the path of the image member and fixed with respect to each other;
at least one positioning bar (70) also elongated in the cross-track direction; and
means for supporting the positioning bar so as to be accurately positioned with respect to the exposure locus, to engage the image member (1) and control the position of the image member (1) with the radiation-sensitive layer in the exposure locus (78), said positioning bar being positioned to contact said base (3) for exposure through the base (3).

2. The apparatus according to claim 1 wherein the positioning bar (70) is adjustable with respect to the focusing device (54) to adjust the distance between an engaged image member (1) and the focusing device (54).
3. The apparatus according to claims 1 or 2 wherein the linear source of radiation is a linear array of LEDs.
4. The apparatus according to claims 1, 2 or 3, including a second positioning bar (80), the two positioning bars (70, 80) being located on opposite sides of the exposure locus.
5. The apparatus according to claims 2, 3 or 4 wherein the positioning bar (70) is eccentrically mounted and is rotatable around the eccentric mounting (72, 74) to vary the distance between the engaged image member (1) and the focusing device (54).
6. The apparatus according to any of claims 1 through 5 including a lens support (55) to which said focusing device (54) is fixed and an end support (67, 69) positioned at each end of the lens support, and cou-

pling means (82, 84, 86, 90) coupling the lens support and the end supports which allows thermal expansion of said lens support in the cross-track direction with respect to each of said end supports.

7. The apparatus according to claim 6, wherein said coupling means includes dampening means (86, 90) having a resilient force opposing thermal expansion of said lens support at each end of said lens support which dampening means also tends to isolate the lens support with respect to vibrations transmitted from said support housing.

15 Patentansprüche

1. Bilderzeugende Vorrichtung mit einem bahnförmigen Bildträger (1), der entlang eines Pfades bewegbar ist, wobei der Bildträger aus mindestens einer strahlungsempfindlichen Schicht auf einer ersten Seite (77) und einer lichtdurchlässigen Trägerschicht (3) besteht, und aus einer linearen Druckkopfanordnung zum Aufzeichnen eines Bildes auf der strahlungsempfindlichen Schicht besteht, wobei die Druckkopfanordnung die folgenden Elemente aufweist:

eine langgestreckte lineare Strahlungsquelle (52),

eine langgestreckte lineare Fokussierungseinrichtung (54) zum Ausrichten der Strahlung von der linearen Strahlungsquelle auf einen langgestreckten Belichtungsort (78),

Tragplatten (56) zum Tragen sowohl der Strahlungsquelle (52) als auch der Fokussierungseinrichtung (54) in einem festen Verhältnis zueinander und zu dem Belichtungsort, wobei sich die Strahlungsquelle (52), die Fokussierungseinrichtung (54) und der Belichtungsort (78) in eine Richtung senkrecht zur Bahn bezogen auf den Pfad des Bildträgers erstrecken und im Verhältnis zueinander fest sind, mindestens eine Positionierleiste (70), die sich ebenfalls senkrecht zur Bahnrichtung erstreckt; und Stützmittel zum Stützen der Positionierleiste, damit diese im Verhältnis zu dem Belichtungsort genau positioniert ist, um den Bildträger (1) zu kontaktieren und die Position des Bildträgers (1) mit der strahlungsempfindlichen Schicht an dem

Belichtungsort zu steuern, wobei die Positionierleiste so positioniert ist, dass sie die Trägerschicht (3), durch die die Belichtung erfolgt, berührt.

2. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet**, dass die Positionierleiste (70) im Verhältnis zu der

Fokussiereinrichtung (54) einstellbar ist, um den Abstand zwischen dem kontaktierten Bildträger (1) und der Fokussiereinrichtung (54) einzustellen.

3. Vorrichtung nach Anspruch 1 oder 2, 5
dadurch gekennzeichnet,
dass die lineare Strahlungsquelle eine lineare Anordnung von LEDs ist.
4. Vorrichtung nach den Ansprüchen 1, 2 oder 3 mit 10
einer zweiten Positionierleiste (80), wobei die zwei Positionierleisten (70, 80) auf gegenüberliegenden Seiten des Belichtungsortes angeordnet sind.
5. Vorrichtung nach den Ansprüchen 2, 3 oder 4, 15
dadurch gekennzeichnet,
dass die Positionierleiste (70) exzentrisch befestigt und um die exzentrische Befestigung (72, 74) drehbar ist, um den Abstand zwischen dem kontaktierten Bildträger (1) und der Fokussiereinrichtung (54) zu verändern. 20
6. Vorrichtung nach einem der Ansprüche 1 bis 5 mit 25
einer Linsenstütze (55), an der die Fokussiereinheit (54) befestigt ist und eine Endstütze (67, 69), die an beiden Enden der Linsenstütze angeordnet ist, und Kupplungselementen (82, 84, 86, 90), die die Linsenstütze und die Endstützen verbinden, so dass eine Wärmeausdehnung der Linsenstütze senkrecht zur Bahnrichtung im Verhältnis zu den 30
beiden Endstützen ermöglicht wird.
7. Vorrichtung nach Anspruch 6, 35
dadurch gekennzeichnet,
dass die Kupplungselemente Dämpferelemente (86, 90) umfassen, die eine Federkraft aufweisen, die der Wärmeausdehnung der Linsenstütze an beiden Enden der Linsenstütze entgegenwirkt, wobei die Dämpferelemente die Linsenstütze im Hinblick auf die Vibrationen isolieren, die von den Tragplatten ausgehen. 40

Revendications

1. Appareil de formation d'images comprenant :

un élément image (1) du type bande pouvant se déplacer le long d'un trajet, ayant au moins une couche sensible aux rayonnements sur une première face (77) et une base transparente (3) ; et

un ensemble imprimante à tête d'impression linéaire destiné à enregistrer une image sur ladite couche sensible aux rayonnements, ledit ensemble imprimante comprenant :

une source de rayonnement linéaire allon-

gée (52)

un dispositif de mise au foyer linéaire allongé (54) destiné à mettre au foyer un rayonnement issu de ladite source de rayonnement linéaire sur un site d'exposition allongé (78),

un boîtier support (56) destiné à supporter à la fois ladite source de rayonnement (52) et le dispositif de mise au foyer (54) dans des positions relatives fixes l'une par rapport à l'autre et par rapport au site d'exposition (78), ladite source de rayonnement (52), ledit dispositif de mise au foyer (54) et ledit site d'exposition (78) étant allongés dans une direction transversale à la voie par rapport au trajet de l'élément image et fixes l'un par rapport à l'autre;

au moins une barre de positionnement (70), elle aussi allongée dans la direction transversale à la voie; et

des moyens destinés à supporter la barre de positionnement de manière qu'elle soit positionnée avec précision par rapport au site d'exposition, pour attaquer l'élément image (1) et commander la position de l'élément image (1) avec sa couche sensible aux rayonnements dans le site d'exposition (78), ladite barre de positionnement étant positionnée pour entrer en contact avec ladite base (3) pour assurer l'exposition à travers la base (3).

2. Appareil selon la revendication 1, dans lequel la barre de positionnement (70) est réglable par rapport au dispositif de mise au foyer (54) pour ajuster la distance entre un élément image attaqué (1) et le dispositif de mise au foyer (54);
3. Appareil selon les revendications 1 ou 2, dans lequel la source de rayonnement linéaire est une rangée linéaire de DEL.
4. Appareil selon les revendications 1, 2 ou 3, comprenant une deuxième barre de positionnement (80), les deux barres de positionnement (70, 80) étant placées de part et d'autre du site d'exposition.
5. Appareil selon les revendications 2, 3 ou 4, dans lequel la barre de positionnement (70) est montée excentriquement et on peut la faire tourner autour de la monture excentrique (72, 74) pour faire varier la distance entre l'élément image attaqué (1) et le dispositif de mise au foyer (54).
6. Appareil selon une quelconque des revendications 1 à 5, comprenant un support de lentille (55) auquel ledit dispositif de mise au foyer (54) est fixé, et un support d'extrémité (67, 69) positionné à chaque

extrémité du support de lentille, et des moyens d'accouplement (82, 84, 86, 90) qui accouplent le support de lentille et les supports d'extrémité et qui permettent une dilatation thermique dudit support de lentille dans la direction transversale à la voie par rapport à chacun desdits supports d'extrémité. 5

7. Appareil selon la revendication 6, dans lequel lesdits moyens d'accouplement comprennent des moyens amortisseurs (86,90) ayant une force élastique antagoniste à la dilatation thermique dudit support de lentille à chaque extrémité dudit support de lentille, lesquels moyens amortisseurs tendent aussi à isoler le support de lentille des vibrations transmises en provenance du boîtier support. 10 15

20

25

30

35

40

45

50

55

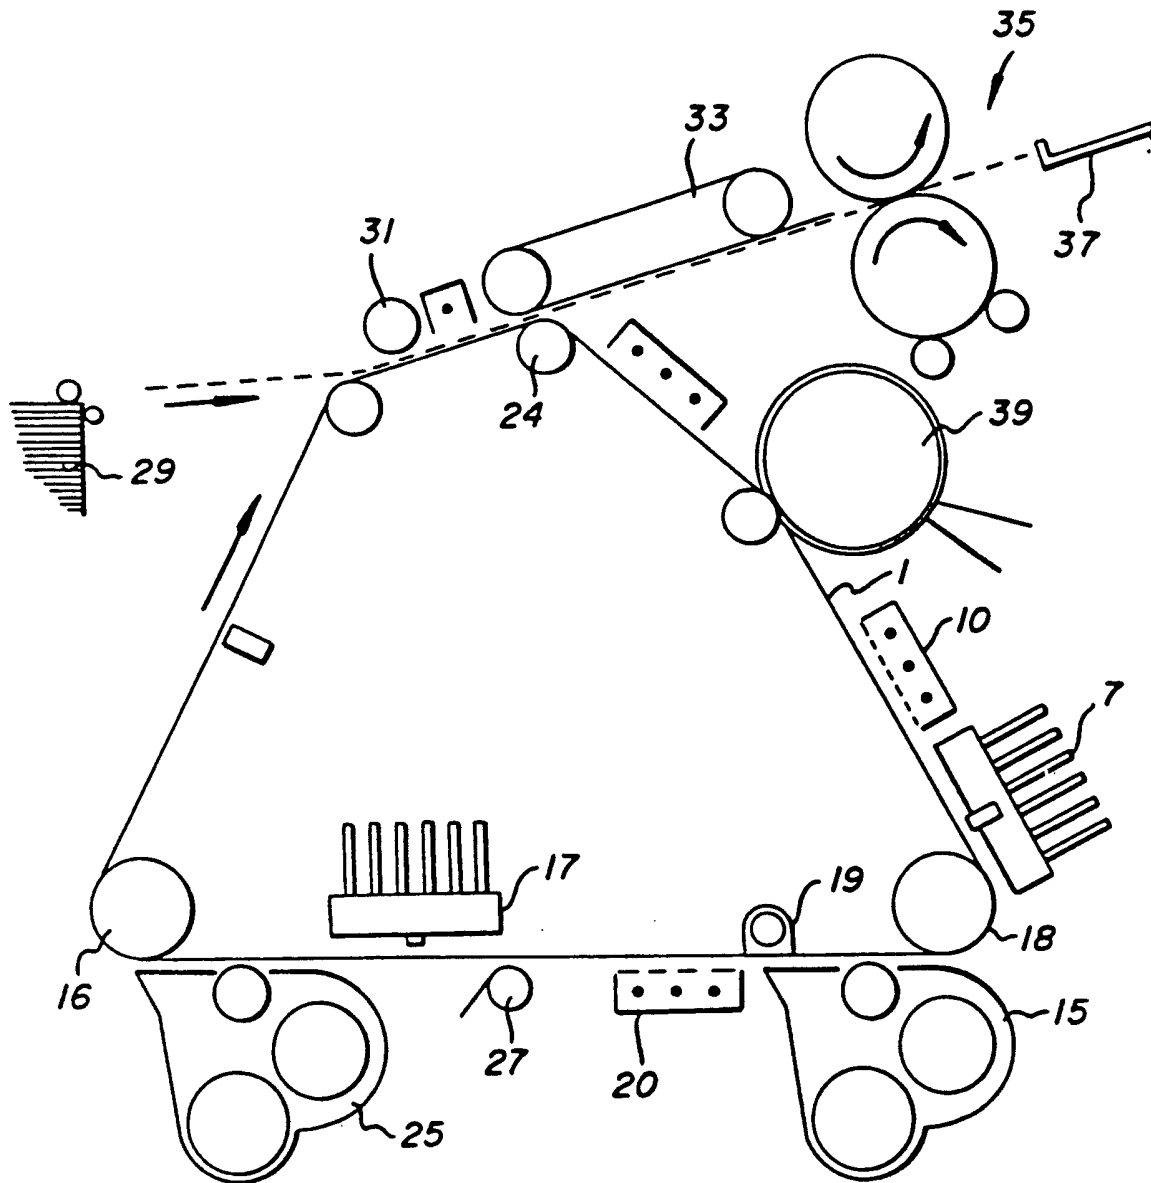
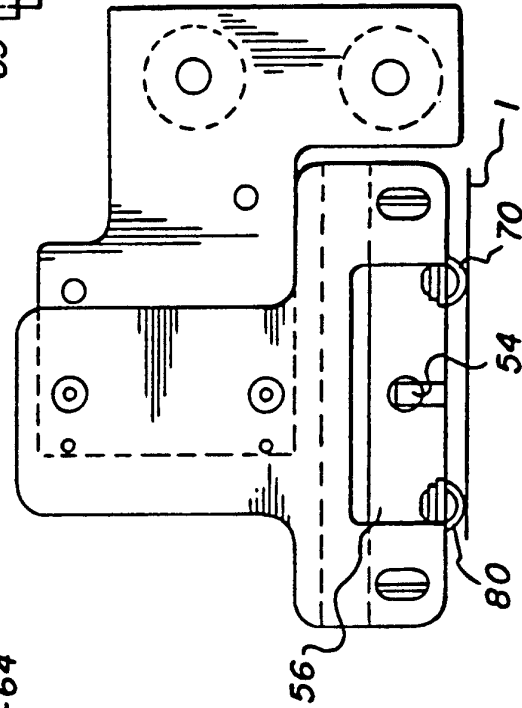
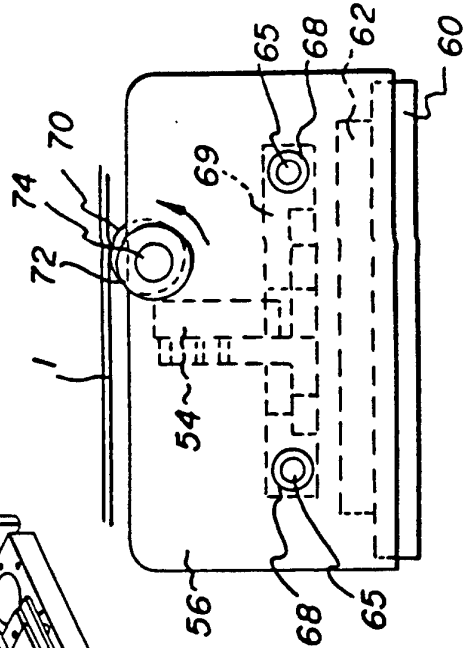
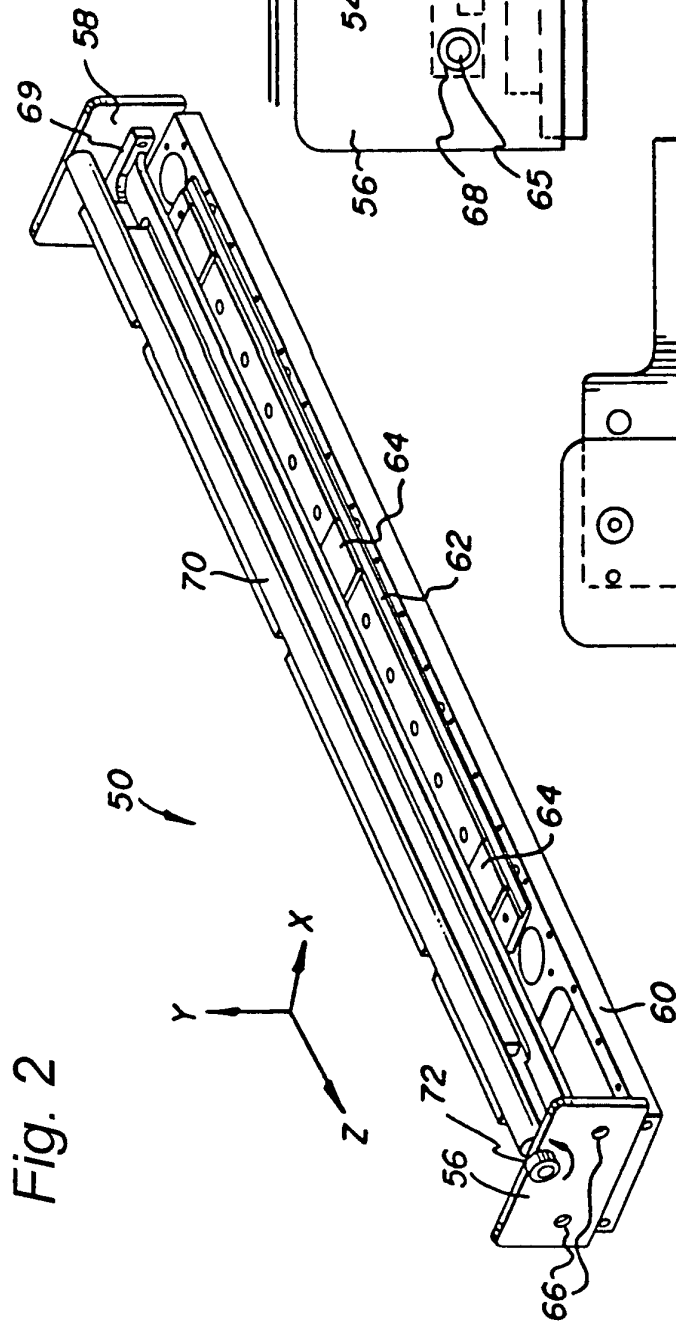


Fig. 1



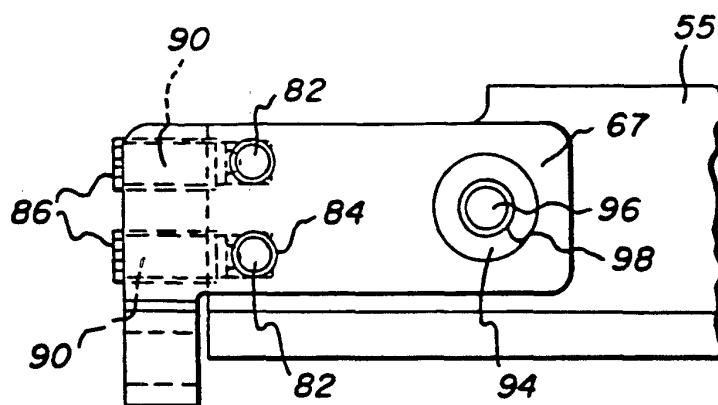


Fig. 5

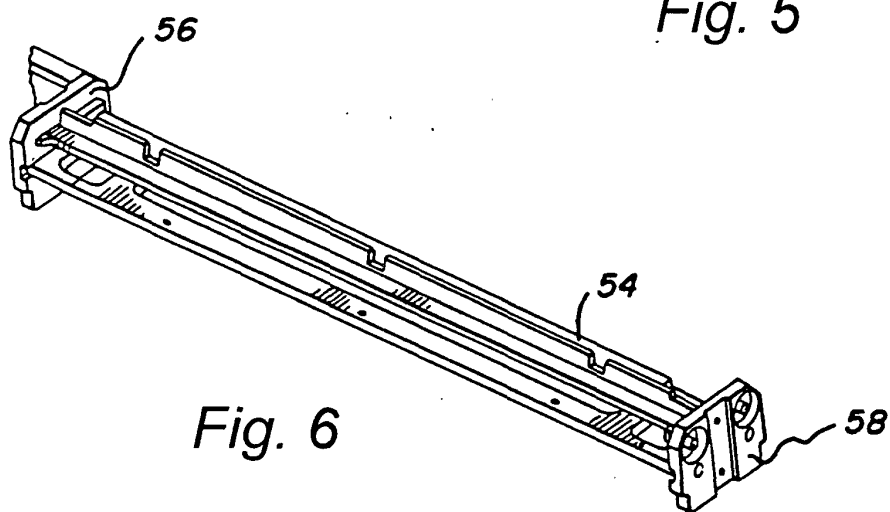


Fig. 6

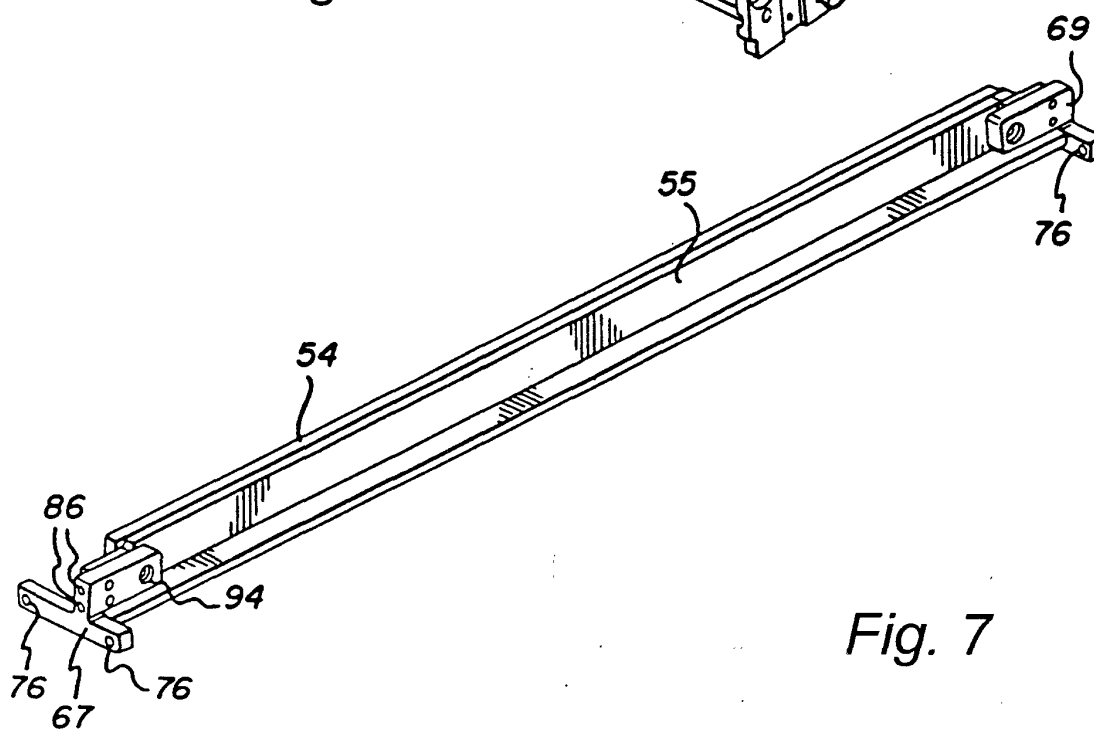


Fig. 7

Fig. 8

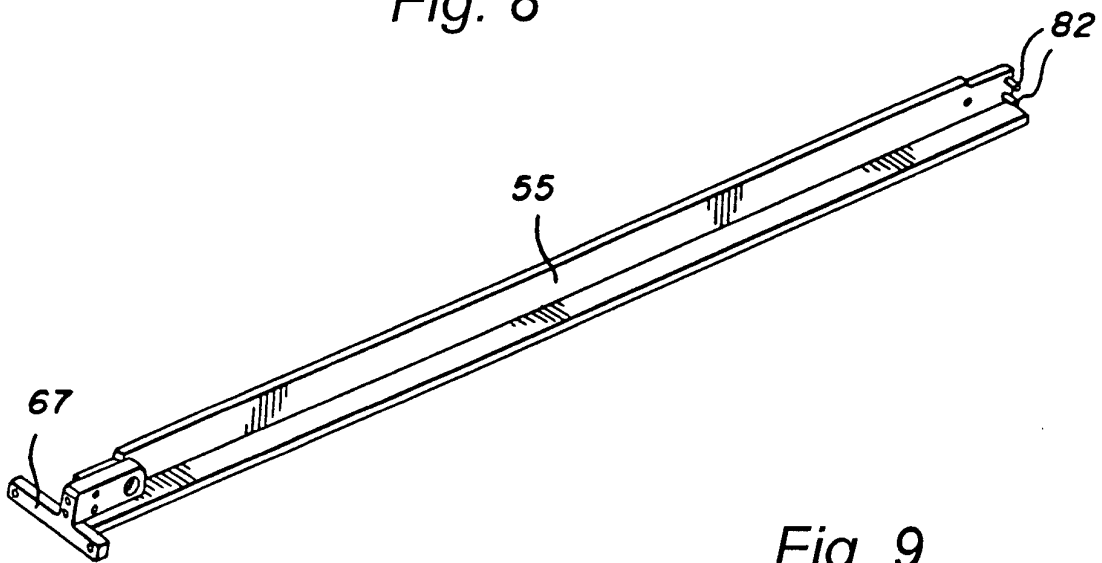


Fig. 9

