

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 799 699 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
25.07.2001 Bulletin 2001/30

(51) Int Cl.7: **B41J 2/14**, B41J 2/16

(21) Application number: **97105639.5**

(22) Date of filing: **04.04.1997**

(54) **Laminated ink jet recording head**

Laminierter Tintenstrahlaufzeichnungskopf

Tête stratifiée d'enregistrement à jet d'encre

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **04.04.1996 JP 10838296**

(43) Date of publication of application:
08.10.1997 Bulletin 1997/41

(73) Proprietor: **SEIKO EPSON CORPORATION**
Shinjuku-ku, Tokyo (JP)

(72) Inventors:
• **Katakura, Takahiro**
Suwa-shi, Nagano-ken (JP)
• **Kamoi, Kazumi**
Suwa-shi, Nagano-ken (JP)
• **Usui, Minoru**
Suwa-shi, Nagano-ken (JP)

(74) Representative:
DIEHL GLAESER HILTL & PARTNER
Patentanwälte
Augustenstrasse 46
80333 München (DE)

(56) References cited:
EP-A- 0 572 231 **EP-A- 0 648 607**
EP-A- 0 653 304 **GB-A- 2 182 611**
US-A- 4 502 059 **US-A- 4 771 298**

- **PATENT ABSTRACTS OF JAPAN vol. 11, no. 149**
(M-588), 15 May 1987 & JP 61 283554 A (RICOH
CO LTD), 13 December 1986
- **PATENT ABSTRACTS OF JAPAN vol. 97, no. 10,**
31 October 1997 & JP 09 150508 A (NEC CORP),
10 June 1997

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 799 699 B1

Description

[0001] The present invention relates to a laminated ink jet recording head that is formed by laminating at least a first cover member, a spacer, and a second cover member and that is fixed to a passage unit having nozzle openings and common ink chambers, the first cover member having piezoelectric vibrators fixed to a surface thereof, the spacer forming pressure generating chambers therein, the second cover member having communicating holes communicating with the common ink chambers and a nozzle plate.

[0002] Using ink droplets to form dots on a recording medium, ink jet recording heads can implement extremely high resolution printing by reducing the size of each ink droplet. However, in order to print data efficiently, the number of nozzle openings must be increased, and when piezoelectric vibrators are used as an ink droplet jetting source, the downsizing of the piezoelectric vibrators is an essential consideration.

[0003] By the way, an ink jet recording head using flexural vibration as an actuator, the actuator unit, which includes a first cover member having piezoelectric vibrators fixed to a surface thereof, a pressure generating chamber forming board forming pressure generating chambers, and a second cover member, can be made of ceramics. As a result, no adhesive is required to bond these members to one another. On the other hand, a passage unit that supplies ink to the actuator unit and jets the ink pressured by the pressure generating chambers in the form of ink droplets must have a number of nozzle openings, each being formed with high accuracy to a diameter of about several tens of μm . As a result, a thin plate made of metal is usually used and is bonded to the actuator unit through an adhesive.

[0004] However, if the nozzle openings are pitched at a small interval, e.g., at an interval of about $210\ \mu\text{m}$, a bonding area becomes extremely narrow. As a result, the nozzle openings are clogged due to the adhesive flowing into the nozzle openings and ink leakage occurs, which in turn has caused the problem of impaired ink jetting performance.

[0005] In GB 2 182 611 a laminated impulse jet print head is disclosed which comprises a plurality of superposed, contiguous plates including a nozzle plate with nozzles for ejecting ink droplets, a channel plate comprising chambers which communicate with an ink supply and the nozzles, a diaphragm plate overlying the channel plate and having transducers thereon for pressurizing the ink in each of the chambers. The nozzles, the chambers and the transducers are arranged in one or more lines.

[0006] JP 9150508 discloses an ink jet type head which shows reduced interference between adjacent nozzles. The ink jet type head comprises a channel forming member wherein a plurality of parallel stripe channels are provided. On one end of each channel the channels are integrally communicating with a common

ink chamber which supplies ink. Furthermore, a plurality of nozzles for allowing the ink to be ejected, a diaphragm applied to the channel forming member and a plurality of piezoelectric elements for pressurizing the ink are provided. The nozzles are arranged in zigzag along two rows.

[0007] The present invention has been made in view of the aforementioned problem and it is therefore an object of the present invention to provide a novel laminated ink jet recording head that has an increased bonding area in the vicinity of nozzle openings that are pitched at a high density.

[0008] To solve this object the present invention provides a laminated ink jet recording head as specified in claim 1.

[0009] Preferred embodiments of the invention are described in the subclaims.

[0010] However, it should be noted that the claims are only a first non-limiting approach for defining the invention in general terms.

[0011] To summarize up, to overcome the aforementioned problem, the present invention is applied to a laminated ink jet recording head comprising: (A) an actuator unit including: pressure generating chambers for pressurizing an ink; and piezoelectric vibrators arranged on the pressure generating chambers; the piezoelectric vibrators expanding and contracting the pressure generating chambers to jet the ink in the pressure generating chambers; and (B) a passage unit bonded to the actuator unit, including: ink supply ports for supplying the ink to the pressure generating chambers of the actuator unit; and nozzle openings for jetting out the ink; wherein the ink supply ports, pressure generating chambers and nozzle openings are communicated by communicating holes provided in the actuator and passage units, the nozzle openings are formed so as to stagger, and the pressure generating chamber, communicating hole, and ink supply port are arranged at uniform positions relative to one another with respect to the pressure generating chamber so as to match a mode of arraying of the nozzle openings.

[0012] The bonding area is increased by shifting the positions of the nozzle openings and the ink supply ports, whose diameter is particularly small, in the axial direction of the pressure generating chambers. In addition, distortions derived from the boring of these nozzle openings and ink supply ports are scattered.

[0013] Further features and advantages of the invention will now be described with reference to the accompanying drawings, in which:

Fig. 1 is a sectional view of an ink jet recording head, which is an embodiment of the invention, showing a section close to pressure generating chambers in enlarged form;

Fig. 2 is a diagram showing a positional relationship among pressure generating chambers, nozzle openings, and communicating holes in the record-

ing head shown in Fig. 1;

Fig. 3 is a diagram showing distances between communicating holes formed in a second cover member of the recording head shown in Fig. 1;

Fig. 4 is a cross sectional view showing pressure generating chambers and their related portions in one actuator unit in another ink jet print head of the invention; and

Fig. 5 is a cross sectional view showing pressure generating chambers and their related portions in one actuator unit in still further ink jet print head of the invention.

[0014] Details of the present invention will now be described with reference to an embodiment shown in the drawings.

[0015] Fig. 1 is a sectional view showing a structure of an inkjet recording head having pressure generating chambers. In Fig. 1, reference numeral 2 denotes a first cover member that is made of a zirconia thin plate whose thickness is about 10 μm . Drive electrodes are formed on the surface of the first cover member so as to confront pressure generating chambers 7, 7'. Piezoelectric vibrators 4, 4' made of PZT or the like are fixed onto the surfaces of the drive electrodes.

[0016] Reference numeral 6 denotes a spacer, which is formed by boring through holes in a ceramic plate such as zirconia (ZrO_2), the ceramic plate having such a suitable thickness as to form the pressure generating chambers 7, 7' therein, such thickness being, e.g., 150 μm . The pressure generating chambers 7, 7' are formed in the spacer 6 with both surfaces of the spacer 6 sealed by a second cover member 8 to be described later and the first cover member 2.

[0017] These pressure generating chambers 7, 7' contract and expand in response to flexural vibration from the piezoelectric vibrators 4, 4', so that not only ink droplets are jetted out of nozzle openings 18, 18' but also ink in common ink chambers 16, 16' is sucked through ink supply ports 12, 12'.

[0018] Reference numeral 8 denotes the second cover member, which is formed by boring nozzle communicating holes 9, 9' and communicating holes 10, 10' similarly in a ceramic plate made of zirconia or the like so that the positions of these holes 9, 9' and 10, 10' can match the positions of the pressure generating chambers 7, 7' respectively. The nozzle communicating holes 9, 9' connect the nozzle openings 18, 18' to the pressure generating chambers 7, 7', and the communicating holes 10, 10' connect the pressure generating chambers 7, 7' to the ink supply ports 12, 12'.

[0019] These members 2, 6, 8 are assembled into the actuator unit without using an adhesive. That is, these members 2, 6, 8 are formed by molding a clay-like ceramic material into predetermined shapes and laminating and sintering such shapes.

[0020] Reference numeral 11 denotes an ink supply port forming board, which serves also as an actuator unit

fixing board. The ink supply port forming board 11 is formed by boring the ink supply ports 12, 12' and nozzle communicating holes 13, 13'. The ink supply ports 12, 12' determine passage resistance between the pressure generating chambers 7, 7' and the common ink chambers 16, 16'. The nozzle communicating holes 13, 13' connect the pressure generating chambers 7, 7' to the nozzle openings 18, 18'.

[0021] Reference numeral 15 denotes a common ink chamber forming board, which is formed by boring through holes that correspond to the shape of the common ink chambers 16, 16' and communicating holes 17, 17' that connect the nozzle openings 18, 18' to the pressure generating chambers 7, 7'. These through holes and communicating holes are formed in a corrosion-resistant plate such as a stainless steel plate having such a suitable thickness as to form the common ink chambers 16, 16', such thickness being, e.g., 150 μm .

[0022] Reference numeral 19 denotes a nozzle plate, which is formed by forming the nozzle openings 18, 18' in the form of arrays at positions communicable with not only nozzle communicating holes 9, 9' of the actuator unit, the communicating holes 13, 13' of the ink supply port forming board 11, and the communicating holes 17, 17' of the common ink chamber forming board 15. These ink supply port forming board 11, common ink chamber forming board 15, and nozzle plate 19 are assembled into a passage unit 20 with adhesive layers interposed therebetween, each adhesive layer being formed of a thermal deposition film, an adhesive, or the like.

[0023] The thus constructed actuator unit and passage unit are fixed to each other through an adhesive layer, whereby the ink jet recording head is formed.

[0024] By the way, the present invention is characterized as positioning the pressure generating chambers 7, 7', the ink supply ports 12, 12', the communicating holes 10, 10', and the like in such a relationship as shown in Fig. 2. That is, a nozzle opening in one array is staggered by a plurality of dots with respect to a nozzle opening in the same array in the horizontal direction as viewed in Fig. 2. More specifically, nozzle openings 18-1, 18-2, 18-3 ... in one array are staggered with one another by a plurality of dots in the horizontal direction as viewed in Fig. 2, and the same applies to nozzle openings 18'-1, 18'-2, 18'-3 ... in the other array. Further, a nozzle opening in one array is staggered by half a pitch with respect to a corresponding nozzle opening in the other array. More specifically, the two arrays of nozzle openings 18-1, 18-2, 18-3 ... , 18'-1, 18'-2, 18'-3 ... are staggered not only horizontally in intra-array terms but also vertically in inter-array terms.

[0025] Pressure generating chambers are similarly positioned to stagger so that the pressure generating chambers confront the corresponding nozzle openings under a predetermined positional relationship. More specifically, the pressure generating chambers 7-1, 7-2, 7-3 ... corresponding to the nozzle openings 18-1, 18-2, 18-3 ... in one array are staggered with one another

substantially by a plurality of dots in the horizontal direction as viewed in Fig. 2 so that the ends of the pressure generating chambers facing the center of the recording head confront the corresponding nozzle openings 18-1, 18-2, 18-3 ... in one array so as to keep a predetermined positional relationship, and the same applies to the pressure generating chambers 7'-1, 7'-2, 7'-3 ... corresponding to the nozzle openings 18'-1, 18'-2, 18'-3 ... in the other array. Further, a pressure generating chamber corresponding to one nozzle opening array is staggered by half a pitch with respect to a corresponding pressure generating chamber corresponding to the other nozzle opening array.

[0026] Likewise, the communicating holes 9, 9', 13, 13', 17, 17' connecting the nozzle openings 18-1, 18-2, 18-3 ..., 18'-1, 18'-2, 18'-3 ... to the pressure generating chambers 7-1, 7-2, 7-3 ..., 7'-1, 7'-2, 7'-3 ... are positioned to stagger with one another so that the nozzle openings 18-1, 18-2, 18-3 ..., 18'-1, 18'-2, 18'-3 ... can be connected to the pressure generating chambers 7-1, 7-2, 7-3 ..., 7'-1, 7'-2, 7'-3 ... through linear passages, respectively. Further, the communicating holes 10, 10' connecting the ink supply ports 12, 12' to the pressure generating chambers 7, 7' are arranged at such uniform positions relative to one another that ink from the ink supply ports 12, 12' can flow into predetermined positions of the pressure generating chambers 7, 7'.

[0027] As shown in Fig. 3, if it is assumed that the distance, in arrangement direction of the communicating holes 10, between the adjacent communicating holes 10 connecting each of the pressure producing chambers 7-1, 7-2, 7-3 ... in each array to the corresponding ink supply port 12 supplying the ink to the pressure generating chamber is L, the communicating holes 10 are positioned so that the shortest distance between adjacent communicating holes 10 and the shortest distance between adjacent nozzle communicating holes 9 connecting the nozzle openings 18 to the pressure generating chambers 7 are equal to and greater than 2L.

[0028] Further, if the shortest distance between adjacent nozzle communicating holes 9 connecting the nozzle openings 18 and the pressure generating chambers 7 is assumed to be 4L, then a bonding area close to each nozzle opening at which the flow of ink, in particular, greatly affects printing quality can be increased. Therefore, not only the flow of an adhesive into the nozzle openings 18, 18' can be prevented at the time of bonding, but also distortions close to the nozzle openings 18, 18' and the ink supply ports 12, 12' for which the operation of boring tiny through holes is required to be performed can be scattered,

[0029] In the afore-mentioned actuator unit, the pressure generating portion (means) comprises the first chamber member 2, the piezoelectric vibrators 4 and lower and upper electrodes (not shown) shown in Fig. 1. Alternatively, the pressure generating portion which comprises piezoelectric vibrating plates 100, lower electrodes 101 and upper electrodes so as to seal a surface

of the space may be applied as shown in Fig. 4. Furthermore, the pressure generating portion comprising cover plates 106, electrically conductive layer 103, heating cover plates 106, electrically conductive layer 103, heating elements 104 and protective layer 105 may be used as shown in Fig. 5. Other constitutions which makes the pressure in the pressure generating chamber changer may be used for the present invention.

[0030] As described in the foregoing, the present invention is characterized as not only forming nozzle openings so as to stagger but also arranging pressure generating chambers, communicating holes, and ink supply ports at uniform positions relative to one another so as to match a mode of arraying of the nozzle openings. Therefore, the bonding area can be increased by shifting the positions of the nozzle openings and ink supply ports, whose diameter is particularly small, in the axial direction of the pressure generating chambers. As a result, not only sufficient bonding strength can be ensured, but also the flow of an adhesive into these nozzle openings and ink supply ports can be prevented. In addition, distortions derived from the boring of the nozzle openings and the ink supply ports can be scattered to thereby ensure high positioning accuracy.

[0031] In the laminated ink jet recording head of the invention, nozzle openings 18-1, 18-2, 18-3, ... are formed so as to stagger, and pressure generating chambers 7-1, 7-2, 7-3, ... , communicating holes 10-1, 10-2, 10-3, ..., and ink supply ports 12 are arranged at uniform positions relative to one another with respect to the pressure generating chambers 7-1, 7-2, 7-3, ... so as to match a mode of arraying nozzle openings 18-1, 18-2, 18-3, ... As a result of this construction, a bonding area is increased by shifting the positions of the nozzle openings 18-1, 18-2, 18-3, ... , whose diameter is particularly small, in an axial direction of the pressure generating chambers 7-1, 7-2, 7-3, ...

Claims

1. A laminated ink jet recording head comprising:

an actuator unit and a passage unit with said passage unit being bonded to said actuator unit

wherein said actuator unit comprises

pressure generating chambers (7-1, 7-2, 7-3, ...) for pressurizing an ink; and

pressure generating means (4, 4') arranged on said pressure generating chambers (7-1, 7-2, 7-3, ...);

said pressure generating means (4, 4') pressurizing said pressure generating chambers (7-1, 7-2, 7-3, ...) to jet the ink;

and said passage unit comprises

ink supply ports (12) for supplying the ink to said pressure generating chambers (7-1, 7-2, 7-3,) of said actuator unit; and 5

nozzle openings (18-1, 18-2, 18-3,) through which ink can be jetted out;

and wherein said ink supply ports (12), said pressure generating chambers (7-1, 7-2, 7-3,) and said nozzle openings are in communication by communicating holes (10-1, 10-2, 10-3,) with said communicating holes being provided in said actuator unit and said passage unit, 10 15

characterized in that

said nozzle openings (18-1, 18-2, 18-3,) are arrayed in a staggered order, 20

and said pressure generating chambers (7-1, 7-2, 7-3,), said communicating holes (10-1, 10-2, 10-3,) and said ink supply ports (12) are also arrayed in said staggered order matching the arraying of said nozzle openings (18-1, 18-2, 18-3,) 25

and are assembled in groups with each group comprising as elements one of said pressure generating chambers, one of said communicating holes and one of said ink supply ports 30

wherein the elements of each of said groups are arranged at uniform positions relative to one another. 35

2. The ink jet recording head according to claim 1, wherein said actuator unit comprises: 40

a pressure generating chamber forming board (6) forming said pressure generating chambers (7, 7'); 45

a first cover member (2) for sealing one surface of said pressure generating chamber forming board (6), piezoelectric vibrators (4, 4') being arranged thereon; and 50

a second cover member (8) for sealing the other surface of said pressure generating chamber forming board (6), and having first communicating holes (9, 9') connecting said ink supply ports (12, 12') to said pressure generating chambers (7, 7') and second communicating holes (10, 10') connecting said pressure generating chambers (7, 7') to said nozzle openings (18-1, 55

18-2, 18-3,) of said passage unit; and

said passage unit comprises:

an ink supply port forming board (11) forming said ink supply ports (12, 12'), and having third communicating holes (13, 13') communicating with said pressure generating chambers (7, 7'); 60

a common ink chamber forming board (15) having common ink chambers (16, 16') communicating with said pressure generating chambers (7, 7') through said ink supply ports (12, 12') and fourth communicating holes (17, 17') communicating with said pressure generating chambers (7, 7'); and a nozzle plate (19) for sealing one surface of said common ink chamber forming board (15), and having said nozzle openings (18, 18') connected to said pressure generating chambers (7, 7') through said second, third and fourth communicating holes (10, 10'; 13, 13'; 17, 17'). 65

3. The ink jet recording head according to claim 2, wherein, if it is assumed that a distance between said first communicating holes (9, 9') formed in said second cover member (8) for connecting said ink supply port (12, 12') to said pressure generating chamber (7, 7') in a nozzle opening arraying direction is L, then said first communicating holes (9, 9') are positioned so that the shortest distance between said first communicating holes (9, 9') and the shortest distance between said second communicating holes (10, 10') formed in said second cover member (8) for connecting said pressure generating chamber (7, 7') to said nozzle opening are equal to or greater than 2L. 70

4. The ink jet recording head according to any one of claims 1 to 3, wherein said actuator unit and passage unit are bonded by an adhesive. 75

5. The ink jet recording head according to claim 3, wherein the shortest distance between said first communicating holes (9, 9') and the shortest distance between said second communicating holes (10, 10') formed in said second cover member (8) for connecting said pressure generating chamber (7, 7') to said nozzle opening are equal to 4L. 80

Patentansprüche

1. Laminierter Tintenstrahlzeichnungskopf umfassend: 85

eine Betätigungseinheit und eine Durchlaßeinheit, wobei die Durchlaßeinheit an die Betätigungseinheit gebunden ist,

wobei die Betätigungseinheit umfasst

Druckerzeugungskammern (7-1, 7-2, 7-3, ...) zum unter Druck setzen einer Tinte; und

Druckerzeugungsmittel (4, 4'), die an den Druckerzeugungskammern (7-1, 7-2, 7-3, ...) angeordnet sind;

wobei die Druckerzeugungsmittel (4, 4') zum Ausstoßen der Tinte die Druckerzeugungskammern (7-1, 7-2, 7-3, ...) unter Druck setzen;

und, wobei die Durchlaßeinheit umfasst

Tintenzuführungsanschlüsse (12) zum Zuführen der Tinte an die Druckerzeugungskammern (7-1, 7-2, 7-3, ...) der Betätigungseinheit; und

Düsenöffnungen (18-1, 18-2, 18-3 ...) durch die die Tinte ausgestoßen werden kann;

und, wobei die Tintenzuführungsanschlüsse (12), die Druckerzeugungskammern (7-1, 7-2, 7-3, ...) und die Düsenöffnungen durch Kommunikationslöcher (10-1, 10-2, 10-3 ...) in Verbindung stehen, wobei die Kommunikationslöcher sowohl in der Betätigungseinheit als auch in der Durchlaßeinheit vorgesehen sind,

dadurch gekennzeichnet, dass

die Düsenöffnungen (18-1, 18-2, 18-3, ...) in einer versetzten Anordnung angebracht sind,

und die Druckerzeugungskammern (7-1, 7-2, 7-3, ...), die Kommunikationslöcher (10-1, 10-2, 10-3, ...) und die Tintenzuführungsanschlüsse (12) auch in der versetzten Anordnung angebracht sind, die mit der Anordnung der Düsenöffnungen (18-1, 18-2, 18-3, ...) übereinstimmt

und in Gruppen zusammengesetzt sind, wobei jede Gruppe als Elemente eine der Druckerzeugungskammern, eines der Kommunikationslöcher und einen der Tintenzuführungsanschlüsse umfasst,

wobei die Elemente jeder der Gruppen in

gleichförmigen Positionen relativ zueinander angeordnet sind.

2. Tintenstrahlaufzeichnungskopf gemäß Anspruch 1, wobei die Betätigungseinheit umfasst:

eine druckerzeugungskammerbildende Platte (6), die die Druckerzeugungskammern (7, 7') bildet;

ein erstes Deckelement (2), um eine Oberfläche der druckerzeugungskammerbildenden Platte (6) abzudichten, wobei piezoelektrische Vibratoren daran angeordnet sind; und

ein zweites Deckelement (8), um die andere Oberfläche der druckerzeugungskammerbildenden Platte (6) abzudichten, und die Tintenzuführungsanschlüsse (12, 12') mit den Druckerzeugungskammern (7, 7') verbindende erste Kommunikationslöcher (9, 9') aufweist, und die Druckerzeugungskammern (7, 7') mit den Düsenöffnungen (18-1, 18-2, 18-3, ...) der Durchlaßeinheit verbindende zweite Kommunikationslöcher (10, 10') aufweist; und

wobei die Durchlaßeinheit umfasst:

eine tintenzuführungsanschlussbildende Platte (11), die die Tintenzuführungsanschlüsse (12, 12') bildet, und die mit den Druckerzeugungskammern (7, 7') in Verbindung stehende dritte Kommunikationslöcher (13, 13') aufweist;

eine gemeinsame tintenkammernbildende Platte (15), die mit den Druckerzeugungskammern (7, 7') durch Tintenzuführungsanschlüsse (12, 12') in Verbindung stehende gemeinsame Tintenkammern (16, 16') umfasst, und die mit den Druckerzeugungskammern (7, 7') in Verbindung stehende vierte Kommunikationslöcher (17, 17') umfasst; und

eine Düsenplatte (19), um eine Oberfläche der gemeinsamen tintenkammerbildenden Platte (15) abzudichten, und die Düsenöffnungen (18, 18') aufweist, die mit den Druckerzeugungskammern (7, 7') durch die zweiten, dritten und vierten Kommunikationslöcher (10, 10'; 13, 13'; 17, 17') in Verbindung stehen.

3. Tintenstrahlaufzeichnungskopf gemäß Anspruch 2, wobei, wenn man annimmt, dass ein Abstand zwischen den ersten Kommunikationslöchern (9, 9'), die in dem zweiten Deckelement (8) zum Verbinden

der Tintenzuführungsanschlüsse (12, 12') gebildet sind, und der Druckerzeugungskammern (7, 7'), die in eine Ordnungsrichtung einer Düsenöffnung laufen, L ist, dann sind die ersten Kommunikationslöcher (9, 9') so angeordnet, dass der kürzeste Abstand zwischen den ersten Kommunikationslöchern (9, 9') und der kürzeste Abstand zwischen den zweiten Kommunikationslöchern (10, 10'), die in dem zweiten Deckelement (8) zum Verbinden der Druckerzeugungskammern (7, 7') gebildet sind, zu der Düsenöffnung etwa gleich oder größer als 2L sind.

4. Tintenstrahlaufzeichnungskopf gemäß einem der Ansprüche 1 bis 3, wobei die Betätigungseinheit und Durchlaßeinheit durch ein Klebemittel gebunden sind.
5. Tintenstrahlaufzeichnungskopf gemäß Anspruch 3, wobei der kürzeste Abstand zwischen den ersten Kommunikationslöchern (9, 9') und der kürzeste Abstand zwischen den zweiten Kommunikationslöchern (10, 10'), die in dem zweiten Deckelement (8) zum Verbinden der Druckerzeugungskammern (7, 7') gebildet sind, zu der Düsenöffnung etwa gleich 4L sind.

Revendications

1. Tête feuilletée d'enregistrement à jets d'encre, comprenant :
 - une unité à organes de manoeuvre et une unité à passages, l'unité à passages étant collée à l'unité à organes de manoeuvre, dans laquelle l'unité à organes de manoeuvre comprend
 - des chambres génératrices de pression (7-1, 7-2, 7-3,...) destinées à mettre l'encre sous pression, et
 - des dispositifs générateurs de pression (4, 4') disposés sur les chambres génératrices de pression (7-1, 7-2, 7-3, ...),
 - les dispositifs générateurs de pression (4, 4') mettant les chambres génératrices de pression (7-1, 7-2, 7-3,...) sous pression pour projeter l'encre, et
 - l'unité à passages comprend
 - des orifices (12) d'alimentation en encre des chambres génératrices de pression (7-1, 7-2, 7-3,...) de l'unité à organes de manoeuvre, et
 - des ouvertures de buse (18-1, 18-2, 18-3,...) par lesquelles l'encre peut être projetée vers l'extérieur, et dans

laquelle les orifices (12) d'alimentation en encre, les chambres génératrices de pression (7-1, 7-2, 7-3,...) et les ouvertures de buse communiquent par des trous de communication (10-1, 10-2, 10-3,...), les trous de communication étant formés dans l'unité à organes de manoeuvre et l'unité à passages,

caractérisée en ce que

les ouvertures de buse (18-1, 18-2, 18-3,...) sont disposées avec un ordre décalé, et les chambres génératrices de pression (7-1, 7-2, 7-3,...), les trous de communication (10-1, 10-2, 10-3,...) et les orifices (12) d'alimentation en encre sont aussi arrangés dans l'ordre décalé correspondant à l'arrangement des ouvertures de buse (18-1, 18-2, 18-3,...) et sont assemblés par groupe, chaque groupe comprenant comme élément l'une des chambres génératrices de pression, l'un des trous de communication et l'un des orifices d'alimentation en encre, et dans laquelle les éléments de chacun des groupes sont arrangés à des positions uniformes les uns par rapport aux autres.

2. Tête d'enregistrement à jets d'encre selon la revendication 1, dans laquelle l'unité à organes de manoeuvre comprend :

une plaque (6) formant des chambres génératrices de pression (7, 7'),
un premier organe de couvercle (2) destiné à sceller une surface de la plaque (6) formant les chambres génératrices de pression, des vibreurs piézoélectriques (4, 4') étant placés sur lui, et
un second organe de couvercle (8) destiné à sceller l'autre surface de la plaque (6) formant les chambres génératrices de pression et ayant des premiers trous de communication (9, 9') qui relient les orifices (12, 12') d'alimentation en encre aux chambres génératrices de pression (7, 7') et des seconds trous de communication (10, 10') qui relient les chambres génératrices de pression (7, 7') aux ouvertures de buse (18-1, 18-2, 18-3,...) de l'unité à passages, et l'unité à passages comprend :

une plaque (11) de formation des orifices d'alimentation en encre (12, 12') et ayant des troisièmes trous de communication (13, 13') qui communiquent avec les chambres génératrices de pression (7, 7'),
une plaque (15) formant des chambres

communes d'encre, ayant des chambres communes d'encre (16, 16') qui communiquent avec les chambres génératrices de pression (7, 7') par les orifices d'alimentation en encre (12, 12') et les quatrièmes trous de communication (17, 17') qui communiquent avec les chambres génératrices de pression (7, 7'), et
 une plaque à buses (19) destinée à sceller une surface de la plaque (15) formant les chambres communes d'encre et ayant des ouvertures de buse (18, 18') connectées aux chambres génératrices de pression (7, 7') par les seconds, troisièmes et quatrièmes trous de communication (10, 10' ; 13, 13' ; 17, 17').

3. Tête d'enregistrement à jets d'encre selon la revendication 2, dans laquelle, si l'on suppose que la distance comprise entre les premiers trous de communication (9, 9') formés dans le second organe de couvercle (8) pour relier l'orifice d'alimentation en encre (12, 12') à la chambre génératrice de pression (7, 7') dans la direction d'arrangement des ouvertures de buse est égale à L, les premiers trous de communication (9, 9') sont positionnés afin que la plus courte distance entre les premiers trous de communication (9, 9') et la plus courte distance entre les seconds trous de communication (10, 10') formés dans le second organe de couvercle (8) pour relier la chambre génératrice de pression (7, 7') à l'ouverture de buse sont égales ou supérieures à 2L.
4. Tête d'enregistrement à jets d'encre selon l'une quelconque des revendications 1 à 3, dans laquelle l'unité à organes de manoeuvre et l'unité à passages sont collées par un adhésif.
5. Tête d'enregistrement à jets d'encre selon la revendication 3, dans laquelle la plus courte distance entre les premiers trous de communication (9, 9') et la plus courte distance entre les seconds trous de communication (10, 10') formés dans le second organe de couvercle (8) pour relier la chambre génératrice de pression (7, 7') à l'ouverture de buse sont égales à 4L.

50

55

FIG. 1

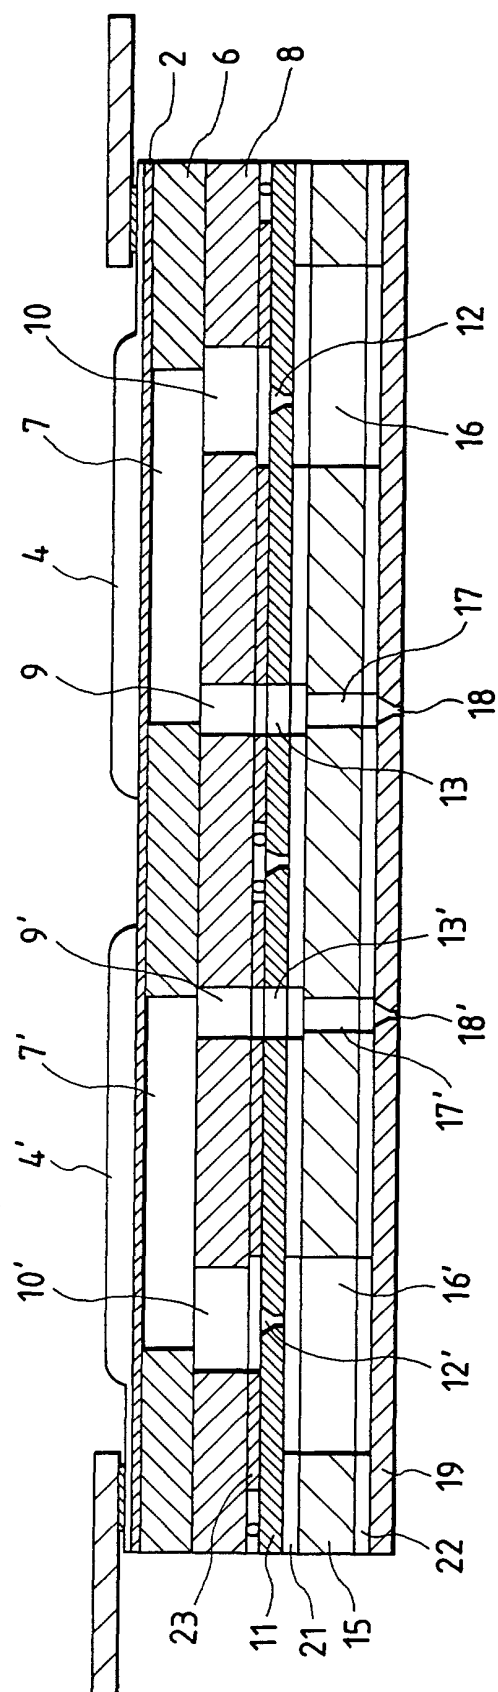


FIG. 2

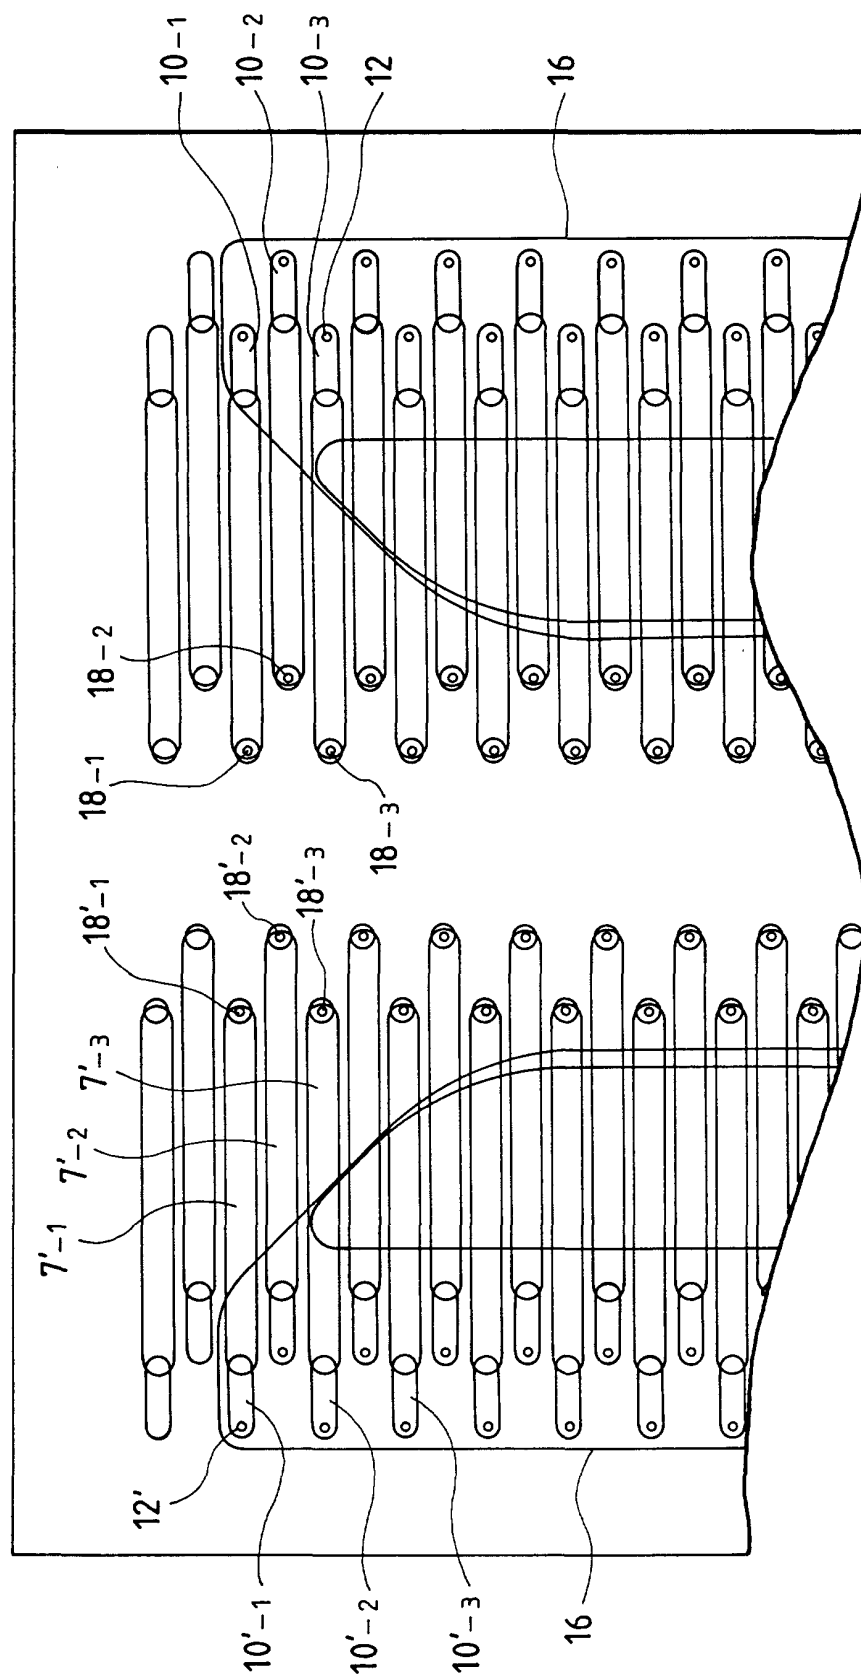


FIG. 3

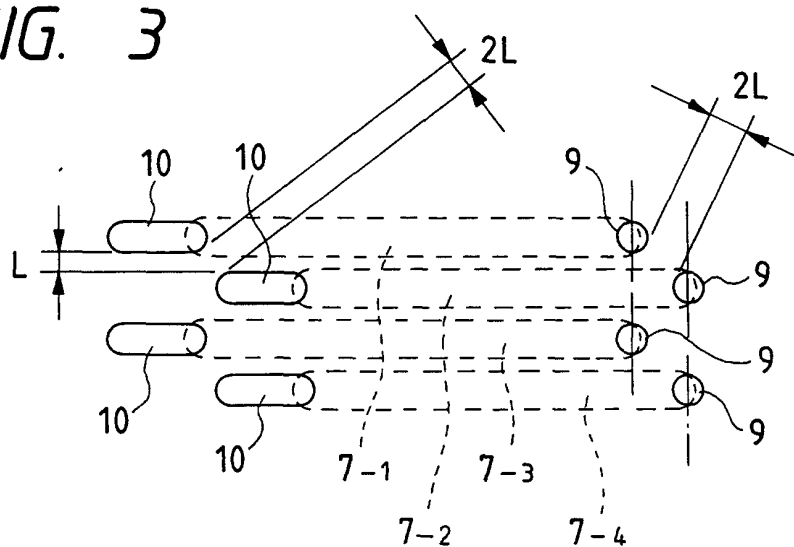


FIG. 4

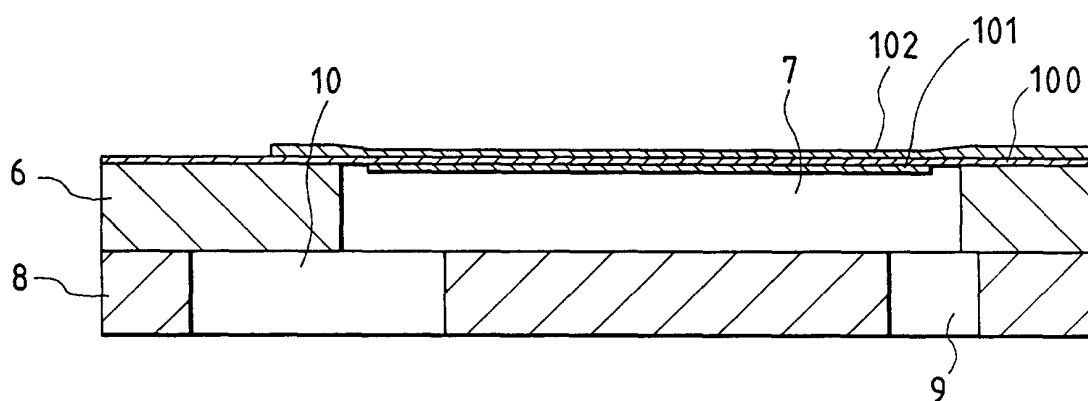


FIG. 5

