

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 802 146 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
21.07.1999 Bulletin 1999/29

(51) Int. Cl.⁶: **B66C 1/28**

(21) Application number: **96830633.2**

(22) Date of filing: **18.12.1996**

(54) Reel handling device

Einrichtung zur Handhabung von Wickelrollen

Dispositif pour la manutention de bobine

(84) Designated Contracting States:
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE**
Designated Extension States:
AL LT LV RO SI

(30) Priority: **19.04.1996 IT UD960019 U**

(43) Date of publication of application:
22.10.1997 Bulletin 1997/43

(73) Proprietor:
**Costruzioni Meccaniche Conte S.r.l.
31044 Montebelluna (TV) (IT)**

(72) Inventor: **Conte, Antonio
31044 Montebelluna (TV) (IT)**

(74) Representative: **Lanzoni, Luciano
c/o Bugnion S.p.A.,
Via Pellicceria, 2
33100 Udine (IT)**

(56) References cited:
**EP-A- 0 527 698 BE-A- 660 916
DD-A- 245 180 DE-A- 4 217 333
FR-A- 2 534 895 US-A- 2 462 691**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 802 146 B1

Description

[0001] The present invention relates to a reel handling device, in particular for cylindrical reels with a horizontal hole axis.

[0002] These devices are used mainly in factories or warehouses where it is required to move cylindrical reels on which long strips of sheet metal, paper, plastic and the like are wound.

[0003] These reels, which may be of considerable size and weight, have a cylindrical hollow central core inside which it is possible to insert the ends of the arms of a manipulator so as to grip said reels securely when moving them from one location to another.

[0004] In the art it is known of reel handling devices which consist substantially of a central body which is located above a set of grippers composed of a pair of facing L-shaped jaws which are moved by an electro-mechanical or electro-hydraulic drive system housed inside the device itself. The central body comprises at the top a hooking pin by means of which the device may be hung from loading hooks or pulley blocks fitted to a bridge crane or the like.

[0005] The jaw drive system, which is fairly bulky, is arranged underneath the hooking pin.

[0006] The particular feature of these devices is that they depend on the cable from which they are hung, for movement thereof from one location to another, but are absolutely autonomous as regards opening and closing of the jaws. In general the electrical or hydraulic power necessary for operation of the jaws is conveyed to the device by means of pipes or cables which are hung from the bridge crane by means of cable-winding or pipe-winding devices.

[0007] In order to increase the versatility of these devices it is known to arrange a rotating head or motor-driven thrust block between the central body and the hooking pin so as to allow complete rotation of the reels about a vertical axis. In this way it is possible to pick up the reels, irrespective of their orientation, and deposit them, arranging them as required.

[0008] The jaw drive system, usually arranged in a central position with respect to the transverse extension of the central body, is thus located between the jaws and the thrust block.

[0009] Such a reel handling device is described in EP-0527698 A1, which discloses all the features of the preamble of claim 1 and wherein the drive systems are located under the coupling zone.

[0010] This solution, however, has the serious drawback that it increases the overall height of the device to the detriment of its manageability.

[0011] In fact, since these devices are often used in large closed warehouses where, in addition to machinery and material of various kinds, the warehouse staff are also present, it is extremely difficult for the operator responsible for handling of the reels, or for the bridge crane operator, to move a device which is suspended in

mid-air and which, in addition to being bulky, also partially obstructs the field of vision of said operator.

[0012] Large overall dimensions of the device make the handling operations more difficult and less safe and increase the risks of accidental collisions due partly to the size of the zones which are hidden from the operator's sight by the shape of the device itself.

[0013] The high productivity achieved by the present-day industries requires, however, rapid times for handling of the reels, thus imposing high speeds also for carrying out these particularly delicate operations.

[0014] The main object of the present invention is therefore that of overcoming the aforementioned drawbacks present in the known art by providing a reel handling device which comprises a rotational head and the overall vertical dimensions of which are substantially similar to those of devices of the known type, but not equipped with the rotational head.

[0015] A further object is that of simplifying access to the drive systems of the jaws and motor-driven thrust block in order to facilitate the maintenance and checking operations.

[0016] A further object is that of reducing the intervention times in the event of faults or malfunctions.

[0017] Last but not least, an object is that of ensuring safer and more simple use of the device by the operators responsible for handling thereof.

[0018] These and still further objects are all achieved by a reel handling device as defined by claim 1 and dependent claims 2 to 5.

[0019] Accordingly two L-shaped jaws are provided which each have a horizontal support arm slidably inserted inside a seat of matching shape formed in a central body. Each of the two arms is operated by a control screw arranged above and parallel to the two support arms. The control screws each consist of a long threaded bar rotatably associated with the central body on which a nut screw moves, said nut screw being connected to the aforementioned support arm.

[0020] A rotating head with a vertical axis is arranged above the two threaded bars.

[0021] The drive systems for the threaded bars and the rotating head are arranged substantially above the rotating head, alongside the coupling zone (hooking-up zone), so as to make the best possible use of the little space available.

[0022] With the proposed solution it is therefore possible to limit considerably the dimensions of the vertical extension of the device forming the subject of the present invention and to convey the reels at greater heights from the ground, greatly reducing any risks of collision with unattentive personnel, who are not visible for the crane operator.

[0023] By reducing the height of the device, a reasonable increase in the productivity is also obtained.

[0024] Finally, the operator, having a wider field of vision and a smaller area hidden from his sight, is able to operate the device in a safer, more controlled, more

efficient and hence faster manner.

[0025] The reduction in the risks of collision during handling of the bulky reels is also due to the fact that some of those obstacles which had to be negotiated using the devices of the known art may now be simply avoided by passing over them.

[0026] Further characteristic features and advantages of the present invention will emerge more clearly from the detailed description which follows of a preferred embodiment, illustrated purely by way of a non-limiting example in the accompanying drawings, in which:

- Figure 1 shows a front view of the reel handling device with some parts removed so as to show more clearly other parts thereof;
- Figure 2 shows a side view of the device according to Fig. 1 with some parts removed so as to show more clearly other parts thereof.

[0027] With reference to the attached drawings, 1 denotes in its entirety the device for handling cylindrical reels with a substantially horizontal axis, forming the subject of the present invention.

[0028] The device 1 consists essentially of an upper coupling zone 9 for hooking the device to a crane and of a central support body 2 with which there is associated a pair of jaws 3,3' moved by a pair of control screws 7,7' driven by a first drive system 10. The central body 2 has arranged above it a rotating head 8 with a vertical axis, moved by a second drive system 11.

[0029] The two jaws 3,3' each consist of a lower L-shaped gripping zone 4,4' and an upper mounting zone 5,5' slidably inserted inside a horizontal guide 6,6' of matching shape formed in the central body 2.

[0030] The two jaws are arranged staggered with respect to one another and lie substantially in two planes parallel with each other. As can be seen in Figure 2, the two jaws 3,3' are slightly S-shaped in a plane perpendicular to their direction of translation, such that the two lower gripping zones 4,4' are located in the centre with respect to the vertical axis of the device.

[0031] This shape of the jaws therefore serves to correct the two points of application of the weighing force of the reel (which coincide with the lower gripping zones 4,4') in such a way that the axis of the reel is always centred with respect to the transverse plane of symmetry of the horizontal guides 6,6'. The pair of control screws 7,7' is arranged at the lower part of the central support body 2 but above the upper mounting zone 5,5'. Said screws consists of a pair of horizontal threaded bars 15,15' rotatably associated with the central body 2.

[0032] They are arranged parallel with one another.

[0033] Each of the two upper mounting zones 5,5' of the jaws 3,3' has a coupling fork 18,18', integral with the mounting zone 5,5', which has inserted inside it a nut screw 19,19' screwed onto the threaded bar 15,15'.

[0034] The opening or closing translatory movement of the jaws 3,3' is therefore obtained by means of the

simultaneous rotational operation of both the threaded bars 15,15', the threads of which are oriented in opposite directions with respect to one other.

[0035] As clearly shown in Figure 1, each of the two threaded bars 15,15' has mounted on one of its ends a first pulley 14,14' moved by the first drive system 10.

[0036] The first drive system 10 is composed of a first motor 12 coupled to a first reduction unit 23 which transmits, in turn, the movement to a second pulley 24. The second pulley 24 causes rotation of the pair of first pulleys 14,14' via a single toothed belt 16.

[0037] The toothed belt 16 is located on the outer side of the device 1 and is therefore extremely accessible and easy to check and replace. In Figure 2, 30 denotes a belt-tensioning device arranged along the trajectory of the belt 16.

[0038] The adoption of the belt solution used for operation of the two jaws 3,3' is made possible owing to the low output chosen for the control screws 7,7' or for the coupling consisting of threaded bar 15,15' and nut screw 19,19', as a result of which it may be ensured that breakage of the belt 16 does not cause accidental opening of the jaws 3,3' and consequent dropping of the reel (not shown).

[0039] The rotating head 8 comprises a toothed wheel 20 integral with an upper coupling zone 9 and a pinion 21, operated by a second drive system 11 integral with the central body 2. The pinion 21 is moved by a second reduction unit 25 with right-angled shafts, operated by the second motor 13.

[0040] Said first and second drive systems 10, 11 are both arranged on the central support body 2 substantially above the rotating head 8 substantially at the same level as said coupling zone 9 and alongside thereof.

[0041] The first and the second motor 12,13 are located above the plane defined by the rotating head 8.

[0042] Both the motors 12,13 are arranged laterally with respect to the coupling zone 9 and therefore are also very easy to reach.

[0043] Access to the two motors is protected by a shaped casing 22 which protects said motors from dust and dirt.

[0044] The coupling zone 9 comprises two coupling pins 26 removably inserted into seats 27 formed in two vertical walls 28.

[0045] Following the mainly structural description given above, operation of the present invention is now described.

[0046] Firstly the device 1 is hooked up to the hook of a bridge crane (not shown). This operation requires disengagement of the two hooking-up pins 26 and lowering of the hook (not shown) until it is positioned inside the box-shaped structure defined by the two vertical walls 28. At this point the pins 26 may be reinserted and locked in the respective seats 27. The device must then be raised from the ground before being able to activate opening of the two jaws 3,3'.

[0047] Opening of the jaws 3,3' is performed by the first drive device 10 which causes simultaneous rotation of the two threaded bars 15,15'. These bars, rotating, cause feeding of the nut screws 19,19' which, in turn, transmit the rectilinear movement to the coupling forks 18,18' and hence to the jaws 3,3'. The two jaws 3,3' are moved apart until the distance between them is greater than the width of the reel (not shown) to be raised. The lower gripping zone 4,4' of the jaws 3,3' is brought into alignment with the axis of the hole in the reel. At this point the first drive system 10 is operated for closing so as to move the two jaws 3,3' closer together. The motor 12 is stopped when both inner flanks 29,29' of the jaws come into contact with the reel.

[0048] By operating the crane controls it is possible to transport the reel into the desired position in an extremely safe manner, taking advantage of the limited overall dimensions of the device 1. In order to avoid obstacles or also merely to orient in a different direction the reel suspended in mid-air, it is possible to operate the rotating head 8, thereby activating the second drive system 11.

[0049] In this case the motor 13 transmits its movement to the pinion 21 by means of the second reduction unit 25. The rotation of the pinion 21 on the toothed wheel 20 results in rotation of the central body 2 with respect to the coupling zone 9, i.e. of the suspended reel with respect to the crane hook.

[0050] The present invention therefore achieves the preset objects. The arrangement of the two motors alongside the coupling zone, in addition to permitting a considerable reduction in the height of the device, also ensures extremely convenient and safe access to the two drive systems. The toothed belt may also be easily inspected and, where necessary, may be replaced with equal ease.

[0051] From the point of view of safety, it is quite clear that the smaller height of the device allows the transportation of reels suspended from it at heights greater than those possible using the devices of the known type. This fact makes it possible to pass over all those obstacles which previously required complex negotiating manoeuvres by the bridge crane operator.

[0052] Obviously the present invention may also assume, in its practical embodiment, forms and configurations different from those illustrated above without thereby departing from the present scope of protection.

Claims

1. Reel handling device comprising:

- an upper coupling zone (9) for hooking the device to a crane;
- a central support body (2);
- a pair of jaws (3, 3') each consisting substantially of a lower L-shaped gripping zone (4, 4') and an upper mounting zone (5, 5') slidably

inserted inside a guide (6, 6') of matching shape formed in the central support body (2);

- translating means (7, 7') **provided at the lower part of the central support body (2) but above the upper mounting zone (5, 5') of said pair of jaws (3, 3')**, for opening and closing the jaws (3, 3') and moved by a first drive system (10);
- a rotating head (8) **provided between the upper coupling zone (9) and the central support body (2)** and operated by a second drive system (11); characterized in that said first and second drive systems (10, 11) are both arranged **on the central support body (2)** substantially above the rotating head (8) **substantially at the same level as said coupling zone (9)** and alongside thereof.

2. Device according to Claim 1, characterized in that said translation means comprise a pair of control screws (7,7').

3. Device according to Claim 2, characterized in that said pair of control screws (7,7') comprises, for each jaw (3,3'), a horizontal threaded bar (15,15') carrying a pulley (14,14') arranged at one of the ends of the bar (15,15') itself and connected to the first drive system (10) by means of a drive belt (16).

4. Device according to Claim 3, characterized in that said two control screws (7,7') are arranged alongside each other and parallel to one another.

5. Device according to Claim 1, characterized in that the rotating head (8) comprises:

- a horizontal toothed wheel (20) integral with the said coupling zone (9);
- a pinion (21) integral with the central support body (2) and operated by the said second drive system (11).

Patentansprüche


1. Einrichtung zur Handhabung von Wickelrollen umfassend:

- einen oberen Kupplungsbereich (9) zum Verkuppeln der Einrichtung mit einem Kran;
- einen mittleren Lagerkörper (2);
- zwei Backen (3,3'), die jeweils im wesentlichen aus einem unteren L-förmigen Klemmbereich (4,4') und einem oberen, in eine komplementär ausgebildete Führung (6, 6') im mittleren Lagerkörper (2) eingeschobenen Montagebereich (5, 5') bestehen;
- im unteren Bereich des mittleren Lagerkörpers (2) jedoch oberhalb des oberen Montagebereichs

- ches (5,5') des genannten Backenpaares (3, 3') angeordnete, von einem ersten Antrieb (10) bewegte Verschiebungsmittel (7,7') zum Öffnen und Schliessen der Backen (3,3');
 - ein zwischen dem oberen Kupplungsbereich (9) und dem mittleren Lagerkörper (2) vorgesehener, von einem zweiten Antriebssystem (11) betätigter Drehkopf (8);
 dadurch gekennzeichnet, dass sowohl das erste als auch das zweite Antriebssystem (10, 11) an dem mittleren Lagerkörper (2) im wesentlichen oberhalb des Drehkopfes (8) im wesentlichen auf der Höhe und längs des genannten Kupplungsbereiches (9) angeordnet ist.
2. Einrichtung nach Anspruch 1, dadurch gekennzeichnet, dass die genannten Verschiebungsmittel zwei Verstellerschrauben (7,7') umfassen.
3. Einrichtung nach Anspruch 2, dadurch gekennzeichnet, dass das genannte Paar Verstellerschrauben (7, 7') pro Backe (3, 3') eine horizontale Gewindestange (15, 15') umfasst, die an einem Ende eine durch einen Antriebsriemen (16) mit dem ersten Antriebssystem (10) verbundene Riemenscheibe (14, 14') trägt.
4. Einrichtung nach Anspruch 3, dadurch gekennzeichnet, dass die beiden Verstellerschrauben (7,7') längs und parallel zueinander angeordnet sind.
5. Einrichtung nach Anspruch 1, dadurch gekennzeichnet, dass der Drehkopf (8):
 - ein horizontal angeordnetes, einstückig mit dem genannten Kupplungsbereich (9) ausgebildetes Zahnrad (20) umfasst,
 - sowie ein mit dem mittleren Lagerkörper (2) einstückig ausgebildetes, von dem genannten zweiten Antriebssystem (11) betätigtes Ritzel (21).
- des moyens translatants (7, 7') placés sur la partie inférieure du corps central de support (2) mais au-dessus de la zone supérieure de montage (5, 5') de ladite paire de mâchoires (3, 3'), pour ouvrir et fermer les mâchoires (3, 3'), et mis en mouvement par un premier système d'actionnement (10);
 - une tête rotative (8) placée entre la zone supérieure d'accouplement (9) et le corps central de support (2) et actionnée par un second système d'actionnement (11); caractérisé en ce que lesdits premier et second systèmes d'actionnement (10, 11) sont tous les deux disposés sur le corps central de support (2) substantiellement au-dessus de la tête rotative (8) approximativement au niveau de ladite zone d'accouplement (9) et le long de celle-ci.
2. Un dispositif selon la revendication 1, caractérisé en ce que lesdits moyens de translation comprennent une paire de vis de commande (7, 7').
3. Un dispositif selon la revendication 2, caractérisé en ce que ladite paire de vis de commande (7, 7') comprend, pour chaque mâchoire (3, 3'), une barre horizontale filetée (15, 15') supportant une poulie (14, 14') placée sur l'une des extrémités de la barre (15, 15') et reliée au premier système d'actionnement (10) au moyen d'une courroie de transmission (16).
4. Un dispositif selon la revendication 3, caractérisé en ce que lesdites deux vis de commande (7, 7') sont disposées le long l'une de l'autre et parallèles entre elles.
5. Un dispositif selon la revendication 1, caractérisé en ce que la tête rotative (8) comprend:
 - une roue dentée horizontale (20) étant une partie intégrante de la zone d'accouplement (9);
 - un pignon (21) faisant partie intégrante du corps central de support (2) et actionné par ledit second système d'actionnement (11).

Revendications

1. Un dispositif pour la manutention de bobines, comprenant:
 - une zone supérieure d'accouplement (9) pour accrocher le dispositif à une grue;
 - un corps central de support (2);
 - une paire de mâchoires (3, 3'), chacune desquelles étant substantiellement constituée d'une zone inférieure de prise en forme de L (4, 4') et d'une zone supérieure de montage (5, 5') insérée et glissant dans un guide (6, 6') de forme appropriée réalisé dans le corps central de support (2);

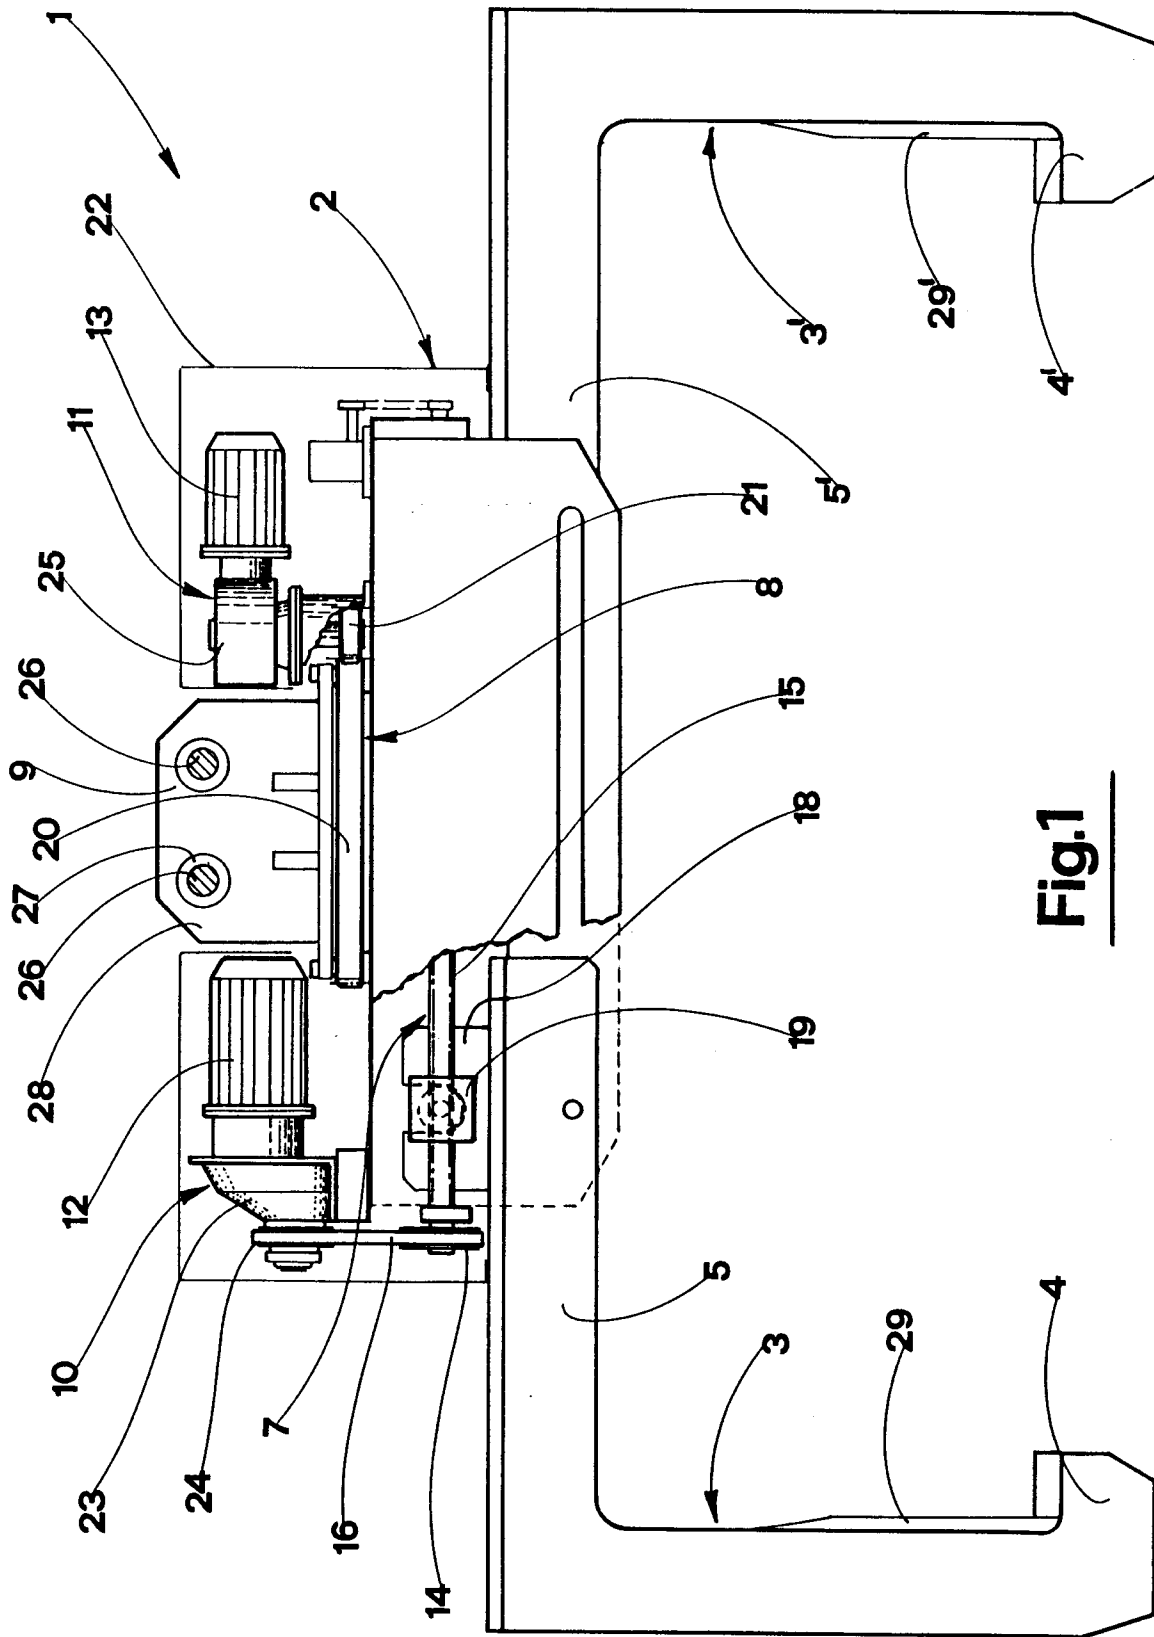

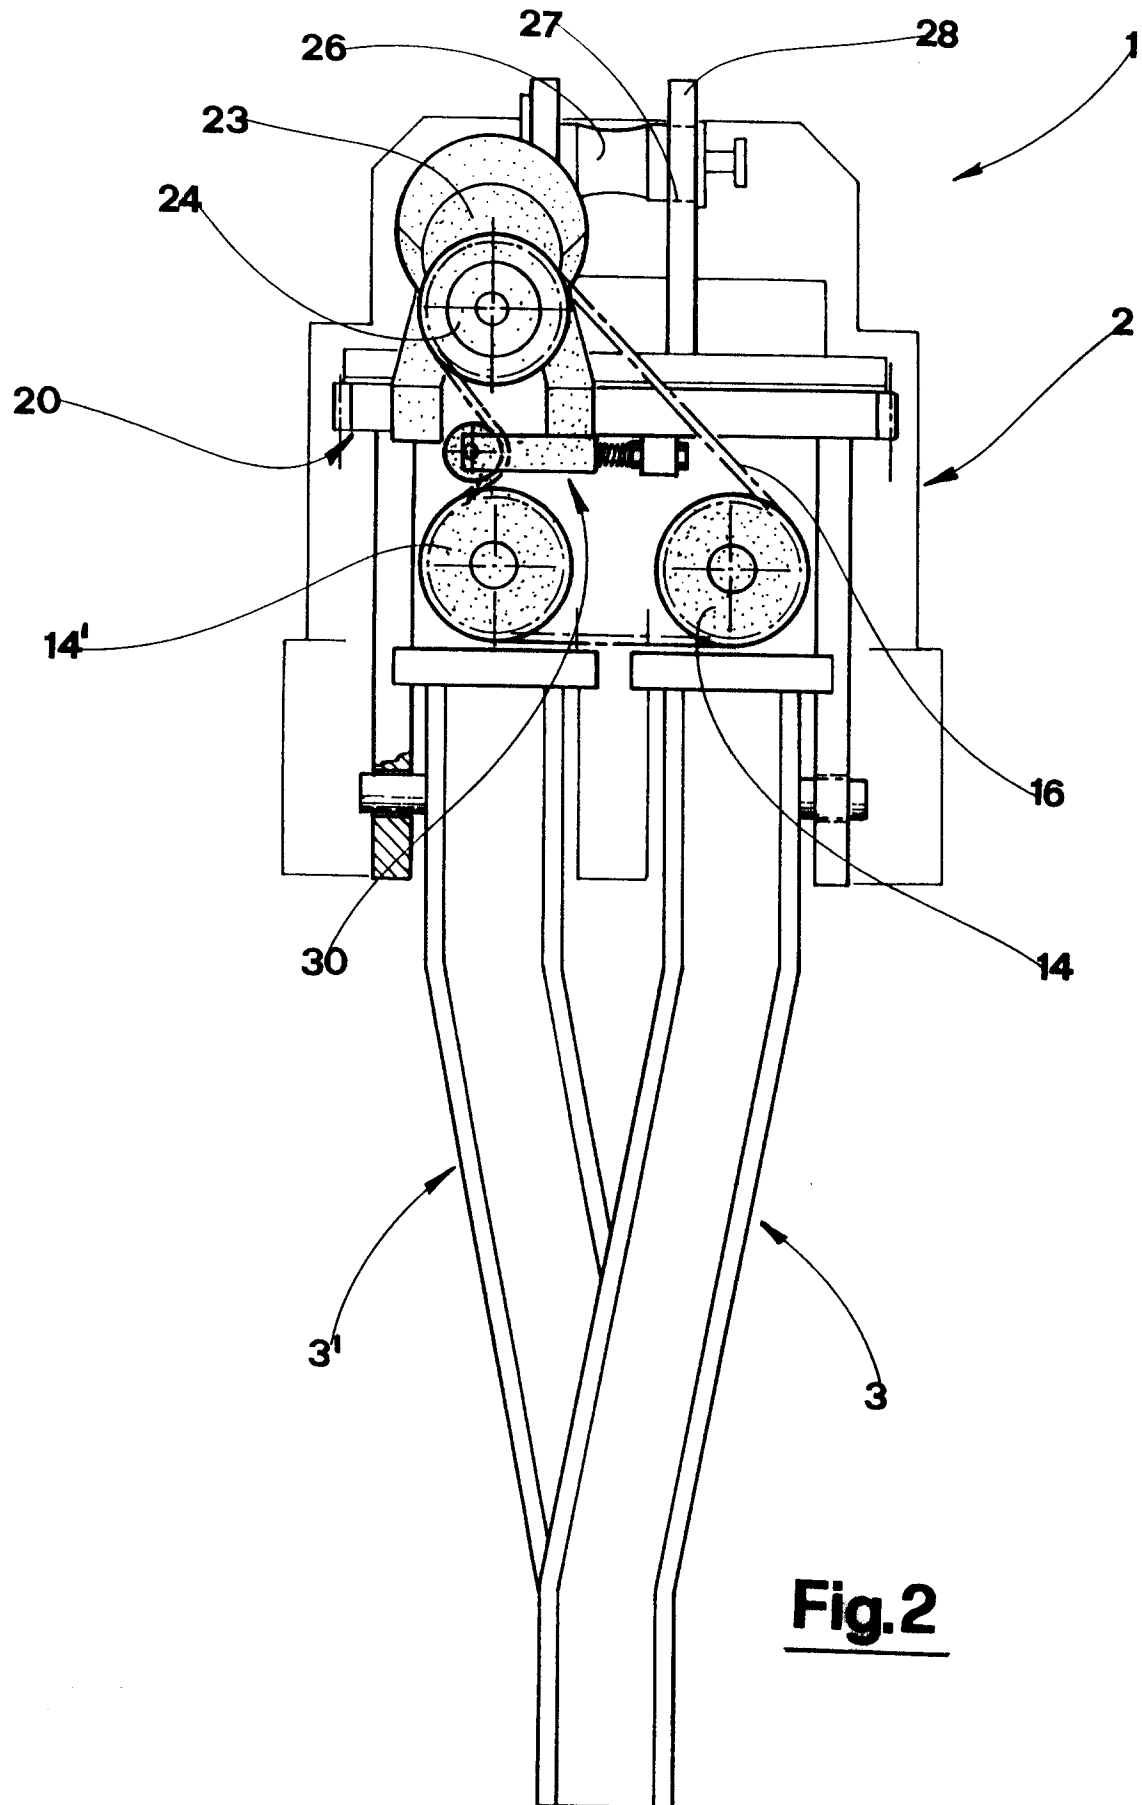


Fig.2