



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 805 026 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
24.05.2000 Bulletin 2000/21

(51) Int Cl.7: **B41J 2/025**, B41J 2/16

(21) Application number: **97302688.3**

(22) Date of filing: **21.04.1997**

(54) **Brazing process for a continuous ink jet printhead**

Hartlötverfahren für einen kontinuierlich arbeitenden Tintenstrahldrucker

Procédé de brasage fort pour une tête d'impression à jet d'encre continu

(84) Designated Contracting States:
DE FR GB

(30) Priority: **30.04.1996 US 640064**

(43) Date of publication of application:
05.11.1997 Bulletin 1997/45

(73) Proprietor: **Scitex Digital Printing, Inc.**
Dayton, Ohio 45420-4099 (US)

(72) Inventor: **Huliba, David, A.**
Centerville, Ohio 45458 (US)

(74) Representative: **Freed, Arthur Woolf et al**
Reginald W. Barker & Co.,
Cliffords Inn
Fetter Lane
London EC4A 1BY (GB)

(56) References cited:
EP-A- 0 051 132 **EP-A- 0 624 469**
US-A- 4 032 928 **US-A- 4 135 197**

- **PATENT ABSTRACTS OF JAPAN** vol. 008, no.
276 (M-346), 18 December 1984 & **JP 59 146860**
A (MATSUSHITA DENKI SANGYO KK), 22
August 1984,

EP 0 805 026 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to continuous ink jet printers and, more particularly, to a brazing process for joining machined resonator portions to yield a single resonator body for a continuous ink jet printhead.

Background Art

[0002] Ink jet printing systems are known in which a printhead defines one or more rows of orifices which receive an electrically conductive recording fluid from a pressurized fluid supply manifold and eject the fluid in rows of parallel streams. Printers using such printheads accomplish graphic reproduction by selectively charging and deflecting the drops in each of the streams and depositing at least some of the drops on a print receiving medium, while others of the drops strike a drop catcher device.

[0003] Droplet generators are one of the major components in a continuous ink jet printhead. Droplet generators often use a nozzle plate attached to a resonant body to stimulate the jets. In a resonator body design where the inlet and outlet ports are not directly in line with the nozzle plate channel, machining from a solid metal block is essentially impossible.

[0004] It is seen then that it would be desirable to eliminate the problems associated with the prior art resonator body design by providing a resonator body design which is particularly useful where the inlet and outlet ports are not directly in line with the nozzle plate channel.

Summary of the Invention

[0005] This need is met by the system according to the present invention, wherein the resonator body of a continuous ink jet printhead is fabricated from two precision machined halves which are brazed together in a process to yield an integral unit. The integral unit comprises the inlet and outlet fluid ports as well as the fluid channel which directs the fluid into the bonded nozzle plate.

[0006] In accordance with one aspect of the present invention, a brazing process is provided for joining machined resonator portions to yield a single resonator body for a continuous ink jet printhead. A first resonator body portion and a second resonator body portion are provided, each resonator portion having partial fluid ingress, fluid egress, and nozzle plate channel fluid cavities. A braze preform is then insertable between the first and second resonator body portions to join the first and second resonator body portions. Alignment pins secure and align the first resonator body portion to the second resonator body portion.

[0007] Accordingly, it is an object of the present inven-

tion to yield a single resonator body for a continuous ink jet printhead. It is a further object of the present invention to provide a resonator body design where the inlet and outlet ports are not directly in line with the nozzle plate channel. It is an advantage of the present invention that it provides a viable resonator body design which addresses the packaging constraints of some printheads.

[0008] Other objects and advantages of the invention will be apparent from the following description, the accompanying drawings and the appended claims.

Brief Description of the Drawings

[0009]

Fig. 1A is a partially cutaway view illustrating two joined halves forming a resonator body in accordance with the present invention;

Fig. 1B is a view along section line B-B of Fig. 1A; Fig. 2 illustrates a brazed foil-resonator preform used to braze the two resonator halves into the single resonator body of Fig. 1A; and

Fig. 3 is a side view of a brazing alignment pin used in the joining of the two resonator halves.

Detailed Description of the Preferred Embodiments

[0010] The present invention provides brazing process whereby two machined resonator halves are brazed together in a manner that yields a single resonator body for a continuous ink jet printhead. In co-pending, commonly assigned patent application 97 302 690.9, published as EP-A-0 805 036, a top feed droplet generator assembly is disclosed, which has an integral fluid cavity wherein fluid ingress and egress to and from the resonator body is on the side of the resonator body opposite the nozzle plate. The brazing process according to the present invention is particularly useful when used to join two resonator halves into the top feed droplet generator described and claimed in co-pending, commonly assigned patent application 97 302 690.9, published as EP-A-0 805 036.

[0011] Referring now to the drawings, in Fig. 1A there is illustrated a partially cutaway view of two resonator halves joined to form a resonator body in accordance with the present invention; and in Fig. 1B there is illustrated a front section view of one of the resonator halves. The resonator is a top feed resonator, wherein inlet and outlet ports are located at the top of the resonator body and communicate with a nozzle plate channel located at the bottom of the resonator body.

[0012] Resonator 1 comprises fluid ingress and egress on a surface 7 opposite nozzle plate 2. A counterbore 3 feature permits an effective means to secure fittings 6 to the droplet generator 1. A fluid passage 4 allows fluid to travel from an ingress point 8 down to the nozzle plate 2. A narrow fluid trench 5 redirects fluid flow from the fluid passage 4 to an in-line direction with the

nozzles (not shown) associated with nozzle plate 2. Since fluid passage 4 is not directly in line with the nozzle plate channel, machining from a solid metal block is impractical and, essentially, impossible.

[0013] To provide such a design using machining, the present invention proposes a two piece resonator design, wherein two pieces 1A and 1B are brazed together to form a single resonator. Each symmetrically machined portion 1A and 1B preferably comprises half of inlet 8, outlet 9 and nozzle plate 2 channel fluid cavity. For a continuous ink jet printhead design, the resonator body 1 is fabricated from the two precision machined portions 1A and 1B which are brazed together to yield an integral unit. The integral unit comprises the inlet 8 and outlet 9 fluid ports and the fluid channel 4 which directs the fluid into the bonded nozzle plate 2. After brazing, a complete resonator body 1 with properly sized fluid channels is achieved.

[0014] In the prior art, such as a one inch, 120 drops per inch ink jet printer resonator body, the fluid channels can be machined in one portion of the resonator body, with the second resonator portion being a solid cover. A rectangular braze foil material without fluid channel cutouts was placed between the two halves, with the fluid cavity half being placed on top to avoid flow of the braze foil into the fluid channels.

[0015] In a one inch, 240 drops per inch printing system, each resonator portion 1A and 1B comprises part of the inlet 8, the outlet 9 and the nozzle plate 2 channel fluid cavity. With two fluid channel symmetrical halves, there is a greater chance for thin, rectangular braze foil to flow into the fluid channels, especially if a solid braze foil, i.e., one without fluid channel cutouts, is used.

[0016] Braze material in the fluid cavities is undesirable for several reasons. One, braze material that has melted and solidified presents a rough, almost grit blasted appearance, which can be a source of fluid flow disturbances and can create sites for air bubble attachment. Either of these problems can severely affect the resonator body performance. Also, the added nonsymmetrical mass due to the excess braze foil in one of the portions 1A or 1B may be another source of poor resonator body performance.

[0017] In an effort to greatly reduce the amount of braze material which can flow into the fluid channels, a braze foil preform 10, as shown in Fig. 2, is used. By the proper, standard mechanical use of brazing alignment pins 11, as illustrated in Fig. 3, insertable into apertures 12 of Fig. 2, the two portions 1A and 1B can be accurately aligned. In a preferred embodiment of the present invention, the pins 11 are machined from round stock and have break edges 14 at each end, to provide relief for ease of insertion into apertures 12. Preferably, one of the resonator sections 1A or 1B, has alignment apertures designed for a press fit; while the other resonator portion 1B or 1A, has alignment apertures designed for a slip fit.

[0018] The braze preform 10 of the present invention

comprises fluid channel cutout 13. The preform shape allows for 5 to 15 mils of overhang into the fluid channels for tolerancing and to ensure adequate braze coverage at the melt temperature. With the insertion of the braze preform 10, the resulting resonator body 1 minimizes braze material in the fluid channels as the preform melts when the braze temperature is applied. This reduces poor resonator performance attributed to the existence of braze material. In a preferred embodiment of the present invention, the pins 11 are of the same material as the resonator portions 1A and 1B, to eliminate differences in thermal expansion at the braze temperature. If thermal expansion rates differ between the pin 11 and the resonator portions 1A and 1B, the upper resonator portions would "hang" up, when the upper resonator portion is actually required to float during the brazing process to obtain perfect braze integrity.

Industrial Applicability and Advantages

[0019] The present invention is useful in the field of ink jet printing, and has the advantage of addressing packaging constraints of certain printheads. The present invention provides the further advantage of providing an integral resonator body by brazing two separate resonator body portions. Finally, the present invention provides the advantage of minimizing braze material in the fluid channels.

[0020] Having described the invention in detail and by reference to the preferred embodiment thereof, it will be apparent that other modifications and variations are possible without departing from the scope of the invention defined in the appended claims.

Claims

1. A resonator for an ink jet printhead of a continuous ink jet printer, the resonator comprising:
 - a first resonator body portion and a second resonator body portion, the first and second resonator body portions each having partial fluid ingress, fluid egress, and nozzle plate channel fluid cavities;
 - a braze preform insertable between the first and second resonator body portions to join the first and second resonator body portions; and
 - at least one alignment pin for securably aligning the first resonator body portion to the second resonator body portion to form a single resonator body.
2. A resonator for an ink jet printhead as claimed in claim 1 wherein the first and second resonator body portions each comprise one half of the single resonator body.

3. A resonator for an ink jet printhead as claimed in claim 1 wherein the at least one alignment pin is machined from round stock.
4. A resonator for an ink jet printhead as claimed in claim 1 wherein the at least one alignment pin has break edges at each end.
5. A resonator for an ink jet printhead as claimed in claim 1 wherein the at least one alignment pin comprises a first alignment pin and a second alignment pin.
6. A resonator for an ink jet printhead as claimed in claim 1 wherein the at least one alignment pin is comprised of a material identical in thermal expansion to that of the first and second resonator body portions.
7. A resonator for an ink jet printhead as claimed in claim 1 wherein the braze preform comprises a fluid channel cutout section.

Patentansprüche

1. Resonatorvorrichtung für einen Tintenstrahl-Druckkopf eines kontinuierlich arbeitenden Tintenstrahl-druckers, wobei die Resonatorvorrichtung enthält;

einen ersten und einen zweiten Resonatorkörperabschnitt, die jeweils einen Teil eines Fluid-einlaufs sowie eines Fluidauslaufs und Düsen-plattenkanal-Fluidhölräume aufweisen, eine Lötform, welche zwischen dem ersten und dem zweiten Resonatorkörperabschnitt einsetzbar ist, um den ersten und den zweiten Resonatorkörperabschnitt zu verbinden, und zumindest einen Ausrichtstift zum sicheren Ausrichten des ersten Resonatorkörperabschnitts gegenüber dem zweiten Resonatorkörperabschnitt, um einen einzelnen Resonatorkörper zu bilden.
2. Resonatorvorrichtung für einen Tintenstrahl-Druckkopf nach Anspruch 1, bei dem der erste und der zweite Resonatorkörperabschnitt jeweils eine Hälfte des einzelnen Resonatorkörpers bilden.
3. Resonatorvorrichtung für einen Tintenstrahl-Druckkopf nach Anspruch 1, bei dem zumindest der eine Ausrichtstift aus einem runden Schaft hergestellt ist.
4. Resonatorvorrichtung für einen Tintenstrahl-Druckkopf nach Anspruch 1, bei dem der zumindest eine Ausrichtstift Anfasun-

gen an jedem Ende aufweist.

5. Resonatorvorrichtung für einen Tintenstrahl-Druckkopf nach Anspruch 1, bei dem der zumindest eine Ausrichtstift einen ersten Ausrichtstift und einen zweiten Ausrichtstift umfaßt.
6. Resonatorvorrichtung für einen Tintenstrahl-Druckkopf nach Anspruch 1, bei dem der zumindest eine Ausrichtstift aus einem Material besteht, welches in seiner Wärmeausdehnungseigenschaft identisch zu dem Material des ersten und des zweiten Resonatorkörperabschnitts ist.
7. Resonatorvorrichtung für einen Tintenstrahl-Druckkopf nach Anspruch 1, bei dem die Lötform einen Fluidkanal-Ausnehmungabschnitt aufweist.

Revendications

1. Résonateur pour tête d'impression à jet d'encre d'une imprimante à jet d'encre continu, le résonateur comprenant :

une première partie de corps de résonateur et une deuxième partie de corps de résonateur, les première et deuxième parties de corps de résonateur présentant, chacune, des cavités d'entrée du fluide, de sortie du fluide, et une cavité formant canal de la plaque à buses ;
 une ébauche de brasage susceptible d'être insérée entre les première et deuxième parties de corps de résonateur afin d'assembler les première et deuxième parties de corps de résonateur ; et
 au moins un taquet d'alignement destiné à aligner, de façon sûre, la première partie de corps de résonateur avec la deuxième partie de corps de résonateur afin de former un corps de résonateur unique.
2. Résonateur pour tête d'impression à jet d'encre selon la revendication 1, dans lequel les première et deuxième parties de corps de résonateur comprennent, chacune, une moitié du corps de résonateur unique.
3. Résonateur pour tête d'impression à jet d'encre selon la revendication 1, dans lequel le taquet d'alignement, au nombre minimum d'un, est usiné à partir d'une barre ronde.
4. Résonateur pour tête d'impression à jet d'encre selon la revendication 1, dans lequel le taquet d'ali-

gnement, au nombre minimum d'un, présente des arêtes cassées à chaque extrémité.

5. Résonateur pour tête d'impression à jet d'encre selon la revendication 1, dans lequel le taquet d'alignement, au nombre minimum d'un, comprend un premier taquet d'alignement et un deuxième taquet d'alignement. 5
6. Résonateur pour tête d'impression à jet d'encre selon la revendication 1, dans lequel le taquet d'alignement, au nombre minimum d'un, est constitué dans un matériau identique, en termes de dilatation thermique, à celui des première et deuxième parties de corps de résonateur. 10
15
7. Résonateur pour tête d'impression à jet d'encre selon la revendication 1, dans lequel l'ébauche de brasage comprend une section découpée pour le canal à fluide. 20

25

30

35

40

45

50

55

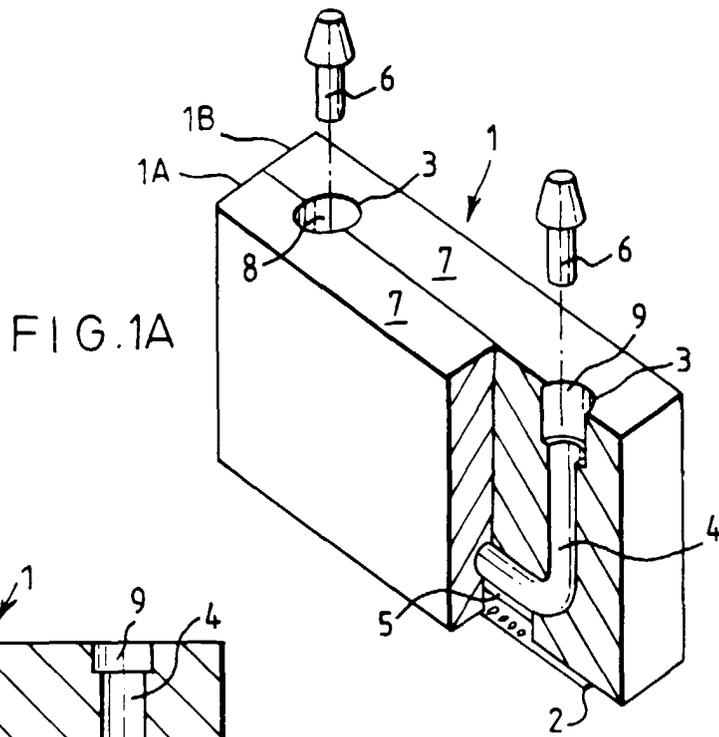


FIG. 1A

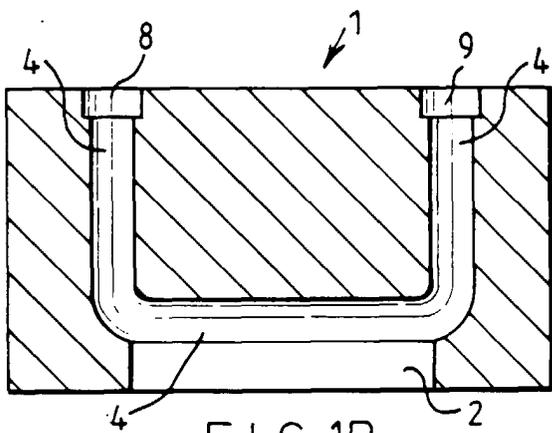


FIG. 1B

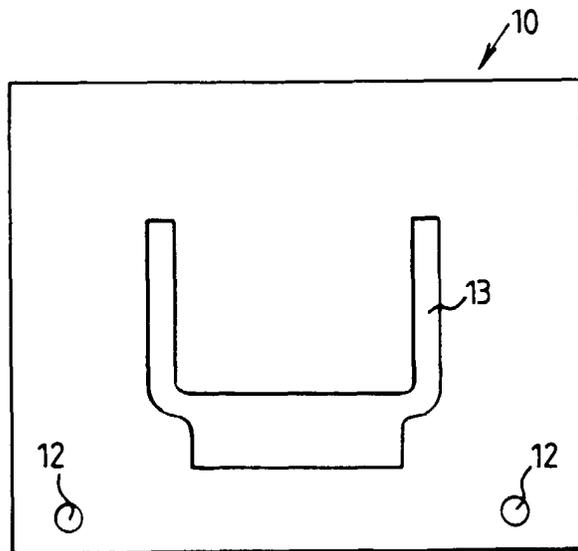


FIG. 2

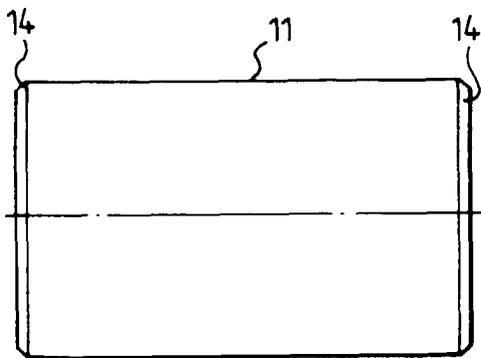


FIG. 3