(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 817 531 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
12.11.2003 Bulletin 2003/46

(51) Int Cl.[7]: **H05B 6/12**, H05B 6/06

(21) Application number: **97500109.0**

(22) Date of filing: **25.06.1997**

(54) **Flexible and re-configurable topology**

Flexible und rekonfigurierbare Topologie

Topologie flexible et reconfigurable

(84) Designated Contracting States:
DE FR GB NL

(30) Priority: **26.06.1996 ES 9601437**

(43) Date of publication of application:
07.01.1998 Bulletin 1998/02

(73) Proprietor: **BSH Balay, S.A.**
50059 Zaragoza (ES)

(72) Inventors:
- **Garcia Martinez, José Andrés**
  50059 Zaragoza (ES)
- **Garcia Giménez, José Ramon**
  50059 Zaragoza (ES)
- **Martinez Iturbe, Abelardo**
  50059 Zaragoza (ES)
- **Burdio Pinilla, José Miguel**
  50059 Zaragoza (ES)

(74) Representative: **Richter, Harald, Dr. et al**
BSH Bosch und Siemens Hausgeräte GmbH,
Postfach 10 02 50
80076 München (DE)

(56) References cited:
EP-A- 0 100 441
EP-A- 0 286 044
DE-A- 3 601 958
US-A- 4 920 475

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 817 531 B1

Description

OBJECT OF THE INVENTION

[0001] The object of the present invention is a flexible and re-configurable topology based on the three-phase bridge with non-symmetric legs, which being used as a power source for two coils as those used in an induction cooking plates, it improves the cooking plate performances because it allows the utilization of all the installed power for both coils and using it for driving one of them. In this way it is obtained a heating element with a power boosted over nominal values, allowing an ultra fast heating of the pot or pan, shortening the rising time necessary to reach the stationary thermal state.

[0002] The initial basic idea is extended to get that all the installed power for both coils to be used for driving any of them.

[0003] The inherent flexibility of the topology allows to accomplish optimal control procedures in the management of the power losses in the semiconductor devices, oriented to reduce their operation temperature, leading to an improving in the system reliability and integrability, and reducing the heat sinking demands.

FIELD OF APPLICATION

[0004] This invention relates to induction heating and more specifically to a bridge inverter topology which has a variable structure suitable for use in induction heating apparatus having ultra-fast heating ability and optimised semiconductor switches power losses.

BACKGROUND OF THE INVENTION

[0005] The principle of induction cooking are the eddy current and hysteretic losses in the surface of a metallic object therein, it has several advantages over heating by conventional techniques as convection or conduction. Induction heating is usually faster than convection or conduction heating because lower thermal mass is associated with induction heating systems. In addition, the induction heating focuses the heat within the heated object yielding higher energy transfer efficiency in contrast to convection or conduction heating wherein the heat is produced outside the heated object.

[0006] The domestic induction heating hobs are driven by an alternative current of medium frequency (25-65 kHz) applied to a induction coil which heats by induction a pot or a pan placed on the coil. This current is generated by a power converter based on solid-state power devices. In what follows a new concept for the power converter used for induction heating hobs is presented.

[0007] The owner of this patent also owners the Patent ES-539,790 $\hat{=}$ DE-A1-3 601 958 wherein an electronic system drives by a high frequency pulsed current a thermal plate as those used in an electric hob. This system uses a full-bridge inverter with MOS transistors which drives a flat coil housed inside a thermal plate by a serial of high frequency power pulses heating ferromagnetic pots or pans.

[0008] The transistorised full-bridge described in the aforementioned Patent is activated by a control circuit which achieves the regulation and the self adaptation of the firing time for each leg of the transistorised full-bridge, scheduled in relation with the inductive-energy time-recovering of the flat coil, and stopping the powering of the coil when there is non-ferromagnetic load. In that way, when a ferromagnetic pot or pan is placed on the thermal plate a thermal plate with self-firing ability is achieved.

[0009] Although the induction heating method is fast, the rising time necessary to reach the stationary thermal state can be shortened if the spare power drive capacity of an idle bridge which normally drives other induction heating plate are used to boost the bridge which drives the active induction plate. Another application of the idle bridge is to help in the reduction of the overall conduction losses of the power semiconductor switches of the active bridge.

[0010] To achieve these goals it is necessary a bridge inverter topology with a variable structure able to do these task. These topology is the core of this invention.

DESCRIPTION OF THE INVENTION

[0011] In this document a flexible and re-configurable topology is described. It is based on a non-symmetric three-phase bridge in which this topology is obtained by modifying another one which is well-known as the three-phase bridge. The later is frequently used as DC-AC converter to drive three-phase loads, but in this invention, it has been modified by adding a two positions one pole switch.

[0012] In this way, the three-phase bridge is non-symmetric because two of its legs are rated for the nominal ratings of the two loads, respectively. In this application the two loads are two coils which constitute the two heating plates of an induction cooking hob. Furthermore, the third leg, so called the common leg, is rated for the addition of the ratings of both loads.

[0013] So, when the switch is not activated, the obtained topology allows to drive both coils used as heating plates of an induction cooking hob, independently. Conversely, when the switch is activated, the obtained topology allows two legs to be connected in parallel. Consequently, the drive capacity is the addition of the drive capacity of both legs connected in parallel.

[0014] If the flexible and re-configurable topology is used as a power source for the two coils used as two heating plates of an induction cooking hob, it allows the improving of the performances of this induction hob because all the drive capacity available for the two coils can be used to apply it for driving one of the coils.

[0015] In addition, it allows to have a heating plate with a power higher than its nominal rate, therefore, hav-

ing an ultra-fast heating of a pot or a pan heated by the heating plate, shortening the rising-temperature time necessary to reach the stationary thermal state.

[0016] The inherent flexibility of the topology allows to accomplish optimal control procedures in the management of the power losses in the semiconductor switches, oriented to reduce their operation temperature, leading to an improving in the system reliability and integrability, and reducing the heat sinking demands.

[0017] In addition, it allows a modular design building up with it a induction module to drive two coils used as heating plates of an induction hob, and to incorporate this module in a mixed induction and non-induction hob.

[0018] Even so, this induction module allows to incorporate two of them to drive four coils used as a heating plates of an induction hob, two of them with a power higher than its nominal rate.

[0019] It has been foreseen that this topology, object of the invention, to be extended by adding two switches instead of one, yielding to an improved flexibility because in this case, it allows that all the installed power for both coils to be used for driving any of them, without distinction.

[0020] When the topology with two switches is used as power source to drive two coils used as heating plates in an induction cooking hob, it allows an improving in performances because all the installed power for both coils can be used for driving any of them, in such a way that any of the heating plates can provide a heating power higher than its nominal rate, and thus, two ultra-fast heating plates are available for heating a pot or a pan, shortening the rising-temperature time necessary to reach the stationary thermal state of the pot or the pan.

[0021] So, the flexibility of the topology with two switches allows to accomplish optimal control procedures in the management of the power losses in the semiconductor devices, oriented to reduce their operation temperature, leading to an improving in the system reliability and integrability, and reducing the heat sinking demands.

[0022] In the same way, the two-switches topology allows a modular design building up with it a induction module suitable for driving two coils used as a heating plates of an induction cooking hob, and to incorporate this module in a mixed induction and non-induction cooking hob, even so, two modules can be incorporated to drive four coils used as heating plates in an induction cooking hob, all of them with power boost capacity.

[0023] To complete this description and with the aim to help in the understanding of the characteristics of the invention, it has been is included a set of drawings in this descriptive document, as a part of it, which have as illustrative but non-limited character. It has been represented what follows:

BRIEF DESCRIPTIONS OF THE DESIGNS

[0024] The features of the invention believed to be novel are set forth with particularity in the appended claims. The invention itself, however, together with further objects and advantages thereof, may best be understood by reference to the following description taken in conjunction with the accompanying drawings in which:

[0025] FIG. 1.- Shows the re-configurable and multi-bridge topology with a single switch and the B2 coil with reinforced power. In this figure it is named:

- S 1 to S6 as the power semiconductor switches.
- The leg formed by S3 and S4 are the so called common leg of the three-phase bridge.
- The leg formed by S1 and S2 are the so called the booster leg of the three-phase bridge.
- The leg formed by S5 and S6 are the so called the fixed leg of the three-phase bridge.
- B 1 is the coil without power boost.
- B2 is the coil with power boost.
- R1 is the single-pole two-positions switch.
- Vd is a generic DC current or voltage power source, obtained by rectifying an AC power source, either filtered or not, being the filter active or passive whether applicable, without any limitation introduced by the nature of the power source.

[0026] FIG. 2.- Shows the re-configurable and multi-bridge topology with two switches and the coils B1 and B2 with reinforced power. This figure uses the same names as in figure 1, but in addition:

- R2 is the second single-pole two-positions switch incorporated to the topology.

[0027] FIG. 3.- This is a table which shows the power availability for each of the B1 and B2 coils versus the switches R1 and R2 activation state represented by "1", or the non-activation state represented by "0".

DESCRIPTION OF A PREFERRED EMBODIMENT

[0028] The invention provides a flexible topology which allows the power supplying for two coils independently which are used as heating plates of an induction cooking hob.

[0029] The basic flexible topology depicted in Figure 1, and so claimed, is obtained by modifying another one which is well-known as the three-phase bridge. The later is frequently used as DC-AC converter to drive three-phase loads, but in this invention, it has been modified by adding a two positions one pole switch.

[0030] The basic flexible topology depicted in Figure 1 is used to explain the basic idea. Subsequently, the topology is expanded by doubling the number of switches included to it as depicted in Figure 2, achieving in this

way, the improving in flexibility and performances.

[0031] The three-phase bridge in Figure 1 is constituted by three identical legs (legs S1-S2, S3-S4 and S5-S6) connected in parallel which draws power from a common power source with voltage Vd. Each leg is constituted by a series connection of two power semiconductor switches (the power semiconductor switches are depicted as plain switches and named as S1, S2, S3, S4, S5 and S6) which activation or non-activation states are externally controlled.

[0032] The functionality of the stage is not affected by the power semiconductor switches used or their technology state.

[0033] The common point between the semiconductor switches of a leg constitutes an output terminal or one of the output phase of the bridge. If the bridge has three phases as in our case, it is named three-phase bridge.

[0034] A bridge is not symmetric if all their legs are not identical concerning the controllability of the power semiconductor switches, the working zone of the voltage/current quadrant or the handled power.

[0035] The modification introduced in the bridge consists in rating individually two of the legs (S1-S2 and S5-S6) with a power handling capacity fitted to the respective coils rating B 1 and B2. These coils constitute two independent heating plates of an induction cooking hob. The third leg, formerly named as the common leg, is rated with a power handling capacity equal to the added ratings of the other two legs. The legs different from the common leg are distinguished themselves by naming them as the fixed leg (S5-S6) and the booster leg (S1-S2), respectively.

[0036] Between the booster leg output (S1-S2) and the common leg output (S3-S4) it is permanently connected one of the coil which constitutes one of the heating plate of the induction cooking hob, which can receive in its case, a power boost. This coil B2 is distinguished because it is named the power boost coil. In the same way, the other coil B 1 is distinguished because it is named the coil without power boost.

[0037] The fixed leg output (S5-S6) is connected to the common pole of the two positions switch. When the switch is in its activated state (no position), it connects the coil without power boost B1 between the fixed leg output (S5-S6) and the common leg output (S3-S4).

[0038] When the switch is not in its activated state (nc position), it connects in parallel the booster leg output (S1-S2) to the fixed leg output (S5-S6). In this way, the coil without power boost B1 is in open circuit and the coil with power boost B2 has available all the installed power being able to draw a power higher than its nominal rate, that is the reason because it is named power boost coil B2.

[0039] This idea of the basic flexible and re-configurable topology depicted in Figure 1 is extended to allow both coils to draw power higher than their nominal rate. For this purpose, the number of switches has been duplicated, yielding the topology depicted in Figure 2. In this way, the second switch R2 is placed with its common pole connected to the formerly named booster leg (S1-S2). When the second switch R2 is in its activated state, it connects the formerly named power boost coil B2 between the booster leg output (S1-52) and the common leg output (S3-S4).

[0040] Figure 3 shows as a table, the power availability for each of the coils B1 and B2 versus the activation state represented as (1) or the non-activation state represented as (0) for both switches R1 and R2.

[0041] With the second switch R2 non-activated (nc position), it connects in parallel the booster leg output (S1-S2) with the fixed leg output (S5-S6). In this way, both switches together with the connected legs and the powered coils shows a symmetric position each other. This symmetry yields in an improved flexibility which allows any coil B1 or B2 to draw all the installed power, indistinctly. The role of the booster leg and the fixed leg in Figure 1 are both interchangeable for the topology in Figure 2 with two switches.

[0042] The two-switches topology allows a modular design building up with it an induction module suitable for driving two coils used as a heating plates of an induction hob, and to incorporate this module in a mixed induction and non-induction cooking hob, even so, two modules can be incorporated to drive four coils used as heating plates in an induction cooking hob, all of them with power boost capacity.

[0043] The inherent flexibility of both topologies allows to accomplish optimal control procedures in the management of the power losses in the power semiconductor switches, oriented to reduce their working temperature, leading to an improving in the system reliability and integrability, and reducing the heat sinking demands.

[0044] Given the arrangement selected for both switches in non-activated position, as depicted in Figure 2, when only one coil is powered, it has available all the installed power because both the fixed coil and the booster leg are parallel connected. In this way the overall conduction losses and the temperature of the power semiconductor switches are lowered.

[0045] The switch position depicted in Figure 1 corresponds to its non-activated state. In this state the common pole of the switch is electrically connected to its normally-close pole (nc), thus, paralleling the fixed leg and the booster leg. In this way all the installed power is available for the coil with power boost B2. If the switch is in its activated state, the common pole of the switch is electrically connected to its normally-open pole (no), thus, the fixed leg powers the coil B1 and the booster leg powers the coil B2.

[0046] The switches positions depicted in Figure 2 correspond to their non-activated state. If R1 is exclusively activated, all the installed power is available for the coil B1. If R2 is exclusively activated, all the installed power is available for the coil B2. If both switches are

activated each coil draws its own rated power.

[0047] While the invention has been particularly shown and described with reference to several preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the true spirit and scope of the invention as defined by the appended claims.

Claims

1. Electric circuit comprising a three-phase bridge (S1 - S2, S3 - S4, S5 - S6) to drive two loads (B1, B2) connected between a first connection (+) of a common power source with a voltage (Vd) for supplying power to the loads (B1, B2) and a second connection (-) wherein the bridge (S1 - S2, S3 - S4, S5 - S6) comprises a first switch (R1) to drive one (B2) of the loads (B1, B2) at its nominal rate of 100 % or at a power higher than its nominal power in dependence of the position (no; nc) of the first switch (R1).

2. Electric circuit according to claim 1 wherein the loads (B1, B2) are two coils.

3. Electric circuit according to claim 2 wherein the coils (B1, B2) constitute two heating plates of an induction cooking hob.

4. Electric circuit according to one of the preceding claims allowing, when the first switch (R1) is not activated, to drive both loads (B1, B2) independently (no).

5. Electric circuit according to one of the claims 1 to 3 allowing, when the first switch (R1) is activated, two legs of the bridge (S1 - S2, S3 - S4, S5 - S6) to be connected in parallel, the drive capacity being the addition of the drive capacity of both said legs connected in parallel (nc).

6. Electric circuit according to one of the preceding claims allowing a modular design building up with it an induction module to drive two coils (B1, B2) used as heating plates of an induction hob wherein power boost of one of the coils (B1, B2) is available.

7. Electric circuit according to claim 6 allowing the modular design to be incorporated in a mixed induction and non-induction hob with two induction heating plates wherein power boost of one of the coils (B1, B2) is available.

8. Electric circuit according to claim 6 allowing two of the modular designs to be incorporated in a four heating plates induction cooking hob wherein power boost of two of them is available.

9. Electric circuit according to claim 1 wherein the bridge (S1 - S2, S3 - S4, S5 - S6) comprises the first (R1) and a second switch (R2) to drive both loads (B1, B2) at their nominal rate (100 %) or one (B1, B2) of the loads (B1, B2) at a power (> 100 %) higher than its nominal power in dependence of the position (no; nc) of the switches (R1, R2).

10. Electric circuit according to claim 9 allowing the modular design to be incorporated in an induction hob with two induction heating plates wherein all the installed power for both loads (B1, B2) is used for driving any of them, without distinction.

11. Electric circuit according to claim 9 allowing the modular design having two heating plates with power boost capacity.

12. Electric circuit according to claim 9 allowing the modular design building up with it an induction module to drive two coils (B1, B2) used as heating plates of an induction hob wherein both heating plates have power boost capacity.

13. Electric circuit according to claim 9 allowing the modular design to be incorporated in a mixed induction and non-induction hob with two induction plates wherein both induction heating plates have power boost capacity.

14. Electric circuit according to claim 9 allowing the modular design to be incorporated in a four heating plates induction cooking hob wherein all heating plates have power boost capacity.

Patentansprüche

1. Elektrische Schaltung, umfassend eine Drehstrombrücke (S1 - S2, S3 - S4, S5 - S6), um zwei Lasten (B1, B2) anzusteuern, die zwischen einem ersten Anschluss (+) einer gemeinsamen Stromquelle mit einer Spannung (Vd) für das Abgeben von Leistung an die Lasten (B1, B2) und einem zweiten Anschluss (-), bei der die Brücke (S1 - S2, S3 - S4, S5 - S6) einen ersten Schalter (R1) umfasst, um eine (B2) der Lasten (B1, B2) bei ihrer Nennleistung von 100 % oder bei einer Leistung, die höher als ihre Nennleistung ist, in Abhängigkeit von der Position (no; nc) des ersten Schalters (R1) anzusteuern, angeschlossen sind.

2. Elektrische Schaltung nach Anspruch 1, bei der die Lasten (B1, B2) zwei Spulen sind.

3. Elektrische Schaltung nach Anspruch 2, bei der die Spulen (B1, B2) zwei Heizplatten eines induktiven Kochfeldes bilden.

4. Elektrische Schaltung nach einem der vorhergehenden Ansprüche, die ermöglicht, beide Lasten (B1, B2) unabhängig (no) anzusteuern, wenn der erste Schalter (R1) nicht eingeschaltet ist.

5. Elektrische Schaltung nach einem Anspruch 1 bis 3, die ermöglicht, wenn der erste Schalter (R1) eingeschaltet ist, zwei Zweige der Brücke (S1 - S2, S3 - S4, S5 - S6) parallel zu verbinden, bei der die Ansteuerungskapazität die Addition der Ansteuerungskapazität der beiden parallel (nc) verbundenen Brückenzweige ist.

6. Elektrische Schaltung nach einem der vorhergehenden Ansprüche, die einen modularen Konstruktionsaufbau mit ihrem induktiven Modul ermöglicht, um zwei Spulen (B1, B2) anzusteuern, die als Heizplatten eines induktiven Kochfeldes verwendet werden, bei der die Leistungsverstärkung einer der Spulen (B1, B2) zur Verfügung steht.

7. Elektrische Schaltung nach Anspruch 6, die ermöglicht, die modulare Ausführung in einem gemischten induktiven und nichtinduktiven Kochfeld mit zwei Induktionsheizplatten einzubauen, bei der die Leistungsverstärkung einer der Spulen (B1, B2) zur Verfügung steht.

8. Elektrische Schaltung nach Anspruch 6, die ermöglicht, zwei der modularen Ausführungen in einem induktiven Kochfeld mit vier Heizplatten einzubauen, bei dem die Leistungsverstärkung von zwei davon zur Verfügung steht.

9. Elektrische Schaltung nach Anspruch 1, bei der die Brücke (S1 - S2, S3 - S4, S5 - S6) den ersten (R1) und einen zweiten Schalter (R2) umfasst, um beide Lasten (B1, B2) bei ihrer Nennleistung (100 %) oder eine (B1, B2) der Lasten (B1, B2) bei einer Leistung (> 100 %), die höher als ihre Nennleistung ist, in Abhängigkeit von der Position (no; nc) der Schalter (R1, R2) anzusteuern.

10. Elektrische Schaltung nach Anspruch 9, die ermöglicht, die modulare Ausführung in einem induktiven Kochfeld mit zwei Induktionsheizplatten einzubauen, bei der die gesamte installierte Leistung für beide Lasten (B1, B2) für das Ansteuern jeder davon ohne Unterscheidung verwendet wird.

11. Elektrische Schaltung nach Anspruch 9, die ermöglicht, dass die modulare Ausführung zwei Heizplatten mit Leistungsverstärkungskapazität aufweist.

12. Elektrische Schaltung nach Anspruch 9, die den modularen Konstruktionsaufbau mit einem induktiven Modul ermöglicht, um zwei Spulen (B1, B2) anzusteuern, die als Heizplatten eines induktiven Kochfeldes verwendet werden, bei der beide Heizplatten die Leistungsverstärkungskapazität aufweisen.

13. Elektrische Schaltung nach Anspruch 9, die ermöglicht, die modulare Ausführung in einem gemischten induktiven und nichtinduktiven Kochfeld mit zwei Induktionsplatten einzubauen, bei der beide Induktionsheizplatten die Leistungsverstärkungskapazität aufweisen.

14. Elektrische Schaltung nach Anspruch 9, die ermöglicht, die modulare Ausführung in einem induktiven Kochfeld mit vier Heizplatten einzubauen, bei der alle Heizplatten die Leistungsverstärkungskapazität aufweisen.

Revendications

1. Circuit électrique comprenant un pont triphasé (S1-S2, S3-S4, S5-S6) pour commander deux charges (B1, B2) connectées entre une première connexion (+) d'une source d'alimentation commune avec une tension (Vd) pour délivrer une puissance aux charges (B1, B2) et une deuxième connexion (-), dans lequel le pont (S1-S2, S3-S4, S5-S6) comprend un premier interrupteur (R1) pour commander une (B2) des charges (B1, B2) à sa valeur nominale de 100 % ou à une puissance supérieure à sa puissance nominale en fonction de la position (no ; nc) du premier interrupteur (R1).

2. Circuit électrique selon la revendication 1, dans lequel les charges (B1, B2) sont deux enroulements.

3. Circuit électrique selon la revendication 2, dans lequel les enroulements (B1, B2) constituent deux plaques de chauffage d'une plaque de cuisson par induction.

4. Circuit électrique selon l'une quelconque des revendications précédentes, permettant, lorsque le premier interrupteur (R1) n'est pas activé, de commander individuellement les deux charges (B1, B2) (no).

5. Circuit électrique selon l'une quelconque des revendications 1 à 3, permettant, lorsque le premier interrupteur (R1) est activé, à deux branches du pont (S1-S2, S3-S4, S5-S6) d'être connectées en parallèle, la capacité de commande étant l'addition de la capacité de commande desdits deux membres connectés en parallèle (nc).

6. Circuit électrique selon l'une quelconque des revendications précédentes, permettant une conception modulaire développant avec elle un module d'induction pour commander deux enroulements (B1,

B2) utilisés comme plaques chauffantes d'une table de cuisson à chauffage par induction, dans lequel une amplification de puissance d'un des enroulements (B1, B2) est disponible.

7. Circuit électrique selon la revendication 6, permettant à la conception modulaire d'être incorporée dans une table de cuisson mixte à induction et sans induction avec deux plaques chauffantes par induction, dans lequel une amplification de puissance d'un des enroulements (B1, B2) est disponible.

8. Circuit électrique selon la revendication 6, permettant à deux des conceptions modulaires d'être incorporées dans une table de cuisson à chauffage par induction à quatre plaques chauffantes, dans lequel une amplification de puissance de deux d'entre elles est disponible.

9. Circuit électrique selon la revendication 1, dans lequel le pont (S1-S2, S3-S4, S5-S6) comprend le premier interrupteur (R1) et le deuxième interrupteur (R2) pour commander les deux charges (B1, B2) à leur puissance nominale (100 %) ou une charge (B1, B2) des charges (B1, B2) à une puissance (> 100 %) supérieure à sa puissance nominale en fonction de la position (no ; nc) des interrupteurs (R1, R2).

10. Circuit électrique selon la revendication 9, permettant à la conception modulaire d'être incorporée dans une table de cuisson par induction avec deux plaques chauffantes par induction, dans lequel toute la puissance installée pour les deux charges (B1, B2) est utilisée pour commander l'une ou l'autre, sans distinction.

11. Circuit électrique selon la revendication 9, permettant à la conception modulaire d'avoir deux plaques chauffantes avec une capacité d'amplification de puissance.

12. Circuit électrique selon la revendication 9, permettant à la conception modulaire de développer avec elle un module d'induction pour commander deux enroulements (B1, B2) utilisés comme plaques chauffantes d'une table de cuisson à chauffage par induction, dans lequel les deux plaques chauffantes ont une capacité d'amplification de puissance.

13. Circuit électrique selon la revendication 9, permettant à la conception modulaire d'être incorporée dans une table de cuisson mixte à induction et sans induction avec deux plaques chauffantes à induction, dans lequel les deux plaques chauffantes par induction ont une capacité d'amplification de puissance.

14. Circuit électrique selon la revendication 9, permettant à la conception modulaire d'être incorporée dans une table de cuisson par induction à quatre plaques, dans lequel toutes les plaques chauffantes ont une capacité d'amplification de puissance.

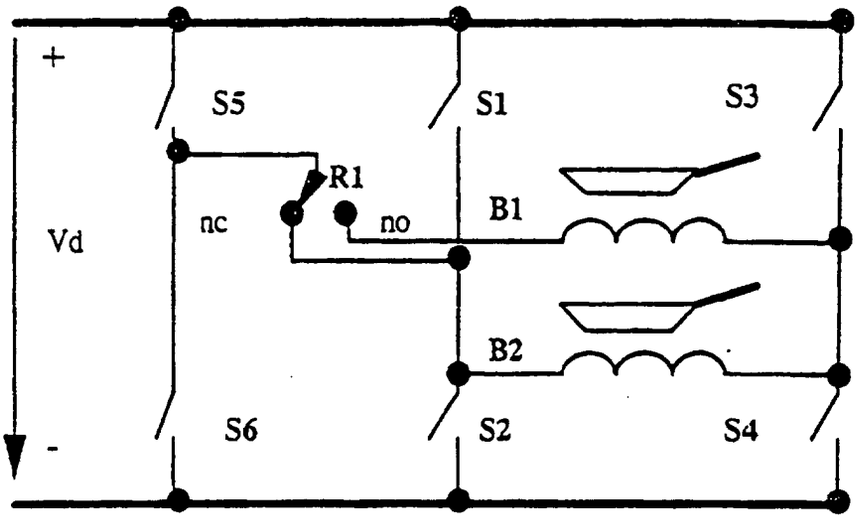

+
S5
S1
S3
R1
nc
no
B1
Vd
B2
S6
S2
S4
-

FIG 1

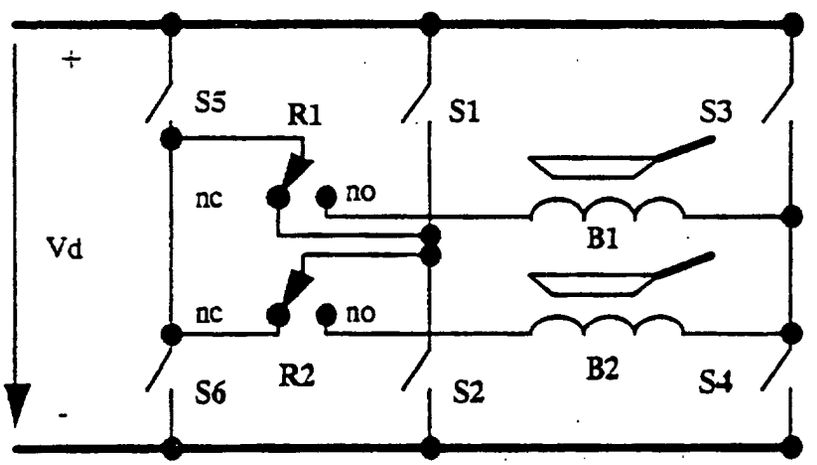

+
S5
R1
S1
S3
nc
no
B1
Vd
nc
no
S6
R2
S2
B2
S4
-

FIG 2

R1, R2 / % Pot	0, 0	0, 1	1, 0	1, 1
B1	0%	0%	>100%	100%
B2	0%	>100%	0%	100%

FIG. 3