

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 819 486 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.06.2001 Bulletin 2001/24

(51) Int Cl.7: **B22C 7/00**

(21) Application number: **96111598.7**

(22) Date of filing: **18.07.1996**

(54) **Shell molding apparatus**

Formmaschine

Machine à mouler

(84) Designated Contracting States:
DE FR GB IT

(43) Date of publication of application:
21.01.1998 Bulletin 1998/04

(73) Proprietor: **HONDA GIKEN KOGYO KABUSHIKI
KAISHA
Minato-ku Tokyo (JP)**

(72) Inventors:
• Shimizu, Akio
Yokkaichi-shi, Mie-ken (JP)
• Kinoshita, Shigeyuki
Kameyama-shi, Mie-ken (JP)
• Yoshikawa, Taiti
Kameyama-shi, Mie-ken (JP)
• Wada, Keiji
Kameyama-shi, Mie-ken (JP)

• Suzuki, Hiroshi
Suzuka-shi, Mie-ken (JP)
• Kawai, Yasuo
Suzuka-shi, Mie-ken (JP)

(74) Representative: **Weiss, Peter, Dr. rer. nat.
Dr, Weiss, Weiss & Brecht
Postfach 1250
78229 Engen (DE)**

(56) References cited:
DE-B- 1 259 024

• **PATENT ABSTRACTS OF JAPAN** vol. 017, no.
164 (M-1390), 30 March 1993 & JP 04 327339 A
(NISSIN KOGYO KK), 16 November 1992,
• **PATENT ABSTRACTS OF JAPAN** vol. 95, no. 006
& JP 07 164101 A (TOYOTA MOTOR CORP), 27
June 1995,

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 819 486 B1

Description

BACKGROUND OF THE INVENTION

Field of the Invention:

[0001] The present invention relates to a shell molding apparatus for molding a shell mold for casting a cylindrical product, such as a sleeve for use in a cylinder block.

Description of the Related Art:

[0002] In a general practice for manufacturing a cylinder block 80 as shown in Fig. 29, a plurality of cylindrical sleeves 81 are manufactured by casting, and the sleeves 81 are then disposed into the cavity of a die casting die. Subsequently, a molten aluminum alloy is charged into the cavity to cast the cylinder block 80.

[0003] For reliable engagement between the sleeves 81 and a block body 82 of aluminum alloy, the sleeves 81 have many protrusions on the surface thereof. According to a conventional practice, such cylindrical sleeves are cast one by one during a casting process using a sand mold formed of greensand or sand which hardens with time. Due to the required use of desertion cores, this conventional method of manufacturing sleeves requires much labor, is inefficient, and further has a drawback that it cannot be used to massproduce double sleeves or sleeves of a higher multiple.

SUMMARY OF THE INVENTION

[0004] The present invention has been achieved in view of the problem described above and of additional problem involving degradation in precision of a molded shell mold due to the occurrence of thermal expansion or of shell sand stagnating while molding a shell mold. A first object of the present invention is to provide a shell molding apparatus capable of reducing variations in precision of shape matching between a spiny insert and a shell molding insert in spite of the occurrence of thermal expansion.

[0005] A second object of the present invention is to provide a shell molding apparatus capable of moving spiny inserts in an equalized manner in spite of the occurrence of thermal expansion.

[0006] A third object of the present invention is to provide a shell molding apparatus which prevents shell sand from stagnating between a spiny insert receiving recess and a spiny insert so as to smoothly utilize the spiny inserts, whereby halved shell molds of high precision are readily mass-produced.

[0007] In order to attain the objects described above, a shell molding apparatus according to the present invention includes the features of claim 1.

[0008] Preferably, the stopper means is composed of a stepped stop end formed in a rod insertion bore portion

provided in the shell molding insert and an end surface of each withdrawal pin which abuts against the stepped stop end. The rod insertion bore portion has a smaller-diameter portion which extends from the stepped stop end to the spiny insert receiving recess, and the length L1 of the smaller diameter portion is identical for all the shell molding inserts.

[0009] Preferably, the spiny insert actuating means is composed of a slide block for moving the withdrawal pins and an actuator cylinder for moving the slide block.

[0010] Preferably, the slide block is held by a slide block positioning/holding member.

[0011] Preferably, the thermal expansion absorbing means is composed of a pin receiving member provided on the slide block; adjusting bolts screwed into the pin receiving member; and a spacing t formed between an end surface of each of the adjusting bolts and an end surface of each of the withdrawal pins held slidably by the slide block for absorbing variations in length of the withdrawal pins caused by thermal expansion,

[0012] Preferably, the thermal expansion differential absorbing means is composed of lower die thermal expansion absorbing means for absorbing the thermal expansion of the lower die; and slide block thermal expansion absorbing means for absorbing the thermal expansion of the slide block.

[0013] Preferably, the lower die thermal expansion absorbing means is a pin holding portion of the slide block which is provided on the slide block positioning/holding member, into which a slide pin is slidably inserted, and which has an oblong guide bore for enabling a relative movement of the slide pin. Further, the pin holding portion of the slide block is a guide bushing.

[0014] Preferably, the slide block thermal expansion absorbing means is a pin insertion bore in the slide block which is formed oblongly in cross-section thereof for enabling the withdrawal pin to move relatively within the pin insertion bore.

[0015] Preferably, the shell molding apparatus according to the present invention includes a sand releasing means for removing sand which gets caught between the spiny insert receiving recesses and the spiny inserts.

[0016] Preferably, the sand releasing means is composed of a sand release bore extending between a bottom portion of the spiny insert receiving recess and a sand outlet, and an air feed bore connected to the sand release bore for feeding air into the sand release bore.

[0017] Preferably, the sand releasing means is composed of a sand release bore extending between a bottom portion of the spiny insert receiving recess and a sand outlet: an air feed bore connected to the sand release bore for feeding air into the sand release bore; and a groove portion provided between the spiny insert receiving recess and the spiny insert inserted into the spiny insert receiving recess and extending from a top surface side of the shell molding insert to the bottom portion of the spiny insert receiving recess.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018]

Fig. 1 is a partially cross-sectioned side view showing primarily the lower die of a shell molding apparatus according to an embodiment of the present invention;

Fig. 2 is a cross-sectional view along line A-A of Fig. 1;

Fig. 3 is a partial cross-sectional view of the shell molding apparatus along line B-B of Fig. 2;

Fig. 4 is a partial cross-sectional view of the shell molding apparatus along line C-C of Fig. 2;

Fig. 5 is an enlarged view showing portion D of Fig. 3;

Fig. 6 is an enlarged view of portion D-1 of Fig. 3;

Fig. 7 is a plan view showing a lower die heating block unit;

Fig. 8 is a cross-sectional view along line E-E of Fig. 6;

Fig. 9 is a cross-sectional view along line F-F of Fig. 6;

Fig. 10 is a plan view showing a shell molding insert structure;

Fig. 11 is a cross-sectional view along line G-G of Fig. 9;

Fig. 12 is a partial cross-sectional view showing the shell molding insert structure as viewed in the direction of arrow I of Fig. 9;

Fig. 13 is a plan view showing one shell molding insert;

Fig. 14 is a side view of the shell molding insert of Fig. 13;

Fig. 15 is a plan view showing a spiny insert;

Fig. 16 is a side view of the spiny insert;

Fig. 17 is a cross-sectional view along line J-J of Fig. 14;

Fig. 18 is a cross-sectional view along line K-K of Fig. 14;

Fig. 19A is a front view showing a slide block mechanism;

Fig. 19B is a partial cross-sectional view along line L-L of Fig. 19A;

Fig. 19C is a cross-sectional view along line T-T of Fig. 19B;

Fig. 20A is a front view showing a slide block;

Fig. 20B is a cross-sectional view of the slide block with part thereof omitted;

Fig. 20C is a view in the direction of arrow M of Fig. 20B;

Fig. 21 is a plan view showing a pin receiving member;

Fig. 22 is a cross-sectional view along line N-N of Fig. 21;

Fig. 23 is a plan view showing an upper die;

Fig. 24 is a cross-sectional view along line O-O of Fig. 23;

Fig. 25 is a cross-sectional view along line Q-Q of Fig. 23;

Fig. 26 is a plan view showing a shell mold composed of halved shell molds and bore forming inserts placed therebetween;

Fig. 27 is a perspective view showing a quadruple sleeve;

Fig. 28 is a perspective view showing a cylinder block; and

Fig. 29 is a perspective view showing a conventional cylinder block.

DETAILED DESCRIPTION OF THE INVENTION

[0019] An embodiment of the present invention will now be described with reference to the drawings.

[0020] Fig. 1 is a partially cross-sectioned side view showing mainly the lower die of a shell molding apparatus according to the embodiment. Fig. 2 is a cross-sectional view along line A-A of Fig. 1. Fig. 3 is a partial cross-sectional view of the shell molding apparatus along line B-B of Fig. 2. Fig. 4 is a partial cross-sectional view of the shell molding apparatus along line C-C of Fig. 2.

[0021] The shell mold molding apparatus according to the present invention is mainly composed of a lower die 1 and an upper die 2. The lower die 1 has a die base 4 fixedly disposed on an apparatus base 3. A lower die heating block unit 5 is fixed on the die base 4. A shell molding insert structure 11 is mounted on the lower die heating block unit 5. The lower die heating block unit 5 and the shell molding insert structure 11 constitute the lower die unit.

[0022] As shown in Figs. 7 to 9, the lower die heating block unit 5 has a heating block 6 having a rectangular shape as viewed from above. Four groups 7 of insert receiving recesses are disposed in rows on the top surface 6A of the heating block 6, two rows on the left half side (MS side) and two rows on the right half side (MP side) as viewed from worker position P. Each group 7 of insert receiving recesses has four insert receiving recesses 8 disposed at a predetermined pitch in the front-rear direction as viewed from the worker position P. A plurality of sand release bores 9 are formed in the bottom portion of the insert receiving recesses 8 such that the sand release bores 9 extend through the heating block 6 to the bottom surface 6B thereof. Also, as shown in Fig. 6, air feed bores 9A are formed in the heating block 6 and connected to respective sand release bores 9.

[0023] For each group 7 of insert receiving recesses, three pin insertion bores 10 are formed in the heating block 6 obliquely upward from the front side (worker position P; hereinafter "front" refers to the side of the worker position P) to front-side three insert receiving recesses 8, and three pin insertion bores 10 are formed in the heating block 6 obliquely upward from the rear side (opposite to the worker position P; hereinafter "rear" refers

to the side opposite to the worker position P) to rear-side three insert receiving recesses 8. Many heater insertion bores 60 are formed in right and left end portions of the heating block 6. Heaters 61 are inserted into the heater insertion bores 60 (see Fig. 1).

[0024] As shown in Figs. 10 to 14, the shell molding insert structure 11 has two groups 12 of shell molding inserts in two rows, each group having four shell molding inserts. Each group 12 of shell molding inserts has a front-side shell molding insert 12A, two intermediate shell molding inserts 12B, and a rear-side shell molding insert 12C. The front-side shell molding insert 12A has an insert body 13 having a semicircular cross-section. The insert body 13 has a rectangular fitting portion 14 at the bottom portion thereof and a flat mating surface 15 at the rear side thereof. A spiny insert receiving recess 16 having a rectangular shape as viewed from above is formed in the insert body 13 at the rear portion thereof. Rod insertion bore portions 17 are formed in the insert body 13 such that they extend from the front surface of the fitting portion 14 to the bottom surface of the spiny insert receiving recess 16. Sand release bores 18 are formed in the insert body 13 such that they extend from the bottom surface of the spiny insert receiving recess 16 to the bottom surface of the fitting portion 14.

[0025] Each of the intermediate shell molding inserts 12B has an insert body 13 having a semicircular cross-section. The insert body 13 has a rectangular fitting portion 14 at the bottom portion thereof and a flat mating surface 15 at each of the front and rear sides thereof. A spiny insert receiving recess 16 having a rectangular shape as viewed from above is formed in the insert body 13 at each of the front and rear portions thereof. Rod insertion bore portions 17 are formed in the insert body 13 such that they extend from the front surface of the fitting portion 14 to the bottom surface of the rear-side spiny insert receiving recess 16. Also, rod insertion bore portions 17 are formed in the insert body 13 such that they extend from the rear surface of the fitting portion 14 to the bottom surface of the front-side spiny insert receiving recess 16. Sand release bores 18 are formed in each insert body 13 such that they extend from each spiny insert receiving recess 16 to the bottom surface of the corresponding fitting portion 14.

[0026] The front-side shell molding insert 12C has an insert body 13 having a semicircular cross-section. The insert body 13 has a rectangular fitting portion 14 at the bottom portion thereof and a flat mating surface 15 at the front side thereof. A spiny insert receiving recess 16 having a rectangular shape as viewed from above is formed in the insert body 13 at the front portion thereof. Rod insertion bore portions 17 are formed in the insert body 13 such that they extend from the rear surface of the fitting portion 14 to the bottom surface of the spiny insert receiving recess 16. Sand release bores 18 are formed in the insert body 13 such that they extend from the spiny insert receiving recess 16 to the bottom surface of the fitting portion 14.

[0027] In the front-side, intermediate, and rear-side shell molding inserts 12A, 12B, and 12C, each rod insertion bore portion 17 is composed of a larger-diameter bore portion 17A and a smaller-diameter bore portion 17B located on the side of the spiny insert-receiving recess 16 while a stepped stop end 17C is formed therebetween. The shell molding inserts are all identical in length L1 of the smaller-diameter bore portion 17B.

[0028] The group 12 of four shell molding inserts is mounted in the group 7 of four insert receiving recesses provided in the lower die heating block unit 5. That is, the front-side shell molding insert 12A is fitted into the front-side insert receiving recess 8 of the group 7 of four insert receiving recesses and then fixed using bolts. Likewise, the intermediate shell molding inserts 12B are fitted into the intermediate insert receiving recesses 8 of the group 7. The rear-side shell molding insert 12C is also fitted into the rear-side insert receiving recess 8 of the group 7.

[0029] Adjacent shell molding inserts 12A, 12B, and 12C contact each other at the mating surfaces 15. The spiny insert receiving recess 16 is formed at each undercut portion R which is formed by adjacent curved surfaces of the adjacent shell molding inserts 12A, 12B, and 12C. The sand release bores 18 extending from the spiny insert receiving recesses communicate with the sand release bores 9 provided in the lower die heating block unit 5.

[0030] The rod insertion bore portions 17 in the front-side shell molding insert 12A and the front-side rod insertion bore portions 17 in each of two intermediate shell molding inserts 12B communicate with front-side three pin insertion bores 10 provided in the lower die heating unit 5. Likewise, the rod insertion bore portions 17 in the rear-side shell molding insert 12C and the rear-side rod insertion bore portions 17 in each of two intermediate shell molding inserts 12B communicate with rear-side three pin insertion bores 10 provided in the lower die heating unit 5. The sand release bores 18 are connected to the sand outlet bores 9B. The sand release bores 18 and 9, the air feed bores 9A, and sand outlet bores 9B provided in the die base 3 constitute sand releasing means.

[0031] Spacer blocks 19 are disposed between two rows of groups 12 of shell molding inserts, i.e. between the opposed end surfaces of the opposed shell molding inserts 12A, of the opposed shell molding inserts 12B, and of the opposed shell molding inserts 12C. The spacer blocks are fixed on the lower die heating block unit 5 using bolts. The shell molding inserts 12A, 12B, and 12C in a right-hand group 12 as viewed from the worker position P are fixed at their right-hand ends using right-hand end holding members 20. Likewise, the shell molding inserts 12A, 12B, and 12C in a left-hand group 12 as viewed from the worker position P are fixed at their left-hand ends using left-hand end holding members 21. The right- and left-hand end holding members 20 and 21 are fixed on the lower die heating block unit 5 using

bolts.

[0032] The spiny inserts 22 are inserted into the spiny insert receiving recesses 16 such that they are allowed to project from the recesses and retract thereinto. As shown in Figs. 15 to 18, each spiny insert 22 has an insert body 23. The curved surface 23a of the insert body 23 has the same curvature as the curved surfaces of the front-side, intermediate, and rear-side shell molding inserts 12A, 12B, and 12C. Many protrusions 24 are formed on the curved surface 23a. The insert body 23 is provided with two rods 25, and end of each rod 25 is formed into a threaded portion 25a.

[0033] The thus manufactured spiny insert 22 is retractably inserted into the spiny insertion recess 16 while the rods 25 thereof are inserted into the rod insertion bore portions 17.

[0034] As shown in Fig. 1, right and left (as viewed from the worker position P) slide block positioning arms 26 are fixed to the die base 4 at the front side thereof, and right and left slide block positioning arms 27 are fixed to the die base 4 at the rear side thereof. As shown in Fig. 3, a cylinder holding member 28 is fixed to the die base 4 at the intermediate portion of the front side thereof, and a cylinder holding member 29 is fixed to the die base 4 at the intermediate portion of the rear side thereof. Each of the front-side right and left slide block positioning arms 26 has a pair of support portions 30, in which pin bores 31 are formed. The front-side (one side) right and left slide block positioning arms 26 hold in place the front-side (one side) slide block 32A.

[0035] As shown in Figs. 19A and 20A, the slide block 32A has a long block member 33 having a rectangular cross-section. A pin sliding mechanism 34 is provided at each of both end portions of the block member 33. The pin sliding mechanism 34 has a structure in which guide bushings 35 and 36 are inserted into a bore 33a formed in the block member 33 and that the guide bushings 35 and 36 are held in place by the bushing holders 37 and 38. Two groups of pin insertion bores 39, each having three bores, are formed in parallel with each other in the block member 33 on the right and left sides with respect to the central portion of the block member 33. As shown in Fig. 5, a pin receiving member 40 is fixed to the block member 33 behind the pin insertion bores 39. Threaded bores 41 are formed in the pin receiving member 40 such that they face the end portions of the pin insertion bores 39.

[0036] The slide block 32A having the above-described structure is held by the front-side right and left slide block positioning arms 26 while the guide bushings 35 and 36 of the pin sliding mechanism 34 are slidably fitted to slide pins 42 which are supported by a pair of support portions 30.

[0037] The guide bushings 35 and 36 have a horizontally oblong cross-section so as to allow the slide pin 42 to horizontally move within the guide bushings 35 and 36, whereby lower die thermal expansion absorbing means is formed.

[0038] As shown in Fig. 5, each of withdrawal pins 43 has a threaded bore 43a at the tip end thereof and a polygonal (octagonal) flange 43b at the base end thereof. The withdrawal pins 43 are inserted into the pin insertion bores 39 of the slide block 32 and into the pin insertion bores 10 of the lower die heating block unit 5. The threaded portions 25a of the rods 25 of each spiny insert 22 are screwed into the threaded bores 43 of the withdrawal pins 43, whereby the withdrawal pins 43 are engaged with the spiny insert 22. A stopper portion 43F is formed between the rod 25 and the end portion of the withdrawal pin 43. In order to prevent the rotation between the rods 25 and the withdrawal pins 43, polygonal (octagonal) washers 40-1 are inserted into the pin receiving member 40.

[0039] Since the pin insertion bores 39 have a horizontally oblong cross-section, the withdrawal pins 43 can move within the corresponding pin insertion bores 39, whereby slide block thermal expansion absorbing means is established.

[0040] The stepped stop end 17C is provided in each of the rod insertion bores 17 provided in the shell molding inserts 12A, 12B, and 12C. The stopper portion 43F, i.e. the end portion of the withdrawal pin 43 abuts against the stepped stop end 17C. The portion of the rod insertion bore portion 17 extending from the stepped stop end 17C toward the spiny insert receiving recess 16 forms the smaller-diameter portion 17B. The shell molding inserts 12A, 12B, and 12C are identical in the length L1 of the smaller-diameter bore portion 17B. In this way, stopper means are established at positions which are free from thermal expansion of the withdrawal pins 43.

[0041] Adjusting bolts 44 are screwed into the threaded bores 41 of the pin receiving members 40, and a spacing "t" is formed between the end surfaces of the adjusting bolts 44 and the end surfaces of the flanges 43b of the withdrawal pins 43 so as to absorb variations in length of the withdrawal pins 43 caused by thermal expansion. In this way, thermal expansion absorbing means for the withdrawal pins 43 is established.

[0042] A front-side (one side) actuator cylinder 45A is mounted to the front-side (one side) cylinder holding member 28, and the piston rod 46A of the actuator cylinder 45A is fixed to the slide block 32A at the central portion thereof. The actuator cylinder 45A, the slide block 32A, and the withdrawal pins 43 constitute front-side spiny insert actuating means.

[0043] The rear-side (the other side) slide block 32B has the same structure as the front-side slide block 32A as described below. As in the front-side slide block 32A, the rear-side (the other side) slide block 32B is held in place by right and left slide block positioning arms 27. Withdrawal pins 43 are inserted into pin insertion bores 39 of the slide block 32B and into the pin insertion bores 10. The threaded portions 25a of the rods 25 of the spiny insert 22 are screwed into the threaded bores 43 of the withdrawal pins 43, whereby the withdrawal pins 43 are

engaged with the spiny insert 22.

[0044] A rear-side (the other side) actuator cylinder 45B is mounted to the rear-side (the other side) cylinder holding member 28, and the piston rod 46B of the actuator cylinder 45B is fixed to the slide block 32B at the central portion thereof. The actuator cylinder 45B, the slide block 32B, and the withdrawal pins 43 constitute rear-side spiny insert actuating means.

[0045] As shown in Fig. 2, a plurality of eject pin bores 46 are formed in the apparatus base 3, the die base 4, and the lower die heating block unit 5. Eject pins 47 are inserted into the eject pin bores 46. The eject pins 47 are linked together and moved vertically by an ejecting lift mechanism (not shown), thus forming eject means.

[0046] The upper die 2 has an upper die unit 48, in which, as shown in Figs. 23 to 32, a die parting face 49 of a cavity 50 is formed. The cavity is formed of a plurality of continuous recesses 51 corresponding to the shell molding inserts 12A, 12B, and 12C of the lower die 1. The upper die unit 48 is provided with gates 52, each communicating with each of the recesses 51. Many heater insertion bores 62 are formed through the upper die unit 48 in the front-rear direction, and heaters 63 are inserted into the bores. The upper die 2 is moved vertically by a lift mechanism (not shown).

[0047] How a shell mold is molded by the shell molding apparatus having the above-described structure will now be described.

[0048] The actuator cylinders 45A and 45B of the lower die 2 are expanded to move (advance) the slide blocks 32A and 32B to thereby moving the withdrawal pins 43 until the end surfaces 43F of the withdrawal pins 43 abut against the stepped stop ends 17C of the rod insertion bore portions 17. As a result, the spiny inserts 22 engaged with the withdrawal pins 43 advance, so that the curved surfaces 23a of the spiny inserts 22 coincide with the surfaces of the front-side, intermediate, and rear-side shell molding inserts 12A, 12B, and 12C. Thus, many protrusions 24 on the curved surfaces 23a project.

[0049] Next, the above-mentioned lift mechanism operates to lower the upper die 2 until the parting face 49 of the upper die unit 48 and the parting face 65 of the lower die unit 64 mate each other. As a result, the shell molding inserts 12A, 12B, and 12C are inserted into corresponding recesses 51 of the cavity 50, whereby a space H having the shape of a sand mold to be molded is formed between the shell molding inserts and the recesses.

[0050] Then, shell sand (mixture of silica sand and thermosetting polymeric material) is charged into the space H through the plurality of gates 52 provided in the upper die unit 48.

[0051] Next, the heaters 61 and 63 provided in the upper and lower dies 1 and 2 are energized to heat the upper and lower die units 48 and 64 and shell molding inserts 12A, 12B, and 12C to a temperature of about 350°C. As a result, the shell sand hardens to form the

shell mold 70.

[0052] Then, the heaters 61 and 63 are de-energized. The upper die 2 is raised by the lift mechanism to part the upper die 2 from the lower die 1. In this state, the shell mold 70 is attached to the shell molding inserts 12A, 12B, and 12C of the lower die 1.

[0053] Next, the actuator cylinders 45A and 45B of the lower die 2 are contracted to retreat the slide blocks 32A and 32B to thereby retract the spiny inserts 22 via the withdrawal pins 43. This retracts the curved surfaces 23a of the spiny inserts 22 from the surfaces of the front-side, intermediate, and rear-side shell molding inserts 12A, 12B, and 12C, thereby parting many protrusions 24 provided on the curved surfaces 23a from the shell mold 70. When the protrusions 24 are about 2 mm long, the amount of retraction of the spiny inserts 22 is about 5 mm.

[0054] Then, the ejector lift mechanism operates to raise the eject pins 47 to push up the shell mold 70 to part it from the lower die 1. The obtained shell mold 70 is half of a required shell mold and is provided, at the undercut portions on the inner surface thereof, with many depressions which are formed by reversely copying many protrusions 24 of the spiny inserts 22.

[0055] At the subsequent step, as shown in Fig. 26, two halved shell molds 70 are engaged each other by bonding them at mating surfaces 70A while four bore forming cores 71 are placed therebetween.

[0056] The shell mold is transferred to a casting site, where molten aluminum alloy is poured into the shell mold to cast a quadruple-sleeve W shown in Fig. 27. Many protrusions 24' are formed on the sleeve W at undercut portions R' thereof. In a subsequent aluminum die casting, the sleeves W are embedded in an aluminum alloy so as to manufacture a cylinder block S shown in Fig. 28.

[0057] According to the above-described embodiment, the stepped stop end 17C is provided in each of the rod insertion bores 17 provided in the shell molding inserts 12A, 12B, and 12C. The stopper portion 43F, i. e. the end portion of the withdrawal pin 43 abuts against the stepped stop end 17C. The portion of the rod insertion bore portion 17 extending from the stepped stop end 17C toward the spiny insert receiving recess 16 forms the smaller-diameter portion 17B. The shell molding inserts 12A, 12B, and 12C are identical in the length L1 of the smaller-diameter bore portion 17B. Accordingly, it is possible to position the withdrawal pins 43 at locations where they equally move due to thermal expansions.

[0058] Also, adjusting bolts 44 are screwed into the threaded bores 41 in the pin receiving members 40 while spacing "t" is formed between the end surfaces of the adjusting bolts 44 and the end surfaces of the flanges 43b of the withdrawal pins 43 so as to absorb variations in length of the withdrawal pins 43 caused by thermal expansion. Accordingly, it is possible to absorb variations in length of the withdrawal pins 43 caused by ther-

mal expansion even when the withdrawal pins 43 are all different in length.

[0059] Further, for example, as a result of the lower die heating block unit 5 being heated to about 360°C and the slide blocks 32A and 32B and the slide block positioning arms 26 and 27 being heated to about 100°C, a difference in thermal expansion is produced between the lower die heating block unit 5 and the slide blocks 32A and 32B and the slide block positioning arms 26 and 27. The thermal expansion differential, however, is absorbed by the proposed lower die thermal expansion absorbing means having the following structure. The guide bushings 35 and 36 of the slide blocks 32A and 32B into which the slide pins 42 are slidably inserted have an oblong cross-section so that the slide pins 42 can move within the guide bushings 35 and 36.

[0060] Also, the slide block thermal expansion absorbing means is formed such that the pin insertion bores 39 provided in the slide blocks 32A and 32B have an oblong cross-section, thereby allowing the withdrawal pins 43 to move within the respective pin insertion bores 39. Accordingly, the thermal expansion differential between the slide blocks 32A and 32B and the lower die heating block unit 5 while they are heated as described above is absorbed by the relative movement of the withdrawal pins 43 within the oblong pin insertion bores 39.

[0061] Further, when a shell mold is molded, shell sand tends to enter between the spiny insert receiving recesses 16 and the spiny inserts 22 and hinder the movement of the spiny inserts 22. However, since air is fed into a groove portion 23b provided in the insert bodies 23 at one end portion thereof and into the sand release bores 18 and 9 and the air feed bores 9A and the fed air flows toward the outlet end of the sand outlet bores 9B, a negative pressure effect occurs which causes the shell sand to be sucked from the spiny insert receiving recesses 16 and discharged to the outlet through the sand release bores 18. Accordingly, the shell sand does not stagnate between the spiny insert receiving recesses 16 and the spiny inserts 22, whereby the spiny inserts 22 can move smoothly.

[0062] Further, since the groove portion 23b is provided between the spiny insert receiving recess 16 and the spiny insert 22 and the groove portion 23b extends from the curved top surface side of the shell molding insert 12 to the bottom portion of the spiny insert receiving recess 16, it is possible to prevent the shell sand from stagnating between the spiny insert receiving recess 16 and the spiny insert 22, whereby the spiny inserts 22 can move smoothly.

[0063] As has been described in detail above, in a shell molding process, a thermal expansion caused by heating and stagnant shell sand cause various kinds of errors, resulting in poorer precision of produced shell molds. The shell molding apparatus of the present invention has a structure to cancel such errors occurring in a shell molding process. Accordingly, it is possible to

minimize variations in shape matching precision between the spiny insert and the shell molding insert. Also, the spiny inserts can move smoothly in an equalized manner, whereby halved shell molds of high precision are readily mass-produced.

Claims

1. A shell molding apparatus, comprising:

a lower die (1) comprising a plurality of shell molding inserts (12A, 12B, 12C), each having the shape of a halved cylinder, spiny insert receiving recesses (16) which are formed in undercut portions (R) formed in curved surfaces of adjacent shell molding inserts (12A, 12B, 12C), spiny inserts (22) which are retractable arranged in the spiny insert receiving recesses (16), each spiny insert (22) having a curved surface (23a) of the same curvature as the curved surface of the shell molding insert (12A, 12B, 12C) and provided with many protrusions (24) on the curved surface (23a);
an upper die (2) in which a body thereof has a plurality of continuously formed recesses (51) corresponding to the plurality of shell molding inserts (12A, 12B, 12C) of said lower die (1);
spiny insert actuating means (32A, 45A, 45B) for projecting and retracting the spiny inserts (22) by moving withdrawal pins (43) connected to the spiny inserts (22); so that the curved surface of the spiny inserts (22) can be brought to coincide with the surface (23a) of the shell molding inserts (12A, 12B, 12C) and to be retracted from this position;
stopper means (17C) for positioning said withdrawal pins (43); and
thermal expansion absorbing means (17, 35, 36, 44) for absorbing thermal expansion of said withdrawal pins (43).

2. A shell molding apparatus according to claim 1, wherein said stopper means comprises a stepped stop end (17C) formed in a rod insertion bore portion (17) provided in the shell molding insert (12A, 12B, 12C) and an end surface of each withdrawal pin (43) which abuts against the stepped stop end (17C), said rod insertion bore portion (17) having a smaller-diameter portion (17B) which extends from the stepped stop end (17C) to the spiny insert receiving recess (16), and the length (L1) of the smaller-diameter portion (17B) being identical for all the shell molding inserts (12A, 12B, 12C).

3. A shell molding apparatus according to claim 1, wherein said spiny insert actuating means comprises a slide block (32A) for moving said withdrawal

pins (43) and an actuator cylinder (45A, 45B) for moving said slide block (32A).

4. A shell molding apparatus according to claim 3, wherein the slide block (32A) is held by a slide block positioning/holding member. 5
5. A shell molding apparatus according to one of claims 1-4, wherein said thermal expansion absorbing means comprises a pin receiving member (40) provided on said slide block (32A), adjusting bolts (44) screwed into said pin receiving member (40), and a spacing (t) formed between an end surface of each of said adjusting bolts (44) and an end surface of each of said withdrawal pins (43) held slidably by said slide block (32A) for absorbing variations in length of said withdrawal pins (43) caused by thermal expansion. 10
6. A shell molding apparatus according to at least one of claim 1-5, comprising thermal expansion differential absorbing means for absorbing a thermal expansion of said lower die (1) and slide block thermal expansion absorbing means for absorbing a thermal expansion of said slide block (32A). 15
7. A shell molding apparatus according to claim 6, wherein said lower die thermal expansion absorbing means is a pin holding portion (35, 36) of said slide block (32A) which is provided on said slide block positioning/holding member, into which a slide pin (43) is slidably inserted, and which has an oblong guide bore (39) for enabling a relative movement of said slide pin (43). 20
8. A shell molding apparatus according to claim 7, wherein the pin holding portion of said slide block (32A) is a guide bushing (35, 36). 25
9. A shell molding apparatus according to one of claims 6-8, wherein said slide block thermal expansion absorbing means is a pin insertion bore (39) in said slide block (32A) which is formed oblongly in cross-section thereof for enabling said withdrawal pin (43) to relatively move within said pin insertion bore (39). 30
10. A shell molding apparatus according to at least one of claims 1-9, comprising a sand releasing means for removing sand which is caught between said spiny insert receiving recesses (16) and said spiny inserts (22). 35
11. A shell molding apparatus according to claim 10, wherein said sand releasing means comprises a sand release bore (9, 18) extending between a bottom portion of the spiny insert receiving recess (16) and a sand outlet, and an air feed bore (9A) con-

nected to said sand release bore (9, 18) for feeding air into said sand release bore (9, 18).

12. A shell molding apparatus according to claim 10 or 11, wherein said sand releasing means comprises a groove portion (23b) provided between said spiny insert receiving recess (16) and said spiny insert (22) inserted into the spiny insert receiving recess (16) and extending from a top surface side of said shell molding insert (12A, 12B, 12C) to the bottom portion of said spiny insert receiving recess (16).

Patentansprüche

1. Formvorrichtung gekennzeichnet durch

ein unteres Formteil (1), welches eine Mehrzahl von Formeinsätzen (12A, 12B, 12C) aufweist, wobei jeder die Form eines halben Zylinders besitzt, durch Ausnehmungen (16) zur Aufnahme eines Dorneinsatzes, welche mit hinterschnittenen Bereichen (R) versehen sind, die in gekrümmte Oberflächen von benachbarten Formeinsätzen (12A, 12B, 12C) eingeformt sind, und durch Dorneinsätze (22), welche zurückziehbar in den Ausnehmungen (16) zur Aufnahme eines Dorneinsatzes angeordnet sind, wobei jeder Dorneinsatz (22) eine gekrümmte Oberfläche (23a) mit derselben Krümmung wie die gekrümmte Oberfläche der Formeinsätze (12A, 12B, 12C) aufweist und mit vielen Vorsprüngen (24) auf der gekrümmten Oberfläche (23a) versehen sind;

ein oberes Formteil (2), dessen Körper eine Mehrzahl von sich fortsetzenden Ausnehmungen (51) aufweist, welche mit einer Mehrzahl von Formeinsätzen (12A, 12B, 12C) des unteren Formteils (1) korrespondieren;

Einrichtungen (32A, 45A, 45B) zum Bewegen der Dorneinsätze, um die Dorneinsätze (22) durch Bewegen von Rückzugsstiften (43) vorzuschieben und zurückzuziehen, welche mit den Dorneinsätzen (22) verbunden sind, so dass die gekrümmte Oberfläche der Dorneinsätze (22) in Übereinstimmung mit der Oberfläche (23a) der Formeinsätze (12A, 12B, 12C) gebracht werden kann und aus dieser Position zurückgezogen wird; Endanschläge (17C) zum Positionieren der Rückzugsstifte (43); und

Absorptionseinrichtungen (17, 35, 36, 44) um die Wäremausdehnung dieser Rückzugsstifte (43) aufzufangen.

2. Formvorrichtung nach Anspruch 1, dadurch ge-

kennzeichnet, dass der Endanschlag aus einen gestuften Endanschlag (17C), der in einen Bohrungsbereich (17) zur Aufnahme eines Stangeneinsatzes eingeformt ist, der in dem Formeinsatz (12A, 12B, 12C) vorgesehen ist, und einer Endfläche eines jeden Rückzugsstiftes (43) besteht, welche gegen den gestuften Endanschlag (17C) anschlägt, wobei der Bohrungsbereich (17) zur Aufnahme eines Stangeneinsatzes einen Bereich (17B) mit einem geringeren Durchmesser aufweist, der sich von dem gestuften Endanschlag (17C) zu der Ausnehmung (16) zur Aufnahme eines Dorneinsatzes erstreckt, und die Länge (L1) des Bereiches (17B) mit dem geringeren Durchmesser identisch für alle Formeinsätze (12A, 12B, 12C) ist.

3. Formvorrichtung nach Anspruch 1, dadurch gekennzeichnet, dass die Betätigungseinrichtung für den Dorneinsatz einen Gleitschlitten (32A) zum Bewegen der Rückzugsstifte (43) aufweist und einen Antriebszylinder (45A, 45B) zum Bewegen des Gleitschlittens (32A).

4. Formvorrichtung nach Anspruch 3, dadurch gekennzeichnet, dass der Gleitschlitten (32A) durch ein Gleitschlittenpositionier/-halteelement gehalten ist.

5. Formvorrichtung nach einem der Ansprüche 1 bis 4, dadurch gekennzeichnet, dass die Einrichtung zur Absorption der thermischen Expansion eine Stiffaufnahme (40), die dem Gleitschlitten (32A) zugeordnet ist, Stellschrauben (44), welche in die Stiffaufnahme (40) eingeschraubt sind, und einen Zwischenraum (t) aufweist, der zwischen einer Endfläche von jeder Stellschraube (44) und einer Endfläche von jedem Rückzugsstift (43) ausgebildet ist, welche gleitbar durch den Gleitschlitten (32A) gehalten sind, um Längenveränderungen der Rückzugsstifte (43), verursacht durch thermische Expansion, aufzufangen.

6. Formvorrichtung nach zumindest einem der Ansprüche 1 bis 5, gekennzeichnet durch eine Absorptionseinrichtung für thermische Expansionsunterschiede, um eine thermische Expansion des unteren Formteils (1) zu absorbieren, und einer Absorptionseinrichtung für die thermische Expansion des Gleitschlittens, um eine thermische Expansion des Gleitschlittens (32A) zu absorbieren.

7. Formvorrichtung nach Anspruch 6, dadurch gekennzeichnet, dass die Absorptionseinrichtung für die thermische Expansion des unteren Formteils ein Bereich (35, 36) des Gleitschlittens (32A) zum Halten der Stifte ist, der auf dem Gleitschlittenpositionier/-halteelement vorgesehen ist, in welchen ein Gleitstift (43) gleitbar eingesetzt ist, und welcher ei-

ne rechteckige Führungsbohrung (39) aufweist, die eine relative Bewegung des Gleitstiftes (43) ermöglicht.

8. Formvorrichtung nach Anspruch 7, dadurch gekennzeichnet, dass der Stifthaltebereich des Gleitschlittens (32A) eine Führungsbüchse (35, 36) ist.

9. Formvorrichtung nach einem der Ansprüche 6 bis 8, dadurch gekennzeichnet, dass die Absorptionseinrichtung für die thermische Expansion des Gleitschlittens eine Bohrung (39) zum Einsetzen eines Stiftes in den Gleitschlitten (32A) aufweist, welche in ihrem Querschnitt rechteckig geformt ist, um eine relative Bewegung des Rückzugsstiftes (43) innerhalb der Bohrung (39) zum Einsetzen des Stiftes zu erlauben.

10. Formvorrichtung nach zumindest einem der Ansprüche 1 bis 9, gekennzeichnet durch eine Sandauslasseinrichtung zum Entfernen von Sand, welcher sich zwischen der Ausnehmung (16) zur Aufnahme eines Dorneinsatzes und dem Dorneinsatz (22) befindet.

11. Formvorrichtung nach Anspruch 10, dadurch gekennzeichnet, dass die Sandauslasseinrichtung eine Sandablassbohrung (9, 18) aufweist, welche sich zwischen einem Bodenbereich der Ausnehmung (16) zur Aufnahme eines Dorneinsatzes und einem Sandauslass befindet, und eine Luftzufuhrbohrung (9A), welche mit der Sandablassbohrung (9, 18) verbunden ist, um Luft in die Sandablassbohrung (9, 18) einzulassen.

12. Formvorrichtung nach Anspruch 10 oder 11, dadurch gekennzeichnet, dass die Sandauslasseinrichtung einen rinnenförmigen Bereich (23B) aufweist, welcher zwischen der Ausnehmung (16) zur Aufnahme eines Dorneinsatzes und dem Dorneinsatz (22) vorgesehen ist, welcher in die Ausnehmung (16) zur Aufnahme eines Dorneinsatzes eingesetzt ist, und der sich von einer Oberflächenseite des Formeinsatzes (12A, 12B, 12C) zu einem Bodenbereich der Ausnehmung (16) zur Aufnahme eines Dorneinsatzes erstreckt.

Revendications

1. Machine de moulage en coquille, comprenant :

une matrice inférieure (1) comprenant un certain nombre de pièces d'insertion de moulage en coquille (12A, 12B, 12C) présentant chacune la forme d'un cylindre en deux moitiés, des cavités de réception (16) de pièce d'insertion à picots formées dans des parties de découpe

(R) réalisées dans des surfaces courbes de pièces d'insertion de moulage en coquille adjacentes (12A, 12B, 12C), des pièces d'insertion à picots (22) disposées de manière rétractable dans les cavités de réception (16) de pièce d'insertion à picots, chaque pièce d'insertion à picots (22) comportant une surface courbe (23a) de même courbure que celle de la surface courbe de la pièce d'insertion de moulage en coquille (12A, 12B, 12C), en étant munie d'un grand nombre de saillies (24) sur la surface courbe (23a) ;

une matrice supérieure (2) dans un corps de laquelle sont formées de façon continue une pluralité de cavités (51) correspondant à la pluralité de pièces d'insertion de moulage en coquille (12A, 12B, 12C) de la matrice inférieure (1) ;

des moyens d'actionnement de pièce d'insertion à picots (32A, 45A, 45B) pour faire sortir et rétracter les pièces d'insertion à picots (22) en déplaçant les broches d'extraction (43) reltées aux pièces d'insertion à picots (22), de façon que la surface courbe des pièces d'insertion à picots (22) puisse être amenée en coïncidence avec la surface (23a) des pièces d'insertion de moulage en coquille (12A, 12B, 12C) et puisse être rétractée de cette position :

des moyens d'arrêt (17C) pour positionner les broches d'extraction (43) ; et
des moyens d'absorption de dilatation thermique (17, 35, 36, 44) pour absorber la dilatation thermique des broches d'extraction (43).

2. Machine de moulage en coquille selon la revendication 1, dans laquelle

les moyens d'arrêt comprennent une extrémité de butée étagée (17C) formée dans une partie de trou d'introduction de tige (17) prévue dans la pièce d'insertion de moulage en coquille (12A, 12B, 12C), et une surface d'extrémité de chaque broche d'extraction (43) qui vient buter contre l'extrémité de butée étagée (17C), cette partie de trou d'introduction de tige (17) comportant une partie de diamètre plus petit (17B) qui s'étend depuis l'extrémité de butée étagée (17C) jusqu'à la cavité de réception (16) de pièce d'insertion, et la longueur (L1) de la partie de diamètre plus petit (17B) étant la même pour toutes les pièces d'insertion de moulage en coquille (12A, 12B, 12C).

3. Machine de moulage en coquille selon la revendication 1, dans laquelle
les moyens d'actionnement de pièce d'insertion à

picots comprennent un bloc de glissière (32A) pour déplacer les broches d'extraction (43), et un cylindre d'actionneur (45A, 45B) pour déplacer le bloc de glissière (32A).

4. Machine de moulage en coquille selon la revendication 3, dans laquelle
le bloc de glissière (32A) est maintenu par un élément de positionnement/maintien de bloc de glissière.
5. Machine de moulage en coquille selon l'une des revendications 1 à 4, dans laquelle
les moyens d'absorption de dilatation thermique comprennent un élément de réception de broche (40) prévu sur le bloc de glissière (32A), des boulons de réglage (44) vissés dans l'élément de réception de broche (40), et un espacement (t) formé entre une surface d'extrémité de chacun des boulons de réglage (44) et une surface d'extrémité de chacune des broches d'extraction (43) maintenues en glissement par le bloc de glissière (32A), pour absorber les variations de longueur des broches d'extraction (43) qui sont provoquées par la dilatation thermique.
6. Machine de moulage en coquille selon l'une au moins des revendications 1 à 5, comprenant
des moyens d'absorption de différence de dilatation pour absorber une dilatation thermique de la matrice inférieure (1), et des moyens d'absorption de dilatation thermique de bloc de glissière pour absorber une dilatation thermique du bloc de glissière (32A).
7. Machine de moulage en coquille selon la revendication 6, dans laquelle
les moyens d'absorption de dilatation thermique consistent en une partie de maintien de broche (35, 36) du bloc de glissière (32A), qui est prévue sur l'élément de positionnement/maintien de bloc de glissière et dans laquelle une broche de glissement (43) est introduite en glissement, cette partie comportant un trou de guidage oblong (39) pour permettre un mouvement relatif de la broche de glissement (43).
8. Machine de moulage en coquille selon la revendication 7, dans laquelle
la partie de maintien de broche du bloc de glissière (32A) est un coussinet de guidage (35, 36).
9. Machine de moulage en coquille selon l'une des revendications 6 à 8, dans laquelle

les moyens d'absorption de dilatation thermique de bloc de glissière consistent en un trou d'introduction de broche (39) percé dans le bloc de glissière (32A) et auquel on donne une section transversale oblongue pour permettre à la broche d'extraction (43) d'effectuer un mouvement relatif à l'intérieur de ce trou d'introduction de broche (39). 5

10. Machine de moulage en coquille selon l'une au moins des revendications 1 à 9, 10
comprenant
des moyens de libération de sable pour retirer le sable qui se trouve piégé entre les cavités de réception (16) de pièce d'insertion à picots et les pièces d'insertion à picots (22). 15

11. Machine de moulage en coquille selon la revendication 10, 20
dans laquelle
les moyens de libération de sable comprennent un trou de libération de sable (9, 18) s'étendant entre une partie de fond de la cavité de réception (16) de pièce d'insertion à picots et une sortie de sable, ainsi qu'un trou d'alimentation d'air (9A) relié au trou de libération de sable (9, 18) pour amener de l'air 25
dans le trou de libération de sable (9, 18).

12. Machine de moulage en coquille selon la revendication 10 ou 11, 30
dans laquelle
les moyens de libération de sable comprennent une partie de rainure (23b) prévue entre la cavité de réception (16) de pièce d'insertion à picots et la pièce d'insertion à picots (22) introduite dans la cavité de réception (16) de pièce d'insertion à picots et s'étendant 35
depuis un côté de surface supérieur de la pièce d'insertion de moulage en coquille (12A, 12B, 12C) jusqu'à la partie de fond de la cavité de réception (16) de pièce d'insertion à picots. 40

45

50

55

FIG.1

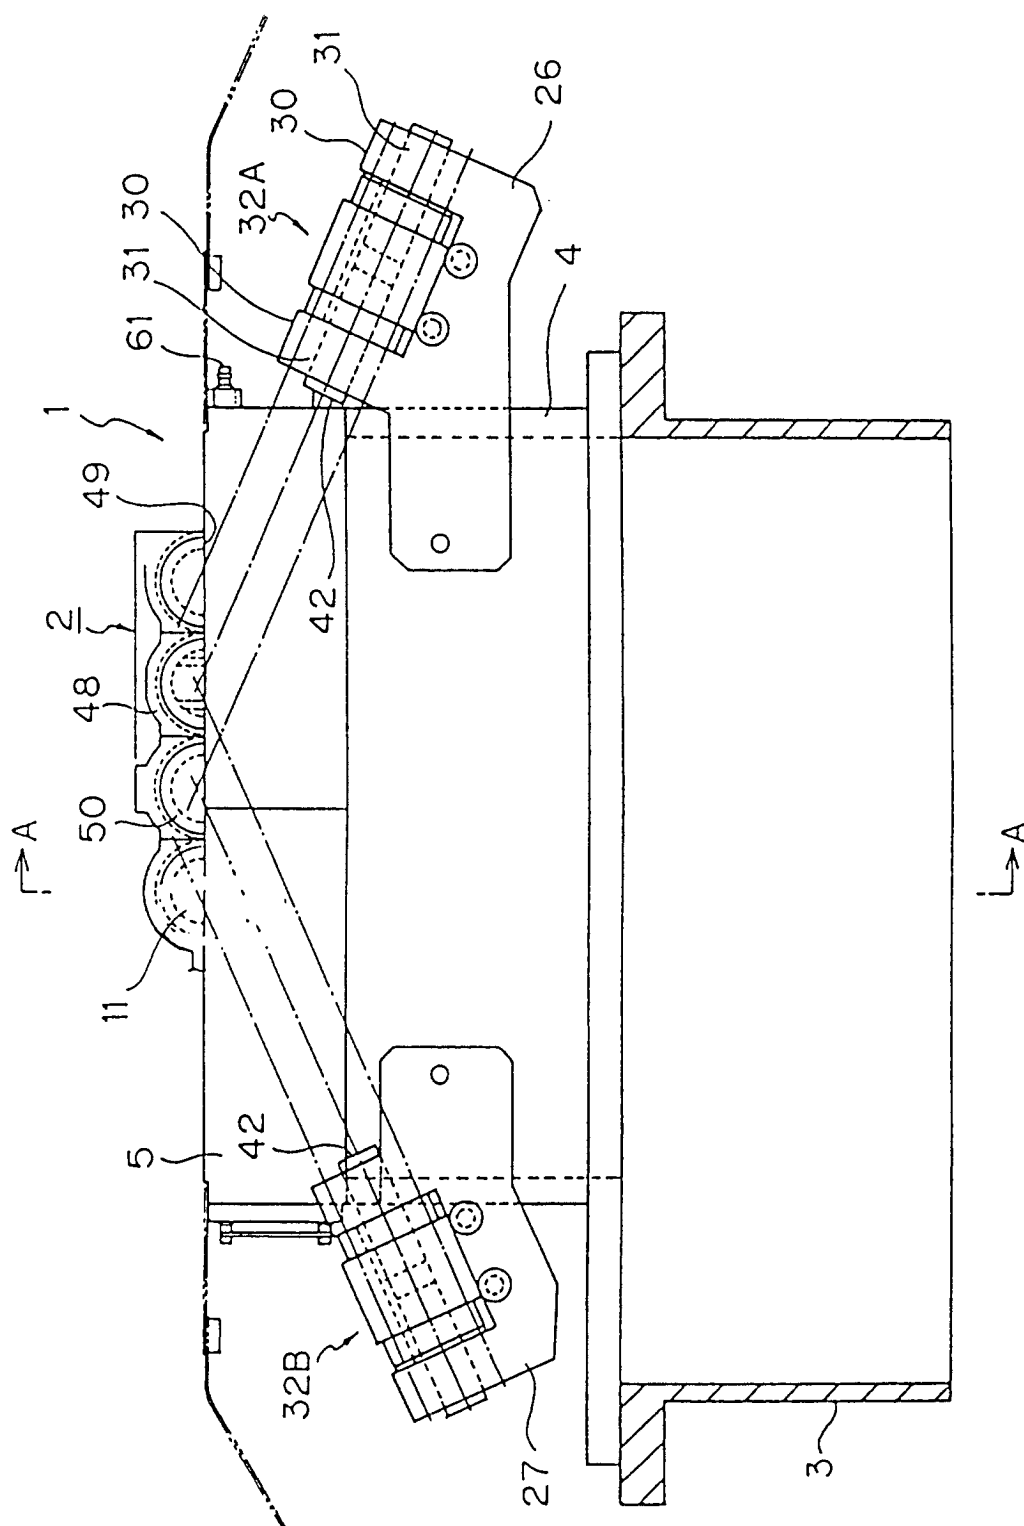


FIG.2

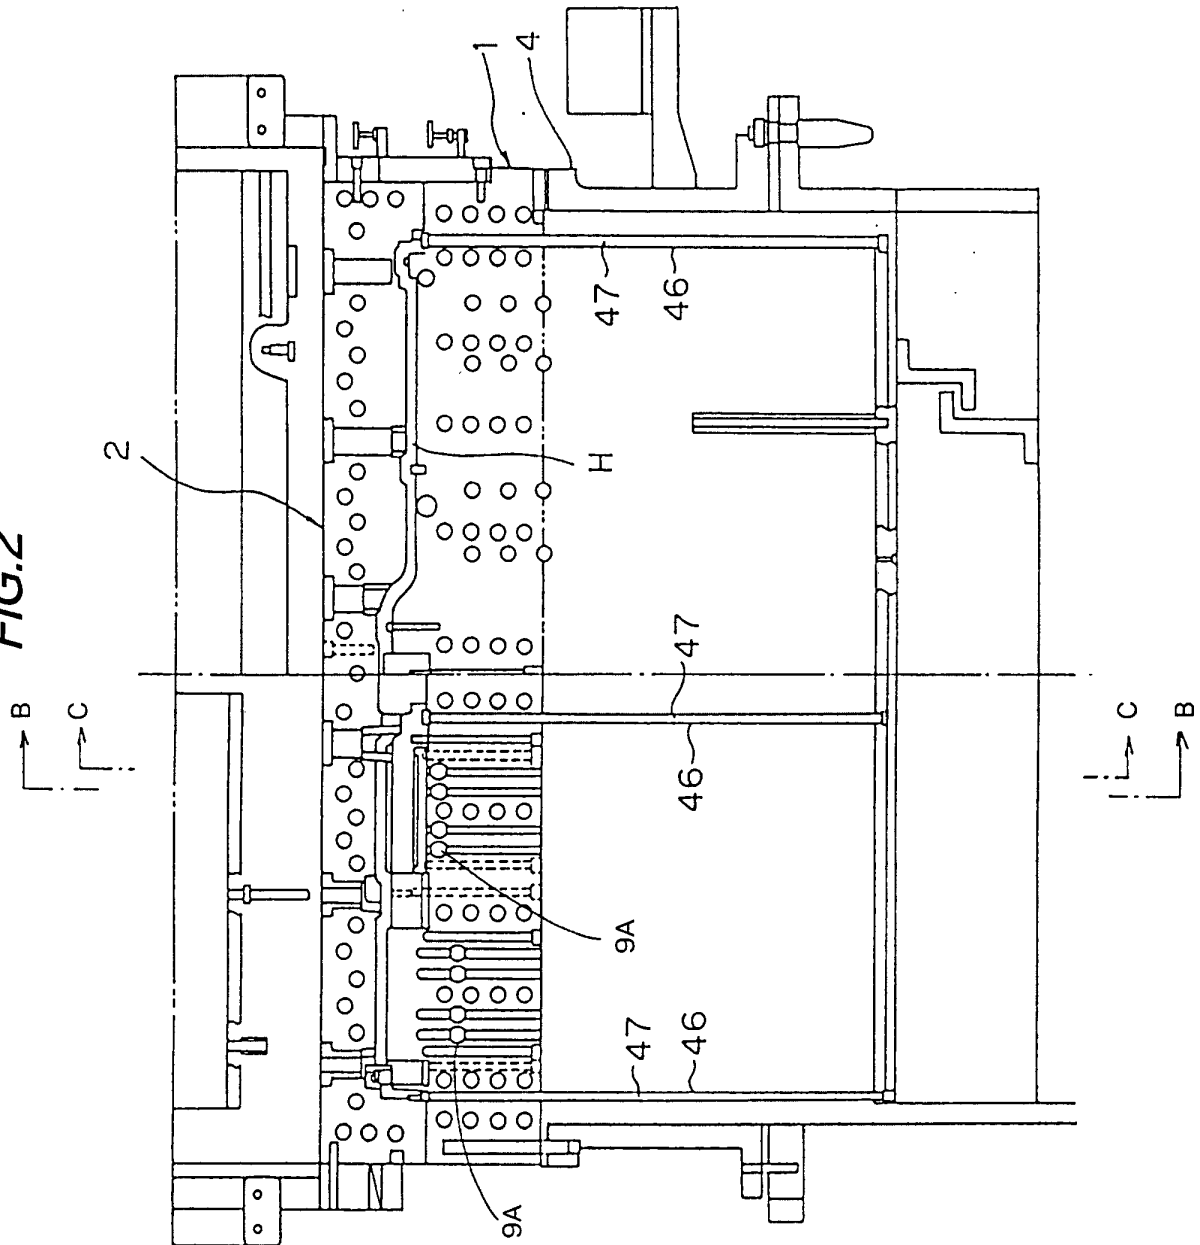


FIG. 3

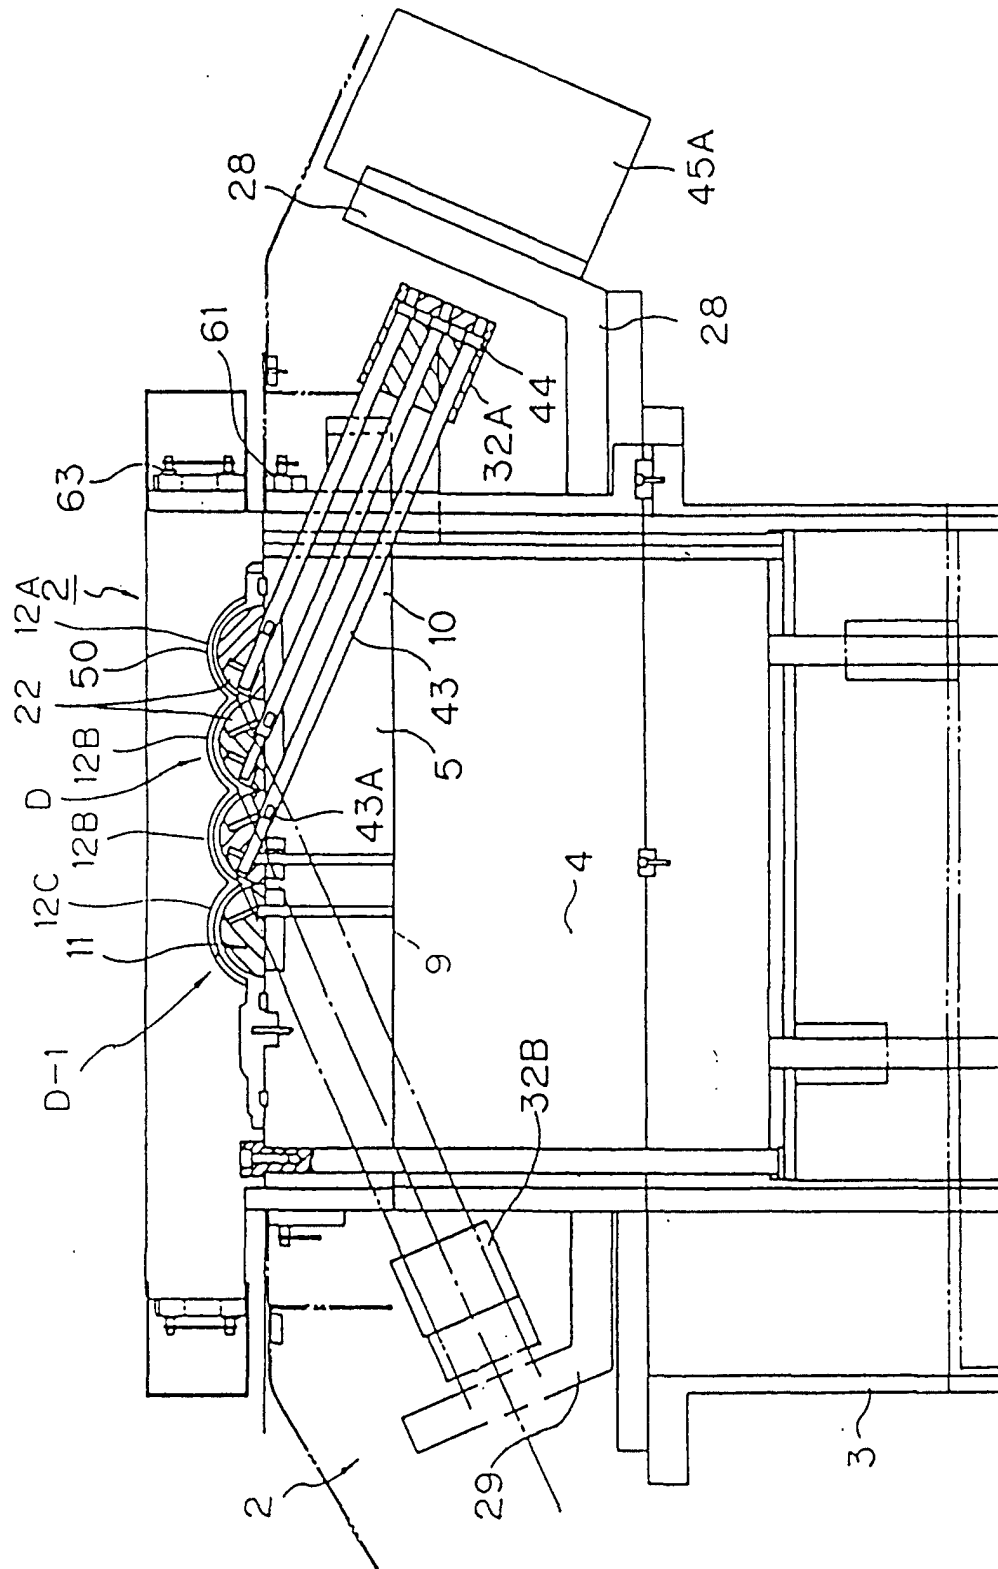


FIG.4

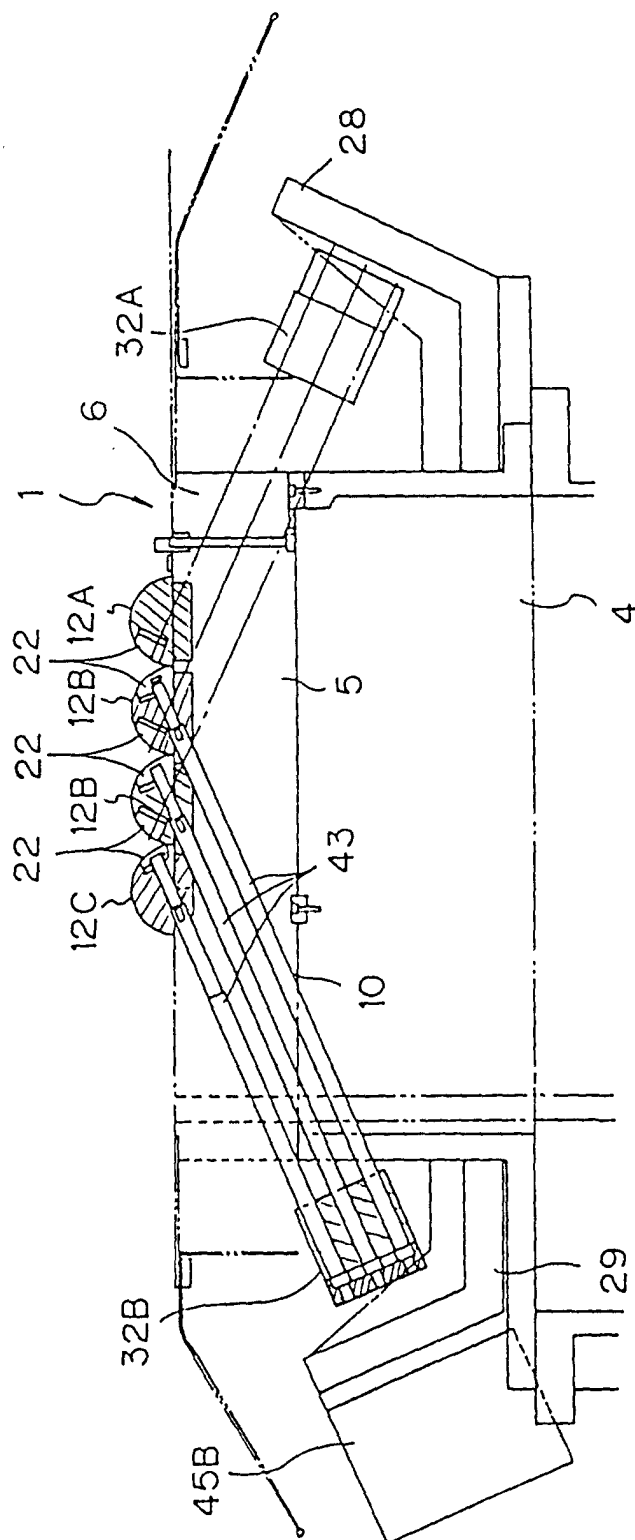


FIG.5

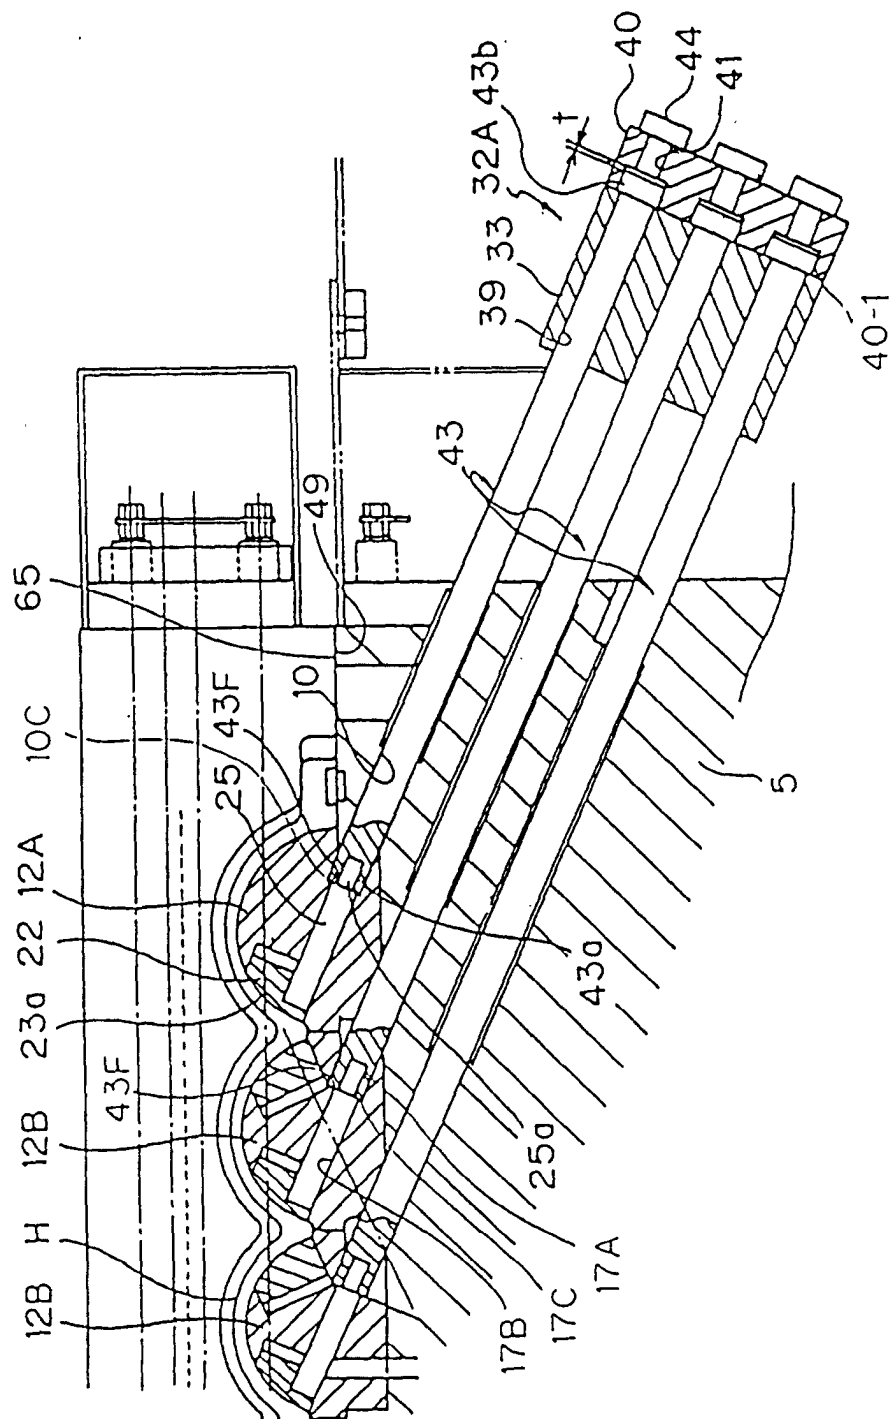


FIG.6

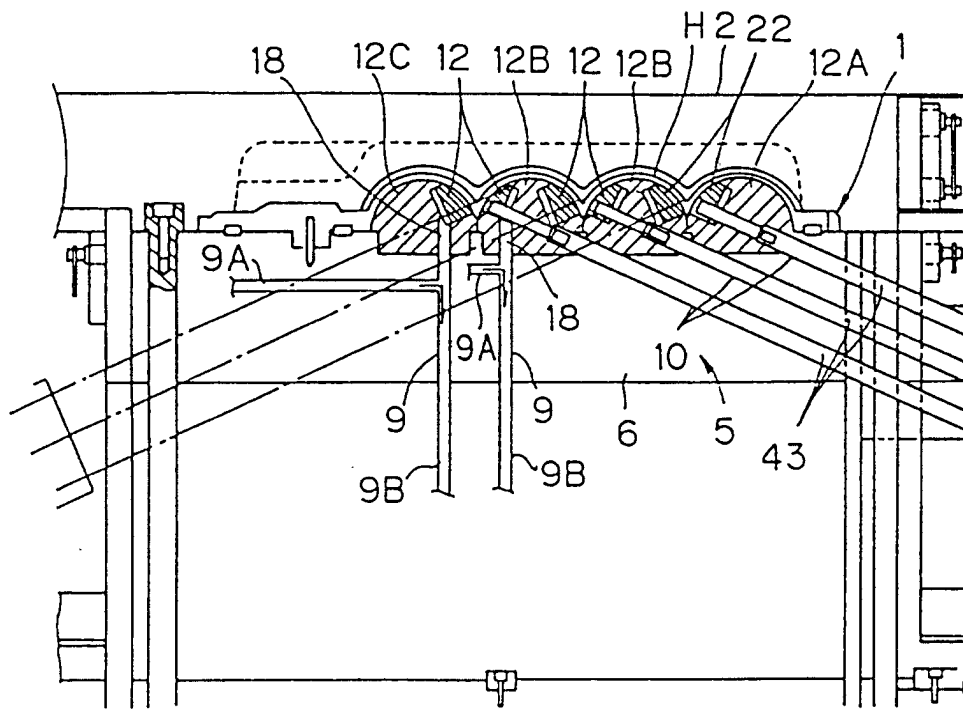


FIG. 7

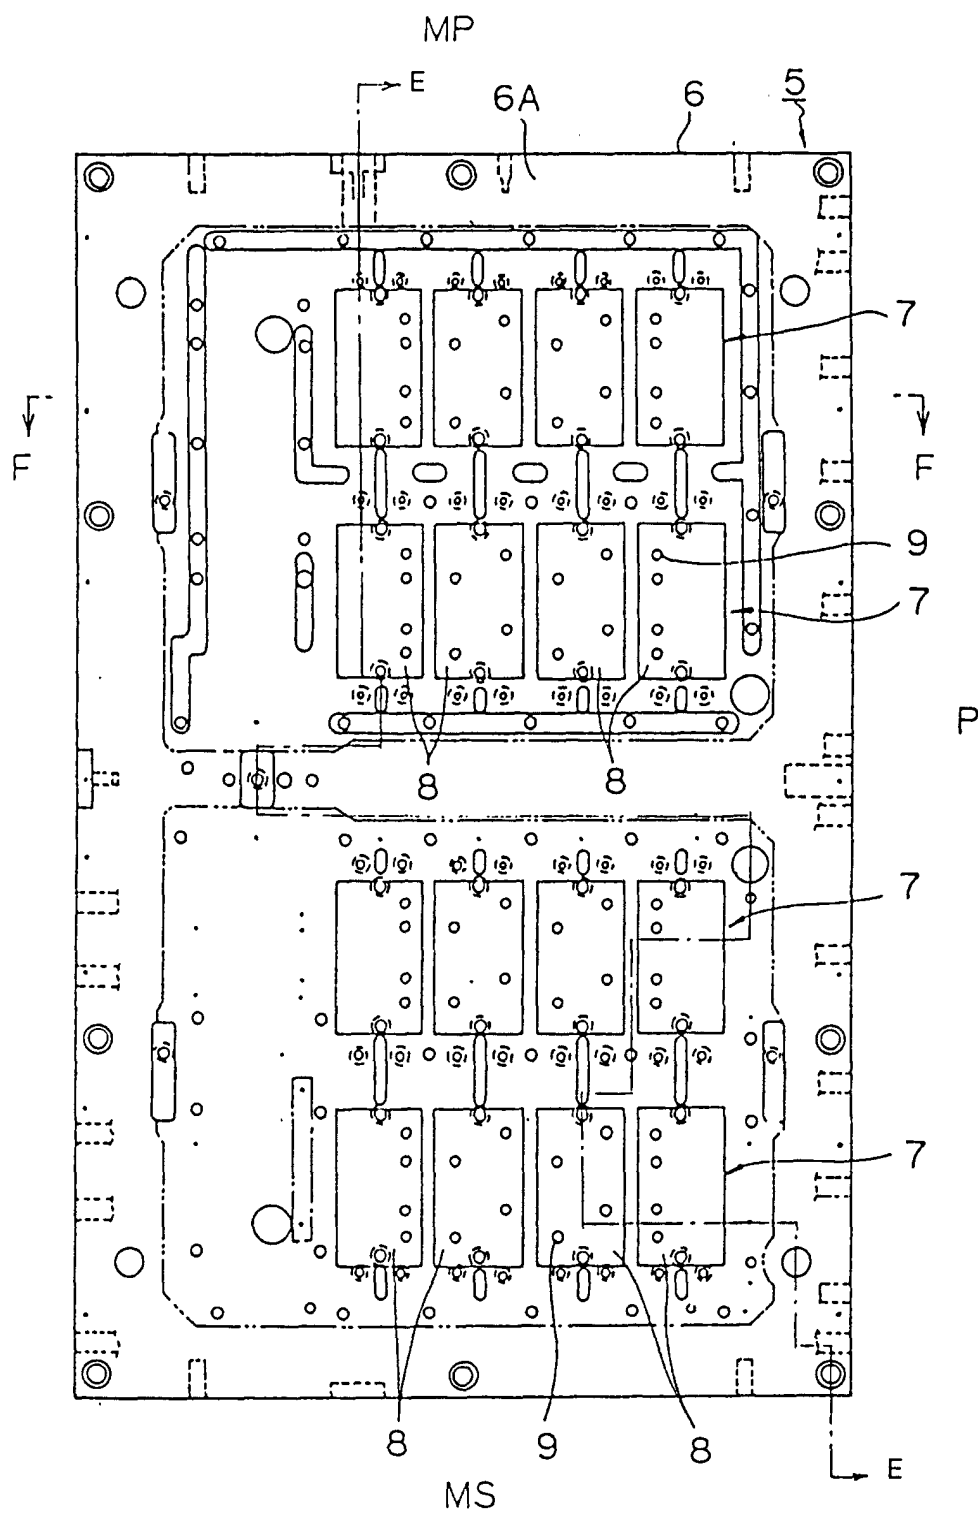


FIG.8

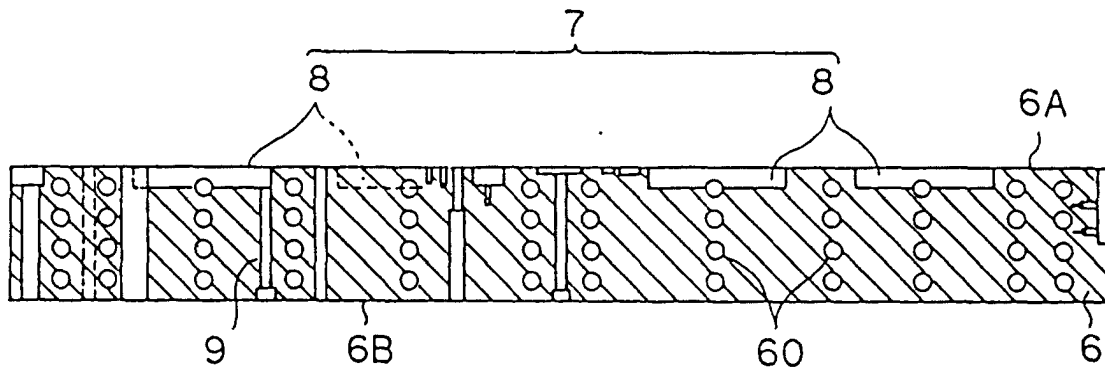


FIG.9

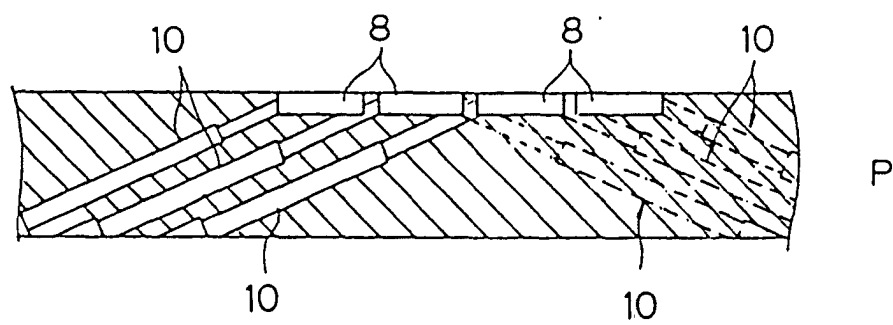


FIG. 10

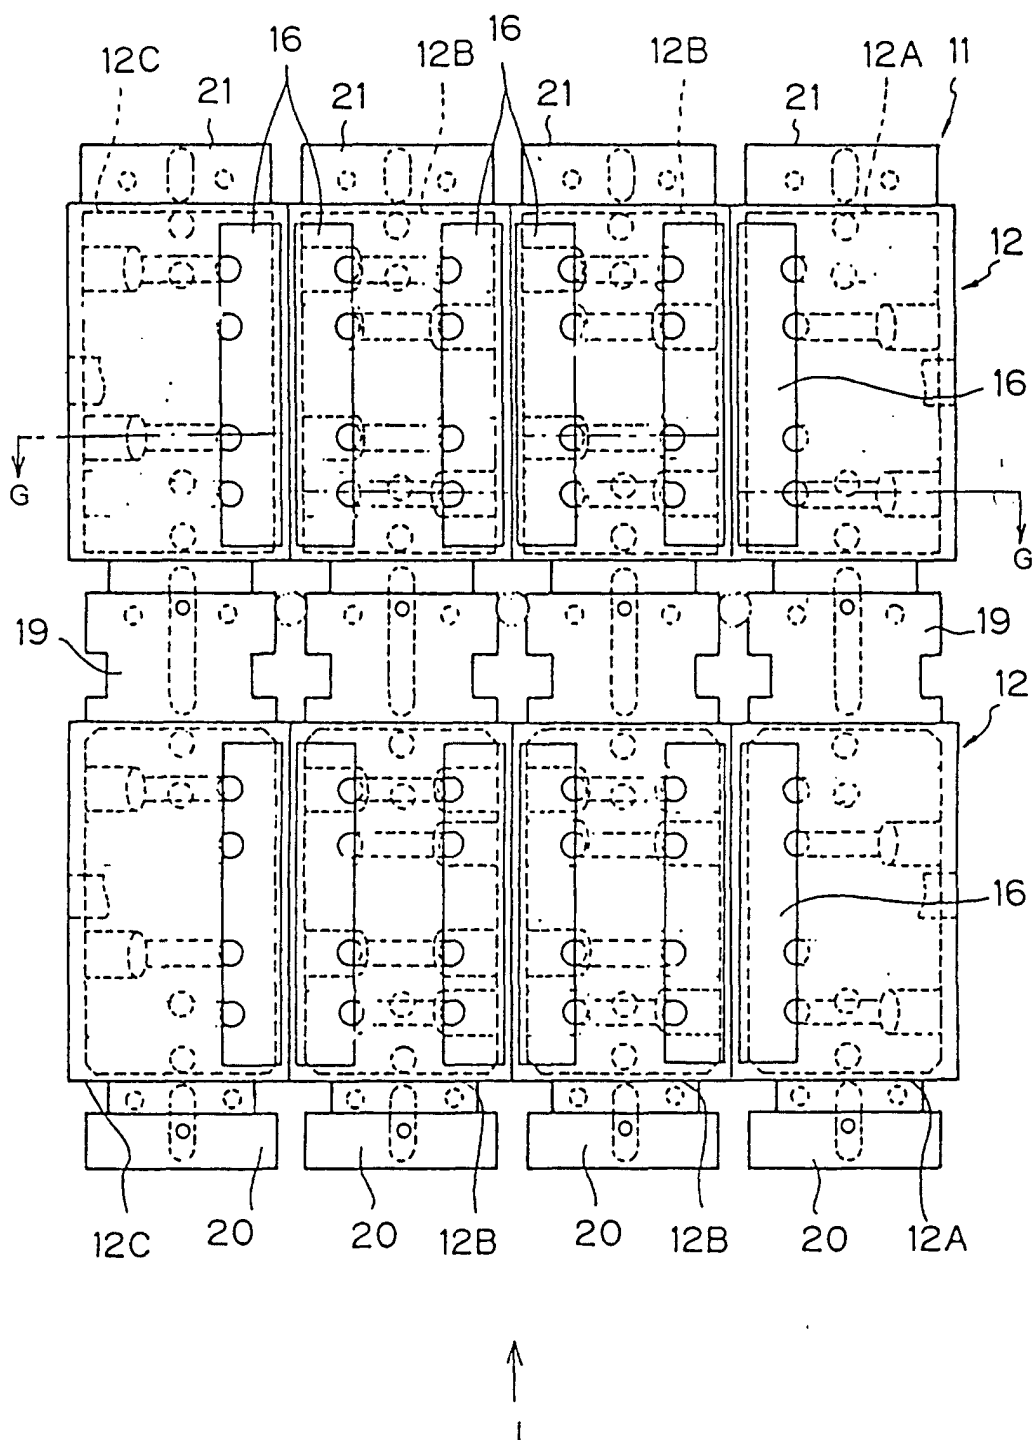


FIG.11.

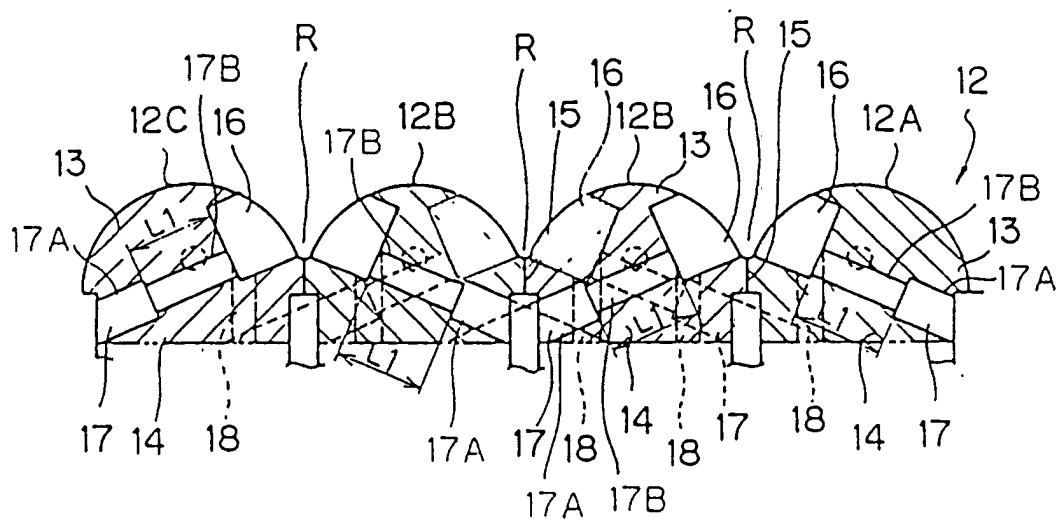


FIG.12

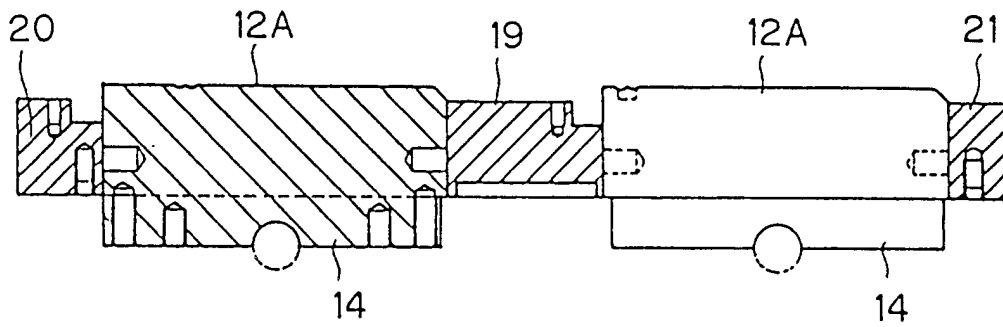


FIG.13

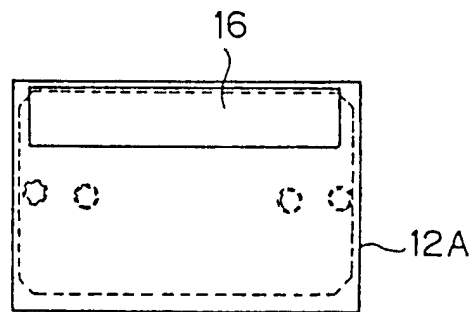


FIG.14

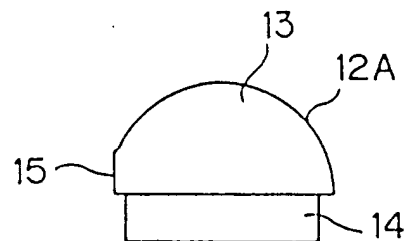


FIG.15

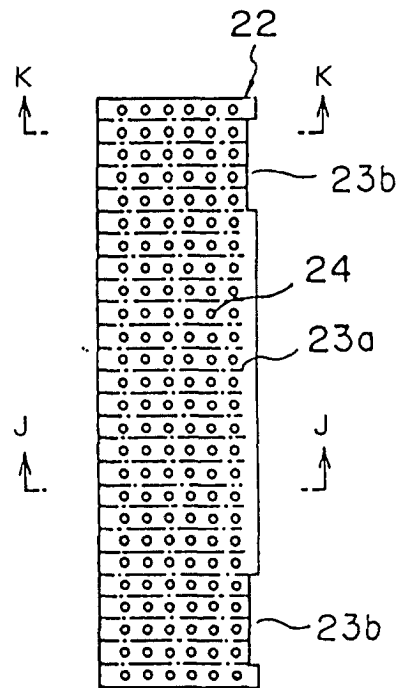


FIG.16

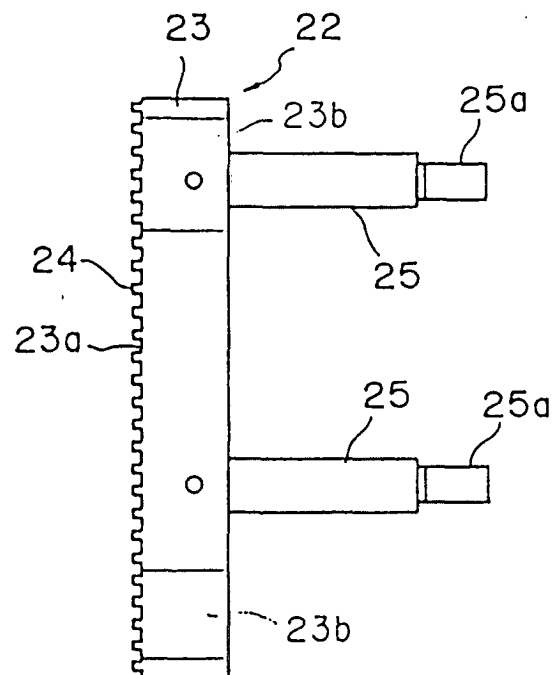


FIG.17

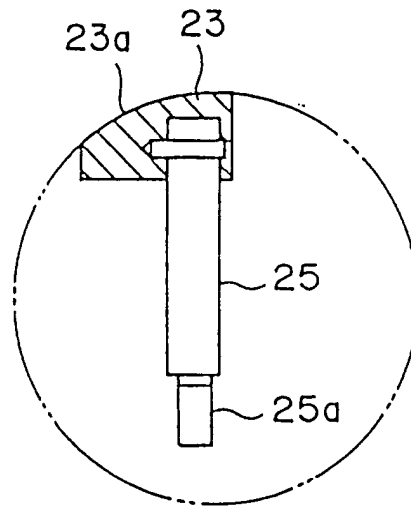


FIG.18

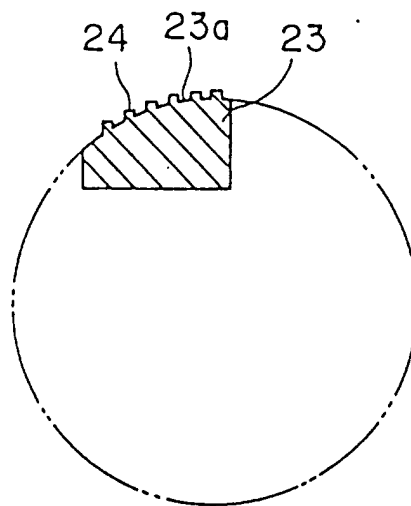


FIG. 19A

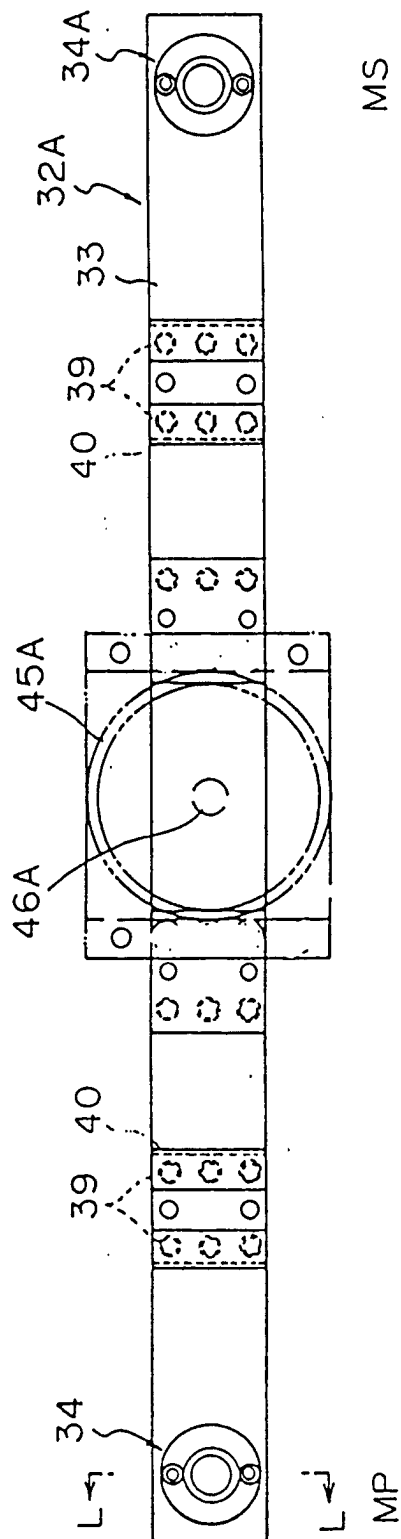


FIG. 19B

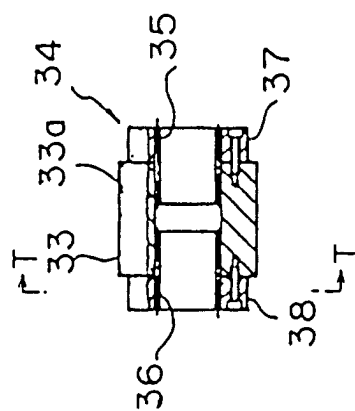


FIG. 19C




FIG.20A

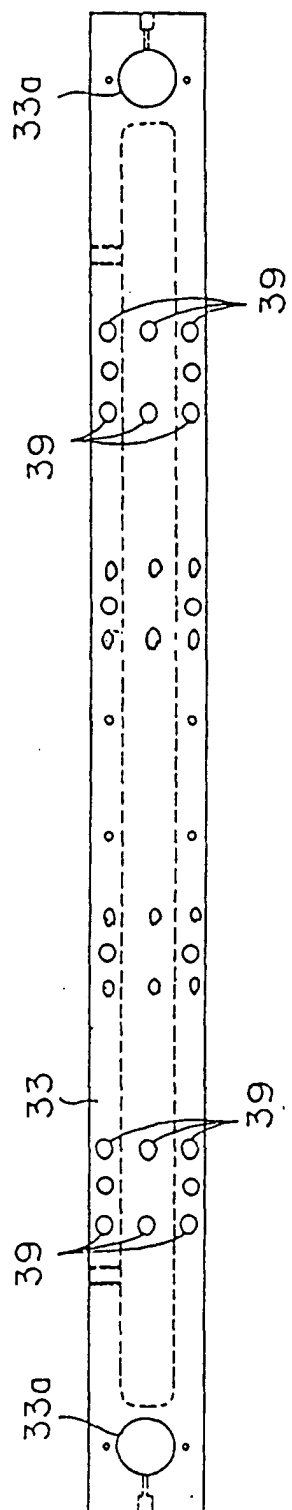


FIG.20B

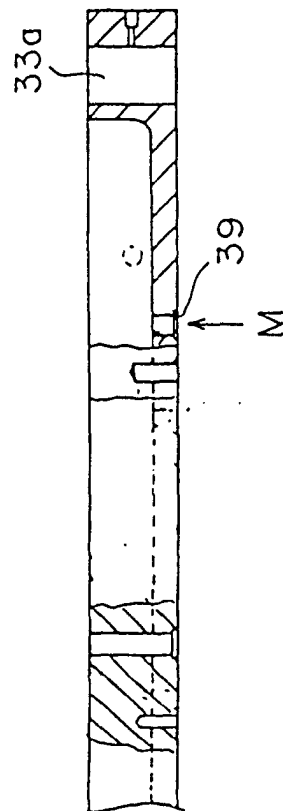


FIG.20C




FIG.21

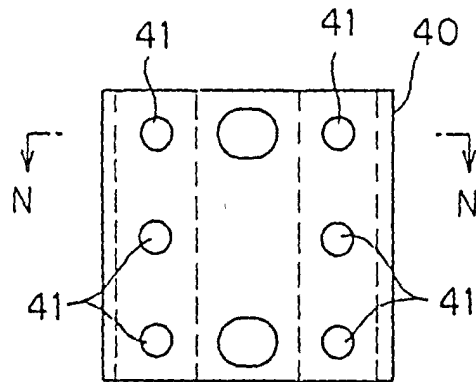


FIG.22

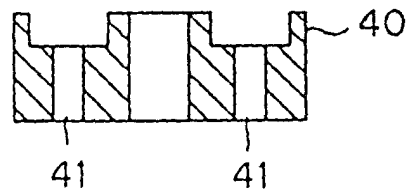


FIG.23

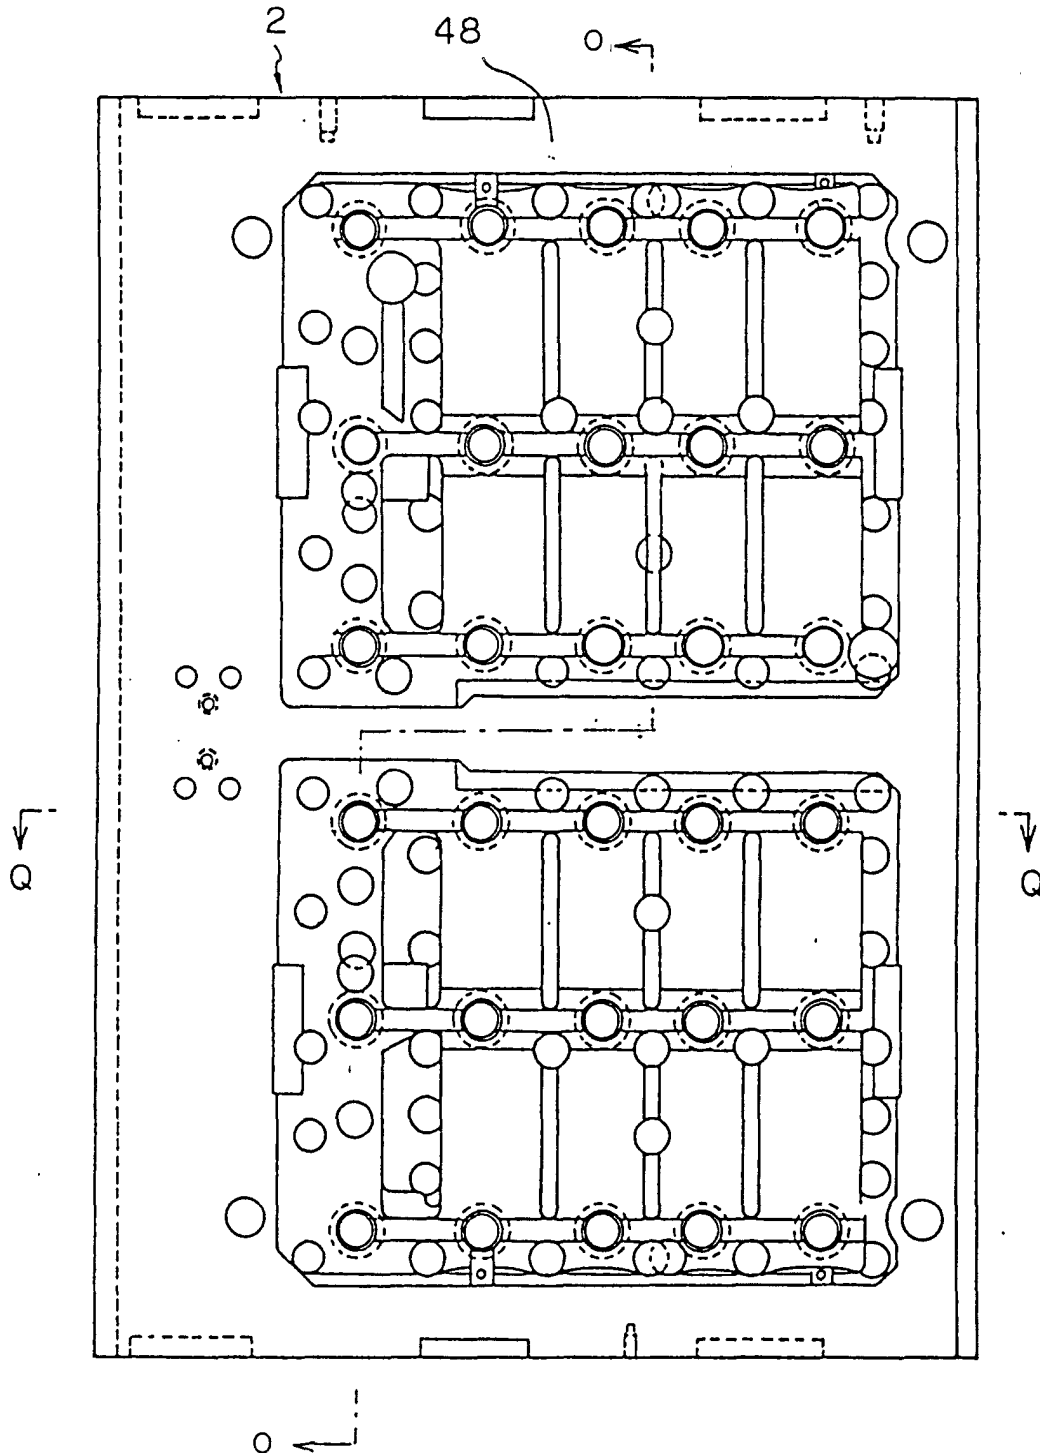


FIG.24

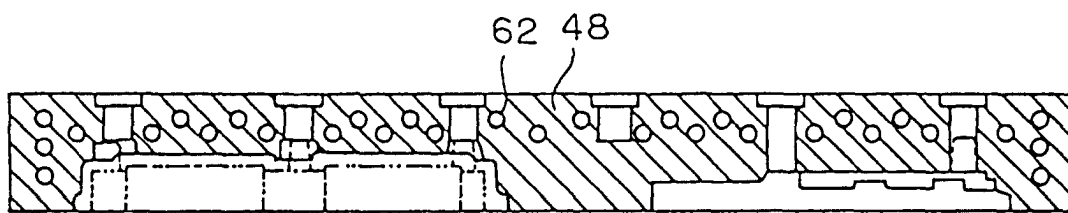


FIG.25

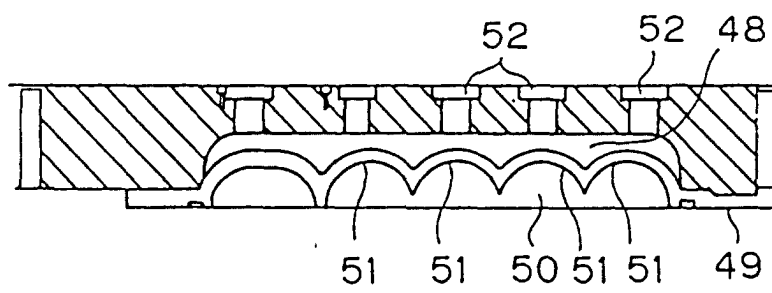


FIG.26

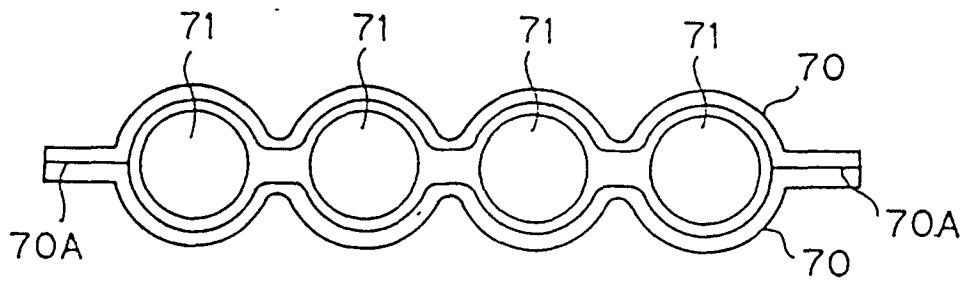


FIG.27

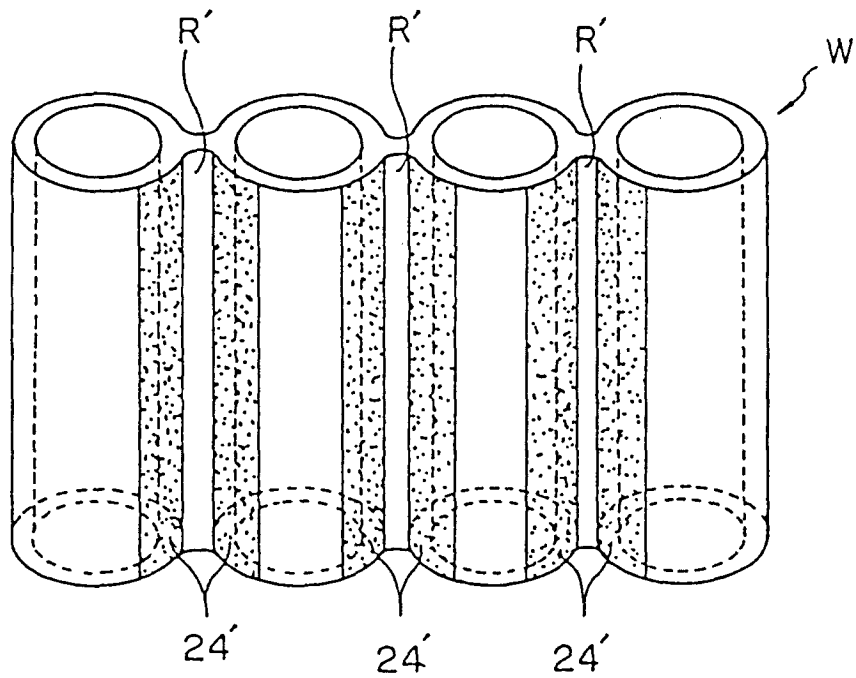


FIG.28

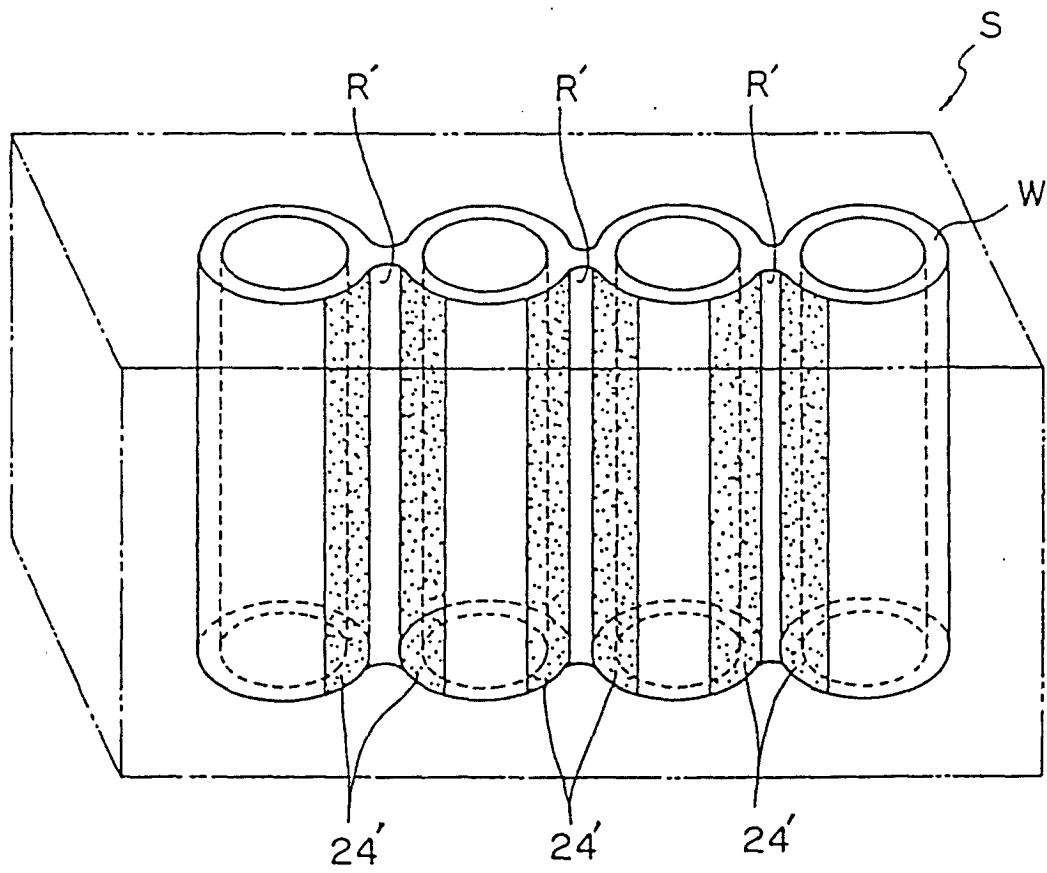


FIG.29

