



(11) **EP 0 866 381 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
31.10.2007 Bulletin 2007/44

(51) Int Cl.:
G03G 15/00 (2006.01) B65H 5/00 (2006.01)

(21) Application number: **98200361.8**

(22) Date of filing: **06.02.1998**

(54) **Electrostatic transport system for tonered sheets**

Elektrostatisches Transportsystem für Blätter mit Tonerbildern

Système de transport électrostatique de feuilles comprenant des images de toner

(84) Designated Contracting States:
BE DE FR GB NL

(30) Priority: **17.03.1997 EP 97200790**

(43) Date of publication of application:
23.09.1998 Bulletin 1998/39

(73) Proprietor: **Punch Graphix International N.V.**
2500 Lier (BE)

(72) Inventors:
• **Janssens, Robert**
2640 Mortsel (BE)
• **Heirbaut, Werner**
2640 Mortsel (BE)
• **Van Goethem, Luc**
2640 Mortsel (BE)

• **Baeyens, Peter**
2640 Mortsel (BE)
• **Trouillard, Frank**
2640 Mortsel (BE)

(74) Representative: **Bird, Ariane et al**
Bird Goën & Co
Klein Dalenstraat 42A
3020 Winksele (BE)

(56) References cited:
US-A- 4 369 729 US-A- 5 009 352
US-A- 5 045 892 US-A- 5 050 859

• **ALBERT H PLATT: "Electrostatic transport for unfused copies" RESEARCH DISCLOSURE, no. 164, December 1977, EMSWORTH, GB, pages 28-29, XP002035329**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates to a transport system, capable of transporting a sheet-like receptor support that may hold a toner image at both sides; this transport system can be used within an electrographic copying or printing apparatus.

BACKGROUND OF THE INVENTION

[0002] It is nowadays becoming possible to make images of near offset quality, especially colour images, using non-offset printing techniques, such as electrophotography. In duplex printing, such an image is made on both sides of a receptor support, such as a paper sheet.

[0003] In an electrophotographic apparatus, highest throughput in duplex printing on pre-cut sheets is obtained by making both images in a single pass through the subsequent stations in the apparatus - these stations are described in more detail below. Such single pass duplex printing requires transporting a sheet holding a toner image at both sides, since initially, after both toner images are made and transferred to the sheet, the images are adhering only loosely to the sheet. They can easily be removed, e.g. by rubbing or by a slight contact. Only in the next processing step, in the fusing station, the images are permanently fixed onto the sheet.

[0004] The problem of transporting a sheet holding an unfixed double-sided toner image also exists, when this image is obtained using other electrographic systems. In direct electrostatic printing, for example switchable aperture electrodes image-wise regulate the toner transfer through the printhead to the sheet. Also in this case, single pass processing of duplex images requires transporting a receptor support holding a double-sided unfixed toner image to a fusing station.

[0005] Patent US-A-4 427 285 describes a single pass duplex reproduction system having a heat insulating prefuser transport device. In particular, the prefuser transport is a pair of cold, toner compacting rolls.

[0006] A drawback of the system disclosed there is that it requires a film of release agent to be deposited onto the compacting rolls, to prevent toner offsetting onto these rolls.

[0007] A restriction of such a system is that the speed of the transfer stations, located before the prefuser transport device, and the speed of the fuser station, located after the prefuser transport device, must be substantially equal.

[0008] Research Disclosure No. 16249 of December 1977 shows a dielectric belt for transporting copy sheets having unfused toner images on one or both sides. The belt is supported by a first and a second roller, and transports the copy sheet while it is suspended to the belt. The belt is charged by an electrostatic charger, causing an electrostatic attraction force, which tacks the copy

sheet to the belt. A neutralising charger, positioned near the second roller, sprays neutralising charges onto the belt. The copy sheet is separated from the belt through the combined effects of neutralisation of the electrostatic attractive force by the neutralising charger, and the sharp bending of the belt about the second roller.

[0009] A drawback of this system is that the electrostatic attraction between the belt on the one hand, and the copy sheet containing the toner image on the other hand, may result in toner being transferred from the copy sheet to the belt, thus causing damage to the toner image contacting the belt.

[0010] Patent US-A-5 009 352 describes a conveyor for transporting sheets having an unfused toner image on one side. The conveyor is charged by an electrostatic charger. The conveyor comprises a dielectric material and electrode parts of a conductive material, in order to create a strong and stable electrostatic field. The electrostatic field causes the sheets to adhere to the conveyor. The conveyor may e.g. be a belt. The conveyor contacts the side of the sheet that does not carry the toner image.

[0011] This system is not intended for conveying sheets having unfused toner images on both sides. However, for transporting sheets having unfused toner images on both sides, or for transporting sheets having only one toner image that contacts the conveyor, this system has the same drawback as the previous system - shown in Research Disclosure No. 16249 - in that the electrostatic attraction may cause damage to the toner image contacting the conveyor.

[0012] Patent US-A-5 045 892 describes an arrangement to convey paper, having an unfused toner image on one side, from a transfer station to a fusing station. The arrangement comprises a guide member to convey the paper under the control of an electrostatic force. Some of the shown embodiments comprise an endless belt; in the embodiments comprising a belt, the paper is conveyed suspended to the belt, so that the unfused toner image does not contact the belt. The belt is charged by an electrostatic charger so as to attract the paper. At least in the second embodiment, the toner image is attracted to the outer surface of the belt. In some embodiments, the paper may be charged by a second electrostatic charger with an opposite polarity to the belt.

[0013] This system is not intended for conveying paper having unfused toner images on both sides, just as the previous system is not. The drawback mentioned above applies to the three last systems described above - i.e. to the systems shown in Research Disclosure No. 16249, in Patent US-A-5 009 352 and in Patent US-A-5 045 892 - viz. the drawback that the electrostatic attraction may cause damage to a toner image contacting the conveying belt. This is especially important if images of high, near offset quality are to be obtained, as in the present invention.

OBJECTS OF THE INVENTION

[0014] It is therefore an object of the invention to transport a receptor support holding a toner image at one or both sides, while minimising damage to this image.

[0015] It is a further object of the invention to avoid shocks during the transport of the receptor support, so that, when transporting the receptor support between two stations, e.g. from a transfer station to a fusing station, no interference with the involved steps occurs.

[0016] It is still a further object of the invention to allow for speed differences between the stations between which the receptor support is transported.

[0017] It is still a further object of the invention to allow for variations of the speed of the receptor support as enforced by the preceding or the following station, e.g. speed variations due to the transfer station drive and/or speed variations due to the fuser station drive.

[0018] Further objects of the invention will become apparent from the description hereinafter.

SUMMARY OF THE INVENTION

[0019] The above mentioned objects are realised by a system including the specific features according to claim 1 and a method according to claim 13. Specific features for preferred embodiments of the invention are set out in the dependent claims.

[0020] Further advantages and embodiments of the present invention will become apparent from the following description and drawings.

[0021] The sheet-like receptor support may be a sheet of paper, a transparency, etc. The support may also be formed by two sheets back to back, in order to print two single sided sheets simultaneously.

[0022] The surface may be realised by an endless belt or by a cylindrical drum. When using a belt, the surface contacting the sheet-like receptor support is preferably rectilinear.

[0023] The term "printing" stands in the first place for a printer which creates the output printing image by laying out the image in a series of horizontal scan lines, each line having a given number of pixels per inch. The transport system may however also be used in a copier device, or in whichever system that needs to transport a support carrying particles or powder.

[0024] A corotron is a charge generating device, comprising a conductive wire, called corona-wire, and a conductive housing. The corona-wire is charged with respect to the housing, at a tension that exceeds the so-called critical voltage of the surrounding medium, so that this medium, usually air, is partly ionised.

[0025] A scorotron comprises a corotron and a grid.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] The invention is described hereinafter by way of examples with reference to the accompanying figures

wherein :

Fig. 1 is a diagrammatic view of an embodiment of a duplex colour printer in accordance with the present invention;

Fig. 2 is a schematic side-view of one embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0027] While the present invention will hereinafter be described in connection with preferred embodiments thereof, it will be understood that it is not intended to limit the invention to those embodiments. On the contrary, it is intended to cover all alternatives, modifications, and equivalents as may be included within the scope of the invention as defined by the appending claims.

[0028] Fig. 1 shows a diagrammatic representation of one embodiment of an electrophotographic duplex colour printer.

[0029] The printer comprises a light-tight housing 10 which has at its inside a stack 12 of sheets to be printed, loaded on a platform 13, the height of which is adjusted in accordance with the size of the stack, and at the output side a platform 14 onto which the printed sheets are received.

[0030] A sheet to be printed is removed from stack 12 by a dispensing mechanism 15, and passed through an alignment station 16 which ensures the longitudinal and lateral alignment of the sheet.

[0031] The following processing stations are located along path 17. A first toner image forming station 20 indicated in a dash-and-dot line for applying a colour toner image to the obverse side of the sheet and a second station 21 for applying a colour toner image to its reverse side. A buffer station 23 with an endless belt 24 for transporting the sheet to fuser station 25 while allowing the speed of the sheet to change because the speed of fusing may be different from that of the speed of toner image formation.

[0032] The purpose of buffer 23, also referred to as transport system, is as follows. A fuser station 25 is operating to melt the toner images transferred to the sheets in order to affix them. It will be understood that this operation requires a certain minimum time since the temperature of the fuser is subject to an upper limit which must not be exceeded, otherwise the roller lifetime becomes unsatisfactory. In other words, the speed of fuser station 25 is limited. The speed of the toner image formation stations 20 and 21, on the other hand, is in principle not limited for any particular reason. On the contrary, it is advantageous to use a high speed of toner image formation and toner image transfer, since the four colour separations of each colour image are written by exposure station 29 in succession, which means that the recording time of one colour image amounts to at least four times the recording time of one part image. All this means a relatively high speed of the photoconductive belts, and

thus of the synchronously moving sheets, as compared with a maximum usable travelling speed through the fuser station. In the apparatus according to the present embodiment, the speed of the two photoconductive belts amounted to 295 mm/s, whereas the fusing speed was 100 mm/s or less.

[0033] Further, it may be desirable to adjust the fusing speed independently from the toner image transfer speed, i.e. the belt speed, for obtaining optimum results. It should be noted that the toner image transfer speed in the imaging stations is preferably constant.

[0034] The length of buffer station 23 is preferably sufficient for receiving the largest sheet size to be processed in the apparatus.

[0035] Buffer station 23 operating initially at the speed of the photoconductive belts of devices 20 and 21, the speed of this station is reduced to the processing speed of fuser station 25 as the trailing edge of the sheet has left toner image forming station 21.

[0036] Fusing station 25 can be of known construction, and can be arranged for radiation or flash fusing, for fusing by convection and/or by pressure, etc. The fused sheet is finally received on platform 14.

[0037] In the printing apparatus described hereinbefore, the path of the receptor support, also referred to as sheet, is preferably substantially rectilinear. Therefore, the preferred embodiment of the invention comprises transport means imparting a rectilinear movement to the receptor means, as shown in Fig. 2.

[0038] Fig. 2 shows a schematic drawing of a side-view of a preferred embodiment, wherein a belt 24 is supported by rollers 51 and 52. The belt 24 is moved by driving means, not shown, and transports a sheet-like receptor support 95 holding a toner image 96 at each side. Preferably, as explained hereinafter, the belt 24 is grounded by an electric grounding device 90, indicated symbolically in Fig. 2. To prevent toner from being carried over to a subsequent receptor support, preferably a scraper 80 removes the toner from the belt.

[0039] Charge generating devices 60 to 62 and 70 spray charges having a polarity as indicated by (+) and (-) respectively; the polarity of the toner charge is indicated by (-). The invention is however not limited to the charge polarities shown in Fig. 2 - e.g. in case of a positive (+) toner charge, all charge signs should preferably be reversed, as will become clear from the description hereinafter.

[0040] The number of charge generating devices is not limited to that shown in Fig. 2, but can be larger, e.g. 5 or 6, or smaller, e.g. 2. The position of the charge generating devices with respect to the belt can also be different.

[0041] The belt 24 can be made of several materials. The surface of the belt, contacting the receptor support, can be conductive or non-conductive. Examples of a belt with a conductive surface include: a metal belt, a polymer belt (e.g. PET) covered with a metal layer e.g. aluminium) at its outer circumference. In case of a non-conductive

surface, the belt preferably comprises at least two layers, of which at least one layer is conductive, while the outer surface layer is non-conductive; examples include: a conductive belt covered with teflon, a conductive belt covered with an organic photoconductor.

[0042] A non-conductive material is a material having a time constant $\tau = \epsilon \cdot \rho$ larger than 10 seconds, wherein ϵ is the dielectrical constant of the material (expressed in F/m in SI-units), and ρ is the electrical resistivity of the material (expressed in Ohms * m in SI-units). A conductive material has a time constant τ smaller than 10 seconds.

[0043] The conductive layer of the belt is preferably electrically grounded, e.g. by a brush 90, as is indicated symbolically in Fig. 2.

[0044] As the receptor support contacts the belt, in a preferred embodiment the first charge generating device 60 sprays onto the receptor support charges of the opposite sign to the toner charge, e.g. positive charges (+) are sprayed if the toner charge is negative (-). The function of these charges is twofold: first, attaching the receptor support electrostatically to the belt, and second, increasing the electrostatic force that is attracting the toner image to the receptor support. The first function is important in transporting the receptor support, the second in minimising toner transfer from the receptor support to the belt, and hence minimising damage to the toner image contacting the belt surface, even when there is a slight slip ($< 4\%$) between the sheet-like receptor support and the surface of the belt. Spraying charges onto the receptor support of the opposite sign of the toner charge thus offers the important advantage that damage to the toner image is lessened. This is especially important in obtaining images of high, near offset quality.

[0045] The function of the charge generating devices 61 and 62 is identical to the function of charge generating device 60.

[0046] We have found that the required number of devices 60 to 62 depends on the belt type used. In case of a belt with conductive surface, a maximum time interval between two charge spraying actions is preferably not exceeded. In a preferred embodiment, the distance between two such charge generating devices does not exceed the sheet-length of the support. In a preferred embodiment, the support is electrostatically charged before it contacts the belt surface.

[0047] We have also found that the charge generating devices 60 to 62 are preferably set to the lowest possible voltage that still charges the receptor support, as this minimises what is called the "re-transfer" of toner, i.e. the amount of toner carried over from the receptor support to the belt. This can be achieved by driving the charge generating device by a current regulator. We have found that re-transfer from the receptor support to the belt increases with increasing voltage of the charge generating devices 60 to 62. On the other hand, devices 60 to 62 preferably should be set at a minimum voltage, since below this minimum voltage, the receptor support is not

charged, which also results in larger re-transfer. Experimental results indicate that charge generating device 60 is preferably set at a voltage between 3.75 kV and 4.50 kV to keep toner re-transfer less than 1 %, in the following test set-up: the belt is a metal belt having at its outer circumference a non-conductive layer of 25 μm of teflon; device 60 is a corotron, the distance between the corona-wire and the belt is chosen 11 mm; the receptor support is Agfa 1001 paper (trade mark); the toner is cyan, the amount of toner is 0.70 mg/cm²; the belt speed is 12.5 cm/s; the relative humidity is 45 %.

[0048] We have also found, when using a belt with a non-conductive surface, that it is highly advantageous to use a charge generating device 70, having a function differing from the one of the previously described devices 60 to 62 : device 70 charges said non-conductive surface with a charge of equal polarity to the toner charge, e.g. negative (-), before the receptor support contacts the belt. If the belt surface is not suitably charged, or if a belt with a conductive surface is used, a relative motion of the receptor support with respect to the belt may cause blurring of the toner image, whereas applying the aforesaid charge to the belt surface has shown to minimise blurring of the toner image, which is an important advantage. A possible cause of said relative motion of the receptor support with respect to the belt can be the following: a large portion of the receptor support has not yet left the station preceding the buffer, and its speed is mainly determined by said preceding station, whereas a speed difference may exist - e.g. because of mechanical tolerances - between the surface of the belt and said preceding station. Another possible cause of said relative motion of the receptor support with respect to the belt can be speed variations due to the transfer station drive and/or speed variations due to the fuser station drive.

[0049] Thus, an advantage of the embodiments described above is that good image quality can be obtained, in spite of variations of the speed of the receptor support, as enforced by the preceding (transfer) station or by the following (fuser) station.

[0050] Another advantage is that the preceding and the following station may each have an own speed, e.g. a first speed of 295 mm/s for the transfer station and a second speed of 100 mm/s for the fuser station. In fact, as explained hereinbefore, the length of buffer station 23 is preferably sufficient for receiving the largest sheet size to be processed, so that the speed of the buffer station 23 can be reduced - or increased - from the first speed to the second speed.

[0051] Because of the flexibility of the belt, and because, as explained above, a relative motion of the receptor support with respect to the belt is allowed, yet another advantage is that shocks are avoided during transport of the receptor support. Thus, no interference occurs with the processing steps in the preceding and the following station.

[0052] We also tested surface materials with different adhesion properties with respect to the support material.

The speed of the receptor support in the tests was up to 4 % larger than the belt speed. These tests have shown that the best image quality is obtained by using a belt with a very adhesive surface, e.g. teflon.

[0053] In spite of all measures stated above, a small quantity of toner may still adhere to the belt after the receptor support has left it. To prevent said toner from being carried over to a subsequent receptor support, preferably a scraper 80 removes the toner from the belt. Various materials can be used for the scraper blade, e.g. polyurethane. In a preferred embodiment, the scraper blade is pressed against the belt: the force exerted onto the scraper should be large enough, yet not too large, for optimal contact between scraper blade and belt, and hence for optimal belt cleaning results. In a test, a force of 24 N/m exerted onto the scraper gave excellent cleaning results, while toner was left on the belt when using a force smaller than 12 N/m - too small a force for good contact - and while a force larger than 30 N/m left longitudinal stripes on the belt, due to the fact that the scraper was bent by this large force, and thus did not contact the belt well enough over the complete scraper blade length. Hence, the contacting force is preferably chosen between 12 and 30 N/m.

[0054] A first preferred embodiment is the one corresponding to Fig. 2, in which four charge generating devices 60, 61, 62 and 70 are used, and in which the belt is a metal belt.

[0055] A second, more preferred embodiment, also corresponds to Fig. 2, but here only two charge generating devices 60 and 70 are used, while the belt comprises a conductive layer covered with a non-conductive outer surface layer, e.g. an organic photoconductor.

[0056] A third, still more preferred embodiment, also corresponds to Fig. 2. Only two charge generating devices 60 and 70 are used and the belt comprises a conductive layer, covered with a non-conductive outer surface layer that is very adhesive, e.g. teflon.

[0057] The following example illustrates the most preferred embodiment: Belt 24 was a metal belt, with an outer surface layer of 25 μm teflon. The belt supporting rollers 51 and 52 had a diameter of 32 mm. The speed was variable between 60 mm/s and 295 mm/s. The charge generating device 60 was a corotron; the distance from corona-wire to belt was 11 mm, the voltage of the corona-wire was 4 kV. The charge generating device 70 was a scorotron; the grid distance was 1 mm. The scraper 80 was formed by a Hokushin Sealingblade, made of polyurethane, type 237900, with a hardness of 70 Shore A. A force was exerted between scraper and belt of 24 N/m.

[0058] Having described in detail preferred embodiments of the current invention, it will now be apparent to those skilled in the art that numerous modifications can be made therein without departing from the scope of the invention as defined in the following claims.

Parts list :

[0059]

10 housing
12 sheet stack
13 platform
14 platform
15 dispenser
16 aligner
17 sheet path
20 image forming station
21 image forming station
23 buffer station
24 transport belt
25 fuser
29 exposure station
51 belt supporting roller
52 belt supporting roller
60 charge generating device
61 charge generating device
62 charge generating device
70 charge generating device
80 scraper
90 electric grounding device, indicated symbolically
95 receptor support holding a toner image at each side
96 toner particles

Claims

1. A transport system (23) for transporting a sheet-like receptor support (95) carrying on at least one side thereof particles (96) having an electrostatic charge, said transport system (23) comprising:

- a surface (24) on said transport system (23) for making contact with said at least one side of said support (95) and for transporting said support (95);
- a first charge generating device (60, 61, 62) for applying first electrostatic charges to said support (95), thereby establishing an electrostatic attraction between said support (95) and said surface (24);
- a second charge generating device (70) for applying second electrostatic charges to said surface (24), thereby establishing an electrostatic attraction between said support (95) and said surface (24);

said first charge generating device (60, 61, 62) being arranged for generating first electrostatic charges, having a polarity opposite to the polarity of said particle electrostatic charge and said second charge generating device (70) being arranged for generating second electrostatic charges have a polarity equal to the polarity of said particle electrostatic

charge.

2. Transport system as claimed in claim 1, wherein said first charge generating device (60, 61, 62) has means for applying said first electrostatic charges to said support (95) before said support (95) contacts said surface (24).
3. Transport system according to any one of the preceding claims, including a plurality of first charge generating devices (60, 61, 62), at a mutual distance not larger than a minimum length of said support (95).
4. Transport system according to any one of the preceding claims, wherein said particles (96) are toner particles having an electrostatic charge.
5. Transport system according to claim 1, wherein said second charge generating device (70) is selected from a corotron and a scorotron.
6. Transport system according to claim 5, wherein said second charge generating device (70) has a current regulator.
7. Transport system according to any one of the preceding claims, wherein said transport system comprises
 - a conductive layer; and
 - a non-conductive layer contacting said conductive layer and for contacting said support (95).
8. Transport system according to claim 7, comprising means for electrically grounding (90) said conductive layer.
9. Transport system according to claim 7 or 8, wherein said non-conductive layer comprises an adhesive material.
10. Transport system according to any one of the preceding claims, wherein said support carries said particles (96) at both sides.
11. Transport system according to any one of the preceding claims, comprising driver means for driving said surface (24) at a variable speed.
12. The combination of a transport system according to any preceding claim and a printer or copier device capable of generating a sheet-like receptor support (95) carrying particles (96) having an electrostatic charge.
13. The combination according to claim 12, wherein the transport system is positioned to transport said support (25) from said printer or copier to a fusing station

(25).

14. A method of transporting a sheet-like receptor support (95) carrying on at least one side thereof particles (96) having an electrostatic charge, said method comprising:

- contacting said at least one side of said support (95) with a surface (24) and moving said surface to transport said support (95);
- applying first electrostatic charges to said support (95), to establish an electrostatic attraction between said support (95) and said surface (24); and
- applying second electrostatic charges to said surface (24) to establish an electrostatic attraction between said support (95) and said surface (24);

said first electrostatic charges having a polarity opposite to the polarity of said particle electrostatic charge, and

said second electrostatic charges having a polarity equal to the polarity of said particle electrostatic charge.

Patentansprüche

1. Transportsystem (23) zum Transportieren eines blattähnlichen Empfängerträgers (95), welcher auf mindestens einer Seite desselben Partikel (96) mit einer elektrostatischen Ladung trägt, wobei das Transportsystem (23) folgendes aufweist:

- eine Oberfläche (24) auf dem Transportsystem (23) zum Berühren der mindestens einen Seite des Trägers (95) und zum Transportieren des Trägers (95);
- eine erste Ladungserzeugungsvorrichtung (60, 61, 62) zum Anlegen erster elektrostatischer Ladungen an den Träger (95) und **dadurch** Bilden einer elektrostatischen Anziehung zwischen dem Träger (95) und der Oberfläche (24);
- eine zweite Ladungserzeugungsvorrichtung (70) zum Anlegen zweiter elektrostatischer Ladungen an die Oberfläche (24) und **dadurch** Bilden einer elektrostatischen Anziehung zwischen dem Träger (95) und der Oberfläche (24);

wobei die erste Ladungserzeugungsvorrichtung (60, 61, 62) zum Erzeugen erster elektrostatischer Ladungen angeordnet ist, welche eine der Polarität der elektrostatischen Ladung des Partikels entgegengesetzte Polarität aufweisen, und die zweite Ladungserzeugungsvorrichtung (70) zum Erzeugen zweiter elektrostatischer Ladungen angeordnet ist, welche

eine der Polarität der elektrostatischen Ladung des Partikels entsprechende Polarität aufweisen.

2. Transportsystem nach Anspruch 1, wobei die erste Ladungserzeugungsvorrichtung (60, 61, 62) eine Einrichtung zum Anlegen der ersten elektrostatischen Ladungen an den Träger (95), bevor der Träger (95) die Oberfläche (24) berührt, aufweist.
3. Transportsystem nach einem der vorangehenden Ansprüche, welches eine Vielzahl an ersten Ladungserzeugungsvorrichtungen (60, 61, 62) in einem wechselseitigen Abstand enthält, welcher nicht größer als eine Mindestlänge des Trägers (95) ist.
4. Transportsystem nach einem der vorangehenden Ansprüche, wobei die Partikel (96) Tonerpartikel mit einer elektrostatischen Ladung sind.
5. Transportsystem nach Anspruch 1, wobei die zweite Ladungserzeugungsvorrichtung (70) aus einem Korotron (Corotron) und Scorotron (screened Corotron) ausgewählt wird.
6. Transportsystem nach Anspruch 5, wobei die zweite Ladungserzeugungsvorrichtung (70) einen Stromregler aufweist.
7. Transportsystem nach einem der vorangehenden Ansprüche, wobei das Transportsystem
 - eine leitende Schicht; und
 - eine die leitende Schicht berührende nicht leitende Schicht zum Berühren des Trägers (95) aufweist.
8. Transportsystem nach Anspruch 7, welches eine Einrichtung (90) zum elektrischen Erden der leitenden Schicht aufweist.
9. Transportsystem nach Anspruch 7 oder 8, wobei die nicht leitende Schicht ein antiadhäsives Material aufweist.
10. Transportsystem nach einem der vorangehenden Ansprüche, wobei der Träger die Partikel (96) auf beiden Seiten trägt.
11. Transportsystem nach einem der vorangehenden Ansprüche, welches eine Antriebseinrichtung zum Antreiben der Oberfläche (24) mit einer variablen Geschwindigkeit aufweist.
12. Kombination eines Transportsystems nach einem der vorangehenden Ansprüche und einer Drucker- oder Kopierervorrichtung, welche zum Erzeugen eines blattähnlichen Empfängerträgers (95) fähig ist, welcher Partikel (96) mit einer elektrostatischen La-

dung trägt.

13. Kombination nach Anspruch 12, wobei das Transportsystem positioniert ist, um den Träger (95) vom Drucker oder Kopierer zu einer Fixierstation (25) zu transportieren. 5

14. Verfahren zum Transportieren eines blattähnlichen Empfängerträgers (95), welcher auf mindestens einer Seite desselben Partikel (96) mit einer elektrostatischen Ladung trägt, wobei das Verfahren Folgendes aufweist:

- Berühren der mindestens einen Seite des Trägers (95) mit einer Oberfläche (24) und Bewegen der Oberfläche, um den Träger (95) zu transportieren; 15
- Anlegen erster elektrostatischer Ladungen an den Träger (95), um eine elektrostatische Anziehung zwischen dem Träger (95) und der Oberfläche (24) zu bilden; und 20
- Anlegen zweiter elektrostatischer Ladungen an die Oberfläche (24), um eine elektrostatische Anziehung zwischen dem Träger (95) und der Oberfläche (24) zu bilden; 25

wobei die ersten elektrostatischen Ladungen eine der Polarität der elektrostatischen Ladung des Partikels entgegengesetzte Polarität aufweisen und die zweiten elektrostatischen Ladungen eine der Polarität der elektrostatischen Ladung des Partikels entsprechende Polarität aufweisen. 30

Revendications 35

1. Système d'acheminement (23) prévu pour acheminer un support récepteur (95) du type feuille, portant sur au moins un côté des particules (96) ayant une charge électrostatique, ledit système d'acheminement (23) comprenant : 40

- une surface (24) située sur ledit système d'acheminement (23) afin de venir en contact avec ledit au moins un côté dudit support (95) et pour acheminer ledit support (95) ; 45
- un premier dispositif générateur de charges (60, 61, 62) pour appliquer des premières charges électrostatiques audit support (95), pour ainsi créer une attraction électrostatique entre ledit support (95) et ladite surface (24) ; 50
- un second dispositif générateur de charges (70) pour appliquer des secondes charges électrostatiques à ladite surface (24), pour ainsi créer une attraction électrostatique entre ledit support (95) et ladite surface (24) ; 55

ledit premier dispositif générateur de charges (60,

61, 62) étant prévu pour la génération de premières charges électrostatiques ayant une polarité opposée à la polarité de ladite charge électrostatique des particules, et ledit second dispositif générateur de charges (70) étant prévu pour la génération de secondes charges électrostatiques ayant une polarité identique à la polarité de ladite charge électrostatique des particules.

2. Système d'acheminement selon la revendication 1, dans lequel ledit premier dispositif générateur de charges (60, 61, 62) comporte des moyens pour appliquer lesdites premières charges électrostatiques audit support (95) avant que ledit support (95) ne vienne en contact avec ladite surface (24).

3. Système d'acheminement selon l'une des revendications précédentes, comprenant une pluralité de premiers dispositifs générateurs de charges (60, 61, 62) ayant entre eux une distance qui n'est pas supérieure à une longueur minimale dudit support (95).

4. Système d'acheminement selon l'une quelconque des revendications précédentes, dans lequel lesdites particules (96) sont des particules d'encre en poudre ayant une charge électrostatique.

5. Système d'acheminement selon la revendication 1, dans lequel ledit second dispositif générateur de charges (70) est soit un corotron soit un scorotron.

6. Système d'acheminement selon la revendication 5, dans lequel ledit second dispositif générateur de charges (70) comporte un régulateur de courant.

7. Système d'acheminement selon l'une quelconque des revendications précédentes, dans lequel ledit système d'acheminement comprend :


- une couche conductrice ; et
- une couche non-conductrice en contact avec ladite couche conductrice et prévue pour venir en contact avec ledit support (95).

8. Système d'acheminement selon la revendication 7, comprenant des moyens pour la mise à la masse (90), sur le plan électrique, de ladite couche conductrice.

9. Système d'acheminement selon la revendication 7 ou 8, dans lequel ladite couche non-conductrice comprend une matière adhésive.

10. Système d'acheminement selon l'une quelconque des revendications précédentes, dans lequel ledit support porte lesdites particules (96) sur ses deux côtés.

11. Système d'acheminement selon l'une quelconque des revendications précédentes, comprenant des moyens d'entraînement pour entraîner ladite surface (24) à une vitesse variable. 5
12. Combinaison d'un système d'acheminement, selon l'une quelconque des revendications précédentes, et d'une imprimante ou d'un dispositif de reproduction, propre à produire un support récepteur de type feuille (95) portant des particules (96) ayant une charge électrostatique. 10
13. Combinaison selon la revendication 12, dans laquelle le système d'acheminement est placé de manière à transporter ledit support (25) depuis ladite imprimante ou ledit dispositif de reproduction jusqu'à un poste de fusion (25). 15
14. Procédé d'acheminement d'un support récepteur (95) du type feuille, portant sur au moins un côté des particules (96) ayant une charge électrostatique, ledit procédé comprenant : 20
- la mise en contact dudit au moins un côté dudit support (95) avec une surface (24), et le déplacement de ladite surface pour acheminer ledit support (95) ; 25
 - l'application de premières charges électrostatiques audit support (95), pour créer une attraction électrostatique entre ledit support (95) et ladite surface (24) ; et 30
 - l'application de secondes charges électrostatiques à ladite surface (24), pour créer une attraction électrostatique entre ledit support (95) et ladite surface (24) ; 35
- lesdites premières charges électrostatiques ayant une polarité opposée à la polarité de ladite charge électrostatique des particules, et 40
- lesdites secondes charges électrostatiques ayant une polarité identique à la polarité de ladite charge électrostatique des particules. 45
- 50
- 55

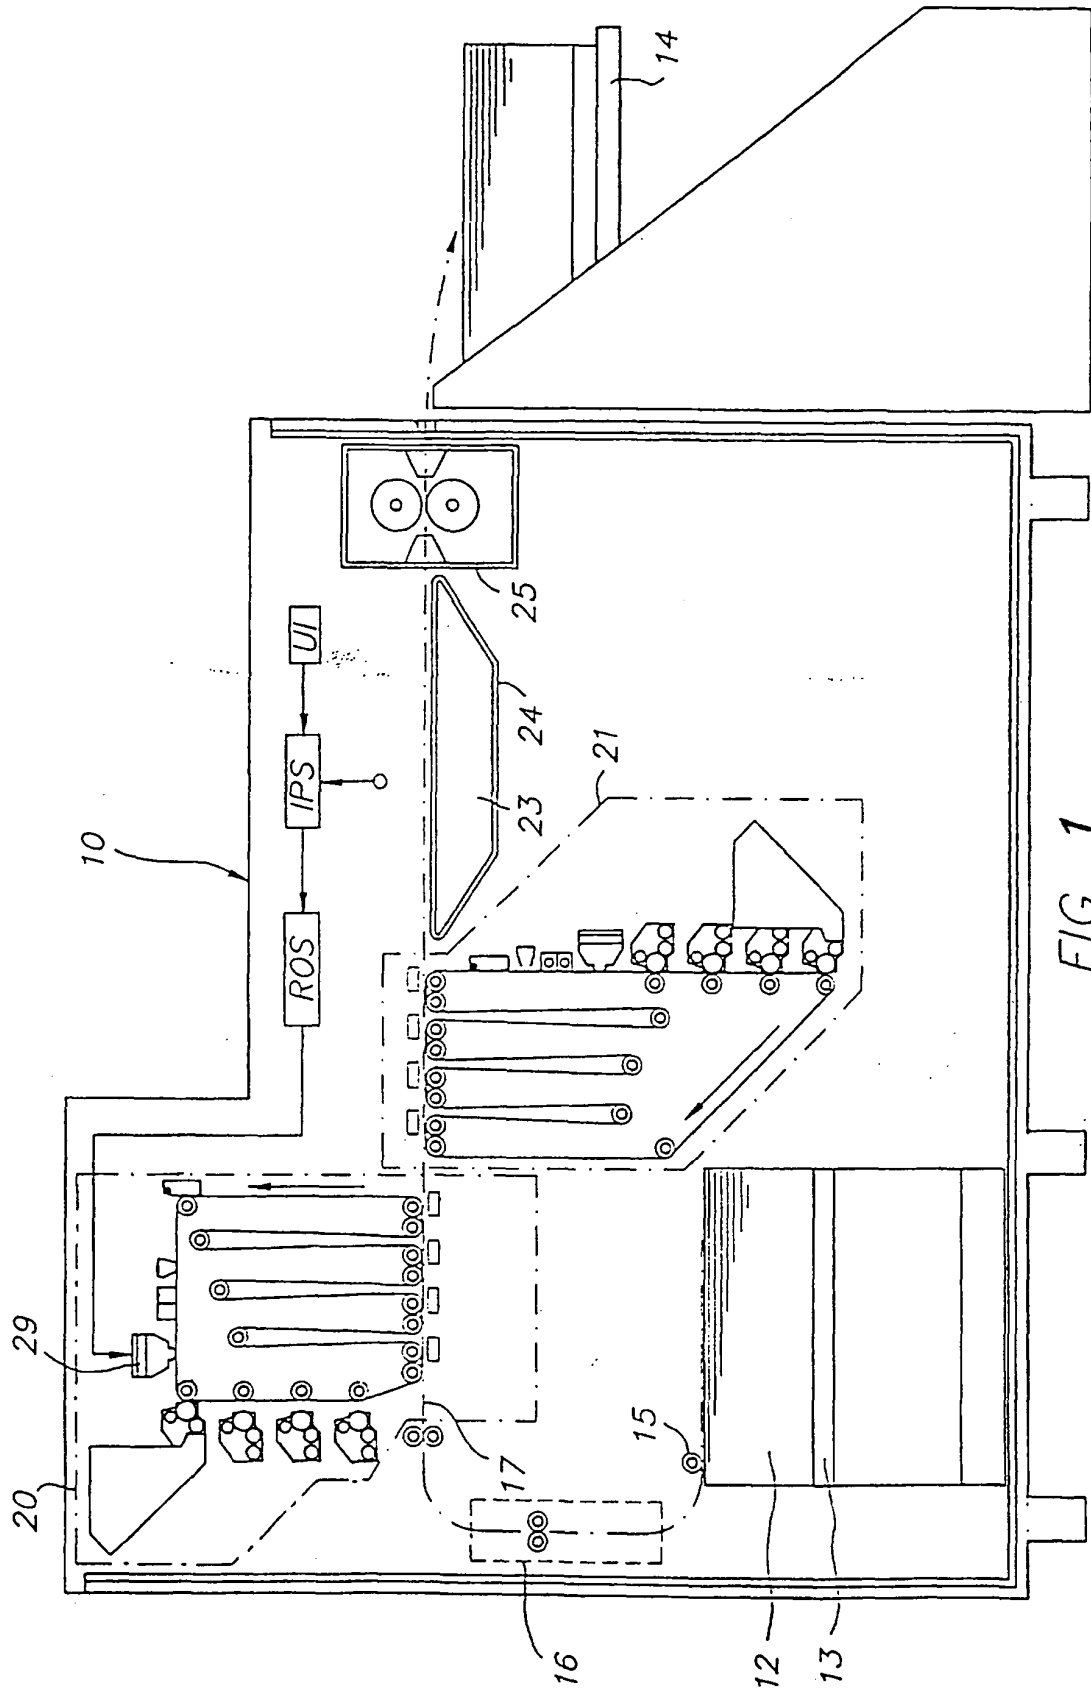

23

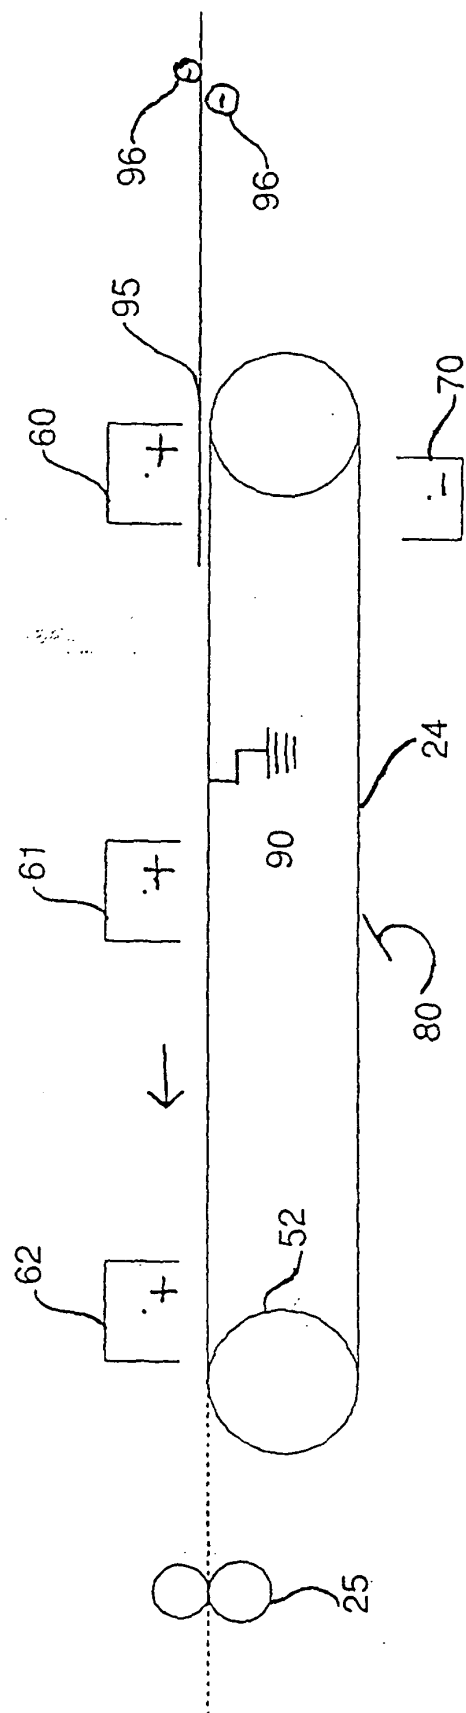


Fig. 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4427285 A [0005]
- US 5009352 A [0010] [0013]
- US 5045892 A [0012] [0013]