



(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

Note: Bibliography reflects the latest situation

- (15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see page(s) 4
- (48) Corrigendum issued on:
06.12.2006 Bulletin 2006/49
- (45) Date of publication and mention
of the grant of the patent:
14.06.2006 Bulletin 2006/24
- (21) Application number: **98907385.3**
- (22) Date of filing: **06.02.1998**
- (51) Int Cl.:
G02B 7/182 ^(2006.01) **G02B 26/10** ^(2006.01)
G02B 7/00 ^(2006.01) **G01K 13/08** ^(2006.01)
- (86) International application number:
PCT/US1998/002306
- (87) International publication number:
WO 1998/035254 (13.08.1998 Gazette 1998/32)

(54) **SCAN MIRROR REMOTE TEMPERATURE SENSING SYSTEM AND METHOD**

VERFAHREN UND VORRICHTUNG ZUR FERNMESSUNG DER TEMPERATUR EINES
ABTASTSPIEGELS

PROCEDE ET SYSTEME DE TELEDETECTION DE CHALEUR POUR MIROIR DE BALAYAGE

- | | |
|---|--|
| <p>(84) Designated Contracting States:
DE FR GB</p> <p>(30) Priority: 07.02.1997 US 797767</p> <p>(43) Date of publication of application:
27.01.1999 Bulletin 1999/04</p> <p>(73) Proprietor: RAYTHEON COMPANY
Los Angeles, CA 90080-0028 (US)</p> <p>(72) Inventors:
 <ul style="list-style-type: none"> • VANDYK, Steven, G.
Goleta, CA 93117 (US) • BALINSKI, Walter
Troy, MI 48098 (US) • CHOO, Ronald, J.
Los Angeles, CA 90066 (US) • BORTFELDT, Paul, R.
Boulder, CO 80302 (US) </p> | <p>(74) Representative: Lindner, Michael et al
c/o Witter, Weller, Gahlert, Otten & Steil,
Rotebühlstrasse 121
70178 Stuttgart (DE)</p> <p>(56) References cited:
 <ul style="list-style-type: none"> • PATENT ABSTRACTS OF JAPAN vol. 011, no. 395
(P-650), 24 December 1987 & JP 62 160417 A
(MATSUSHITA GRAPHIC COMMUN SYST INC), 16
July 1987, • PATENT ABSTRACTS OF JAPAN vol. 006, no. 198
(P-147), 7 October 1982 & JP 57 106975 A
(FUJITSU LTD), 3 July 1982, • PATENT ABSTRACTS OF JAPAN vol. 096, no.
011, 29 November 1996 & JP 08 178689 A
(MITSUBISHI ELECTRIC CORP), 12 July 1996, • PATENT ABSTRACTS OF JAPAN vol. 011, no. 037
(P-543), 4 February 1987 & JP 61 207935 A
(FUJITSU LTD), 16 September 1986, </p> |
|---|--|

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention described herein was made in the performance of work under NASA Contract No. NAS5-30800 and is subject to the provisions of Section 305 of the National Aeronautics and Space Act of 1958 (72 Stat. 435; 42 USC 2457).

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention relates to spacecraft instrumentation. More specifically, the present invention relates to systems and techniques for monitoring the temperature of scan mirrors used in connection with spacecraft instruments.

Description of the Related Art

[0003] Scan mirrors are often used in spacecraft to redirect energy received by the craft from a surface to an onboard sensor. The sensor is typically part of an instrument which generates data from the sensor readings. The data is stored, processed onboard and/or transmitted to earth for processing.

[0004] Some spacecraft components rotate for stabilization, scanning or other purposes. Scan mirrors on spacecraft in orbit around planetary and astral bodies near the sun experience temperature variations during rotation due to the effects of solar radiation and deep space. This causes distortions in images reflected by the mirror. Accurate knowledge of the mirror temperature is of paramount importance in calibrating data generated by the instrument under such circumstances.

[0005] An alternate approach for detecting the temperature of the mirror involves the location of a temperature sensor on the scanning mirror. This is only practical when the mirror oscillates instead of rotates as the extraction of electrical signals from the sensor is not possible in as much as any wires would experience a considerable amount of stress due to the scanning motion of the mirror.

[0006] Patent Abstract of Japan, vol. 011, no. 395, 24 December 1987 (JP 62160417) discloses a laser beam scanner which comprises a rotary polyhedral mirror which deflects a beam to a photosensitive drum. The rotary polyhedral mirror is built in an optical deflector. The temperature of the deflector is detected by a thermistor in order to control the operation of a refrigerating element. This element serves to cool the mirror as to prevent any deformation due to temperature variations.

[0007] Patent Abstract of Japan, vol. 006, no. 198, 7 October 1982 (JP 57106975) discloses a picture data processing circuit which comprises an oscillating mirror. In order to carry out temperature compensation, a temperature sensor is held stationary near the oscillating mirror.

[0008] Patent Abstract of Japan, vol. 096, no. 011, 29

November 1956 (JP 08178689) discloses an earth sensor which is loaded on an artificial satellite. The disclosed system further comprises a scanning mirror and a temperature sensor, which provides temperature data of the scanning mirror surface. This data is then processed by a temperature control device.

[0009] Patent Abstract of Japan, vol. 011, no. 037, 4 February 1987 (JP 61207935) discloses a solid-state image pickup device comprising a rotary polygon mirror and a photodetecting element array for detecting a temperature radiation of a black body surface of the polygon mirror.

[0010] To circumvent the aforementioned problem, a radio transmitter has been used with the temperature sensor. However, this approach is costly, may impede the operation of the mirror and the radio signal may interfere with one or more of the instruments or other systems located on the spacecraft.

[0011] Hence, a need remains in the art for a low cost, effective system and/or technique for accurately measuring the temperature of a scanning mirror without interfering with the operation of the mirror or other instruments and systems on the spacecraft.

SUMMARY OF THE INVENTION

[0012] The need in the art is addressed by the remote temperature sensing system of the present invention. The inventive system is adapted for use with a scanning mirror and comprises a sensor which is maintained a predetermined nonzero distance from the scanning mirror. The sensor detects heat radiated by the mirror and provides a signal indicative thereof

[0013] In the illustrative implementation, the system includes a thermistor mounted within a housing. The housing is contoured to maximize the receipt of thermal energy thereby. A mounting assembly maintains the thermistor in close proximity (e.g., one-tenth of an inch) to the scanning mirror. The invention includes a shroud mounted on the mirror for shielding the thermistor and a support tube connected to the thermistor housing on a first end and to a base on the second end thereof. The support tube is adapted to remain stationary within the shroud as the scanning mirror and the shroud rotate due to the scanning of the mirror. Wires are connected to the thermistor on a first end thereof and are wrapped around the support tube. The wires include a specific length of electrically conductive material, such as Manganin, having a resistivity which has a low sensitivity to temperature variations thereby enhancing overall system accuracy. The sensor output is processed in a conventional manner to provide an output indicative of the temperature of the mirror.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014]

Fig. 1 is a simplified diagram of a scanning mirror

arrangement incorporating the remote temperature sensing system of the present invention.

Fig. 2 is a magnified perspective view of a portion of the arrangement of Fig. 1 showing the scan mirror tilted and the remote temperature sensing system of the present invention in relation thereto.

Fig. 3 is an elevated side view of the remote temperature sensing system of the present invention depicted without the shroud for clarity.

Fig. 4 is a sectional side view of the remote temperature sensing system taken along the line A-A of Fig. 3.

Figs. 5 is a top view of the thermistor assembly of the remote temperature sensing system of the present invention.

Fig. 6 is a sectional view of the plate and thermistor housing of the remote temperature sensing system of the present invention taken along the line B-B of Fig. 5.

Fig. 7 is a magnified view of a section of the plate and thermistor housing of the remote temperature sensing system of Fig. 6.

Fig. 8 is a bottom perspective (isometric) view of the thermistor housing of the remote temperature sensing system of the present invention.

Fig. 9 is a top perspective (isometric) view showing the plate of the remote temperature sensing system of the present invention.

Fig. 10 is a top view of the plate of the remote temperature sensing system of the present invention.

Fig. 11 is a bottom view of the thermistor housing of the remote sensing system of the present invention.

Fig. 12 is a sectional view of the thermistor housing of the remote sensing system of the present invention taken along the line B-B of Fig. 10.

Fig. 13 is a sectional view of the thermistor housing of the remote sensing system of the present invention taken along the line A-A of Fig. 10.

Fig. 14 is a magnified view of the upper portion of the thermistor housing depicted in Fig. 13.

Fig. 15 is a sectional bottom view of the thermistor housing of the remote sensing system of the present invention taken along the line D-D of Fig. 12.

Fig. 16 is a perspective view of the support tube of the thermistor assembly of the remote temperature sensing system of the present invention.

Fig. 17 is a bottom view of the base of the support tube showing terminals therein.

Fig. 18 is a block diagram of an illustrative electrical system utilizing the remote temperature sensing system of the present invention.

DESCRIPTION OF THE INVENTION

[0015] Illustrative embodiments and exemplary applications will now be described with reference to the accompanying drawings to disclose the advantageous teachings of the present invention.

[0016] While the present invention is described herein with reference to illustrative embodiments for particular applications, it should be understood that the invention is not limited thereto. Those having ordinary skill in the art and access to the teachings provided herein will recognize additional modifications, applications, and embodiments within the scope thereof and additional fields in which the present invention would be of significant utility.

[0017] Fig. 1 is a simplified diagram of a scanning mirror arrangement incorporating the remote temperature sensing system of the present invention. As shown in Fig. 1, the arrangement 1 includes a mirror housing 3 which is conventionally implemented as a container constructed of metal, plastic or other suitable material. The mirror 7 is disposed within the housing 3. The mirror 7 is an oblong section of Beryllium with a reflective surface on both sides. Typical dimensions for a spacecraft scanning mirror are 22" x 8" x 2" in length, width and depth, respectively. A conventional motor 9 is mounted on one side of the mirror 7 at the axis of rotation thereof. The motor 9 is secured to a left wall of the housing 3 and to the mirror 7. Diametrically opposed to the motor 9, at the axis of rotation of the mirror 7, is the inventive remote temperature sensing system 10 of the present invention. The system 10 is rigidly secured to a right wall of the housing 3 on one end and maintains a heat sensor a predetermined nonzero distance from the mirror 7 on the other. In the illustrative embodiment, the predetermined nonzero distance is 1/10 of an inch.

[0018] Fig. 2 is a magnified perspective view of a portion of the arrangement of Fig. 1 showing the scan mirror tilted and the remote temperature sensing system of the present invention in relation thereto. As shown in Fig. 2, the system 10 includes a shroud 12 attached to the side 11 of the mirror 7. The shroud 12 is a cylinder of aluminum or other suitable thermally conductive material. The shroud is bolted to the mirror 7 and serves to protect a heat sensor, disposed therein, from stray thermal radiation. As discussed more fully below, the system 10 includes a heat sensor which is maintained a predetermined nonzero distance from the scan mirror 7 by an assembly 14 which mounts, at the base thereof, to a panel in a side of the housing 3. The shroud cover is not shown to reveal the manner by which the assembly 14 engages the shroud 12.

[0019] Fig. 3 is an elevated side view of the remote temperature sensing system of the present invention depicted without the shroud for clarity. Fig. 4 is a sectional side view of the remote temperature sensing system taken along the line A-A of Fig. 3. As shown in Figs. 3 and 4, the assembly 14 has an upper portion 16 and a lower portion 18 connected by the support tube 15. The upper portion 16 includes a thermistor housing 20 and an end plate 22 disposed above the shroud cover 24. The mounting of thermistors within the thermistor housing 20 is best illustrated with respect to Figs. 5 - 15 below.

[0020] Figs. 5 is a top view of the assembly 14 of the

remote temperature sensing system of the present invention. Fig. 6 is a sectional view of the plate and thermistor housing of the remote temperature sensing system of the present invention taken along the line B-B of Fig. 5. Fig. 7 is a magnified view of a section of the plate and thermistor housing of the remote temperature sensing system of Fig. 6. As illustrated in Figs. 5 - 7, the plate 22 has a plurality of concentric, annular grooves 23 thereon on the surface which faces the scan mirror 7. In the illustrative embodiment, the grooves 23 are cut at 40° angles and serve to increase the surface area and thereby maximize the efficient reception of thermal energy radiated from the mirror 7.

[0021] The thermistor housing 20 is disposed on the back side of the plate 22 and integral therewith. The housing 20 and plate 22 are constructed of aluminum or other suitably thermally conductive material. As illustrated in Fig. 6, the thermistor housing 20 is adapted to retain two thermistors 26 and 28. The thermistors 26 and 28 are bonded into the housing with a suitable thermally conductive adhesive.

[0022] The thermistors 26 and 28 are of conventional design and construction and may be selected to suit a particular application and purchased from a number of companies such as Yellow Springs Inc. **[deletion(s)]** In the preferred embodiment, two thermistors are used. However, those skilled in the art will appreciate that the invention is not limited to the number of thermistors. Indeed, the number and nature of the thermal sensors may be varied without departing from the scope of the present teachings.

[0023] As shown in Fig. 6 and the magnified view of Fig. 7, each thermistor 26 and 28 is connected to two of the terminals 30 - 33 (31 and 33 not shown) by leads 34 - 37 (35 and 37 not shown). In the preferred embodiment, the terminals 30 - 33 are commercially available micro-terminals. **[deletion(s)]**

[0024] Fig. 8 is a bottom perspective (isometric) view of the thermistor housing of the remote temperature sensing system of the present invention.

[0025] Fig. 9 is a top perspective (isometric) view showing the plate of the remote temperature sensing system of the present invention.

[0026] Fig. 10 is a top view of the plate 22 of the remote temperature sensing system of the present invention.

[0027] Fig. 11 is a bottom view of the thermistor housing 20 of the remote sensing system of the present invention.

[0028] Fig. 12 is a sectional view of the thermistor housing of the remote sensing system of the present invention taken along the line B-B of Fig. 10.

[0029] Fig. 13 is a sectional view of the thermistor housing of the remote sensing system of the present invention taken along the line A-A of Fig. 10.

[0030] Fig. 14 is a magnified view of the upper portion of the thermistor housing depicted in Fig. 13.

[0031] Fig. 15 is a sectional bottom view of the thermistor housing of the remote sensing system of the

present invention taken along the line D-D of Fig. 12.

[0032] As depicted in Figs. 8 - 15, the thermistor housing 20 includes first and second semi-circular sections 38 and 40 which house the thermistors 26 and 28 of Fig. 6. As best illustrated in Fig. 15, the first section 38 has plural recesses 42, 44 and 46. The second section 40 has recesses 48, 50 and 52. The recesses 44 and 50 serve to retain the thermistors while the recesses 42, 46, 48 and 52 serve to captivate the terminals 30-33. This is done by providing an area in which the insulated portion of the terminal, in this case teflon, can cold flow in the recesses 42, 46, 48 and 52 after insertion into 56, 60. The apertures 54, 56, 58 and 60 serve to receive the terminals 30 - 33 (not shown).

[0033] In the preferred embodiment, the plate 22 is 1/10th of an inch thick. Hence, the thermistors 26 and 28 are retained a predetermined nonzero distance from the mirror 7 to maximize the effectiveness thereof in sensing heat radiated by the mirror 7. The thermistor housing 20 is bonded to the support tube 15 with a suitable structural adhesive.

[0034] Returning to Fig. 3, a resistance measurement is taken from the thermistors 26 and 28 via wires 61 - 64 each of which is connected to a respective terminal 30 - 33. In the preferred embodiment, the wires 61 - 64 are strands of a conductive material, such as Manganin, which has a resistivity with a low sensitivity to temperature variations. The wires are wrapped around the support tube 15 as illustrated in Fig. 3. A layer of insulation 17 is wrapped around the support tube to protect against stray thermal radiation. The insulator 17 may be polyester or other suitable material separated by layers of reflective polyester mesh which further isolates each reflective insulator.

[0035] Fig. 16 is a perspective view of the support tube of the thermistor assembly of the remote temperature sensing system of the present invention. As shown in Fig. 16, the support tube 15 includes an elongate tube or cylinder 72 and a generally circular base 74. In the preferred embodiment, the support tube 15 is fabricated with a polycarbonate polymer construction such as Lexan_{tm} which is a poor thermal conductor. The tube 72 may be sectional or a single unitary segment. The upper portion of the tube 72 seats in the thermistor housing 20 as depicted in Figs. 4, 6 and 7. Returning to Fig. 16, channels 75 - 78 are provided in a dome shaped transition section 77 of the base 74. As illustrated in Fig. 4, the channels 75 - 78 allow the wires 61 - 64 to feed through the base 74 and connect with terminals 80 - 86 (even numbers only with 86 not shown in Fig. 4) which seat in the underside thereof.

[0036] Fig. 17 is a bottom view of the base 74 of the support tube 15 showing the terminals 80 - 86. Wires 88 - 94 (even numbers only) connect to the terminals 80 - 86, respectively. The wires are disposed within a sheath 96 which is terminated with a connector 98.

[0037] Fig. 18 is a block diagram of an illustrative electrical system utilizing the remote temperature sensing

system of the present invention. As shown in Fig. 18, the system 100 includes the scanning mirror 7 which radiates heat to the remote temperature sensing system 10 of the present invention. The output of the sensing system 10 is used by an instrument 102 for calibration. After calibration, energy reflected by the mirror (shown dashed) is received by a detector 104. The output of the detector 104 is received by the instrument 102 and adjusted for the temperature of the mirror 7 as necessary. The scan of the mirror 7 is controlled by a spacecraft controller 106 via the motor 9. The output of the instrument 104 is input to a spacecraft controller 106 for transmission to a ground station.

[0038] Thus, the present invention has been described herein with reference to a particular embodiment for a particular application. Those having ordinary skill in the art and access to the present teachings will recognize additional modifications applications and embodiments within the scope thereof, as defined by the appended claims.

Claims

1. A remote temperature sensing system (10) for a scanning mirror, comprising:

a scanning mirror (7) being rotatably arranged about a rotation axis, the temperature sensing system (10) being located at the mirror's axis of rotation;

sensor means for sensing the temperature (26, 28) of said scanning mirror; and

further means (12, 20, 22) adapted to maintain said sensor means (26, 28) a predetermined nonzero distance from the scanning mirror (7) so that the sensing of the temperature of the scanning mirror (7) is facilitated, said further means including a shroud (12) for shielding said sensor means (26, 28) from stray thermal radiation, the shroud being mounted on the mirror (7) for being rotatable relative to said sensor means (26, 28).

2. The system of Claim 1, **characterized in that** the first means is a thermistor (26, 28).

3. The system of Claim 1, **characterized in that** the thermistor (26, 28) is mounted within the shroud (12).

4. The system of Claim 3, **characterized by** a housing (20) within which the thermistor (26, 28) is mounted.

5. The system of Claim 4, **characterized in that** the housing (20) is mounted within the shroud (12).

6. The system of Claim 5, **characterized in that** the housing (20) has a surface (22) contoured to facili-

tate the receipt of thermal energy thereby.

7. The system of Claim 6, **characterized in that** the surface (22) has a plurality of grooves (23) therein.

8. The system of Claim 2, **characterized by** wires (61-64) connected to the thermistor (26, 28) on a first end thereof, wherein the wires (61-64) include a length of electrically conductive material having a resistivity which has a low sensitivity to temperature variations.

9. A method for remotely sensing the temperature of a scanning mirror including the steps of:

providing a temperature sensor (26, 28) at a predetermined nonzero distance of a one-tenth of an inch (0.254 cm) from said scanning mirror (7), said temperature sensor (26, 28) being part of a remote temperature sensing system (10) located at said mirror's axis of rotation to facilitate the sensing of the temperature of said scanning mirror (7) by detecting heat radiated thereby,

providing a shroud (12) which is mounted on said scanning mirror for shielding said temperature sensor (26, 28) and being rotatable relative to said temperature sensor, and processing electrical signals received from said temperature sensor (26, 28) to ascertain the temperature of said scanning mirror (7).

Patentansprüche

1. Temperatur-Fernmesssystem (10) für einen Abtastspiegel, mit:

einem Abtastspiegel (7), der um eine Drehachse drehbar angeordnet ist, wobei das Temperatur-Messsystem (10) an der Drehachse des Spiegels angeordnet ist,

einem Sensormittel zum Erfassen der Temperatur (26, 28) des Abtastspiegels; und

einem weiteren Mittel (12, 20, 22), das angepasst ist, um das Sensormittel (26, 28) in einem vorbestimmten Abstand, der ungleich Null ist, von dem Abtastspiegel (7) zu halten, so dass das Erfassen der Temperatur des Abtastspiegels (7) erleichtert wird, wobei das weitere Mittel eine Hülle (12) aufweist, um das Sensormittel gegenüber thermischer Streustrahlung abzuschirmen, wobei die Hülle auf dem Spiegel (7) befestigt ist, um relativ zu dem Sensormittel (26, 28) drehbar zu sein.

2. System nach Anspruch 1, **dadurch gekennzeichnet, dass** das erste Mittel ein Thermistor (26, 28) ist.

3. System nach Anspruch 1, **dadurch gekennzeichnet, dass** der Thermistor (26, 28) innerhalb der Hülle (12) befestigt ist.
4. System nach Anspruch 3, **gekennzeichnet durch** ein Gehäuse (20), innerhalb dem der Thermistor (26, 28) befestigt ist.
5. System nach Anspruch 4, **dadurch gekennzeichnet, dass** das Gehäuse (20) innerhalb der Hülle (12) befestigt ist.
6. System nach Anspruch 5, **dadurch gekennzeichnet, dass** das Gehäuse (20) eine Fläche (22) besitzt, die eine Kontur hat, um **dadurch** die Aufnahme der thermischen Energie zu erleichtern.
7. System nach Anspruch 6, **dadurch gekennzeichnet, dass** die Fläche (22) eine Vielzahl von Nuten (23) aufweist.
8. System nach Anspruch 2, **gekennzeichnet durch** Leitungen (61-64), die mit einem ersten Ende des Thermistors (26, 28) verbunden sind, wobei die Leitungen (61-64) eine Länge eines elektrisch leitfähigen Materials mit einem Widerstand aufweisen, der eine geringe Empfindlichkeit gegenüber Temperaturschwankungen besitzt.
9. Verfahren zum entfernten Messen der Temperatur eines Abtastspiegels, mit den Schritten:

Bereitstellen eines Temperatursensors (26, 28) an einem vorbestimmten Abstand, der nicht Null ist, eines Zehntelinches (0,254 cm) von dem Abtastspiegel (7) entfernt, wobei der Temperatursensor (26, 28) Teil eines Temperatur-Fernmesssystems (10) ist, das an der Drehachse des Spiegels platziert ist, um das Erfassen der Temperatur des Abtastspiegels (7) durch Erfassen der abgestrahlten Wärme zu erleichtern, Bereitstellen einer Hülle (12), die auf dem Abtastspiegel befestigt ist, um den Temperatursensor (26, 28) abzuschirmen und die relativ zu dem Temperatursensor drehbar ist, und Verarbeiten der elektrischen Signale, die von dem Temperatursensor (26, 28) empfangen werden, um die Temperatur des Abtastspiegels (7) festzustellen.

Revendications

1. Système de détection de température à distance (10) pour un miroir de balayage, comprenant :
- un miroir de balayage (7) qui est agencé avec possibilité de rotation autour d'un axe de rota-

tion, le système de détection de température (10) étant situé au niveau de l'axe de rotation du miroir, un moyen de capteur destiné à détecter la température (26, 28) dudit miroir de balayage, et un autre moyen (12, 20, 22) conçu pour maintenir ledit moyen de capteur (26, 28) à une distance non nulle prédéterminée du miroir de balayage (7) de sorte que la détection de la température du miroir de balayage (7) soit facilitée, ledit autre moyen comprenant une enveloppe de protection (12) destinée à protéger ledit moyen de capteur (26, 28) d'un rayonnement thermique parasite, l'enveloppe de protection étant montée sur le miroir (7) de façon à pouvoir tourner par rapport audit moyen de capteur (26, 28).

2. Système selon la revendication 1, **caractérisé en ce que** le premier moyen est une thermistance (26, 28).
3. Système selon la revendication 1, **caractérisé en ce que** la thermistance (26, 28) est montée à l'intérieur de l'enveloppe de protection (12).
4. Système selon la revendication 3, **caractérisé par** un boîtier (20) à l'intérieur duquel est montée la thermistance (26, 28).
5. Système selon la revendication 4, **caractérisé en ce que** le boîtier (20) est monté à l'intérieur de l'enveloppe de protection (12).
6. Système selon la revendication 5, **caractérisé en ce que** le boîtier (20) présente une surface (22) profilée afin de faciliter la réception d'énergie thermique par celle-ci.
7. Système selon la revendication 6, **caractérisé en ce que** la surface (22) comporte une pluralité de rainures (23) dans celle-ci.
8. Système selon la revendication 2, **caractérisé par** des fils (61 à 64) reliés à la thermistance (26, 28) sur une première extrémité de celle-ci, où les fils (61 à 64) comprennent une longueur de matériau électriquement conducteur présentant une résistivité qui a une faible sensibilité aux variations de température.
9. Procédé de détection à distance de la température d'un miroir de balayage comprenant les étapes consistant à :

procurer un capteur de température (26, 28) à une distance non nulle prédéterminée d'un dixième de pouce (0,254 cm) dudit miroir de balayage (7), ledit capteur de température (26, 28)

faisant partie d'un système de détection de température à distance (10) situé au niveau de l'axe de rotation dudit miroir pour faciliter la détection de la température dudit miroir de balayage (7) en détectant la chaleur rayonnée par celui-ci, 5
procurer une enveloppe de protection (12) qui est montée sur ledit miroir de balayage pour protéger ledit capteur de température (26, 28) et qui peut tourner par rapport audit capteur de 10
température, et
traiter les signaux électriques reçus dudit capteur de température (26, 28) pour s'assurer de la température dudit miroir de balayage (7).

15

20

25

30

35

40

45

50

55

FIG. 1.

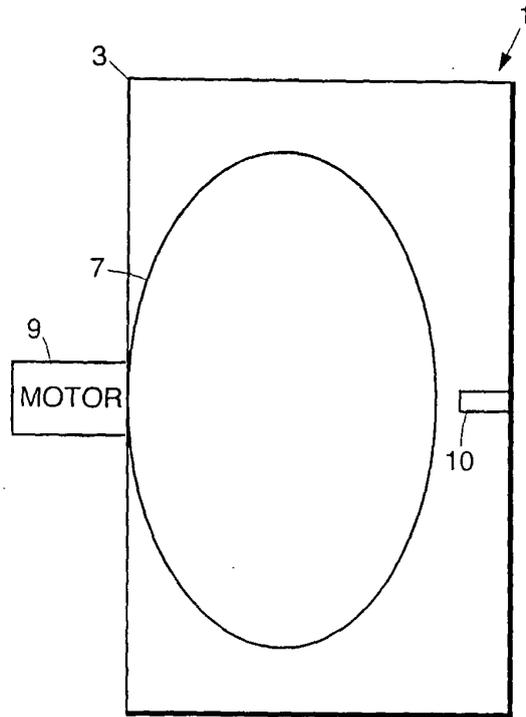
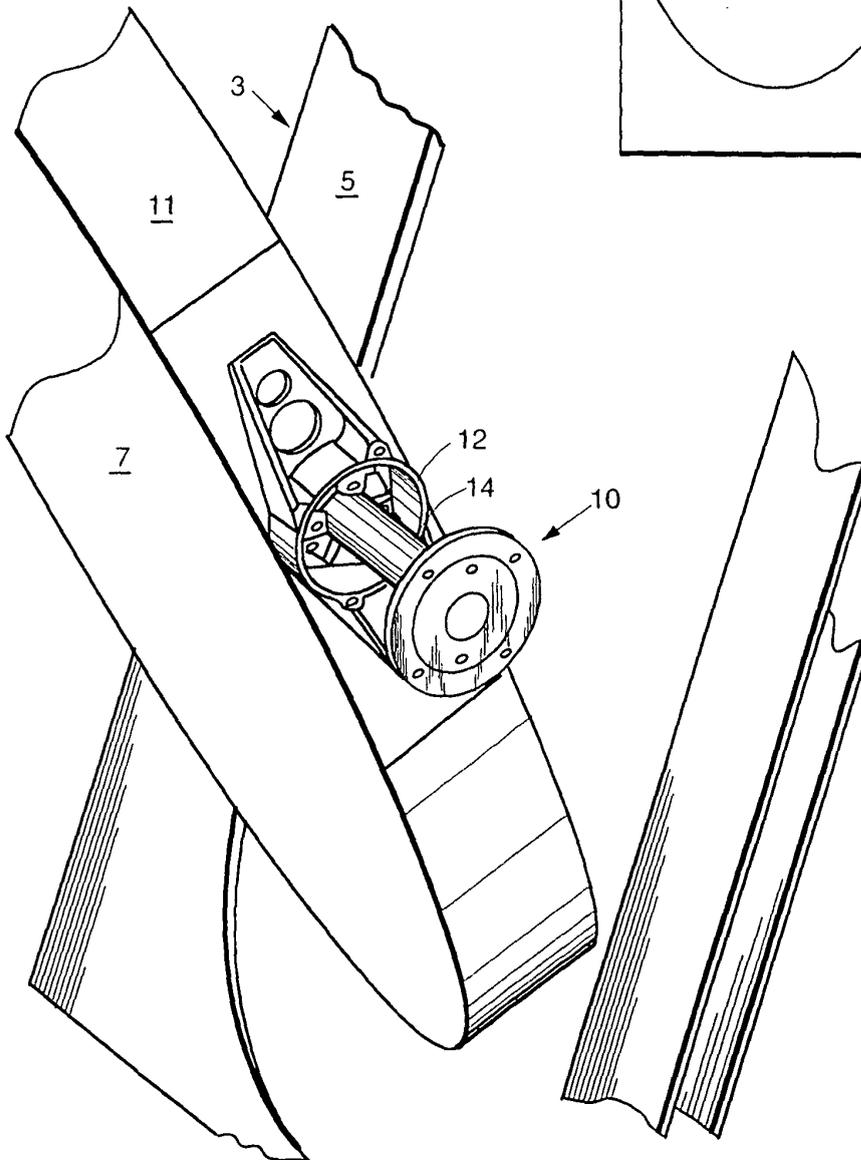


FIG. 2.



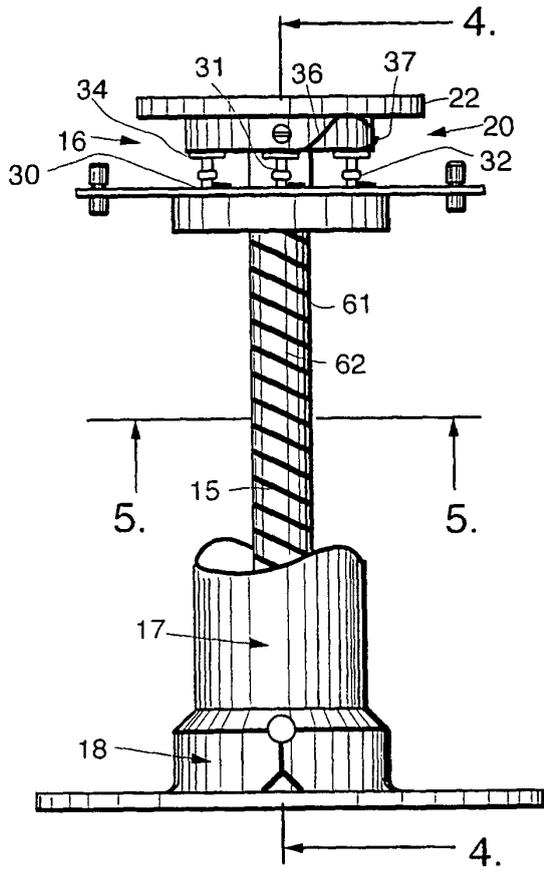


FIG. 3.

FIG. 4.

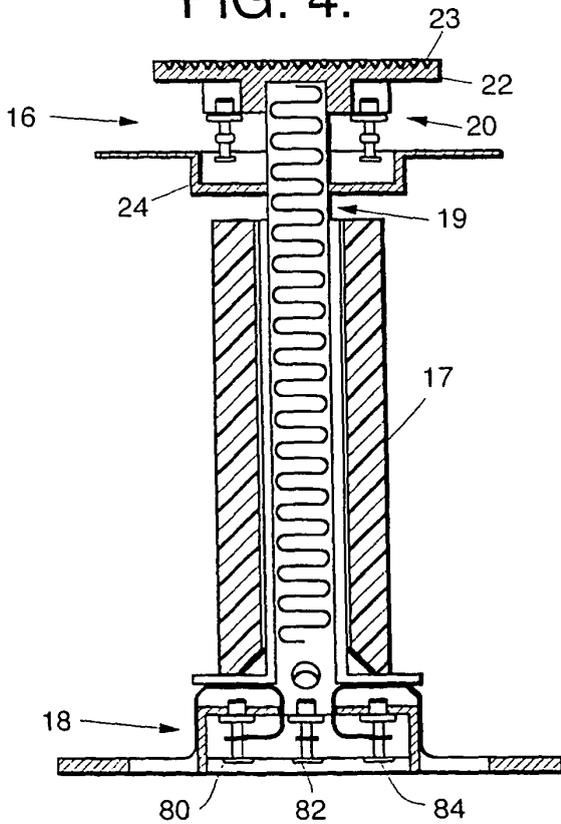
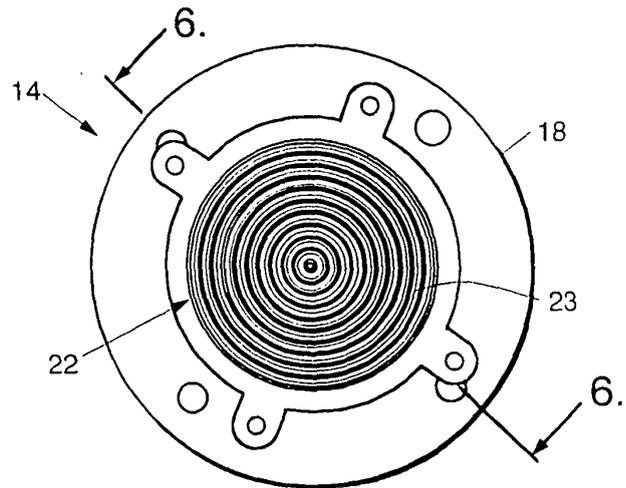


FIG. 5.



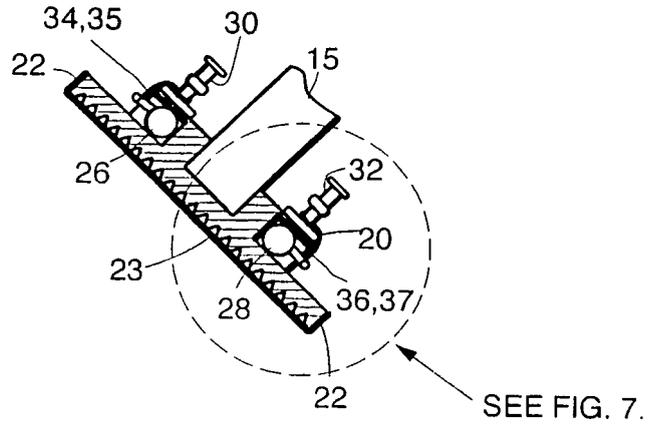


FIG. 6.

FIG. 7.

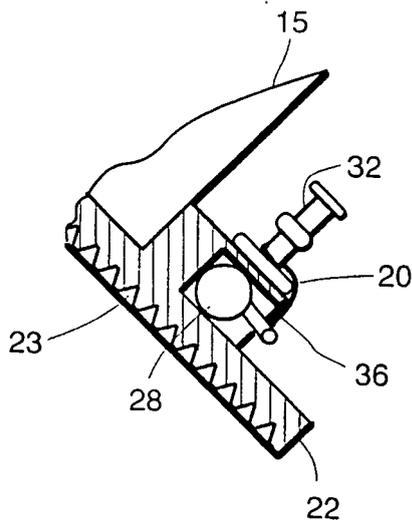


FIG. 8.

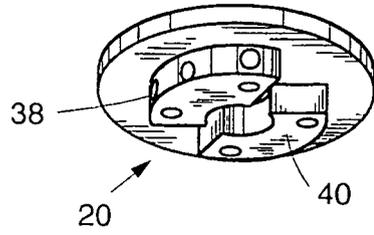


FIG. 9.

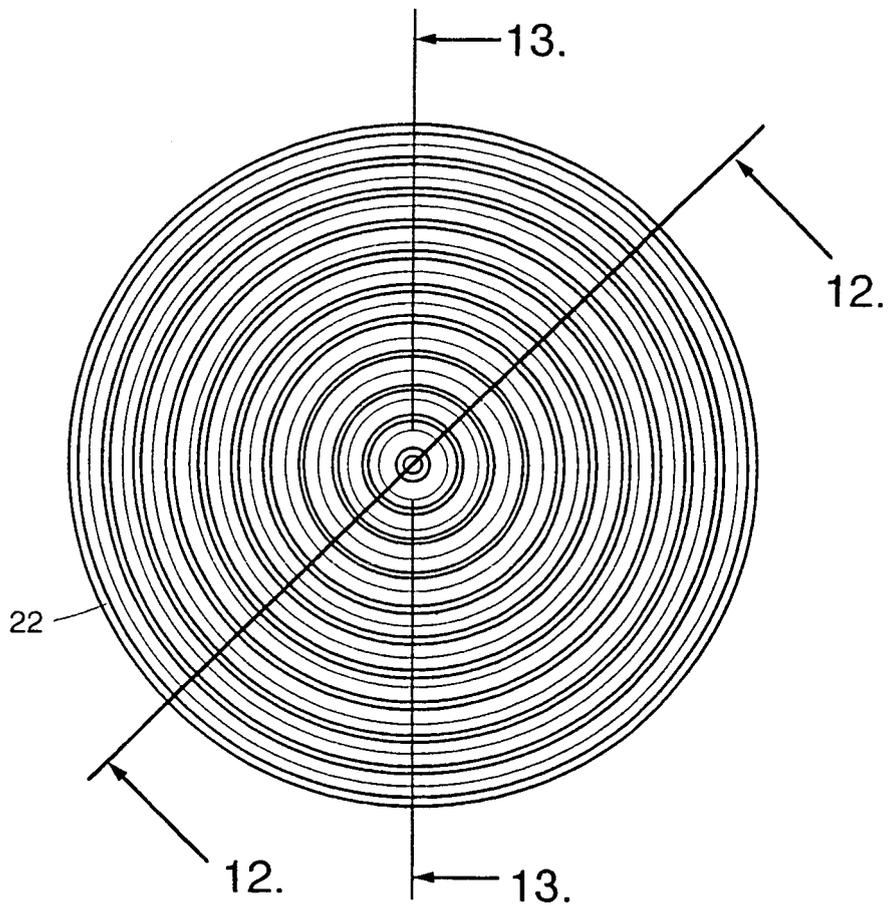
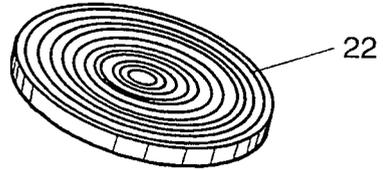


FIG. 10.

FIG. 11.

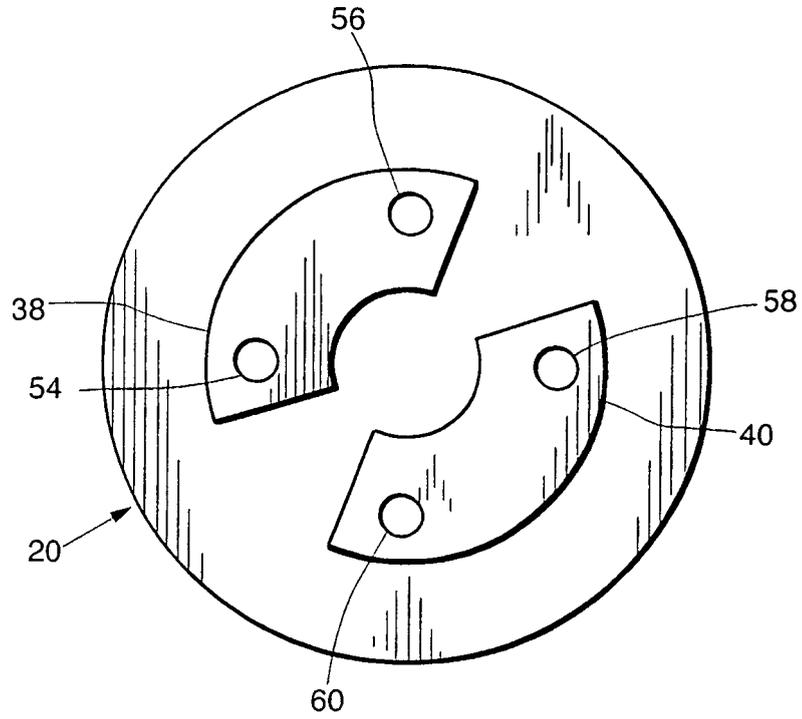


FIG. 12.

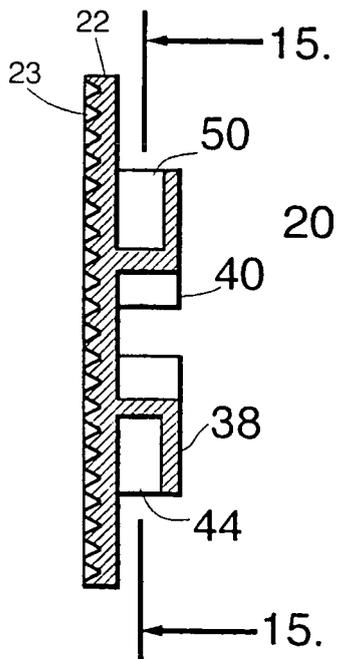
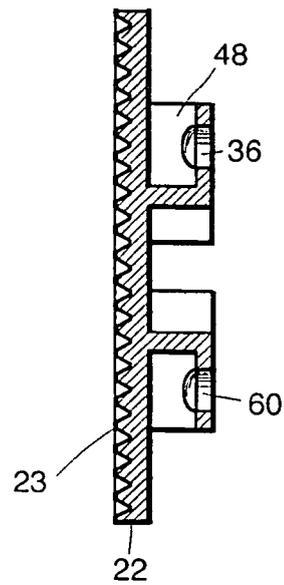


FIG. 13.



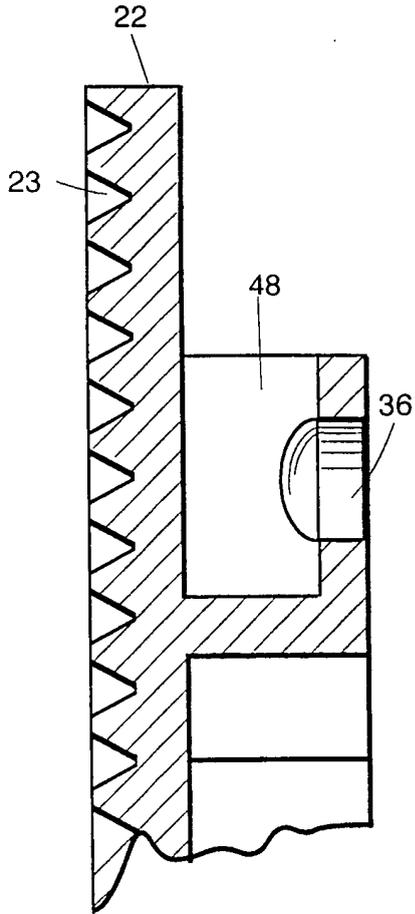


FIG. 14.

FIG. 15.


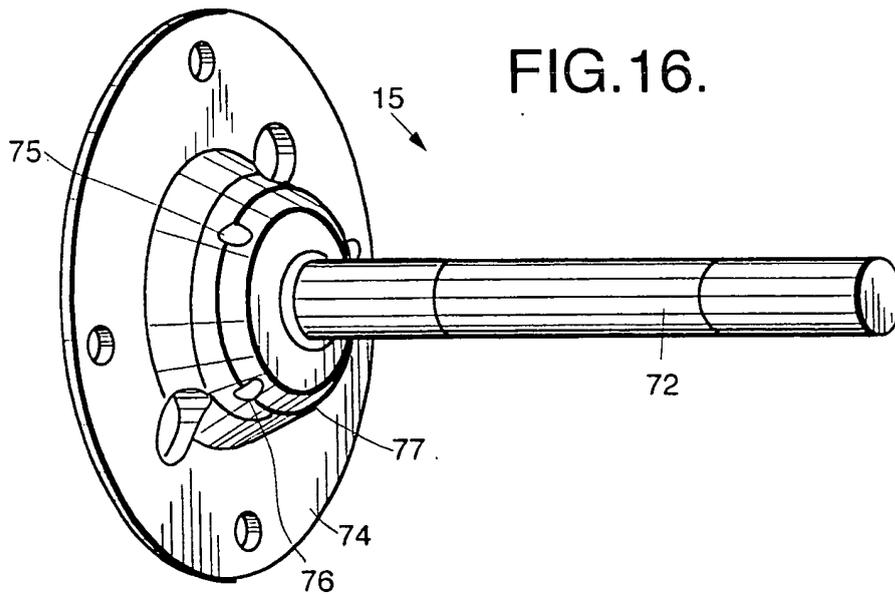


FIG. 16.

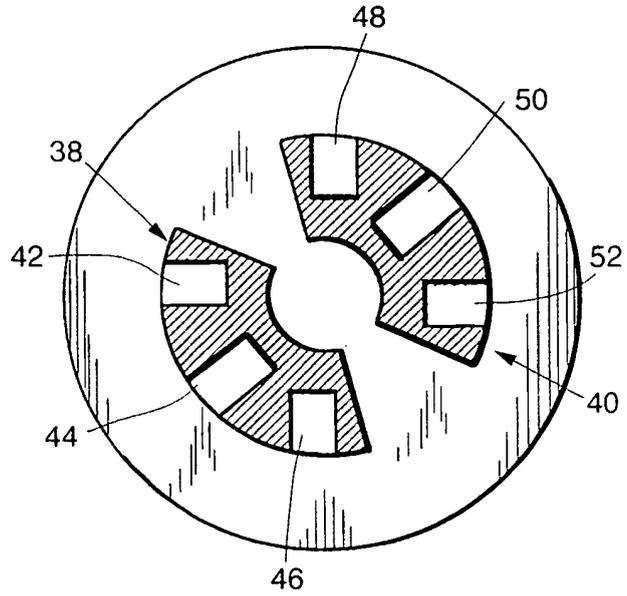