



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 897 801 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:

12.03.2003 Bulletin 2003/11

(21) Application number: **97912457.5**

(22) Date of filing: **14.11.1997**

(51) Int Cl.7: **B41J 2/045**, B41J 2/175

(86) International application number:
PCT/JP97/04150

(87) International publication number:
WO 98/022288 (28.05.1998 Gazette 1998/21)

(54) **INK-JET RECORDING HEAD**

TINTENSTRAHLSCHREIBKOPF

TETE D'ECRITURE A JET D'ENCRE

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **18.11.1996 JP 32234596**

(43) Date of publication of application:
24.02.1999 Bulletin 1999/08

(73) Proprietor: **SEIKO EPSON CORPORATION**
Tokyo 163 (JP)

(72) Inventor: **KITAHARA, Tsuyoshi,**
Seiko Epson Corporation
Suwa-shi Nagano-ken 392 (JP)

(74) Representative:

Diehl, Hermann, Dr. Dipl.-Phys. et al
DIEHL, GLÄSER, HILTL & PARTNER
Patentanwälte
Augustenstrasse 46
80333 München (DE)

(56) References cited:

JP-A- 7 060 957 **JP-A- 7 156 383**
JP-A- 61 193 859 **US-A- 4 611 219**
US-A- 5 444 471

- **PATENT ABSTRACTS OF JAPAN vol. 1996, no. 05, 31 May 1996 (1996-05-31) & JP 08 011304 A (NEC CORP), 16 January 1996 (1996-01-16)**

EP 0 897 801 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to an ink-jet printing head, more particularly relates to a method of producing a flow passage forming substrate.

2. Description of the Related Art

[0002] In an ink-jet printing head, as shown in Fig. 13, a flow passage unit is constituted by a flow passage forming substrate F in which a reservoir A to which ink is supplied from an outside tank, a pressure generating chamber B which is concave and pressurized from the outside, an ink supply port C connecting the reservoir A and the pressure generating chamber B and a nozzle communicating hole E which is a through hole and connects the pressure generating chamber B and a nozzle aperture D are formed, an elastic plate G for sealing one surface of the flow passage forming substrate F and a nozzle plate H provided with the nozzle aperture D for sealing the other surface of the flow passage forming substrate F. The ink-jet printing head is constituted so that ink in the reservoir A is sucked in the pressure generating chamber B via the ink supply port C by touching a piezoelectric vibrator J to the elastic plate G and expanding the pressure generating chamber B by the displacement of the piezoelectric vibrator J and an ink droplet ejects from the nozzle aperture D by pressurizing ink the pressure generating chamber B by contracting the pressure generating chamber B.

[0003] As in such an ink-jet printing head, full color printing can be readily executed by using color ink, the ink-jet printing head is rapidly popularized as a printing head of a color printer and hereby, it is demanded that printing quality and density are further enhanced.

[0004] As the printing quality and density of an ink-jet printing head greatly depend upon the size of a dot which an ink droplet forms, it is required to reduce the quantity of ink per droplet as much as possible to miniaturize the size of a dot.

[0005] Therefore, the volume of a pressure generating chamber can be reduced as much as possible and, in addition, pressure generating chambers can be arrayed in high density by arraying pressure generating chambers in high density, selecting a substrate 300 μm or more thick, desirably a substrate approximately 500 μm thick, for example a monocrystalline silicon substrate in view of working precision as a flow passage forming substrate in consideration of preventing a flow passage forming substrate from being deformed by pressure when an ink droplet ejects and, further, facility in handling in assembly and forming the pressure generating chamber as a shallow concave portion by photolithography and anisotropic etching as disclosed in

Unexamined Japanese Patent Application No. Sho. 58-40509.

[0006] When the pressure generating chamber is constituted on one surface of the substrate as a concave portion as described above, the nozzle communicating hole E for connecting the pressure generating chamber and the nozzle aperture is required to let the pressure generating chamber communicate with the nozzle aperture D of the nozzle plate arranged on the surface on the side reverse to the surface on which the pressure generating chamber is formed.

[0007] Such a nozzle communicating hole E is formed by making a through hole with a minute diameter pierced from one surface to the other surface in an area to be the nozzle communicating hole E beforehand as disclosed in Unexamined Japanese Patent Application No. Sho. 5-309835 and executing anisotropic etching to the depth using the above through hole as an etching pilot hole so that the width of the nozzle communicating hole E is approximately equal to the width of the pressure generating chamber B at the maximum.

[0008] Therefore, as shown in Fig. 14, as the height of a partition in an area K' which faces the nozzle communicating hole E is equal to the thickness d' of the monocrystalline silicon substrate and large though the partition in the vicinity of the pressure generating chamber is provided with high rigidity because the depth d of the pressure generating chamber B is small in an area K in the vicinity of the pressure generating chamber of partitions for partitioning the pressure generating chambers B, the rigidity of the partition between the adjacent nozzle communicating holes E is extremely small and there is a problem that pressure when ink is jetted elastically deforms the area K' and crosstalk is caused between the adjacent pressure generating chambers B.

SUMMARY OF THE INVENTION

[0009] An ink-jet printing head according to the present invention is provided with a flow passage forming substrate in which a pressure generating chamber, a reservoir, an ink supply port and a nozzle communicating hole which is a through hole are formed, a nozzle plate provided with a nozzle communicating with the pressure generating chamber via the nozzle communicating hole, a capping member for sealing the side of the pressure generating chamber of the flow passage forming substrate and pressure generating means for pressurizing the pressure generating chamber, two reservoirs are formed with the pressure generating chamber held between the two reservoirs, the pressure generating chamber communicates with at least one reservoir of them via the ink supply port, and the nozzle communicating holes are arranged zigzag in an approximately symmetrical position in which the center in the longitudinal direction of the pressure generating chamber is held between the adjacent nozzle communicating holes and so that one of the adjacent nozzle communi-

cating holes is shifted in the longitudinal direction of the pressure generating chamber.

[0010] Hereby, as the height of a partition for partitioning the nozzle communicating hole which is a through hole and the adjacent pressure generating chamber is approximately equal to the height of a partition between the pressure generating chambers, the flow passage forming substrate can be provided with sufficient rigidity. Therefore, even if the pressure generating chambers are arrayed in high density, a piezoelectric vibrator smaller than the outside diameters of a diaphragm may be used and crosstalk can be prevented.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

Figs. 1 (a) and 1 (b) show an embodiment of an ink-jet printing head according to the present invention as the sectional structure viewed along a center line between adjacent pressure generating chambers, Fig. 2 is a top view showing an embodiment of a flow passage forming substrate in the above ink-jet printing head by enlarging the vicinity of an ink supply port, a pressure generating chamber and a nozzle communicating hole and Fig. 3 is a perspective drawing showing the vicinity of a reservoir, the ink supply port, the pressure generating chamber and the nozzle communicating hole in the flow passage forming substrate of the above ink-jet printing head by enlarging the above vicinity;

Figs. 4, 5 and 6 respectively show an embodiment in case the flow passage forming substrate according to the present invention is manufactured by anisotropic etching using a monocrystalline silicon substrate;

Figs. 7 (a) and 7 (b) show another embodiment of the ink-jet printing head according to the present invention as the sectional structure viewed along a center line between adjacent pressure generating chambers;

Figs. 8 (a) and 8 (b) show further another embodiment of the ink-jet printing head according to the present invention as the sectional structure viewed along a center line between adjacent pressure generating chambers;

Fig. 9 is a top view showing the arrangement of nozzle apertures which may be applied to the ink-jet printing head shown in Figs. 8 in relationship between the arrangement of nozzle apertures and the flow passage forming substrate;

Figs. 10 (a) and 10 (b) each shows the other embodiment of the ink-jet printing head according to the present invention as the sectional structure viewed along a center line between adjacent pressure generating chambers;

Fig. 11 is a top view showing another embodiment of the flow passage forming substrate used for the

ink-jet printing head according to the present invention;

Fig. 12 is a top view showing the other embodiment of the flow passage forming substrate used for the ink-jet printing head according to the present invention;

Fig. 13 shows an example of a conventional type ink-jet printing head and Fig. 14 is a perspective drawing showing an example of a flow passage forming substrate in the conventional type ink-jet printing head.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0012] The present invention will be described in detail based upon embodiments shown in the drawings below.

[0013] Figs. 1 (a) and 1 (b) show an embodiment of the present invention as the sectional structure viewed along a center line (a line A-A and a line B-B in Fig. 2) between adjacent pressure generating chambers 2, a flow passage forming substrate 1 is made of a monocrystalline silicon substrate in this embodiment, a pressure generating chamber 2 is formed by anisotropic half-etching as a shallow concave portion, and a first reservoir 3 and a second reservoir 4 are also formed by anisotropic etching in two columns as a through hole in this embodiment on both sides of each pressure generating chamber 2. Each pressure generating chamber 2 adjacent in a row communicates with the first reservoir 3 or the second reservoir 4 via an ink supply port 5 or 6 which is a concave portion with depth approximately equal to the depth of the pressure generating chamber 2.

[0014] At the end on the side on which the ink supply port 5 or 6 is not formed, a nozzle communicating hole 7 or 8 pierced from the pressure generating chamber 2 to the other surface, that is, to the surface of a nozzle plate 13 is formed. In Fig. 2, zigzag hatching shows an area which is not etched, oblique hatching shows a half-etched area and further, an area which is not hatched shows a through hole.

[0015] The surface on the side of the pressure generating chamber of the spacer 1 constituted as described above is sealed by an elastic plate 10, the other surface is sealed by a nozzle plate 13 in which a nozzle aperture 11 or 12 is made in an area opposite to each nozzle communicating hole 7 or 8 and a flow passage unit is composed of the above members.

[0016] In each pressure generating chamber 2, pressure generating means, a piezoelectric vibrator 14 in a longitudinal vibration mode which is pressure generating means in the present embodiment is provided in an approximately central area on the center line A-A or B-B between the pressure generating chambers 2 on the elastic plate 10 with the end of the piezoelectric vibrator in contact with an island part 10a formed on the elastic plate 10 and with the other end fixed to a head frame

not shown which also functions as a fixing member. The piezoelectric vibrators 14 which respectively function as pressure generating means are arranged by the number of the pressure generating chambers 2 in the row of the pressure generating chambers 2.

[0017] In this embodiment, when a driving signal is applied to the piezoelectric vibrator 14, the piezoelectric vibrator 14 is contracted and the pressure generating chamber 2 is expanded. Ink in the first or second reservoir 3 or 4 flows into the pressure generating chamber 2 via the ink supply port 5 or 6 because of the above expansion.

[0018] Next, when the charges of the piezoelectric vibrator 14 are discharged, the piezoelectric vibrator 14 expands to an original state and compresses the pressure generating chamber 2. Hereby, pressurized ink is jetted as an ink droplet from the nozzle aperture 11 or 12 via the nozzle communicating hole 7 or 8.

[0019] In this embodiment, as the nozzle communicating holes 7 and 8 of adjacent pressure generating chambers 2 are arranged at least at an interval L shown in Fig. 2 in the longitudinal direction of the pressure generating chamber 2 and the height M of areas 15' and 15'' respectively opposite to the nozzle communicating holes 7 and 8 of a partition 15 for partitioning adjacent pressure generating chambers 2 as shown in Fig. 3 is equal to the depth N of each pressure generating chamber 2 and shallow, the areas 15' and 15'' are provided with sufficient rigidity approximately equal to the rigidity of the partition 15 partitioning adjacent pressure generating chambers 2. Therefore, the areas 15' and 15'' adjacent to each nozzle communicating hole 7 or 8 of the partition 15 are never deformed by pressure when ink is jetted and crosstalk is prevented.

[0020] As the nozzle apertures 11 and 12 which respectively communicate with adjacent pressure generating chambers 2 can be arranged at an interval in the longitudinal direction of the pressure generating chamber 2, the degree of freedom is enhanced in the layout of nozzle apertures and distortion when the nozzle plate 13 is pressed can be dispersed.

[0021] Figs. 4 to 6 show a method of manufacturing the above flow passage forming substrate, taking a case that one reservoir and one nozzle communicating hole are formed as an example and a silicon oxide film 22 which functions as a film for protecting from etching is formed on the whole surface of a monocrystalline silicon substrate 21 with thickness easy to handle, for example the thickness of approximately 500 μm and the orientation of a crystal plane of (110) by thermal oxidation so that the silicon oxide film has predetermined thickness, for example, is 1 μm thick. As for the film for protecting from etching, if a substance provided with corrosion resistance to anisotropic etchant is formed as a film such as a silicon nitride film and a metallic film as shown in Fig. 4 (I), the similar action as a film for protecting from etching is produced.

[0022] Next, a photoresist is applied uniformly on both

surfaces of the silicon oxide film 22 by spinning and others to form photoresist layers 23 and 24 as shown in Fig. 4 (II) and resist patterns 25, 25', 26 and 26' to be the pressure generating chamber 2 and the reservoir 3 are formed on both sides by photolithography as shown in Fig. 4 (III).

[0023] Patterns 27, 27', 28 and 28' respectively corresponding to the resist patterns 25, 25', 26 and 26' are transferred as a result of half-etching the silicon oxide film 22 by dipping the monocrystalline silicon substrate 21 in buffer hydrofluoric solution as shown in Fig. 4 (IV).

[0024] Next, a pattern 29 for an ink supply port is formed on one surface by exposing and developing areas to be the ink supply ports 5 and 6 and the pressure generating chamber 2 as shown in Fig. 5 (I) and the monocrystalline silicon substrate 21 is etched by dipping the monocrystalline silicon substrate in buffer hydrofluoric solution again until the patterns 27, 27', 28 and 28' of the silicon oxide film formed in the above process shown in Fig. 4 (IV) disappear as shown in Fig. 5 (II). Hereby, a pattern 30 of the silicon oxide film is left and patterns 31, 31', 32 and 32' for anisotropic etching respectively corresponding to the pressure generating chambers 2 and the reservoirs 3 and 4 are formed on both sides.

[0025] After unnecessary photoresist layers 33 and 34 are peeled as shown in Fig. 5 (III), an etching pilot hole 33 with depth to the extent that etching can reach the other surface from one surface of the patterns 31 and 31' to be the approximately parallelogrammatic pressure generating chamber 2 is made desirably in the center of the pattern 31 by irradiating a laser beam with wavelength suitable for boring the monocrystalline silicon substrate 21, for example a YAG laser beam as shown in Fig. 5 (IV).

[0026] When boring operation is finished, the monocrystalline silicon substrate 21 is dipped in the aqueous solution of potassium hydroxide (KOH) of 20 percent by weight kept approximately 80°C for anisotropic etching. A reservoir 35 is formed by a monocrystalline silicon plane (111) with an angle θ to the surface of the monocrystalline silicon substrate 21 by the above anisotropic etching.

[0027] An area in which the patterns 31 and 31' for the nozzle communicating holes 7 and 8 are formed is etched in the range of the patterns 31 and 31' in the direction of the thickness, being guided by the etching pilot hole 33 and finally, a through hole with predetermined cross section is formed as shown in Fig. 6 (I).

[0028] Next, after concave patterns 36 and 37 to be the ink supply ports 5 and 6 and the pressure generating chamber 2 are formed as shown in Fig. 6 (II), anisotropic etching is executed as shown in Fig. 6 (III) until the above patterns become concave portions 38 and 39 with depth suitable for the ink supply ports 5 and 6 and the pressure generating chamber 2 and finally, when the silicon oxide film 22 is removed by etching, a flow passage forming substrate is completed as shown in Fig. 6

(IV).

[0029] In the above embodiment, the ink supply ports 5 and 6 are formed only on the side of the elastic plate 10, however, when a second ink supply port 40 or 41 and a second pressure generating chamber 42 or 43 communicating with the above ink supply port 40 or 41 and the nozzle communicating hole 7 or 8 is formed on the side of the nozzle plate 13 as shown in Figs. 7 (a) and 7 (b), ink in the reservoir 3 or 4 can be supplied to the pressure generating chamber 2 via the two ink supply ports 5 and 40 or 6 and 41. Hereby, time required for supplying ink to the pressure generating chamber 2 is reduced and the printing head can be driven at high speed.

[0030] According to this embodiment, as shown in Figs. 8 (a) and 8 (b), not only the nozzle aperture 11 or 12 is formed in a position opposite to the nozzle communicating hole 7 or 8 but a nozzle aperture 11' or 11" is formed in an area opposite to the second pressure generating chamber 42 or 43 and ink pressurized in the pressure generating chamber 2 can be jetted as an ink droplet.

[0031] Hereby, if each pressure generating chamber 2 is alternately arranged in a different direction as shown in Fig. 9, the nozzle apertures 11' and 12' can be also arranged on the same line Lr and timing when an ink droplet is jetted can be simplified.

[0032] In the above embodiment, the ink supply port 5 or 6 is formed with the width at the end of the pressure generating chamber 2 narrowed, however, as shown in Fig. 9, a part not etched 44 or 45 may be also provided on the side of the reservoir in the pressure generating chamber 2 to adjust resistance in a passage.

[0033] Also, in the above embodiment, the ink supply port 5 or 6 is formed at one end on the side apart from the nozzle aperture 11 or 12 in the pressure generating chamber 2 and ink is supplied from one side, however, first and second ink supply ports 5 and 46 or 6 and 47 may be also formed on both sides of each pressure generating chamber 2 as shown in Figs. 10 so that the two ink supply ports respectively communicate with the two reservoirs 3 and 4 arranged with the pressure generating chamber 2 between the two reservoirs.

[0034] Further, in the above embodiment, the nozzle communicating hole 7 and the pressure generating chamber 2 are formed so that they have the same width, however, even if a nozzle communicating hole 48 or 49 with width Wb narrower than the width Wa of the pressure generating chamber 2 is formed as shown in Fig. 11, the similar action is produced. In Fig. 11, zigzag hatching shows an area which is not etched, oblique hatching shows a half-etched area and further, an area which is not hatched shows a through hole.

[0035] Furthermore, in the above embodiment, the width of the pressure generating chambers 2 alternately arranged in a reverse direction is equalized, however, as ink droplet jetting performance can be changed by making a difference between the width Wc and Wd of

the pressure generating chambers 2 different in a direction as shown in Fig. 12, the width suitable for the viscosity and property of ink can be selected, each ink droplet of different types of ink in one printing head, for example each ink droplet of black ink and color ink or each ink droplet of different colors of ink can be adjusted in size suitable for printing and the degree of freedom of usable ink can be enhanced.

[0036] In the above embodiment, the flow passage forming substrate is processed by anisotropically etching a monocrystalline silicon substrate in which a concave portion and a through hole can be formed precisely, however, as it is clear that the strength of the partition in the vicinity of the nozzle communicating hole can be also enhanced if the flow passage forming substrate is formed by boring a thin plate made of metal, ceramics or glass or by the injection molding of polymeric material, the similar action is also produced in case the flow passage forming substrate is formed by material except a monocrystalline silicon substrate.

[0037] As described above, as in an ink-jet printing head according to the present invention, the two reservoirs are formed with the pressure generating chamber between them, the pressure generating chamber communicates with at least one reservoir via the ink supply port and adjacent nozzle communicating holes are arranged in approximately opposite positions with the center in the longitudinal direction of the pressure generating chamber between the adjacent nozzle communicating holes and arranged zigzag with the adjacent nozzle communicating holes shifted in the longitudinal direction of the pressure generating chamber, the height of the partition for partitioning the nozzle communicating hole which is a through hole and the adjacent pressure generating chamber is approximately equal to the height of the partition between the adjacent pressure generating chambers and rigidity enough to prevent crosstalk can be kept.

[0038] As the nozzle apertures can be arranged in different positions in the longitudinal direction of the pressure generating chamber, the degree of freedom of the position of the nozzle aperture is high and distortion when the nozzle plate is added can be dispersed.

Claims

1. An ink-jet printing head comprising:

a flow passage forming substrate (1) made of a plate in which a plurality of pressure generating chambers (2), a plurality of ink supply ports (5, 6) and a plurality of nozzle communicating holes (7, 8) are formed, wherein said nozzle communicating holes (7, 8) are through holes in said plate, wherein each said pressure generating chamber (2) communicates with a reservoir (3, 4) via at least one said ink supply port

(5, 6), and wherein said plurality of pressure generating chambers (2) is provided adjacent to each other in an arrangement direction of said pressure generating chambers;

a nozzle plate (13) provided on one side of said substrate plate and provided with a plurality of nozzles (11, 12), each nozzle communicating with said pressure generating chamber (2) via said nozzle communicating hole (7, 8);

an elastic plate (10) provided on the other side of said substrate plate for sealing said pressure generating chambers (2); and

a plurality of pressure generating means (14) contacting said elastic plate (10) for pressurising said pressure generating chambers (2);

characterized by

two reservoirs (3, 4) extending in said arrangement direction and spaced apart from each other in a longitudinal direction transverse to said arrangement direction, wherein said said pressure generating chambers (2) are arranged between said two reservoirs (3, 4);

wherein said plurality of pressure generating means (14) contact said elastic plate (10) in an area approximately central between said two reservoirs (3, 4); and

wherein each pair of nozzle communicating holes (7, 8) adjacent in the arrangement direction is arranged on opposite sides of said areas of contact in said longitudinal direction.

2. An ink-jet printing head according to Claim 1, wherein: said ink supply port is formed on the side on which said pressure generating chamber is formed.
3. An ink-jet printing head according to Claim 1, wherein: said ink supply ports are formed on the sides of said capping member and said nozzle plate.
4. An ink-jet printing head according to Claim 1, wherein: said ink supply ports are formed at both ends of said pressure generating chamber.
5. An ink-jet printing head according to Claim 1, wherein: said nozzle communicating hole is formed so that the width is narrower than the width of said pressure generating chamber.
6. An ink-jet printing head according to Claim 1, wherein: said nozzle communicating hole is formed by being etched from a hole with a minute diameter.

7. An ink-jet printing head according to Claim 1, wherein: said pressure generating means is constituted by a piezoelectric vibrator; said pressure generating means is extended in the direction of the row of said pressure generating chambers; and said pressure generating means is arranged on the approximately center line of said pressure generating chamber.

8. An ink-jet printing head according to Claim 1, wherein: the width of adjacent said pressure generating chambers is different.

9. An ink-jet printing head according to Claim 1, wherein: a second ink supply port is also provided on the side of said nozzle plate; and a passage from said second ink supply port to said nozzle communicating hole is provided.

10. An ink-jet printing head according to Claim 9, wherein: said nozzle aperture is formed in a position opposite to said passage.

11. An ink-jet printing head according to Claim 9, wherein: said nozzle apertures are arranged approximately straight.

12. An ink-jet printing head according to Claim 1, wherein: said flow passage forming substrate is constituted by anisotropically etching a monocrystalline silicon substrate.

Patentansprüche

1. Tintenstrahl-Druckkopf, umfassend:

ein strömungsdurchlassbildendes Substrat (1), hergestellt aus einer Platte, in der eine Vielzahl an druckerzeugenden Kammern (2), eine Vielzahl an Tintenzuflussöffnungen (5, 6) und eine Vielzahl an Düsenverbindungs Löchern (7, 8) gebildet sind, wobei die Düsenverbindungs Löcher (7, 8) Durchgangslöcher in der Platte sind, wobei jede druckerzeugende Kammer (2) über mindestens eine Tintenzuflussöffnung (5, 6) mit einem Speicher (3, 4) in Verbindung steht und wobei die Vielzahl an druckerzeugenden Kammern (2) einander benachbart in einer Anordnungsrichtung der druckerzeugenden Kammern bereitgestellt ist;

eine Düsenplatte (13), mit der eine Seite der Substratplatte versehen ist und die mit einer Vielzahl an Düsen (11, 12) versehen ist, wobei jede Düse über das Düsenverbindungsloch (7, 8) mit der druckerzeugenden Kammer (2) in Verbindung steht;

eine elastische Platte (10), mit der die andere Seite der Substratplatte zum Abdichten der druckerzeugenden Kammern (2) versehen ist; und

eine Vielzahl an druckerzeugenden Vorrichtungen (14), die die elastische Platte (10) zum Druckaufbau in den druckerzeugenden Kammern (2) berühren;

gekennzeichnet durch

zwei Speicher (3, 4), die sich in der Anordnungsrichtung erstrecken und die in einer Längsrichtung quer zu der Anordnungsrichtung mit einem Abstand voneinander angeordnet sind, wobei die druckerzeugenden Kammern (2) zwischen den beiden Speichern (3, 4) angeordnet sind; wobei die Vielzahl an druckerzeugenden Vorrichtungen (14) die elastische Platte (10) in einem Bereich annähernd in der Mitte zwischen den beiden Speichern (3, 4) berührt; und wobei jedes Paar der Düsenverbindungslöcher (7, 8), die in der Anordnungsrichtung benachbart sind, auf gegenüberliegenden Seiten der Berührungsbe-
reiche in der Längsrichtung angeordnet ist.

2. Tintenstrahl-Druckkopf gemäß Anspruch 1, wobei die Tintenzuflussöffnung auf der Seite gebildet ist, auf der die druckerzeugende Kammer gebildet ist.
3. Tintenstrahl-Druckkopf gemäß Anspruch 1, wobei die Tintenzuflussöffnungen auf den Seiten des Abdeckungselementes und der Düsenplatte gebildet sind.
4. Tintenstrahl-Druckkopf gemäß Anspruch 1, wobei die Tintenzuflussöffnungen an beiden Enden der druckerzeugenden Kammer gebildet sind.
5. Tintenstrahl-Druckkopf gemäß Anspruch 1, wobei das Düsenverbindungsloch so gebildet ist, dass die Breite schmaler ist als die Breite der druckerzeugenden Kammer.
6. Tintenstrahl-Druckkopf gemäß Anspruch 1, wobei das Düsenverbindungsloch durch Ausätzen aus einem Loch mit einem sehr kleinen Durchmesser gebildet ist.
7. Tintenstrahl-Druckkopf gemäß Anspruch 1, wobei die druckerzeugende Vorrichtung von einem piezoelektrischen Vibrator gebildet ist, die druckerzeugende Vorrichtung sich in der Richtung der Reihe der druckerzeugenden Kammern erstreckt und die druckerzeugende Vorrichtung auf der annähernd mittleren Linie der druckerzeugenden Kammer angeordnet ist.

8. Tintenstrahl-Druckkopf gemäß Anspruch 1, wobei die Breite von benachbarten der druckerzeugenden Kammern verschieden ist.

5 9. Tintenstrahl-Druckkopf gemäß Anspruch 1, wobei auch die Seite der Düsenplatte mit einer zweiten Tintenzuflussöffnung versehen ist und ein Durchlass von der zweiten Tintenzuflussöffnung zum Düsenverbindungsloch bereitgestellt ist.

10

10. Tintenstrahl-Druckkopf gemäß Anspruch 9, wobei die Düsenöffnung an einer Stelle gebildet ist, die dem Durchlass gegenüberliegt.

15

11. Tintenstrahl-Druckkopf gemäß Anspruch 9, wobei die Düsenöffnungen annähernd geradlinig angeordnet sind.

20

12. Tintenstrahl-Druckkopf gemäß Anspruch 1, worin das strömungsdurchlassbildende Substrat durch anisotropes Ätzen eines einkristallinen Siliziumsubstrates gebildet ist.

25

Revendications

1. Tête d'impression à jet d'encre comportant :

30

un substrat de formation de passage d'écoulement (1) composé d'une plaque dans laquelle une multiplicité de chambres de génération de pression (2), une multiplicité d'orifices d'alimentation en encre (5, 6) et une multiplicité de trous de communication de buse (7, 8) sont formées, lesdits trous de communication de buse (7, 8) étant des trous débouchants dans ladite plaque, chaque dite chambre de génération de pression (2) communiquant avec un réservoir (3, 4) par l'intermédiaire d'au moins un dit orifice d'alimentation en encre (5, 6), et ladite multiplicité de chambres de génération de pression (2) étant prévue de façon adjacente l'une à l'autre dans une direction d'agencement desdites chambres de génération de pression;

35

une plaque de buse (13) prévue sur un côté de ladite plaque de substrat et pourvue d'une multiplicité de buses (11, 12), chaque buse communiquant avec ladite chambre de génération de pression (2) par l'intermédiaire dudit trou de communication de buse (7, 8);

40

une plaque élastique (10) prévue sur l'autre côté de ladite plaque de substrat afin de rendre étanches lesdites chambres de génération de pression (2); et

45

plusieurs moyens de génération de pression (14) en contact avec ladite plaque élastique (10) afin de mettre en pression lesdites chambres de génération de pression (2);

caractérisée par

- deux réservoirs (3, 4) qui s'étendent dans ladite direction d'agencement et espacés l'un de l'autre dans une direction longitudinale transversale à ladite direction d'agencement, lesdites chambres de génération de pression (2) étant disposées entre lesdits deux réservoirs (3, 4); ladite multiplicité de moyens de génération de pression (14) étant en contact avec ladite plaque élastique (10) dans une zone approximativement centrale en lesdits deux réservoirs (3, 4); et chaque paire de trous de communication de buse (7, 8) adjacents dans la direction d'agencement étant disposée sur des côtés opposés desdites zones de contact dans ladite direction longitudinale.
2. Tête d'impression à jet d'encre selon la revendication 1, dans laquelle ledit orifice d'alimentation en encre est formé sur le côté sur lequel ladite chambre de génération de pression est formée. 20
 3. Tête d'impression à jet d'encre selon la revendication 1, dans laquelle : lesdits orifices d'alimentation en encre sont formés sur les côtés dudit élément de bouchon et de ladite plaque de buse. 25
 4. Tête d'impression à jet d'encre selon la revendication 1, dans laquelle lesdits orifices d'alimentation en encre sont formés aux deux extrémités de ladite chambre de génération de pression. 30
 5. Tête d'impression à jet d'encre selon la revendication 1, dans laquelle ledit trou de communication de buse est formé de telle sorte que la largeur est plus étroite que la largeur de ladite chambre de génération de pression. 35
 6. Tête d'impression à jet d'encre selon la revendication 1, dans laquelle ledit trou de communication de buse est formé en étant gravé à partir d'un trou avec un petit diamètre. 40
 7. Tête d'impression à jet d'encre selon la revendication 1, dans laquelle lesdits moyens de génération de pression sont constitués par un vibreur piézo-électrique, lesdits moyens de génération de pression s'étendent dans la direction de la rangée desdites chambres de génération de pression; et lesdits moyens de génération de pression sont disposés sur l'axe approximativement central de ladite chambre de génération de pression. 45 50
 8. Tête d'impression à jet d'encre selon la revendication 1, dans laquelle la largeur desdites chambres de génération de pression adjacentes est différente. 55
 9. Tête d'impression à jet d'encre selon la revendication 1, dans laquelle un deuxième orifice d'alimentation en encre est également prévu sur le côté de ladite plaque de buse; et un passage depuis ledit deuxième orifice d'alimentation en encre jusqu'au dit trou de communication de buse est prévu.
 10. Tête d'impression à jet d'encre selon la revendication 9, dans lequel ladite ouverture de buse est formée dans une position opposée au dit passage.
 11. Tête d'impression à jet d'encre selon la revendication 9, dans laquelle lesdites ouvertures de buse sont disposées de manière approximativement droite.
 12. Tête d'impression à jet d'encre selon la revendication 1, dans laquelle ledit substrat de formation de passage d'écoulement est constitué par une gravure anisotrope d'un substrat en silicium monocristallin.

FIG. 1 (a)

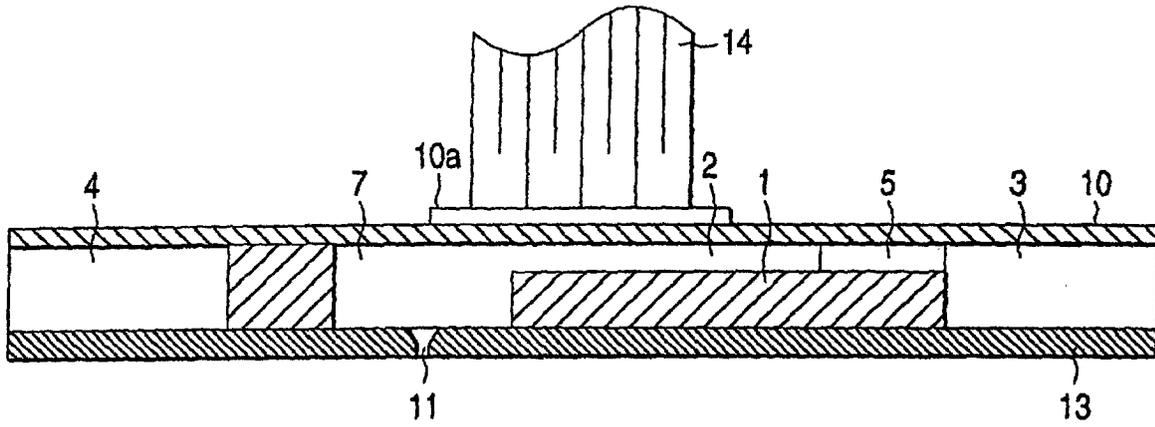


FIG. 1 (b)

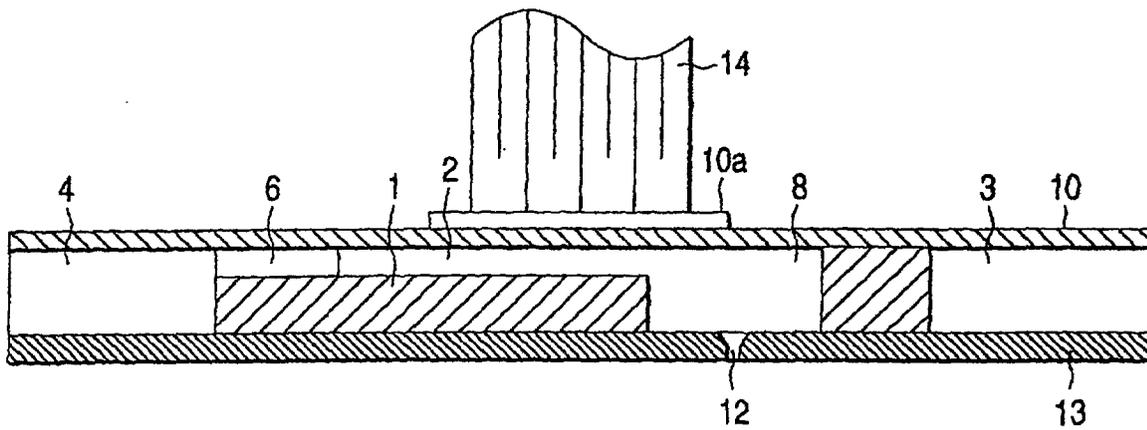


FIG. 2

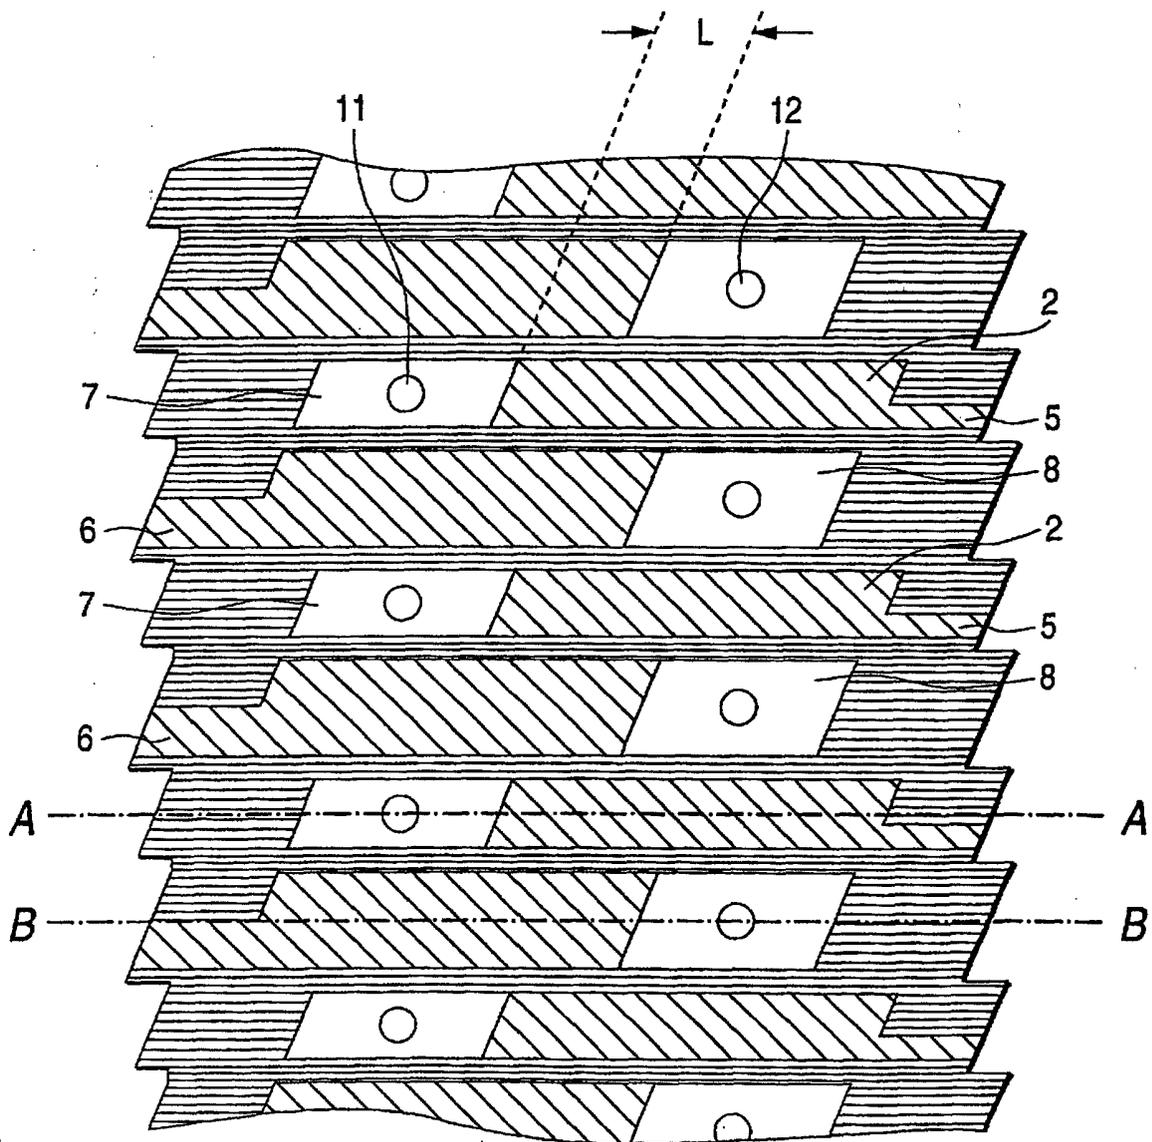


FIG. 3

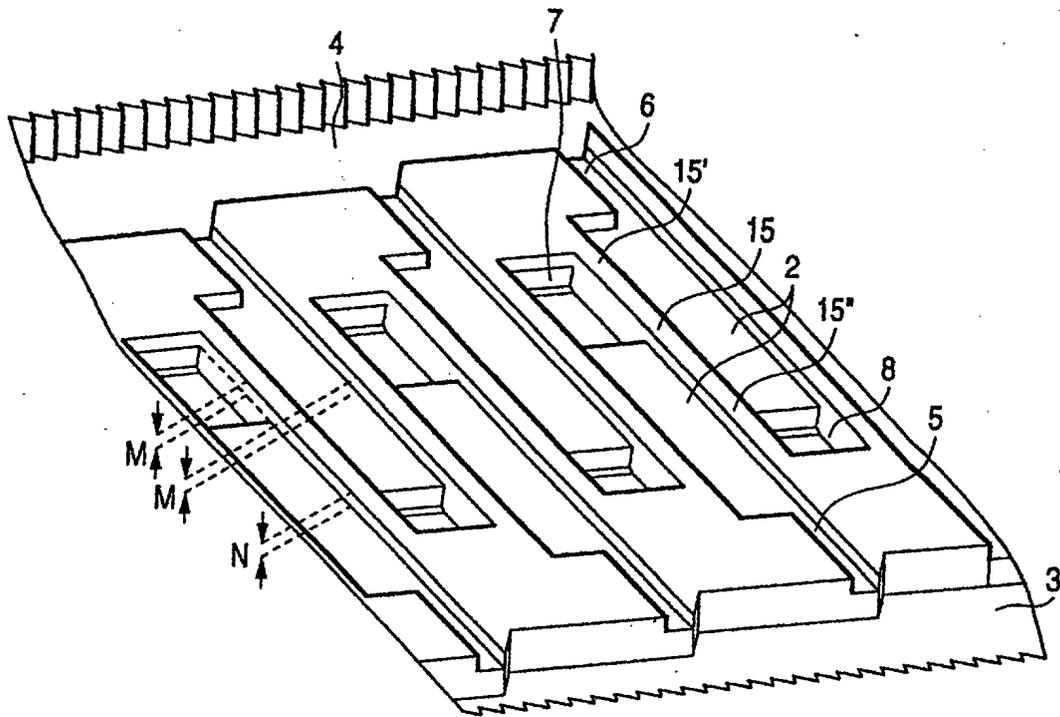


FIG. 4

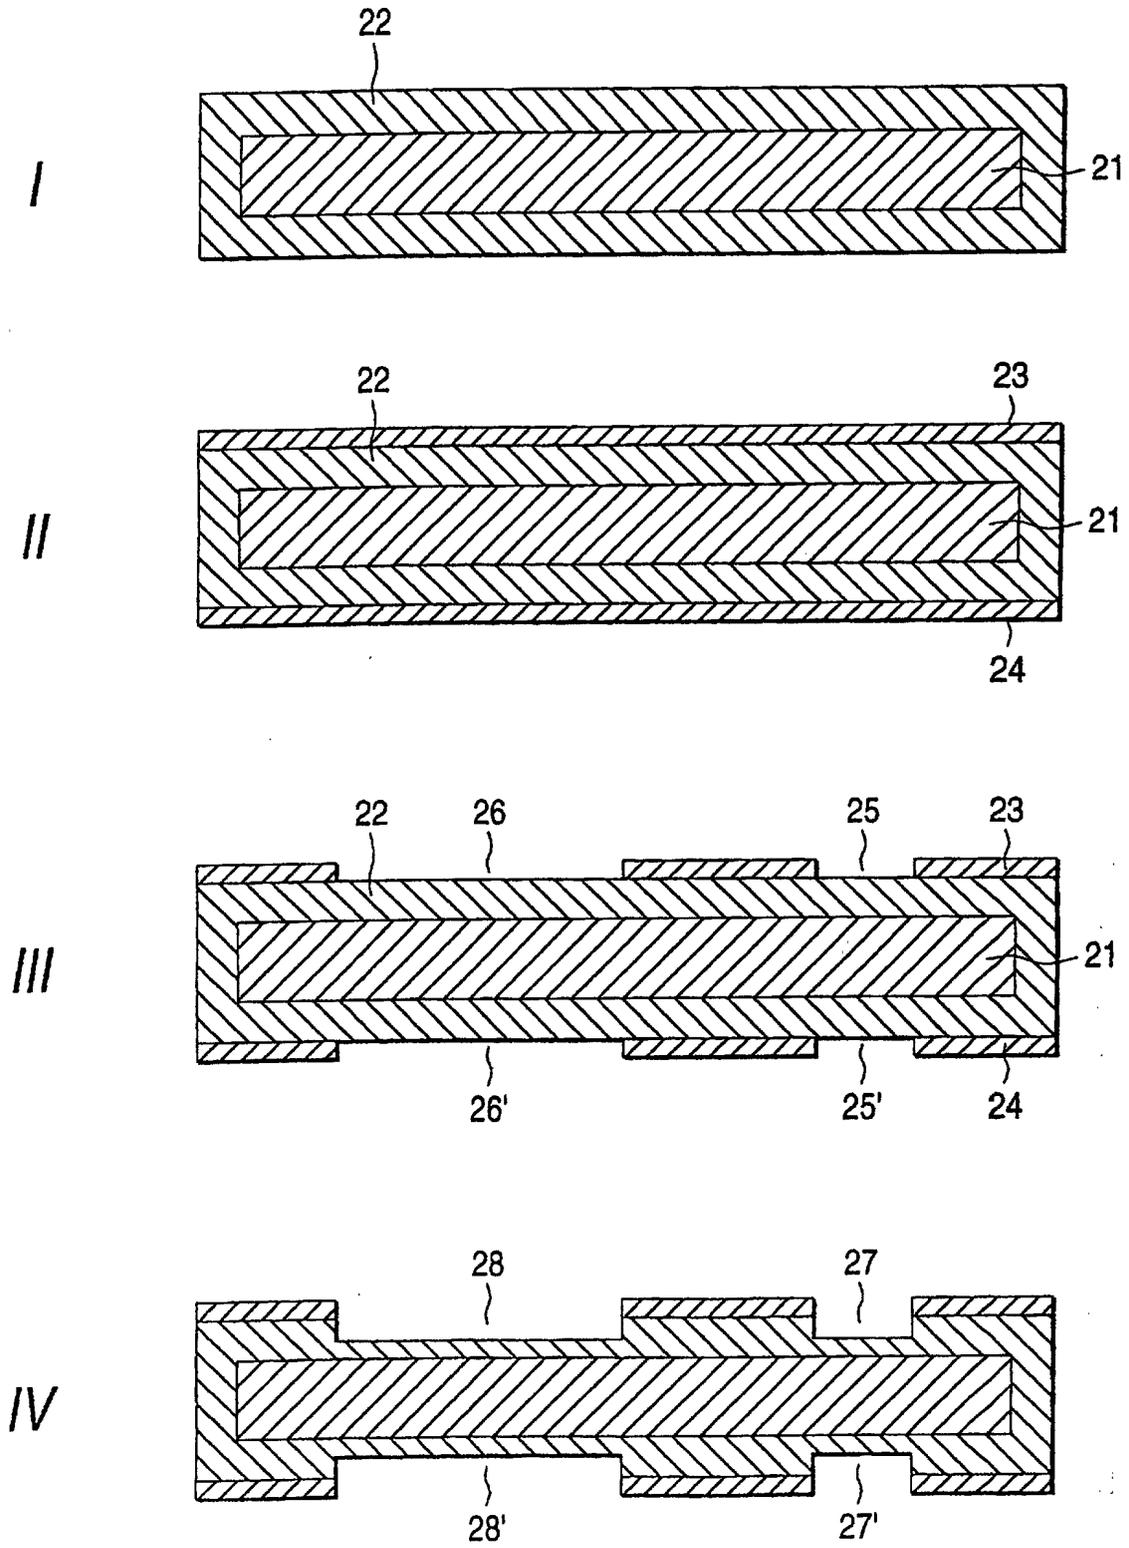


FIG. 5

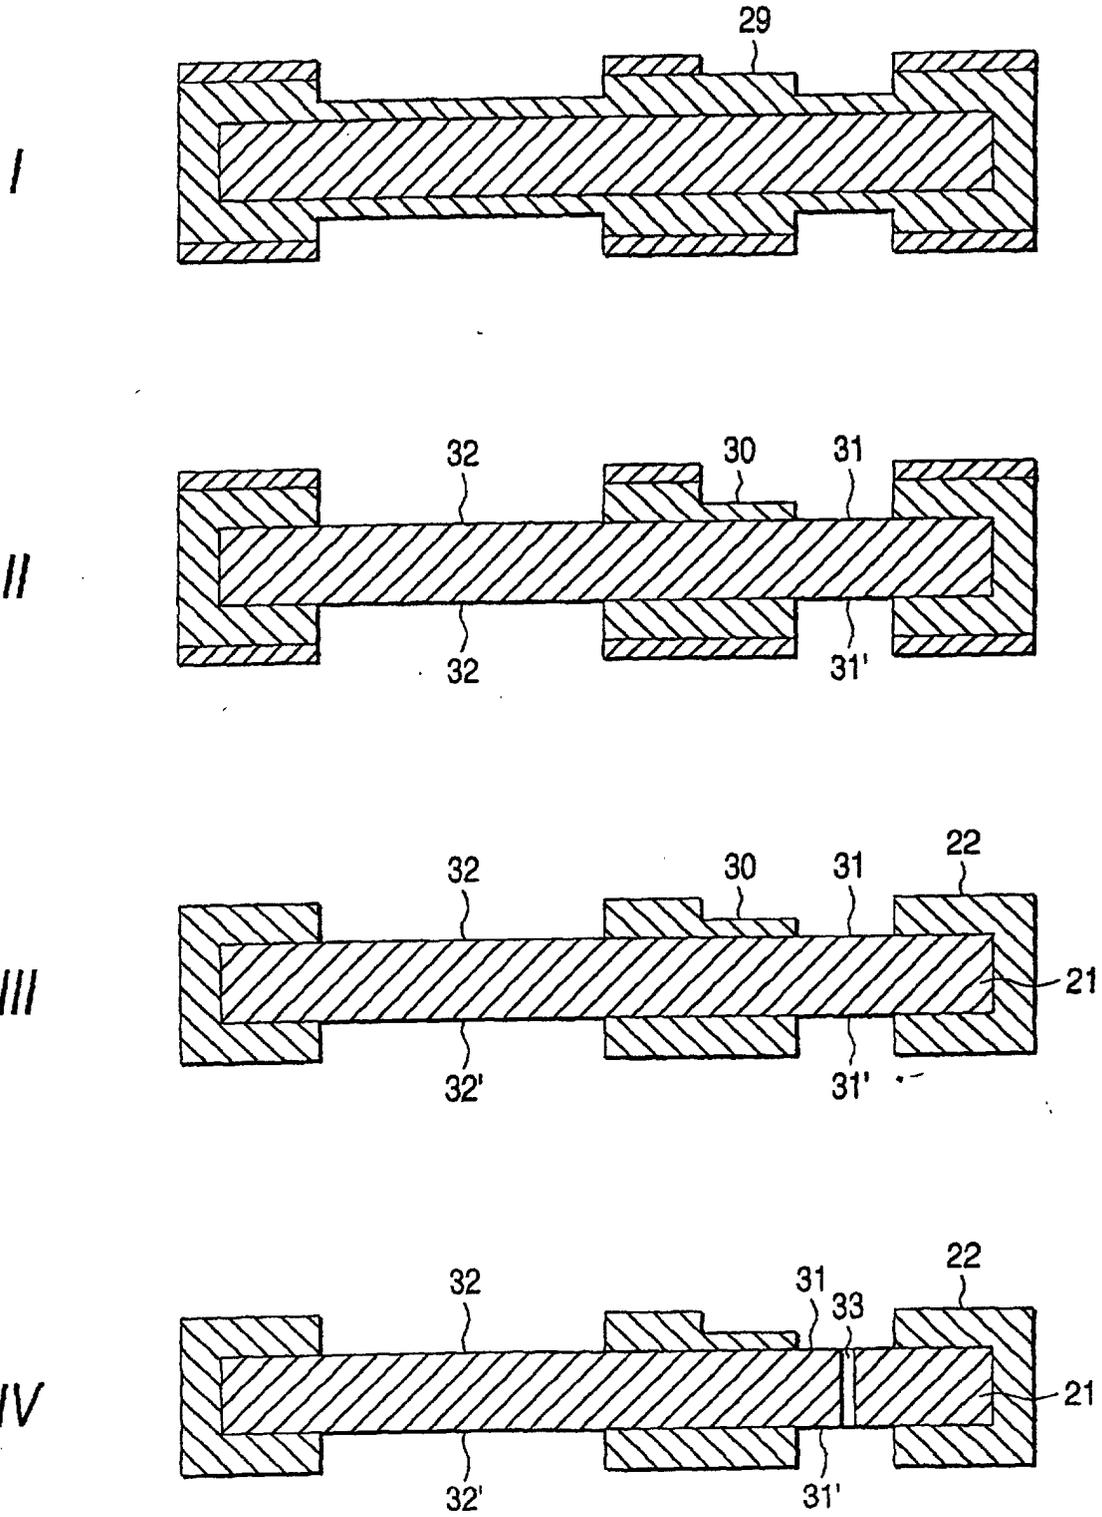


FIG. 6

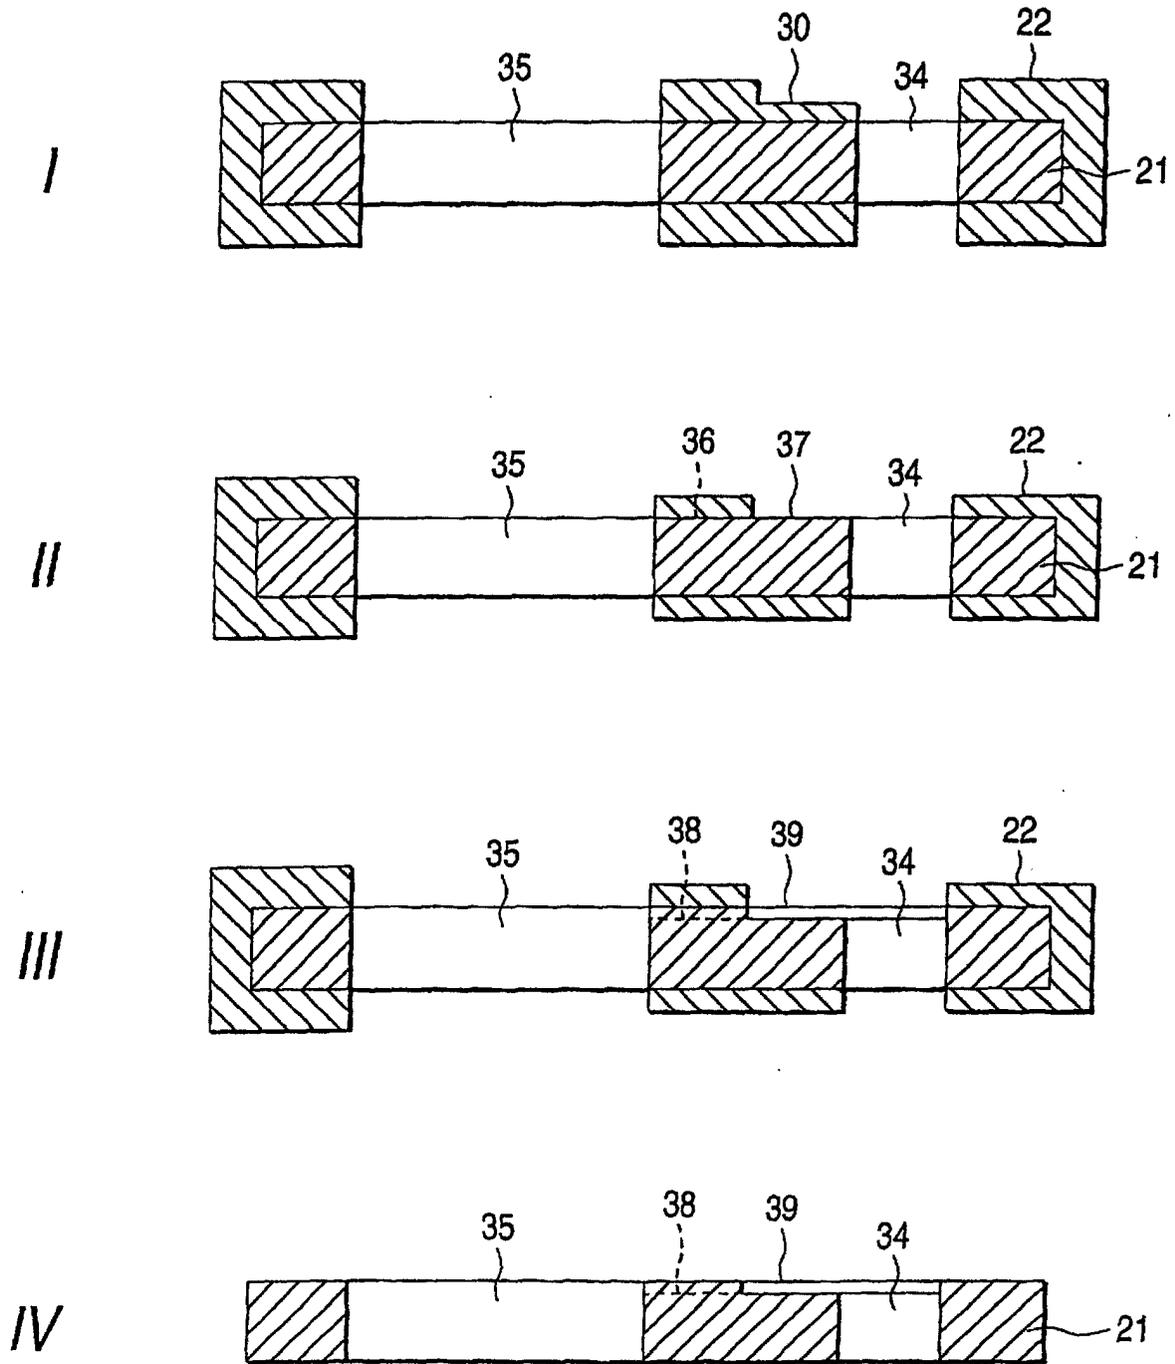


FIG. 7 (a)

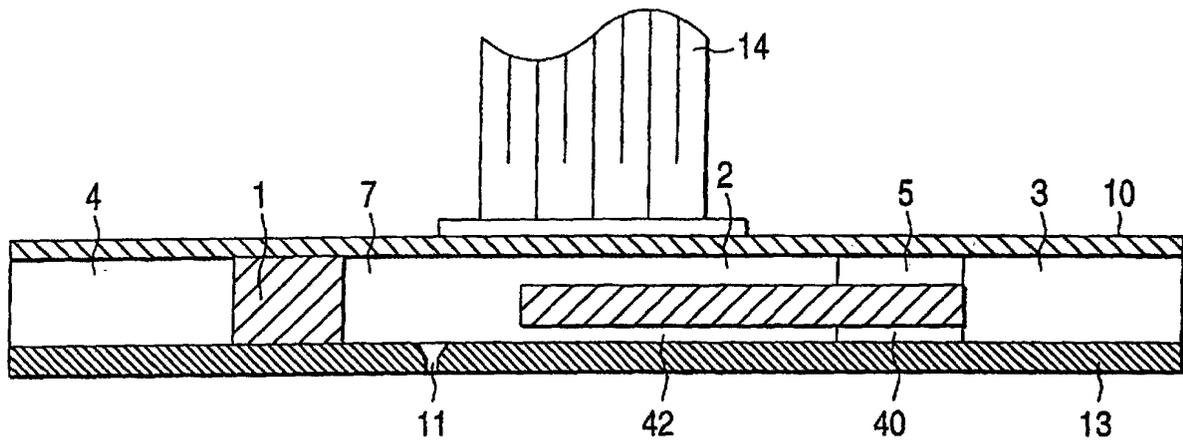


FIG. 7 (b)

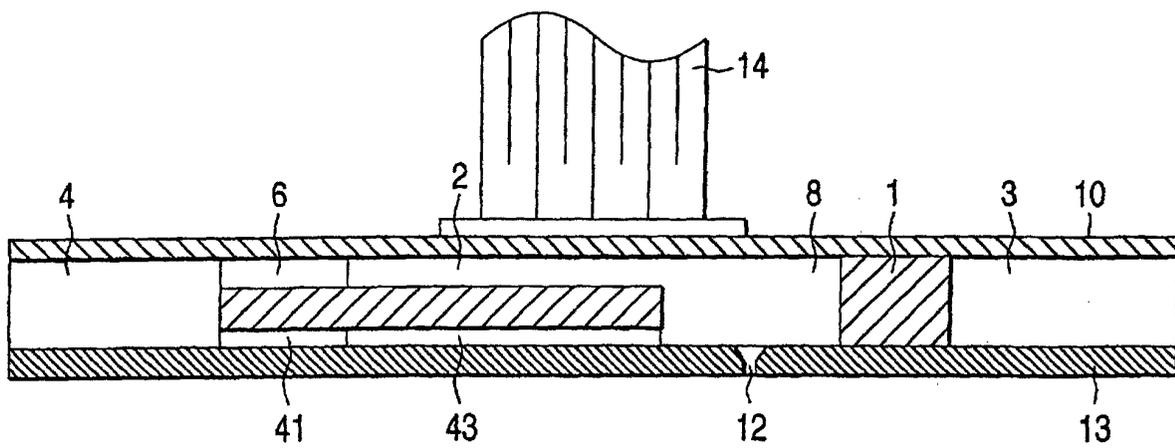


FIG. 8 (a)

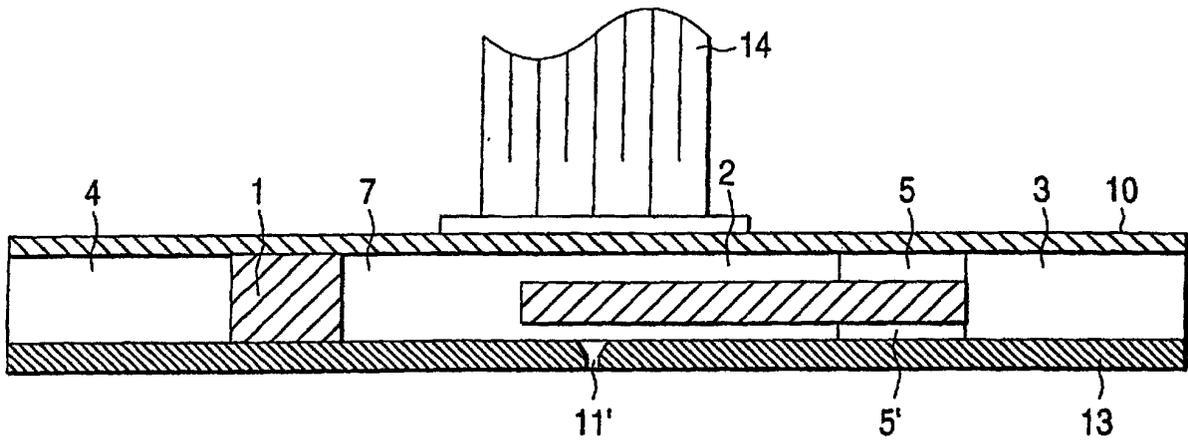


FIG. 8 (b)

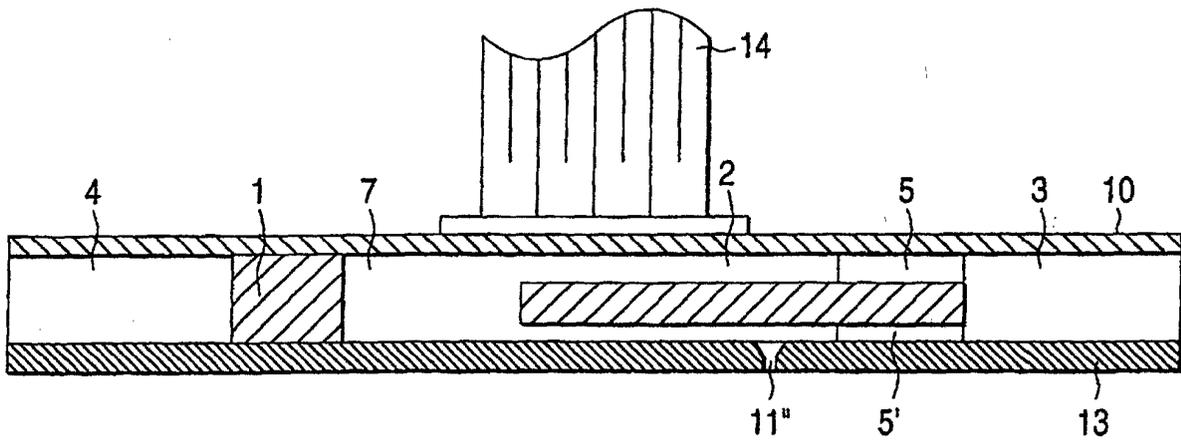


FIG. 9

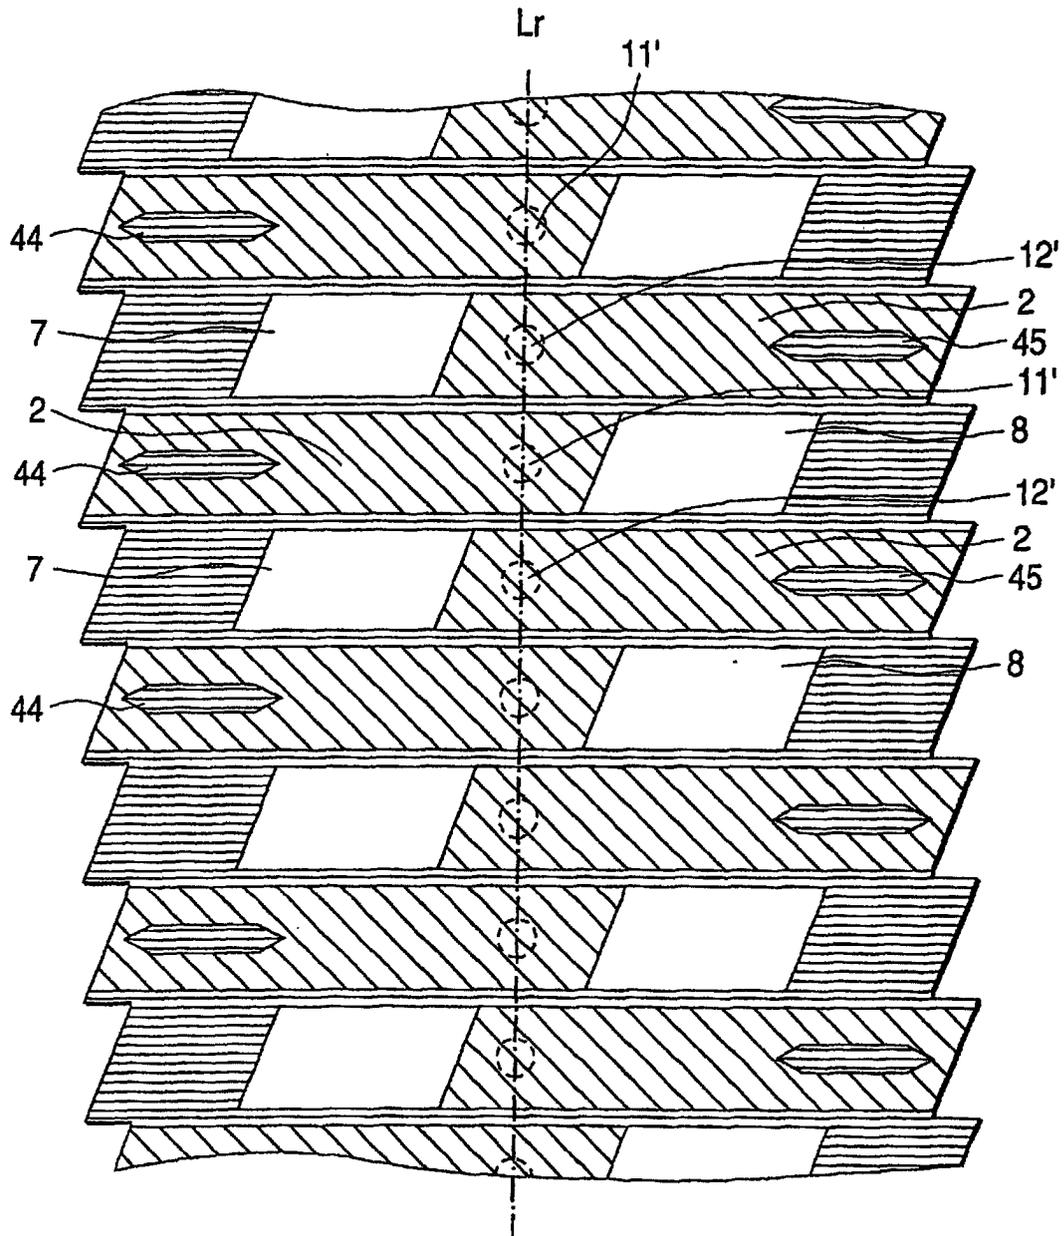


FIG. 10 (a)

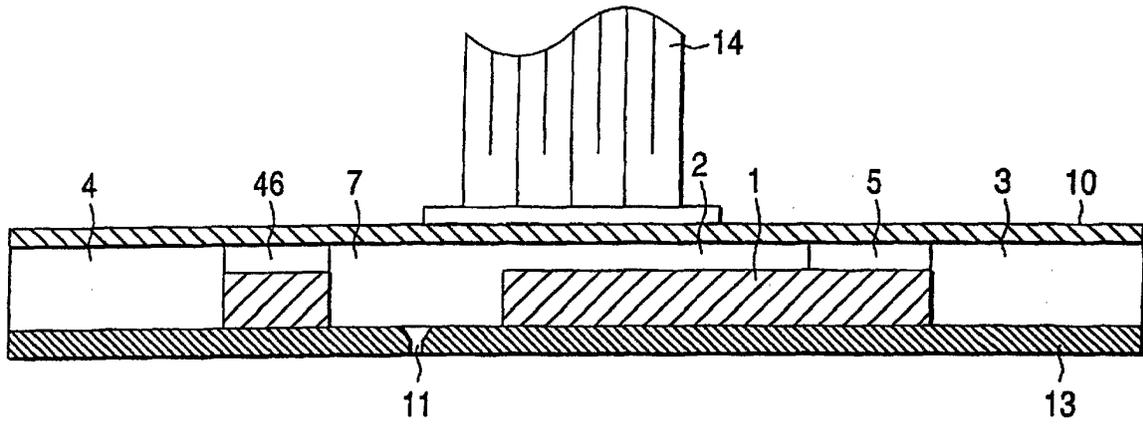


FIG. 10 (b)

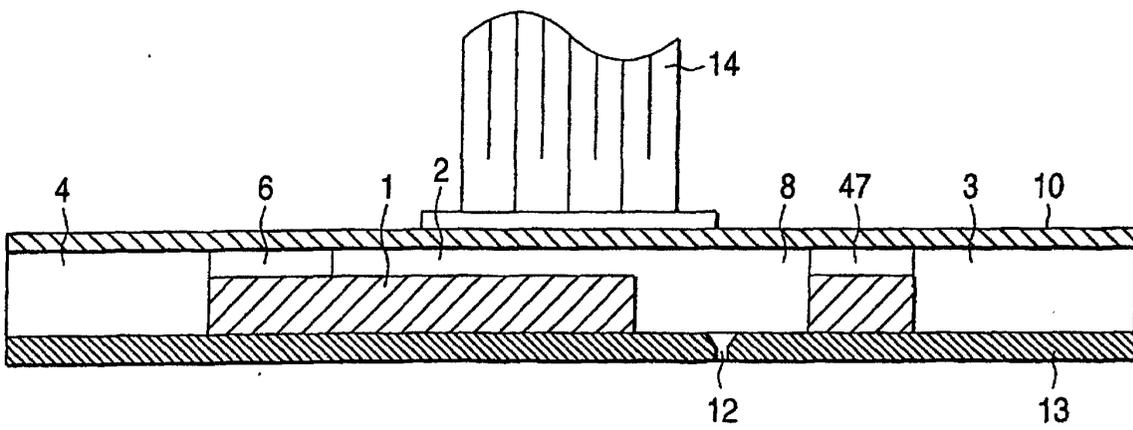


FIG. 11

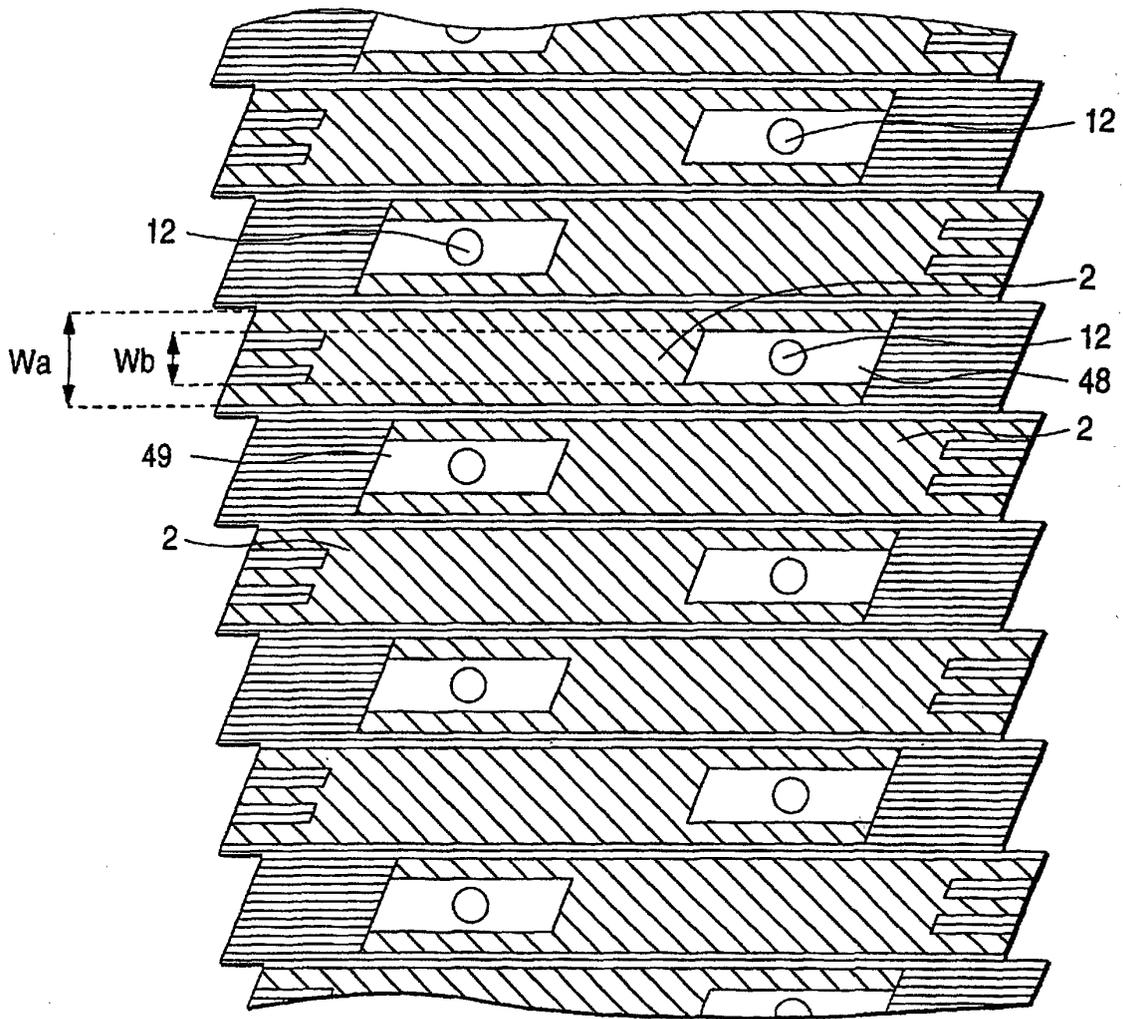


FIG. 12

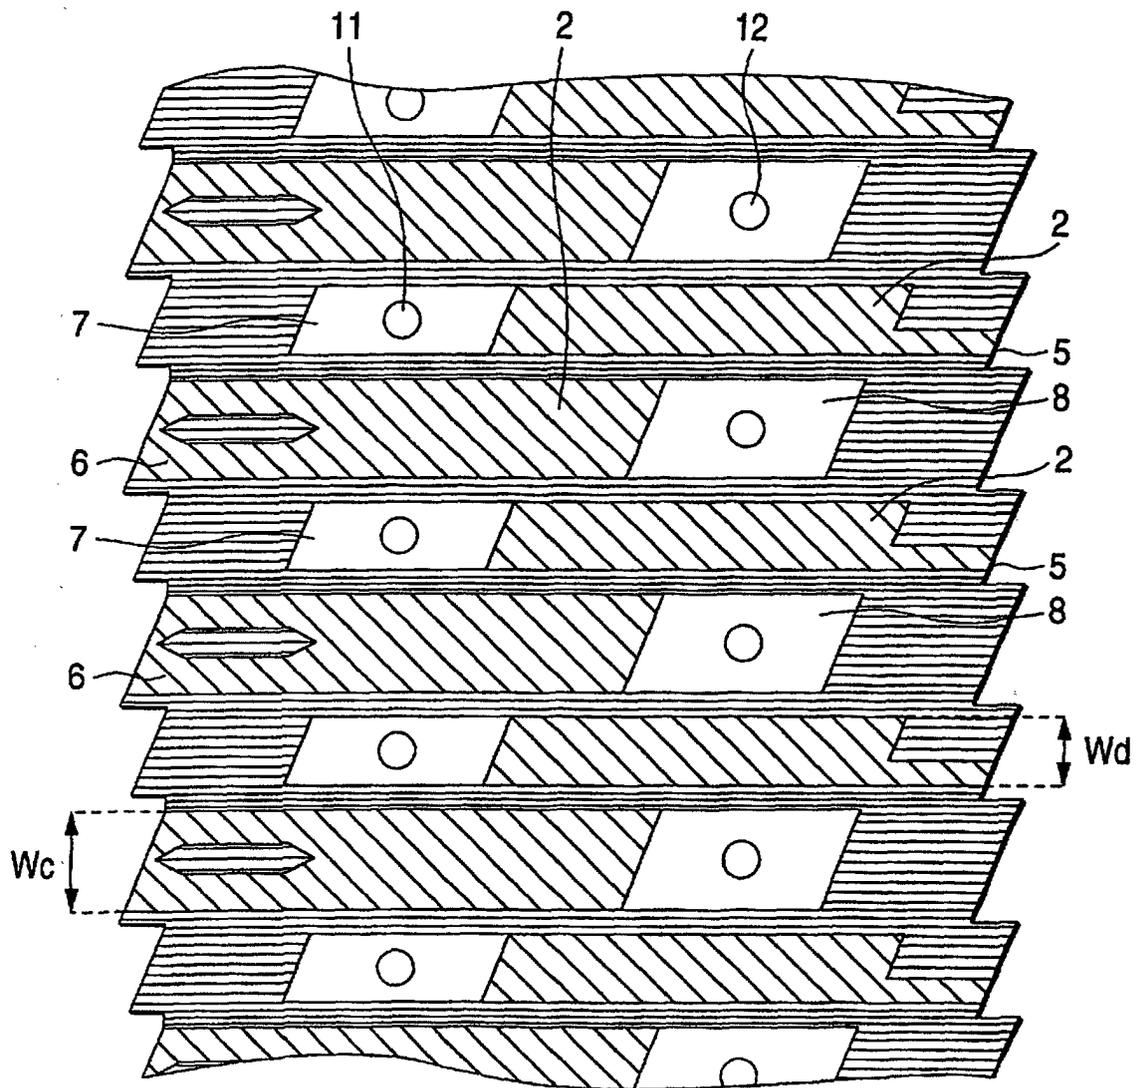


FIG. 13

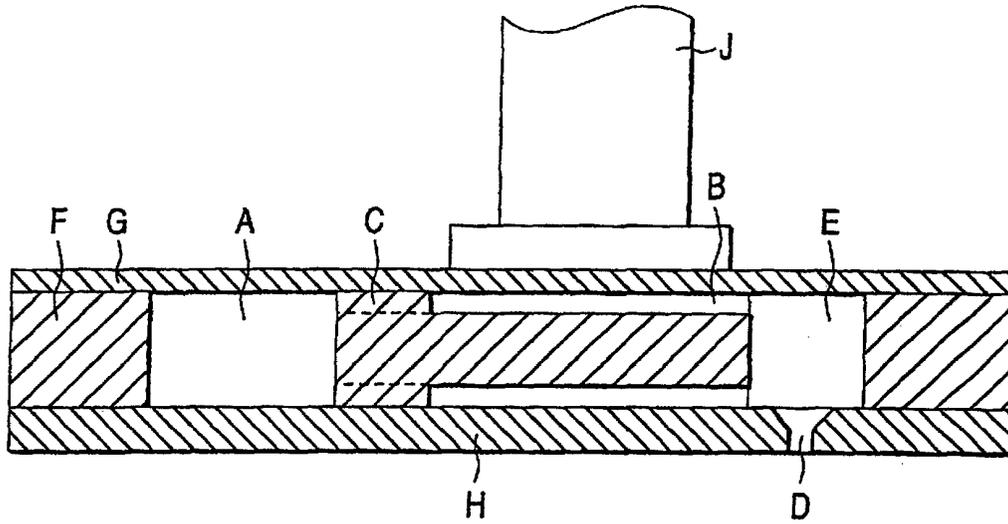


FIG. 14

