(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 906 460 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
12.01.2005 Bulletin 2005/02

(21) Application number: **97943351.3**

(22) Date of filing: **12.09.1997**

(51) Int Cl.[7]: **D02G 3/00**

(86) International application number:
PCT/US1997/016505

(87) International publication number:
WO 1998/012371 (26.03.1998 Gazette 1998/12)

(54) FABRICS FORMED FROM YARNS OF COVERED HIGH MODULUS MATERIAL

GEWEBE AUS ÜBERZOGENEN FÄDEN AUS MATERIAL MIT HOHEM E-MODUL

TISSUS FABRIQUES DE FILS DE MATERIAU A HAUT MODULE RECOUVERT

(84) Designated Contracting States:
AT BE DE ES FI FR GB IT NL SE

(30) Priority: **18.09.1996 US 710488**

(43) Date of publication of application:
07.04.1999 Bulletin 1999/14

(73) Proprietor: **ALBANY INTERNATIONAL CORP.**
Albany, New York 12204 (US)

(72) Inventors:
- **DENTON, Jeffrey, Scott**
  Mendon, MA 01756 (US)
- **EAGLES, Dana, Burton**
  Sherborn, MA 01770 (US)
- **O'CONNOR, Joseph, Gerald**
  Hopedale, MA 01747 (US)
- **DAVIS, Robert, Bernard**
  Framingham, MA 01701 (US)

(74) Representative: **Giver, Sören Bo**
Awapatent AB,
P.O. Box 5117
200 71 Malmö (SE)

(56) References cited:
EP-A- 0 310 201
WO-A-96/16216
US-A- 4 927 698
US-A- 5 527 597
US-A- 5 549 967
US-A- 5 617 903

- **PATENT ABSTRACTS OF JAPAN vol. 13, no. 589 (C-670), 25 December 1989 (1989-12-25) & JP 01 246434 A (NIPPON PILLAR PACKING CO LTD), 2 October 1989 (1989-10-02)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 906 460 B1

Description

Field of the Invention

[0001] The present direction is directed to fabrics comprising yarns of high modulus materials, such as polymer materials, covered within a second material. The fabrics can be used in clothings for paper making machines and other industrial fabric applications.

Background of the Invention

[0002] Paper machine clothing is the term for industrial fabrics used on paper machines in the forming,. pressing and drying sections. They are generally fabricated with either polyester or polyamide multifilaments and/or monofilaments woven on conventional, large textile looms. These fabrics have generally been fabricated by conventional weaving techniques.

[0003] The primary function of all paper machine clothing' (PMC) is removal of water from the paper sheet. As' both the manufacturer of paper making machine and papermaker work to increase the speed of the papermaking process and improve paper quality, new barriers have been identified for PMC fabrics that demand innovation in materials and fabric design. Furthermore, the PMC manufacturer is also looking for more efficient production of PMC fabrics and enhancing key quality characteristics of the same.

[0004] Today, paper making machines are attaining such rapid speeds that the thickness of the fabric structure is beginning to limit the rate of water removal, especially in the forming section. Insufficient dewatering results in low sheet strength. Sheet strength is critical for transferring and maintaining sheet properties through the next, more aggressive stages of sheet dewatering. One possible solution is to lengthen the forming section of the machine, but this is rather expensive and therefore of limited viability. The other approach is for the PMC manufacturer to produce thinner fabrics, but in a weaving process the smallest possible dimensions are the combined diameters of the filaments used in the warp and shute directions. Criteria such as dimensional stability, fabric strength and fabric life result in a practical limit to the fineness of the filament diameter and thus the overall thickness of the fabric. In many PMC positions, a tradeoff of these properties is not feasible or practical, and in fact higher machine speeds actually require further enhancement of these properties.

[0005] There is a definite need for high strength, low weight, relatively thinner clothings than those which are presently available.

[0006] The surface topography of PMC fabrics contributes to the quality of the paper product. Efforts have been made to create a smoother contact surface with the paper sheet. However, surface smoothness of PMC woven fabrics is limited by the topography resulting from the weave pattern and the filament physical properties. In a woven fabric (or knitted fabric), smoothness is inherently limited by the knuckles formed at the cross-over points of intersecting yarns.

[0007] High modulus materials are potential materials for use in applications requiring high mechanical properties and light weight. On a property-weight basis, high modulus polymers have a distinct advantage over metals and ceramics.

[0008] High modulus polymers are highly anisotropic, and high modulus is achieved only in the direction of molecular chain orientation. In fact, properties normal to the molecular axis exhibit considerably lower values than the properties exhibited in the longitudinal direction. As a result,. low shear and compressive properties are exhibited in the direction normal to the molecular axis.

[0009] Composite design concepts are known in the art in order to compensate for the discrepancy in properties. Representative is U.S. Patent No. 4,927,698 which discloses yarns of a core of fire-resistant filaments such as Kevlar® and Nomex® within a sheath of shrinkable staple fibers such as yarns which appear to be chemically bonded to the fire-resistant core through the reactions between a first cross-linkable resin, a second cross-linkable resin, the Kevlar®/Nomex® component, and the staple fiber component.

[0010] From US 5 617 903 published on 8 th April 1997 it is also known a papermaker's fabric that is constructed from polymeric fibers with 15 percent or more of the fabric'fibers larger than 100 denier and multipolymeric fibers. The multipolymeric fibers contain two or more distinct polymeric regions within their cross sections. The muitipolymeric fibers may be constructed in a sheath-core, side by side, or islands in the stream form. The components of the multipolymeric fibers are each selected to provide a combination of properties not available from any single polymer fiber.

Summary of the Invention

[0011] The present invention is directed towards fabrics according to claim 1 which are formed from yarns of covered high modulus filament materials. The present invention is intended to provide a composite filamentary material which exhibits the advantages of high modulus materials while providing a means for compensating the diminished properties exhibited by such fibers in the direction normal to molecular chain orientation.

[0012] The present invention is a composite filament structure wherein a high modulus filament material is covered with bicomponent filaments. The composite filament structure has a first interior layer of high modulus filament material and a second exterior layer of bicomponent fibers, the second exterior layer of bicomponent fibers being covered around the first interior layer of high modulus material along its entire length. The entire surface area of the high modulus material should be covered.

[0013] The bicomponent fibers of the present invention may be either a sheath-core arrangement or a side-by-side arrangement, with sheath-core being preferred. It is further preferred that the sheath component have a melting point lower than the core component.

[0014] Suitable bicomponent fibers include sheath-core combinations of co-polyester/poly (ethylene terephthalate), polyamide/poly (ethylene terephthalate) , polyamide/polyamide,polyethylene/poly (ethylene terephthalate), polypropylene/poly (ethylene terephthalate), polyethylene/polyamide, polypropylene/polyamide, thermoplastic polyurethane/polyamide and thermoplastic polyurethane/poly (ethylene terephthalate.

[0015] "Modulus", as used herein, refers to the tensile modulus as defined by the slope of the initial linear portion of the load extension response (stress-strain curve) of a specimen deformed at room temperature.

[0016] High modulus material, as used herein, includes high modulus polymers that exhibit tensile modulus greater than about 25% of theory. Alternatively, a high modulus polymer is one possessing a tensile modulus greater than about 25 GPA. Encyclopedia of Polymer Science 2d ed. vol 7, pp. 699-722. It should be noted that highly oriented polymer structures are anisotropic, and as modulus is increased by raising the degree of molecular chain orienta ion, modulus decreases commensurately in other directions.

[0017] Suitable high modulus polymers include, but are not limited to aramids such as poly (p-phenyleneterephthalamide), available from Dupont under the tradename Kevlar®, other aramids such as Kermel® (available from Rhone-Poulenc) Arenka®, available from Akzo, Nomex (available from DuPont), polyethylene naphthalate (PEN), poly (p-phenylene benzobisthiazole), polyesters, glass, aromatic polyamide resins Arenka®, an aramid available from Akzo, thermotropic copolyesters such as Vectra® (Celanese) and Xydar® (Dart), high modulus polyethylene fibers such as Spectra 900 (Allied).

[0018] The skilled artisan should appreciate that there are several ways in which the high modulus interior could be covered, such as braiding and wrapping. A braid of bicomponent fibers around the high modulus interior provides a structure with good stability. Wrapping the high modulus fibers with the bicomponent fiber material is another suitable method. Fibers could be covered with either a single covering machine or a double covering machine. In either case, the core fibers are spirally covered at a selected pitch.

[0019] In constructing fabrics of the present invention, advantage is taken of the unique structure of bicomponent filament. The melting point of the sheath component is lower than the melting point of the core component, and lower than the melting point of the high modulus interior. Improved structural integrity is imparted by heating the fabric, which has been formed from the yarns, which intersect each other in the fabric, to a temperature in excess of the melting point of the sheath but lower than the melting point of the core and high modulus interior, followed by subsequent cooling. This process, hereinafter referred to heat fusion, causes the sheath components of the bicomponent fibers to enter a softened state, and accordingly, the yarns fuse together at contact points when cooled to temperatures below the melting point of the sheath material. For the most part, such contact points are the points where the yarns intersect each other.

[0020] Due to the improved stability of the fabrics of the present invention, it is believed that a single layer fabric constructed of the composite yarns of the present invention could successfully run on a paper making machine. That is, the present invention provides a means for producing single layered fabrics able to withstand the demanding conditions which paper machine clothings are subjected to. Generally, fabrics must be constructed of at least two layers to insure that the fabrics have the necessary dimensional stability and strength in order to withstand the demanding running conditions.

[0021] The present invention could also be used as the top laminate structure of a multilayer structure, and it is believed that its use as such a layer would offer advantages over conventional materials due to reduced knuckle size on the surface of the fabric and reduced caliper of the fabric. Reduced knuckle size would create a smoother fabric surface, a feature desired by paper makers. It is also possible that a thinner fabric can be made using the high modulus composite yarns of the present invention since the excellent tensile properties possessed by high modulus materials means that less material could be used to attain the degree of strength possessed by conventional fabrics. The present invention may also be used as the base layer of a multilayer structure. The improved dimensional stability of this layer makes it well suited for this usage. Using a fabric according to the invention as a base layer would impart certain advantages to the overall fabric construction. Because the composite yarns of the present invention exhibit a relatively high degree of strength along the axis of the yarn, the use of this fabric layer as the base layer would provide the stability and strength required of the overall fabric structure. Therefore, less rigid materials could be used in other fabric layers, enabling the paper maker to, for example, select fibers of fine denier to construct other layers. Accordingly, fabrics could be made thinner in this way as well. A thinner fabric is desirable since drainage properties would be improved.

[0022] The yarns may be the sole constituents of at least one layer of a clothing. In the case of multiple layer clothing, at least one layer is constructed of the yarns of the present invention, and preferably constitute the surface layer in contact with the paper sheet. Whether the fabric is a single layer or multiple layer, the bicomponent fibers are to be arranged in an orderly non-random manner. By arranged in an orderly non-random manner, it is meant that fibers of a clothing run in a first direction; the first direction fibers do not intersect with

other fibers running in the first direction; and that fibers of the clothing run in a second direction; the second direction fibers do not intersect with other fibers running in the second direction; that fibers running in the first direction intersect with fibers running in the second direction, and vice versa. For instance, fibers arranged in the machine direction will not intersect with each other and such fibers will intersect only with fibers running in the cross machine direction. The clothings may be constructed of fibers running in the machine or cross machine direction, but such clothings could be constructed of fibers which run in directions that are at angles to the machine and cross machine direction of a paper making machine.

Brief Description of the Drawings

[0023]

Figure 1 is a composite braided fabric of the present invention.
Figure 2 is another composite braided fabric of the present invention.
Figure 3 is a cross section of a yarn of the present invention.

Detailed Description of the Preferred Embodiment

[0024] Figure 1 is a fabric comprised of yarns of the present invention. The fabric is a plain weave construction, with yarns in the warp and shute direction being comprised of yarns of the present invention. It can be observed from Fig. 1 that the yarns are interconnected with other yarns at the points at which the yarns intersect. This is attributable to heat fusion of the yarns, wherein the sheaths of the bicomponent materials fuse to each other after heating the fabric to a temperature above the melting point of the sheath material, yet lower than the melting point of the core material.

[0025] Both the warp and shute yarns of the fabric shown in Figure 1 are of the same structure. The high modulus interior of the yarns are about 134 filaments of Kevlar® 49. Eight bicomponent yarns have been braided around the Kevlar® interior. Each yarn is constituted of sixteen (16) bicomponent filaments. The filaments are Bellcouple® from Kanebo, 250 denier, 16 filament count having a low melt copolyester sheath material and a poly (ethylene terephthalate) core, with the melting point of the copolyester sheath being lower than the melting point of the PET core.

[0026] The eight bicomponent yarns are braided around the Kevlar® interior. Braiding forms a relatively stable structure, and the covered high modulus yarns can be used to form fabrics as shown in Figure 1. Such fabrics are formed according to methods readily appreciated to one skilled in the art. After the fabric has been formed, it is placed under tension, heated to a temperature greater than the melting point of the sheath, yet lower than the melting point of the core, and then cooled to a temperature lower than the melting point of the sheath.

[0027] Due to the improved stability of the fabrics of the present invention, it is believed that a single layer fabric constructed of the composite yarns of the present invention could successfully run on a paper making machine. That is, the present invention provides a means for producing single layered fabrics able to withstand the demanding conditions which paper machine clothings are subjected to.

[0028] Generally, fabrics must be constructed of at least two layers to insure that the fabrics have the necessary dimensional stability and strength in order to withstand the demanding running conditions. Yet because the paper machine clothings of the present invention are characterized by high modulus, low stretch materials, the stiffness and dimensional stability of the fabric is provided by the layer of high modulus materials and accordingly, one layer fabrics are possible. In other words, because of the high degree of strength provided by such materials, it is possible to use less material in constructing a fabric while imparting equal or even greater strength when compared to multi layer materials which contain considerably more material. Achieving a single layer fabric design would be a substantial breakthrough in PMC design. As machine speed increases, reducing the amount of time for drainage, the ability to achieve the smallest possible caliper becomes more significant, since a single layer fabric would be thinner than a multi-layer fabric, reducing the distance liquid must traverse in order to drain.

[0029] The present invention could also be used as the top laminate structure of a multilayer structure, and it is believed that its use as such a layer would offer advantages over conventional materials due to increased planarity on the surface. Increased planarity is the result of reduced knuckle size at points where yarns intersect. Upon heat fusion of the fabric, the low-melt component of the bicomponent fiber collapses and flows, reducing the knuckle size of the crossover points.

[0030] The present invention may also be used as the base layer of a multilayer structure. The improved dimensional stability of this layer makes it well-suited for this usage. Thus, other materials, such as those of fine diameters, can be used in other layers, since stability and strength is imparted by the layer constructed of the high modulus material. The use of fine diameter materials in paper-sheet contacting layers would improve surface smoothness, a desirable feature of paper machine clothings.

[0031] Figure 2 shows a fabric wherein the yarns described in relation to Figure 1 above are used in the warp direction. The shute direction yarns are comprised of 9 ply material. That is, they are a ply of nine yarns of bicomponent material as described in Figure 1. The plied yarns are twisted loosely together. The yarns have a distinctly flattened appearance. That is, after heat fusion,

the yarns take on a ribbon like appearance.

[0032] Figure 3 shows a cross section of a composite yarn according to the present invention. The Kevlar® interior is visible as a distinct region. The bicomponent exterior is not discrete.

[0033] when running on a paper making machine, a fabric according to the present invention should remain cleaner than a clothing comprised of conventional monofilaments. Heat fusion of a fabric comprised of bicomponent fibers are characterized in part by fused, intersecting yarns. In contrast, conventional monofilaments have interstices at points where yarns intersect. Fusion at the intersections of bicomponent fibers diminishes, and possibly eliminates, such interstices. Interstices are pinch points at which debris can be entrapped and collect over time. Accordingly, the heat fused intersecting yarns produced with bicomponent fibers provides a structure that should remain relatively cleaner than a clothing comprised of conventional monofilaments.

[0034] Another advantage that paper machine clothings of the present invention are believed to possess over conventional clothings comprised of monofilaments is that such clothings exhibit relatively planar, knuckle free surfaces at cross over points. It can be readily appreciated that when fibers are woven (or knitted), knuckles are formed which diminish surface smoothness. As noted, knuckle size is reduced upon heat fusion of the bicomponent fibers, which improves the surface smoothness. Surface smoothness is a factor which affects paper quality. Accordingly, clothings of improved smoothness are of interest to the manufacturer of paper and related products. A network of bonds between intersecting fibers will be formed upon heat fusion of a clothing comprised of bicomponent fibers. Physical bonding of this kind will improve the dimensional stability over a conventional clothing constructed of monofilament. Because of the nature of bicomponent fibers and the unique structures they may form, fibers of denier lower than those for required for conventional monofilaments can be used. The use of lower denier fibers offers the advantage of a clothing thinner than a clothing comprised of conventional monofilament, without sacrificing fabric strength.

Claims

1. A fabric for use in the forming, pressing, or drying sections of a paper making machine, the fabric having at least one layer comprised of a composite yarn comprised of:

   a first yarn of high modulus. filamentary material within a second yarn;

   wherein the second yarn is a bicomponent filamentary material, the bicomponent filamentary material having a sheath component and a core component, wherein the bicomponent filamentary material covers the first, high modulus filamentary material and encases the first, high modulus filamentary material along the length of the composite yarn.

2. The fabric as set forth in claim 1 wherein the yarns comprising the fabric are woven.

3. The fabric as set forth in claim 1 wherein the yarns comprising the fabric are knitted.

4. The fabric as set forth in claim 1 wherein the composite yarns extend in the warp and shute directions.

5. The fabric as set forth in claim 1 wherein the composite yarns extend in the warp direction.

6. The fabric as set forth in claim 1 wherein the composite yarns extend in the shute direction.

7. The fabric of claim 1 wherein the first, high modulus material is selected from the group consisting of high modulus polyamides, aramids, poly(ethylene naphthalate), glass fiber, thermotropic, aromatic copolyesters, poly(p-phenylene benzobisthiazole), polyesters, and high modulus polyethylene fibers, and mixtures thereof.

8. The fabric of claim 1 wherein the sheath-core combinations of the bicomponent fibers are selected from combinations of co-polyester/poly (ethylene terephthalate), polyamide/poly (ethylene terephthalate), polyamide/polyamide, polyethylene/poly (ethylene terephthalate) , polypropylene/poly (ethylene terephthalate), polyethylene/polyamide, polypropylene/polyamide, thermoplastic polyurethane/polyamide and thermoplastic polyurethane/poly (ethylene terephthalate.

9. The fabric of claim 1, wherein the high modulus filamentary material is further comprised of a plurality of high modulus filaments.

10. The fabric of claim 1 wherein the biocomponent filamentary material is further comprised of a plurality of bicomponent yarns, each bicomponent yarn being further comprised of bicomponent filaments having a sheath core arrangement.

11. The fabric of claim 1 wherein the fabric is heated to a temperature greater than the melting point of the sheath component yet lower then the melting point of the core component and cooled to a temperature lower than the melting point of the sheath component.

12. The fabric of claim 1 wherein the composite yarn is heat fused prior to formation of the fabric.

13. The fabric of claim 1 wherein the fabric is a single-layer fabric.

Patentansprüche

1. Gewebe zum Einsatz in der Sieb-, der Press- und der Trockenpartie einer Papiermaschine, wobei das Gewebe wenigstens eine Schicht hat, die aus einem Verbundgam besteht, das besteht aus:

einem ersten Garn aus hochmodulem Fadenmaterial in einem zweiten Garn;

wobei das zweite Garn ein Zweikomponenten-Fadenmaterial ist, das Zweikomponenten-Fadenmaterial eine Mantelkomponente sowie eine Kemkomponente hat und das Zweikomponenten-Fadenmaterial das erste hochmodule Fadenmaterial bedeckt und das erste hochmodule Fadenmaterial über die Länge des Verbundgams umhüllt.

2. Gewebe nach Anspruch 1, wobei die Game, die das Gewebe bilden, gewebt sind.

3. Gewebe nach Anspruch 1, wobei die Game, die das Gewebe bilden, gewirkt sind.

4. Gewebe nach Anspruch 1, wobei sich die Verbundgame in der Kett- und der Schussrichtung erstrekken.

5. Gewebe nach Anspruch 1, wobei sich die Verbundgame in der Kettrichtung erstrecken.

6. Gewebe nach Anspruch 1, wobei sich die Verbundgame in der Schussrichtung erstrecken.

7. Gewebe nach Anspruch 1, wobei das erste hochmodule Material aus der Gruppe ausgewählt wird, die aus hochmodulen Polyamiden, Aramiden, Polyethylennaphthalat, Glasfaser, thermotropen aromatischen Copolyestem, Poly(p-phenylenbenzobisthiazol), Polyestern und hochmodulen Polyethylenfasem sowie Gemischen daraus besteht.

8. Gewebe nach Anspruch 1, wobei die Mantel-Kern-Kombinationen der Zweikomponentenfasem aus Kombinationen aus Copolyester/Polyethylenterephthalat, Polyamid/Polyethylenterephthalat, Polyamid/Polyamid, Polyethylen/Polyethylenterephthalat, Polypropylen/Polyethylenterephthalat, Polyethylen/Polyamid, Polypropylen/Polyamid, Thermoplastpolyurethan/Polyamid und Thermoplastpolyurethan/Polyethylenterephthalat ausgewählt werden.

9. Gewebe nach Anspruch 1, wobei das hochmodule Fadenmaterial des Weiteren aus einer Vielzahl hochmoduler Einzelfäden besteht.

10. Gewebe nach Anspruch 1, wobei das Zweikomponenten-Fadenmaterial des Weiteren aus einer Vielzahl von Zweikomponentengamen besteht und jedes Zweikomponentengam des Weiteren aus Zweikomponenten-Einzelfäden mit einer Mantel-Kern-Anordnung besteht.

11. Gewebe nach Anspruch 1, wobei das Gewebe auf eine Temperatur über dem Schmelzpunkt der Mantelkomponente, jedoch unter dem Schmelzpunkt der Kemkomponente erhitzt wird und auf eine Temperatur unter dem Schmelzpunkt der Mantelkomponente abgekühlt wird.

12. Gewebe nach Anspruch 1, wobei das Verbundgam vor der Herstellung des Gewebes wärmeverschmolzen wird.

13. Gewebe nach Anspruch 1, wobei das Gewebe ein einlagiges Gewebe ist.

Revendications

1. Tissu pour utilisation dans les sections de formation, de pressage ou de séchage d'une machine à papier, le tissu ayant au moins une couche constituée d'un fil composite constitué de :

un premier fil de matière filamentaire de module élevé à l'intérieur d'un second fil ;

dans lequel le second fil est une matière filamentaire bicomposant, la matière filamentaire bicomposant ayant un composant de gaine et un composant de coeur, dans lequel la matière filamentaire bicomposant couvre la première matière filamentaire de module élevé et encastre la première matière filamentaire de module élevé suivant la longueur du fil composite.

2. Tissu selon la revendication 1, dans lequel les fils constituant le tissu sont tissés.

3. Tissu selon la revendication 1, dans lequel les fils constituant le tissu sont tricotés.

4. Tissu selon la revendication 1, dans lequel les fils composites s'étendent dans la direction de chaîne et de trame.

5. Tissu selon la revendication 1, dans lequel les fils

composite s'étendent dans la direction de chaîne.

6. Tissu selon la revendication 1, dans lequel les fils composite s'étendent dans la direction de trame.

7. Tissu selon la revendication 1, dans lequel la première matière de module élevé est choisie dans le groupe consistant en les polyamides, les aramides, le poly(naphtalate d'éthylène), les fibres de verre, les copolyesters aromatiques thermotropes, le poly (p-phénylène benzobisthiazole), les polyesters de module élevé et les fibres de polyéthylène de module élevé, et les mélanges de ceux-ci.

8. Tissu selon la revendication 1, dans lequel les combinaisons gaine-coeur des fibres bicomposants sont choisis parmi les combinaisons de co-polyester/poly(téréphtalate d'éthylène), de poly-amide/poly(téréphtalate d'éthylène), de polyamide/polyamide, de polyéthylène/poly(téréphtalate d'éthylène), de polypropylène/poly(téréphtalate d'éthylène), de polyéthylène/polyamide, de polypropylène/polyamide, de polyuréthane/polyamide thermoplastique et de polyuréthane/poly(téréphtalate d'éthylène) thermoplastique.

9. Tissu selon la revendication 1, dans lequel la matière filamentaire de module élevé est constituée en outre d'une pluralité de filaments de module élevé.

10. Tissu selon la revendication 1, dans lequel la matière filamentaire bicomposant est constituée en outre d'une pluralité de fils bicomposants, chaque fil bicomposant étant constitué en outre de filaments bicomposants ayant un agencement gaine/coeur.

11. Tissu selon la revendication 1, dans lequel le tissu est chauffé à une température supérieure au point de fusion du composant de gaine, cependant inférieure au point de fusion du composant de coeur et refroidi à une température inférieure au point de fusion du composant de gaine.

12. Tissu selon la revendication 1, dans lequel le fil composite est thermosoudé avant la formation du tissu.

13. Tissu selon la revendication 1, dans lequel le tissu est un tissu monocouche.

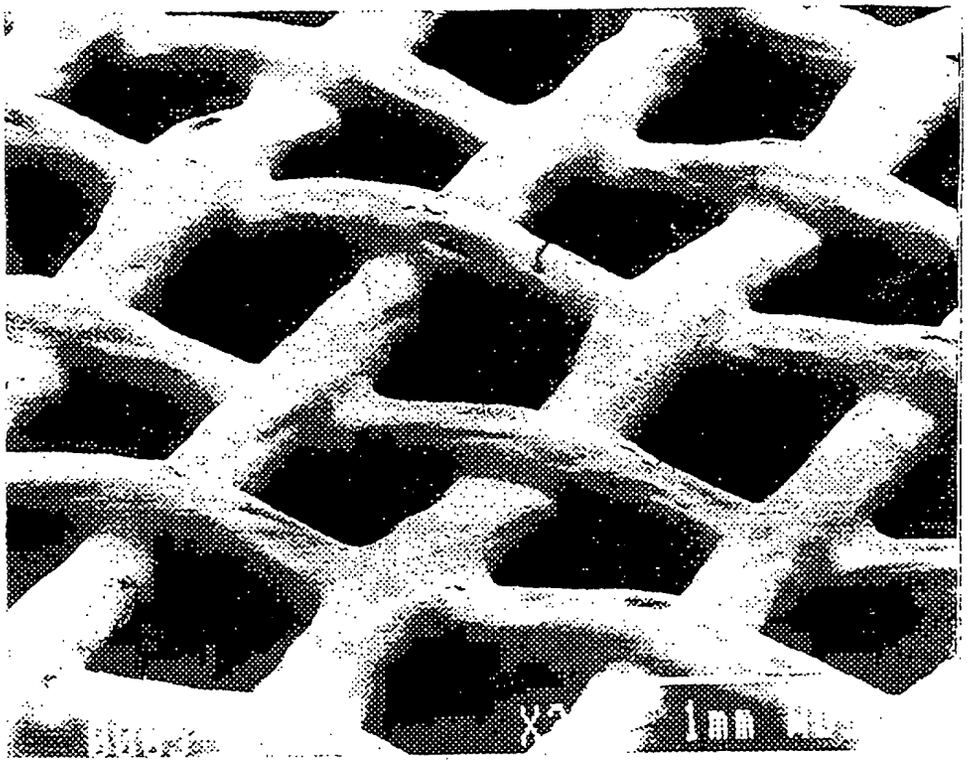


FIG.1

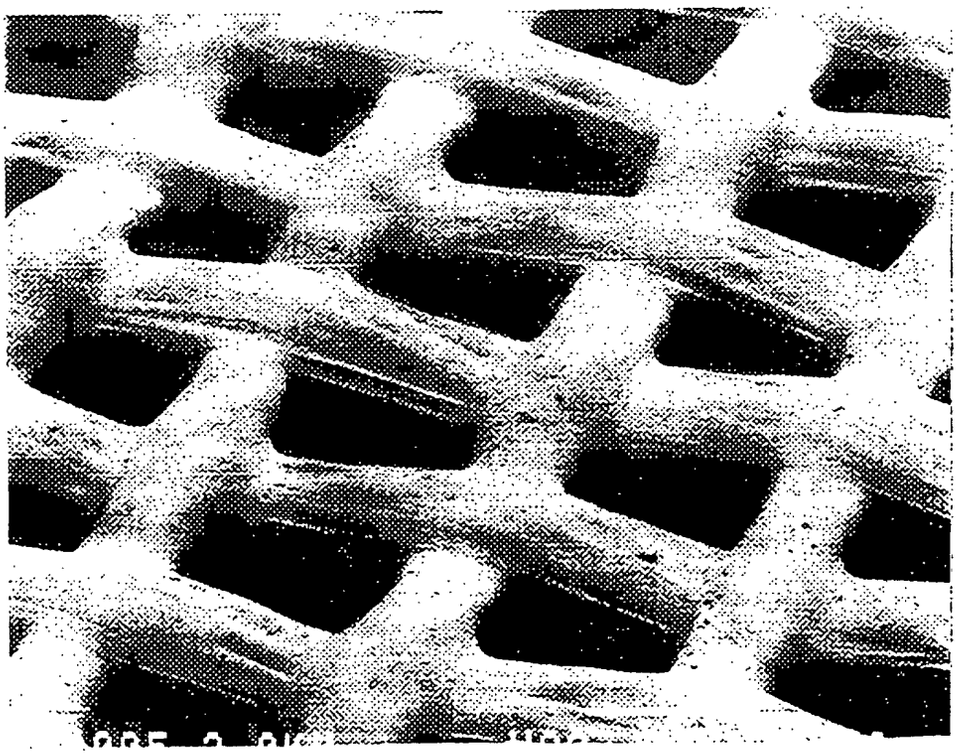


FIG.2

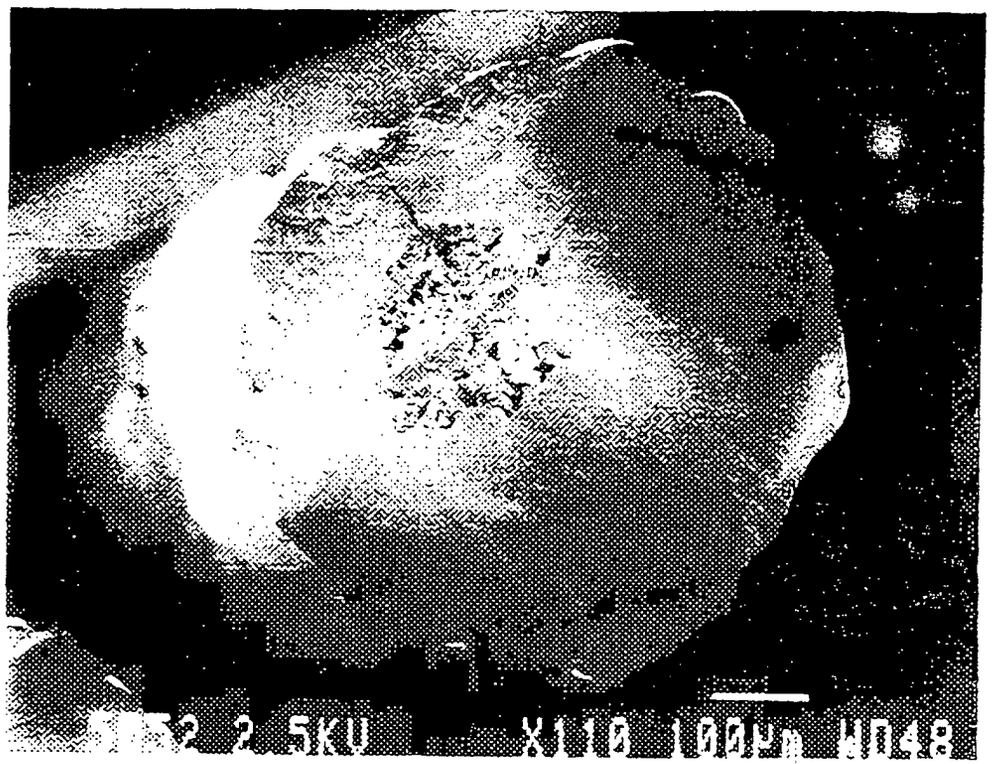


FIG.3