



(11) **EP 0 926 366 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 B1)
Corrections, see
Claims EN

(51) Int Cl.:

F16C 32/06 (1974.07)

(48) Corrigendum issued on:

03.10.2007 Bulletin 2007/40

(45) Date of publication and mention
of the grant of the patent:

12.05.2004 Bulletin 2004/20

(21) Application number: **98203918.2**

(22) Date of filing: **20.11.1998**

(54) **An hydrostatic bearing with a roughened annular area on the inside surface of the bearing**

Hydrostatisches Lager mit einem aufgerauhten ringförmigen Bereich in der Lagerinnenfläche

Palier hydrostatique présentant une partie annulaire rugueuse sur la surface intérieure du palier

(84) Designated Contracting States:
DE FR GB

(30) Priority: **16.12.1997 US 991256**

(43) Date of publication of application:
30.06.1999 Bulletin 1999/26

(73) Proprietor: **United Technologies Corporation**
Hartford,
Connecticut 06101 (US)

(72) Inventors:

- **Scharrer, Joseph K.**
Fair Oaks,
California 95628 (US)

- **Hecht, Robert F.**
Baltimore, MD 21220 (US)

(74) Representative: **Land, Addick Adrianus Gosling**
Arnold & Siedsma,
Advocaten en Octrooigemachtigden,
Sweelinckplein 1
2517 GK Den Haag (NL)

(56) References cited:

WO-A-86/01268	US-A- 4 671 676
US-A- 5 271 677	US-A- 5 310 265
US-A- 5 433 528	US-A- 5 688 053

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 926 366 B9

Description

Background of the Invention

1. Field of the invention

[0001] This invention relates to orifice compensated hydrostatic bearings and more particularly to using a roughened surface for reducing the whirl frequency ratio of fluid within the annulus of the orifice compensated hydrostatic bearings, according to the preamble of claim. Such a bearing is known from US-A-5 310 265.

2. Description of the related art

[0002] Orifice compensated hydrostatic bearings are very popular but to make them more robust they have a large clearance to radius ratio for reducing rubbing on start up and shut down which increases the bearing life. The increased clearance to radius ratio however permits cross coupling forces to grow which are a rotor destabilizing mechanism. The cross coupling forces are caused by the increased flow of the fluid film within the annulus traveling tangentially with the surface of the rotor, as the fluid moves from the high pressure source to the low pressure sump. The resulting increase in the whirl frequency ratio increases rotor destabilizing forces and reduces the rotor dynamic stability allowances.

Summary of the Invention

[0003] The invention defined by claim 1 relates to an enhancement to a standard orifice compensated hydrostatic bearing wherein, the annulus lands that make the orifice compensated hydrostatic bearings more robust, decrease the fluid flow, reducing the cross coupling forces which increase the journal's whirl frequency ratio. By using tire track roughened lands the fluid flow from the feed orifice flowing to the outside edge of the hydrostatic bearing which causes cross coupling forces is reduced producing a more stable bearing with a lower whirl frequency ratio and higher damping which benefits the rotordynamics of the system.

Objects of the Invention

[0004] It is an object of the invention to reduce the cross coupling forces in a hydrostatic bearing.

[0005] It is an object of the invention to enhance damping of the hydrostatic film such that a machine can operate safely at a high rate of speed.

[0006] It is an object of the invention to reduce rotor motion of a journal after a perturbing force is applied to the journal.

[0007] It is an object of the invention to provide a smooth stable operation with no rotordynamic loads that could result in a premature wearing out of the machine.

[0008] It is an object of the invention to reduce the whirl

frequency ratio of the hydrostatic bearing.

[0009] It is another object of the invention to increase the life of the bearing.

[0010] It is a further object of the invention to increase the stiffness and damping of the hydrostatic bearing relative to the cross-coupling effects.

[0011] Other objects and advantages of the present invention will become apparent from the following detailed description of the invention when considered in conjunction with the accompanying drawing.

Brief Description of the Drawing

[0012] The Figure is a cutaway perspective view of the preferred embodiment of the bearing housing

Detailed Description of the Preferred Embodiment

[0013] Referring to the Figure, shown is a cross section of a hydrostatic bearing 10 having a housing 12 having bore 26 with orifices 14 for injecting a fluid inside of the annulus. The hydrostatic fluid entering orifice 14 comes from a common manifold 20 so that the pressure is equal in all of the orifices 14. Orifice 14 leads to recess 22 on the bore 26 of housing 12. The hydrostatic fluid from the recess 22 pushes against journal 24 (dashed) and separates the journal 24 from the bearing bore 26 of the housing 12 to form a hydrostatic bearing. In a standard orifice compensated hydrostatic bearing the land area 16 (the area from the center line 15 to the exit 17) is smooth. When the journal 24 is at rest, the hydrostatic fluid flows from the high pressure area in recess 22 across the land area 16 to the exit 17 of the bearing 10 as shown by the axial through flow vector 30. When the journal 24 is rotating at high speeds the hydrostatic fluid is influenced by the journal to move tangentially as indicated by fluid flow vector 28 (couette flow) with a resultant vector between 28 and 30. The resultant fluid flow causes cross coupling forces in the hydrostatic bearing which increase the whirl frequency ratio, thereby reducing the bearing's rotordynamic effectiveness.

[0014] The roughened pattern 25 is added to the bearing bore land area 16 to retard the couette flow 28, and to slow the axial flow 30, thus reducing leakage of fluid at exit 17. Enhancing the surface roughness extends the boundary layer effect into the flow field, slowing the fluid flow, particularly near the roughened surfaces. Retarding couette flow 28 reduces the cross coupling forces and enhances damping for a better whirl frequency ratio and a more stable bearing. The retarding of the axial flow 30 reduces the leakage and the secondary flow of the machine for a better hydrodynamic performance.

[0015] A diamond knurled pattern is shown in the Figure but other shapes or patterns which reduce fluid flow can be used. Multiple roughness patterns have been used to retard both the tangential couette flow 28 and the axial flow 30 in the annulus formed by the bearing bore 26 and the journal 24, such as flat bottom holes and

high machine surface roughness machining.

[0016] The roughened area 18 is added to the land area 16 of the bearing in the circular width feature, referred to as tire tracks, because of ease of manufacture. Tooling was not needed to roughen the land area 16 between the raised areas of recesses 22 because there is very little benefit to roughing the communication of the fluid between the recesses 22. The key feature is to retard the fluid between the recesses 22 and the exit at edge 17 by inserting the roughness in tire track fashion therebetween.

[0017] Obviously, many modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that, within the scope of the appended claims, the invention may be practiced otherwise than as specifically described.

Claims

1. A roughened orifice compensated hydrostatic bearing (10) comprising:

a hydrostatic bearing housing (12), the housing having a cylindrical inside surface with a center and an edge on either side of the center, the hydrostatic bearing housing (12) having a plurality of orifices (14) for introducing a pressurized fluid into the housing at the center of the inside surface such that the fluid enters the hydrostatic bearing surface at the center and exits at the edges, a roughened annular area (18) on the inside surface of the hydrostatic bearing **characterised in that** the roughened annular area (18) is located on the inside surface of the bearing (18) between a nonroughened annular center area (16) and each edge to retard the fluid flow thereby reducing the whirl frequency and increasing the stiffness of the hydrostatic bearing.

2. A roughened orifice compensated hydrostatic bearing (10) as in claim 1 wherein:

the roughened area (18) has a diamond knurled pattern.

Patentansprüche

1. Aufgerautes Öffnung kompensiertes hydrostatisches Lager (10), umfassend:

ein hydrostatisches Lagergehäuses (12), wobei das Gehäuse eine zylindrische Innenoberfläche mit einer Mitte und einem Rand auf beiden Seiten der Mitte aufweist,

wobei das hydrostatische Lagergehäuse (12) eine Mehrzahl von Öffnungen (14) aufweist, um eine unter Druck stehende Flüssigkeit an der Mitte der Innenoberfläche derart einzuführen, dass die Flüssigkeit an der Mitte in die hydrostatische Lageroberfläche eindringt und an den Rändern austritt, einen aufgerauten Ringbereich (18) auf der Innenoberfläche des hydrostatischen Lagers, **dadurch gekennzeichnet, dass** der aufgeraute Ringbereich (18) auf der Innenoberfläche des Lagers (10) zwischen einem nicht aufgerauten Ringbereich (16) und jedem Rand lokalisiert ist, um den Flüssigkeitsstrom abzuschwächen, wodurch die Wirbelfrequenz verringert und die Biegefestigkeit des hydrostatischen Lagers erhöht wird.

2. Aufgerautes Öffnung kompensiertes hydrostatisches Lager (10) nach Anspruch 1, wobei:

der aufgeraute Bereich (18) ein Diamant gerändeltes Muster aufweist.


Revendications

1. Palier hydrostatique (10) compensé via des orifices et présentant une partie rugueuse, comprenant :

un boîtier de palier hydrostatique (12), le boîtier ayant une surface intérieure cylindrique avec une partie centrale et une bordure sur chaque côté de la partie centrale, ledit boîtier de palier hydrostatique (12) ayant une pluralité d'orifices (14) pour introduire un fluide sous pression dans le boîtier au centre de la surface intérieure, de telle façon que le fluide pénètre par la surface du palier hydrostatique au niveau du centre et en sort au niveau des bordures, une zone annulaire rugueuse (18) sur la surface intérieure du palier hydrostatique, **caractérisé en ce que** la zone annulaire rugueuse (18) est localisée sur la surface intérieure du palier (10) entre une zone centrale annulaire non rugueuse (16) et chaque bordure afin de retarder l'écoulement de fluide, réduisant grâce à cela la fréquence de tourbillonnement et augmentant la raideur du palier hydrostatique.

2. Palier hydrostatique (10) compensé via des orifices et présentant une partie rugueuse selon la revendication 1, dans lequel :

la zone rugueuse (18) présente un motif moleté en losange.

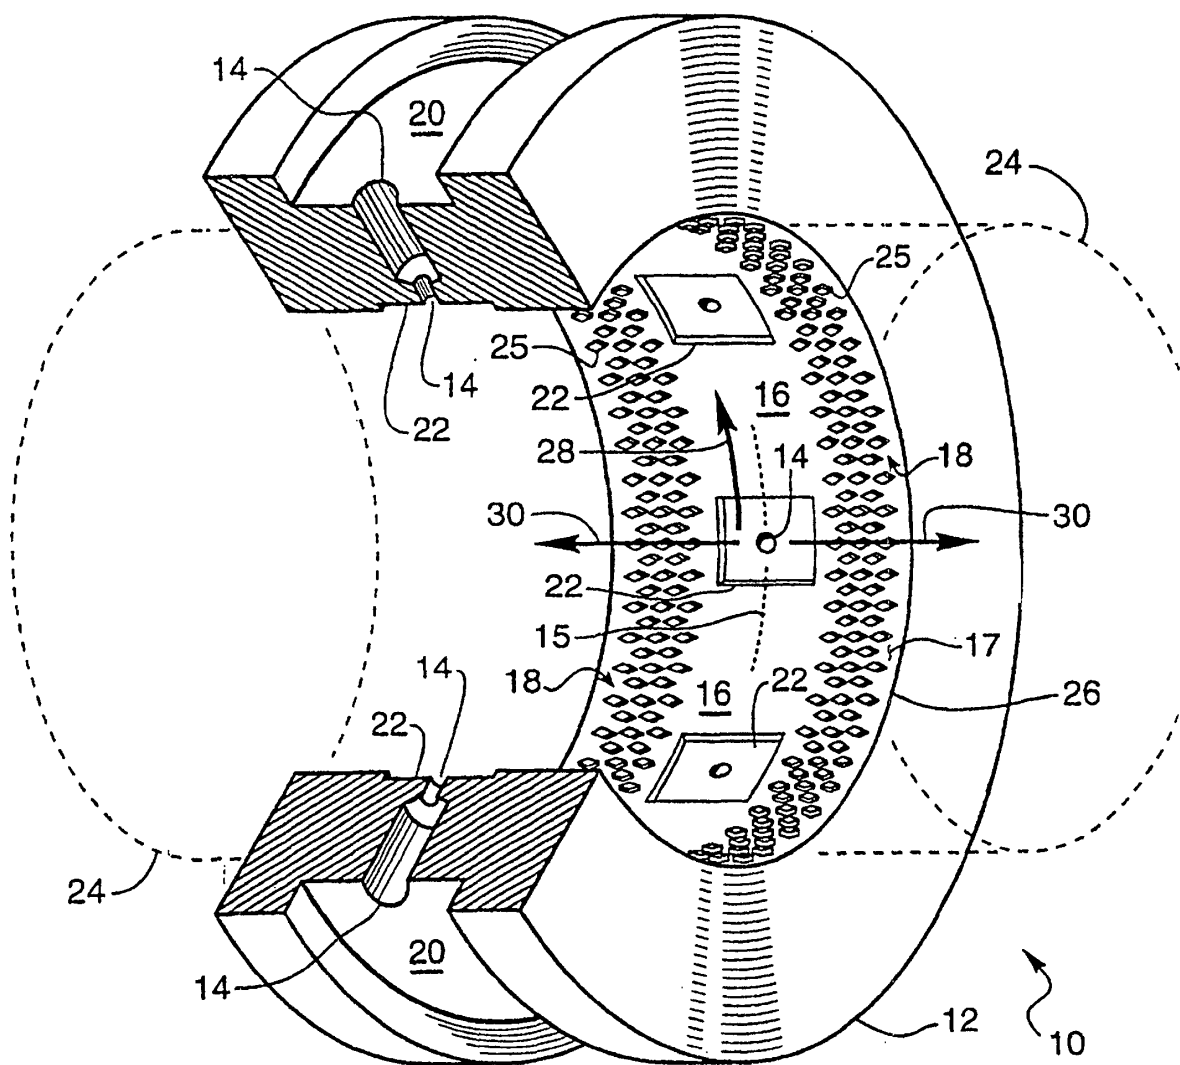

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5310265 A [0001]