



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 930 039 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
21.07.1999 Bulletin 1999/29

(51) Int. Cl.⁶: **A47K 10/36**

(21) Application number: **98830550.4**

(22) Date of filing: **22.09.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **15.01.1998 IT MI980065**


(71) Applicant:
Steiner Company International S.A.
1000 Lausanne 19 (CH)

(72) Inventor: **Macchi Cassia, Antonio**
20144 Milano (IT)

(74) Representative:
Adorno, Silvano et al
c/o SOCIETA' ITALIANA BREVETTI S.p.A.
Via Carducci, 8
20123 Milano (IT)

(54) Dispensing device for paper towels obtained by manual cutting from a continuous band

(57) A dispensing device for paper towels cut from a continuous band includes a manually-operated feeding and cutting mechanism (M) provided with at least a pair of blades (26) mounted on a roller (21) and at least a pair of blades (27) fixedly mounted and positioned to interfere with the blades (26) carried by the roller (21), said pairs of blades (26, 27) being mounted and structured so as to achieve during the cutting a punctiform contact between a rigid blade and a yielding blade. Preferably, the fixed blades (27) are flexible and converging upwards whereas the rotating blades (26) are rigid and horizontal. The case of the device also includes catches (9) suitable to engage corresponding resilient latching means (37) formed on the mechanism (M) whereby the latter can be easily removed from the device.

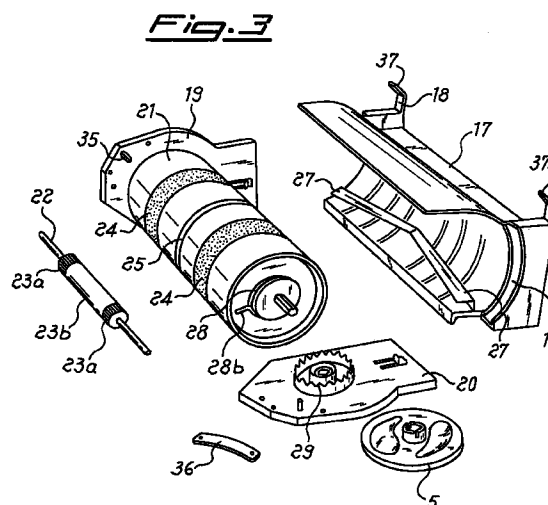

EP 0 930 039 A1

Description

[0001] The present invention relates to devices for the controlled dispensing of portions of paper from a continuous band to be used as towels, and in particular to a device of the manually-operated type. In this kind of device it is the pull exerted by the user on the tip of paper projecting from the device that controls the feeding of a pre-established length of band and the cutting thereof

[0002] There are known dispensing devices for paper towels from a continuous band wherein the cutting blade is fixed and the user must carry thereon the portion of paper pulled out from the device, so as to sever it from the band and thus be able to use it. This type of device is very simple and reliable, but it leaves up to the user the choice of the length of the portion of paper to be cut with consequential unavoidable wastes. Moreover, it implies the presence of a blade in an accessible and therefore potentially dangerous position.

[0003] A natural evolution of said device is the automatic paper cutting, still through manually-operated device and without resorting to motor-driven solutions which are much more expensive and less reliable. An example of such a kind of device is a device wherein a blade-driving cam is provided which is connected to the paper-feeding roller, so that it springs out radially from a rest position within a longitudinal slot formed in the roller itself to a cutting position wherein it intersects the paper outside the roller. This involves a clear danger of a possible springing out of the blade while the user is manually performing the paper inserting operation on the feed roller. Moreover, it may be difficult to access the blade for its possible replacement, due to its position inside the roller.

[0004] Another kind of device similar to the preceding one is a device wherein the blade acts on the strip of paper in a radial direction from outside towards the inside of the feed roller by entering a longitudinal slot thereof. In this case, the blade is mounted on a cutting group by means of a fork pivoted and laterally guided so as to be operated in synchronism with the rotation of the roller. Though it overcomes the drawbacks of the preceding kind of device, however also this solution implies a fairly complicated mechanism which is therefore expensive and not completely reliable.

[0005] Still other kinds of device produce portions of band with saw-toothed or V-shaped cuts which therefore have an irregular and unpractical shape for the use as towels. Furthermore, the progressive wear of the blade and/or the occurring of plays may make the band cutting ever more difficult and irregular.

[0006] Therefore the object of the present invention is to provide a device for dispensing paper towels which overcomes the above-mentioned drawbacks.

[0007] This object is achieved by means of a device having the characteristics disclosed in claim 1.

[0008] A first advantage of the present device is to

provide an effective cutting which is consistent in time, with the automatic recovery of the play, if any. This result is achieved through a very simple, cheap and reliable mechanism.

[0009] A second advantage of this device is that it produces towels with a regular rectangular shape thanks to a straight cut which is perpendicular to the band axis.

[0010] A further advantage of said device is that it includes a feeding and cutting mechanism which can be easily replaced completely since it is mounted in a removable way inside the case of the device.

[0011] Still another advantage of the present device is to make easier the protrusion of the tip of paper for the following user. This is achieved by means of a small uncut central portion of the band which allows for exerting still a certain pull even after the cutting has been carried out.

[0012] These and other advantages and characteristics of the device according to the present invention will be clear to those skilled in the art from the following detailed description of an embodiment thereof, with reference to the annexed drawings wherein:

Fig. 1 is a schematic perspective view from the bottom of the closed and empty device;

Fig. 2 is a partial schematic front view of the above-mentioned device in the opened condition;

Fig. 3 is a schematic perspective view from the right of the feeding and cutting mechanism in a partially disassembled condition;

Fig. 4 is a schematic front view of the device of fig. 3 in the assembled condition; and

Fig. 5 is a schematic view from the left of the mechanism of fig. 4.

[0013] Referring to figs. 1 and 2, there is seen that the case of the device is made up of a rear base 1, an upper transparent dome 2 and a lower door 3. The case of the device has a lower slot 4 as paper outlet, as well as a circular opening on the right side for a knob 5 for initially feeding the band when the device is loaded with a new roll.

[0014] Dome 2 and door 3 are hinged to base 1 by means of horizontal hinges 6 which allow a frontal opening of the device. In base 1 there are formed holes 7 for the wall mounting, rests 8 for the roll, catches 9 for mounting the feeding and cutting mechanism M (as it will be made clear further on), catches 10 for locking door 3 and a sleeve 11 wherein there is rotatably inserted a roll support 12 having a variable width, so as to receive rolls of different width.

[0015] Slot 4 is formed partially in base 1 and partially in door 3, which also has a central rib 13 whose function will be illustrated later on. Door 3 also carries a pair of hooks 14 connected to a rod 15 and biased by a spring 16 into engagement with the locking catches 10 when door 3 is closed onto base 1. Dome 2 is retained in turn in its closed position by door 3.

[0016] With reference also to figs.3-5, the feeding and cutting mechanism M will be now illustrated. Mechanism M essentially includes a rear supporting member 17 with end vertical seats 18 for inserting a left side shoulder 19 and a right side shoulder 20, between which there are rotatably mounted a feeding and cutting roller 21 and a shaft 22 carrying a pressure group 23. The latter is made up of a pair of pressure rollers 23a made from rubber with a horizontal knurl, between which there is placed a small tube 23b acting as a spacer. The length of spacer 23b is such that the two rollers 23a abut on corresponding strips of rubber band 24 applied to roller 21.

[0017] In a central position on roller 21 there is formed a groove 25 which rib 13 of door 3 enters upon closure of the latter. In this way, the paper band carried by roller 21 is surely deviated out of the device by rib 13 through slot 4. Therefore there is no risk that the band remains on roller 21 beyond the angular rotatory position corresponding to the outlet slot 4.

[0018] A first pair of blades 26 is projectingly mounted in a longitudinal position on roller 21 in corresponding aligned horizontal seats, said seats being formed with an angle intermediate between the radial direction and the tangential direction. Blades 26 extend along the whole length of roller 21, but at groove 25, and they have a thickness sufficient to provide a suitable rigidity, indicatively 2 mm.

[0019] A second pair of blades 27 is mounted on the inner face of the rear support 17, i.e. on the side facing roller 21. Blades 27 are mounted in a position converging upwards, i.e. in the direction opposite to the feeding direction of the paper band, and they have a thickness suitable to provide an adequate flexibility, indicatively 0,3 mm.

[0020] Roller 21, in the illustrated embodiment, can only rotate clockwise (as seen from the right) since on the right end of its supporting shaft there is placed a counter-reverse spring 28. This spring 28 is a left-spiral spring and has a tip 28b which projects radially into engagement with one of the notches of a raised crown 29 formed on the inner face of the right shoulder 20. In this way, the clockwise rotation of roller 21 causes by reaction the "opening" of spring 28, whereas a counter-clockwise rotation causes the "closing" thereof on the shaft of roller 21 which is therefore braked.

[0021] Figure 5 illustrates in particular the spring group which provides the completion of the rotation of roller 21 so that the cutting is soft and light since it depends more on the spring strength than on the pull of the user on the band. Furthermore, the spring makes sure that an end tip of the band projects from the device for the following user. A crank 30 is keyed at one end thereof onto the axis of roller 21, and carries at its opposite end a pulley 31 rotatable around a relevant pin 32. A shaped spring 33 is mounted on a relevant pin 34 and engages pulley 31 between pin 32 and the axis of roller 21. Spring 33 is shaped so as to produce a rest position

of roller 21 (a little after the position shown in fig.5) and a position beyond which the rotation of roller 21 is completed under the push of spring 33, through crank 30, even if there is no more pull on the band by the user.

[0022] In order to keep the pressure group 23 pressed against roller 21 while allowing the passage of the protruding blades 26, the ends of shaft 22 are housed in radially elongated seats 35 and leaf springs 36 mounted on the outside of shoulders 19, 20 act on said ends.

[0023] As mentioned above, the whole mechanism M can be easily removed from the case of the device in which it is mounted through resilient latching means 37. These means 37 are formed on the support 17 at the top of seats 18, and they are shaped so as to engage catches 9 formed on base 1. In this way, mechanism M is retained between catches 9 and the bottom of base 1 at slot 4, and in order to pull it out it is sufficient to act on latches 37. In case of failure or maintenance it is therefore advantageous to replace the whole mechanism M rather than working on site, the removed mechanism being then easily serviced at the manufacturing company.

[0024] The simple and effective operation of the present device, as will be now illustrated, can be easily understood from the description above.

[0025] The continuous paper band unwound from the roll retained by support 12 is introduced from the front side between the pressure group 23 and roller 21 which is rotated through knob 5 until the band comes out through slot 4. When the user pulls the protruding tip of the band, this pull causes the rotation of roller 21 which carries blades 26 into contact with blades 27 fixed on support 17. The two pairs of blades are mounted so as to come into contact, with the flexible blades 27 which slightly bend upon the contact with the rigid blades 26. In particular, since blades 27 are inclined the contact does not occur along their whole length but just at a point which progressively moves from the center outwards. This produces a straight "scissors-like" cut perpendicular to the feeding direction of the band, thus obtaining a rectangular paper towel.

[0026] The presence of the counter-reverse spring 28 prevents a possible reverse motion of roller 21 at the end of the rotation under the push of spring 33. This makes sure that the tip to be pulled by the following user comes out. The use of a pair of rigid blades (26) and a pair of flexible blades (27) which intersect each other allows the automatic recovery of possible plays and/or wear within a certain amount. Moreover, the discontinuity in cutting at the central groove 25 allows to retain a small connection between the band and the cut portion, whereby no accidental fall of the towel produced by the cutting is possible.

[0027] It is clear that the above-described and illustrated embodiment of the device according to the invention is just an example susceptible of various modifications. In particular, it is possible to reverse the arrangement of blades 26 and 27 by mounting the latter

on roller 21, and/or to mount blades 26 in an inclined position and blades 27 horizontally, or else to have the inclined blades converge in the same direction of feeding of the paper band whereby the cutting starts from the edges instead of starting from the center. Also, the inclined blades could be not converging but parallel whereby the cutting starts from an edge and from the center, or each pair of blades could include an inclined blade and a horizontal blade.

[0028] Even the number of blades may be different from those illustrated, e.g. by using more than two blades on roller 21 with more than one groove 25, or the pairs of blades could include longer and shorter blades, for example if groove 25 is not in a central position. It is also possible to replace the flexible blades 27 with rigid blades yet mounted in a yielding way, i.e. by means of biasing springs which allow a certain degree of motion upon contact with the rigid blades 26.

[0029] Similarly, latches 37, the spring group of roller 21, the counter-reverse spring 28, and so on could be replaced by other mechanically equivalent members and/or could be arranged in a different way.

Claims

1. A dispensing device for paper towels cut from a continuous band, comprising a case (1, 2, 3) housing a feeding and cutting mechanism (M) and provided with a lower slot (4) as band outlet, characterized in that said mechanism (M) includes at least a pair of blades (26) mounted on a feeding and cutting roller (21) and at least a pair of blades (27) fixedly mounted and positioned to interfere with said blades (26) carried by said roller (21), said pairs of blades (26, 27) being mounted and structured so as to achieve during the cutting a punctiform contact between a rigid blade and a yielding blade.
2. A device according to claim 1, characterized in that one of said pairs of blades (26, 27) is substantially flexible whereas the other pair is substantially rigid.
3. A device according to claim 2, characterized in that the flexible blades (27) are fixedly mounted and the rigid blades (26) are mounted on the roller (21).
4. A device according to claim 2 or 3, characterized in that the flexible blades (27) are metallic blades with a thickness of about 0,3 mm and the rigid blades (26) are metallic blades with a thickness of about 2 mm.
5. A device according to one or more of the preceding claims, characterized in that the fixed blades (27) are inclined and converging in a direction opposite to the feeding direction of the band whereas the blades mounted on the roller (21) are horizontally aligned.
6. A device according to one or more of the preceding claims, characterized in that the case of the device includes catches (9) suitable to engage corresponding resilient latching means (37) formed on the feeding and cutting mechanism (M) whereby the latter is easily removable from the device.
7. A device according to one or more of the preceding claims, characterized in that the roller (21) includes a groove (25) which is entered by a rib (13) formed on the inner face of the case and suitable to deviate the band towards the outlet slot (4).
8. A device according to one or more of the preceding claims, characterized in that the feeding and cutting mechanism (M) includes a pressure group (23) pressed against the roller (21) by supporting and biasing means (22, 35, 36) suitable to provide it with a play sufficient for the passage of the blades (26) mounted on said roller (21).
9. A device according to one or more of the preceding claims, characterized in that the feeding and cutting mechanism (M) includes a counter-reverse spring (28) placed on the axis of the roller (21) and engaged in a fixed seat (29) so as to allow said roller (21) only one direction of rotation.
10. A device according to one or more of the preceding claims, characterized in that the feeding and cutting mechanism (M) includes a spring group (30, 31, 32, 33, 34) suitable to complete the rotation of the roller (21) so that an end tip of the band projects from the device for the following user.

Fig. 1

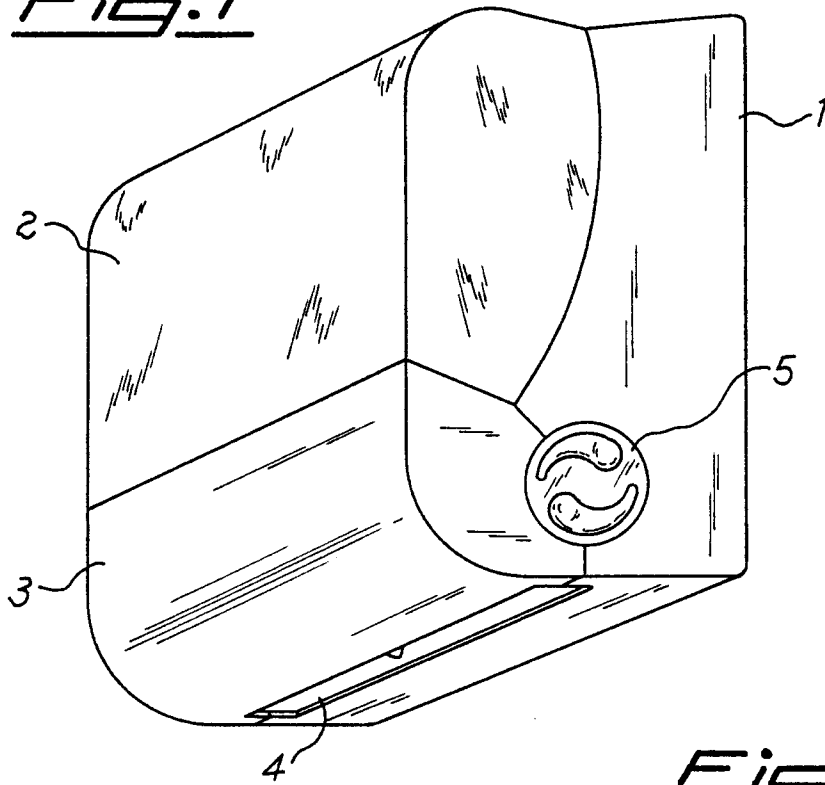


Fig. 2

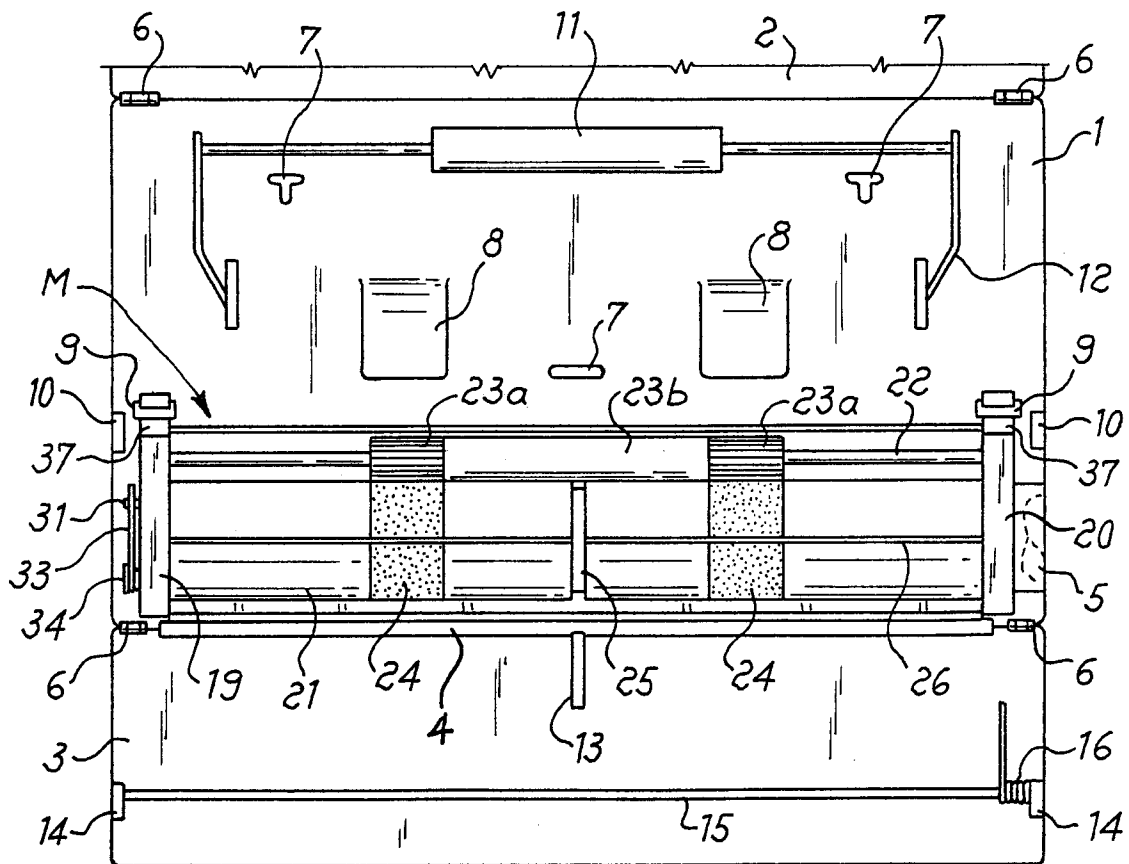
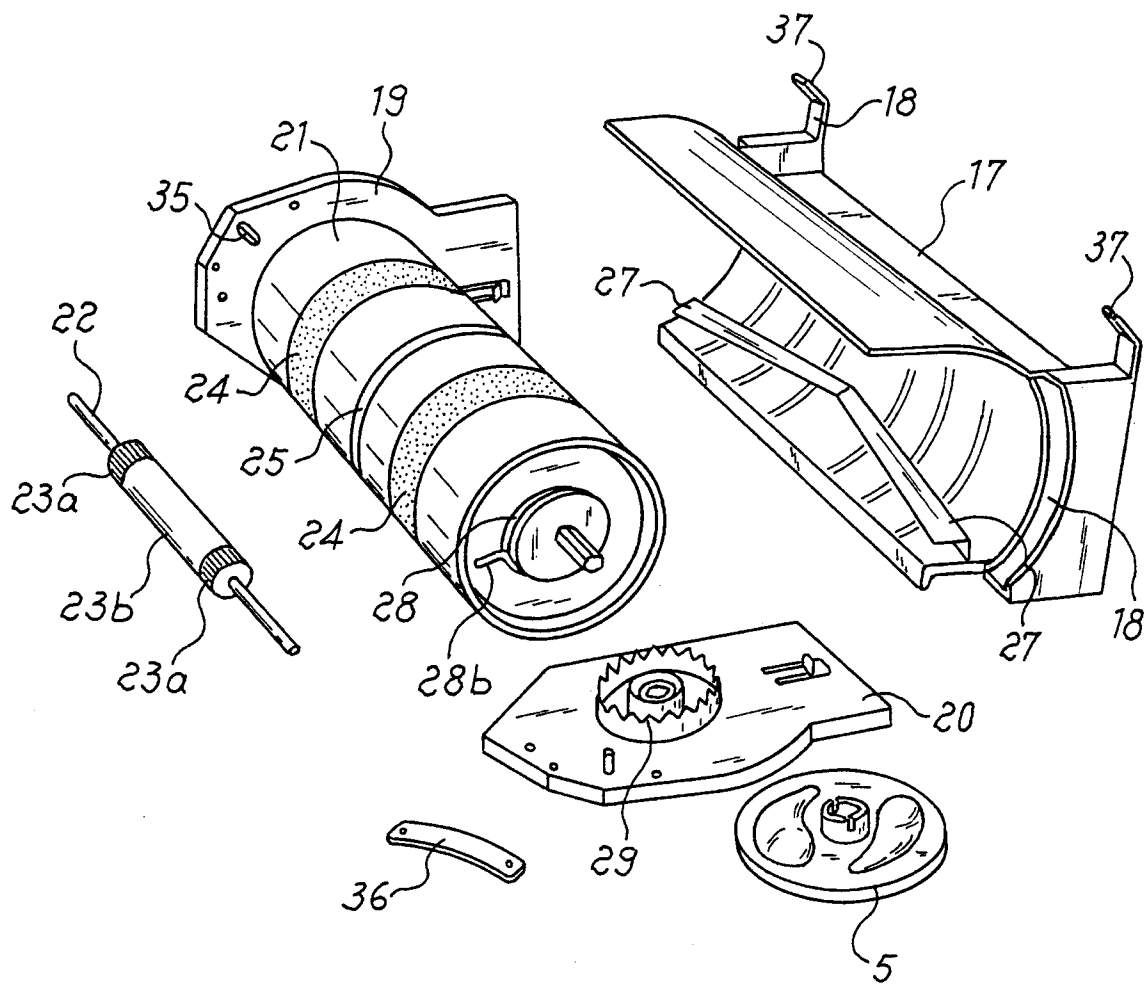


Fig. 3




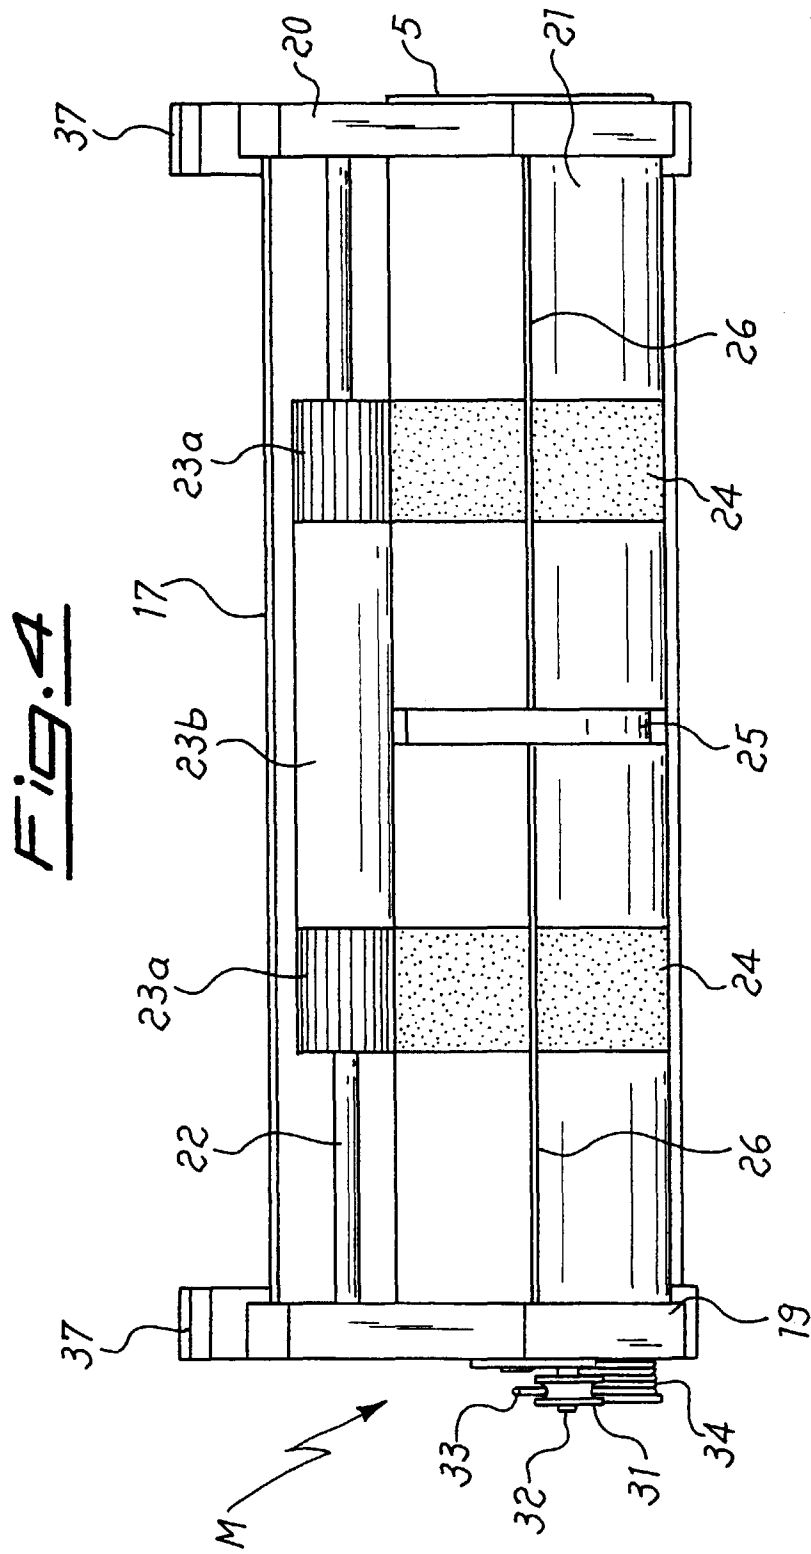


Fig. 5



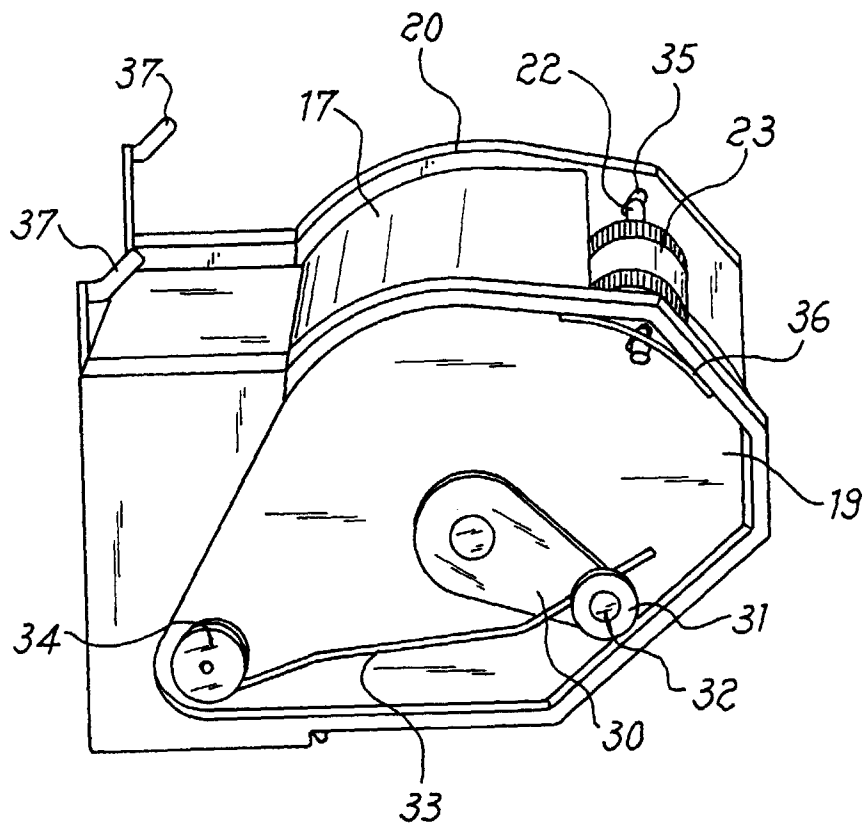

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 83 0550

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 629 372 A (JAMES RIVER PAPER CO) 21 December 1994 * the whole document *	1,5	A47K10/36
X	EP 0 693 268 A (JAMES RIVER PAPER CO) 24 January 1996 * the whole document *	1	
A	US 4 846 035 A (GRANGER MAURICE) 11 July 1989 * the whole document *	1,7	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			A47K B65H
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		7 April 1999	Vrugt, S
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 83 0550

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-04-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0629372 A	21-12-1994	NONE	
EP 0693268 A	24-01-1996	NONE	
US 4846035 A	11-07-1989	FR 2609010 A	01-07-1988
		AT 73632 T	15-04-1992
		CA 1282683 A	09-04-1991
		DE 3777617 A	23-04-1992
		EP 0275806 A	27-07-1988
		GR 3004875 T	28-04-1993
		JP 63176251 A	20-07-1988
		KR 9511433 B	04-10-1995
		OA 8795 A	31-03-1989