

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 933 471 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

04.08.1999 Bulletin 1999/31(51) Int Cl.⁶: **D21F 3/02**(21) Application number: **99850014.4**(22) Date of filing: **29.01.1999**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

Designated Extension States:

AL LT LV MK RO SI(30) Priority: **30.01.1998 SE 9800262****30.10.1998 US 183924**(71) Applicant: **VALMET CORPORATION****00620 Helsinki (FI)**


(72) Inventors:

- **Snellman, Jorma**
40500 Jyväskylä (FI)

• **Kivimaa, Juha****Charlotte, NC 28273 (US)**• **Brox, Erik****66733 Forshaga (SE)**• **Gustavsson, Lars****65460 Karlstad (SE)**(74) Representative: **Rostovanyi, Peter et al****AWAPATENT AB,****Box 5117****200 71 Malmö (SE)****(54) Shoe press**

(57) A shoe press for applying pressure to a moving web (W) of paper or the like includes a press shoe extending along a full width of the web being carried through a nip (N) defined between the shoe and a backing member (16), a support (18) for the shoe, and a plurality of articulated hydraulic loading cylinders (20) arranged between the support and the shoe for urging the shoe toward the backing member (16) to apply pressure to the web. Each loading cylinder (20) includes a single piston (26) and first and second cylinders (22, 24) attached to the shoe and to the support, respectively. The

opposite end portions of the piston are slidably received within the cylinders so as to define working chambers (34) in the cylinders which are pressurizable by hydraulic fluid for urging the two cylinders away from each other. The piston (26) engages the cylinders (22, 24) at seals (32) which enable the piston to pivot with respect to both cylinders about axes parallel to and perpendicular to the machine direction so as to enable the loading cylinders to accommodate deformations and thermal expansion of the shoe in the cross-machine direction and to allow the shoe to pivot about an axis perpendicular to the machine direction.

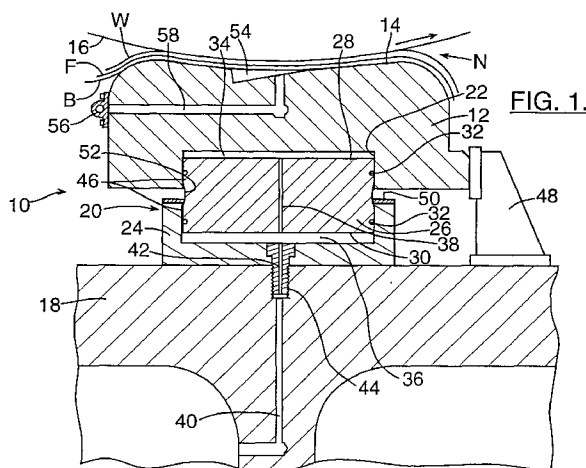**FIG. 1.****EP 0 933 471 A2**

Description

Field of the Invention

[0001] The present invention relates to shoe presses for applying pressure to a running web of paper, paper-board, or the like. More particularly, the present invention relates to a shoe press of the type having a support which supports a press shoe adjacent to a counter roll or other backing member such that the press shoe and backing member form an extended nip therebetween, and having a hydraulic device for urging the press shoe toward the backing member to apply pressure to the web running through the nip.

Background of the Invention

[0002] In a papermaking machine, a wet web of paper or the like from the forming section of the machine is typically carried through the nip of a shoe press of the above-described type, where the web is pressed between two layers of absorbent felt or the like for wicking moisture from the web. Such shoe presses can also be used for calendering the web downstream of the forming section.

[0003] Various shoe presses of the above-described type have been proposed. For example, U.S. Patent No. 4,917,768, which is commonly owned with the present application, discloses a shoe press in which the press shoe is carried on the support by tubular sleeves rigidly affixed to and spaced apart on the support along the cross-machine direction, the sleeves being slidably received within cylindrical recesses in the press shoe to permit the press shoe to be moved toward and away from a counter roll for varying the nip pressure. The shoe press includes hydraulic jacks upstream and downstream of the sleeves for urging the press shoe toward the counter roll and for pivoting the shoe about a cross-machine axis so as to vary the nip pressure in the machine direction. The sleeves fit somewhat loosely in the recesses in the shoe and a resilient seal encircles each sleeve for sealing the interface between the sleeve and recess. Accordingly, the press shoe is capable of pivoting relative to the support for varying the nip pressure in the machine direction.

[0004] One of the difficulties encountered in shoe presses is thermal expansion of the shoe from frictional heating of the shoe by the belt that carries the paper web through the press, as well as from hot hydraulic fluid which is circulated through the shoe for various purposes. Thermal expansion of the shoe causes elongation in the cross-machine direction. In the shoe press disclosed in the '768 patent, such thermal expansion of the shoe causes the sleeves to be placed under bending stresses, which is undesirable. Moreover, although the shoe in the '768 patent is slidable on the pistons of the hydraulic jacks, the large normal forces exerted on the shoe by the pistons during operation of the shoe press

result in substantial frictional forces on the pistons when the shoe expands through thermal action. Consequently, the pistons are placed in bending within the cylinders of the hydraulic jacks, and such bending can lead to malfunction of the jacks, particularly for the cylinders toward the outer ends of the shoe farthest from the centerline where thermal expansion results in relatively greater translation of the shoe relative to the support and pistons. Bending of the pistons is undesirable from the standpoint of wear on the pistons, cylinders, and seals, and can also interfere with proper functioning of the press. Additionally, thermal expansion of the shoe can cause leakage of hydraulic fluid when the seals are excessively deformed.

[0005] In part because of the problems noted above with respect to the bending of the sleeves, the assignee of the present application developed an alternative shoe press similar to that disclosed in the '768 patent but eliminating the sleeves. However, this shoe press still suffered from the problems of bending of the pistons of the hydraulic jacks as noted above. Additionally, because the shoe was freely supported on the pistons of the hydraulic jacks, the shoe was free to take a variety of positions relative to the support beam and counter roll. More particularly, the shoe could become slanted, wherein one end of the shoe was displaced towards the downstream end of the machine and the opposite end was displaced toward the upstream end of the machine. Because of frictional forces between the shoe and the pistons, once the shoe became slanted it was difficult for the shoe to readjust into a correct position.

Summary of the Invention

[0006] The present invention provides a shoe press capable of tolerating relatively large cross-machine elongations and other deformations of the press shoe without the problems associated with some prior shoe presses noted above. In one embodiment of the invention, the shoe press includes a press shoe that extends in a cross-machine direction along the full width of a web being carried through the press, and a plurality of articulated hydraulic loading cylinders spaced apart along the shoe in the cross-machine direction and supported by a support. The loading cylinders define working chambers that are pressurizable by hydraulic fluid so as to cause the loading cylinders to urge the press shoe away from the support and toward a counter roll or other backing member for applying pressure to the web being carried through the nip defined between the shoe and the backing member. Each loading cylinder comprises a piston member disposed within a cylinder member. One of the piston and cylinder members comprises a two-piece member having a first member fixed relative to the press shoe and a second member fixed relative to the support, while the other of the piston and cylinder members comprises a coupler. For example, in one preferred embodiment, the two-piece member comprises

first and second cylinders and the coupler comprises a piston which is slidably received within both of the cylinders. In an alternative preferred embodiment, the two-piece member comprises first and second pistons and the coupler comprises a cylinder which surrounds both of the pistons.

[0007] The coupler sealingly engages both the first and second members such that the first member is urged away from the second member in a loading direction by pressurization of the working chamber to cause the press shoe to be urged toward the backing member. In order to enable the loading cylinders to accommodate cross-machine elongation of the press shoe, each coupler engages the respective first and second members at seals which enable the coupler to pivot relative to the first and second members about axes parallel to the machine direction. Thus, the press shoe is free to thermally expand in the cross-machine direction without causing bending of any piston and/or cylinder members of the loading cylinders.

[0008] In accordance with a preferred embodiment of the invention, each loading cylinder includes first and second cylinders and a single piston. A first working chamber is defined by the first cylinder and a first end of the piston which is slidably received therein, and a second working chamber is defined by the second cylinder and a second end of the piston which is slidably received therein. Each working chamber is pressurizable with hydraulic fluid for urging the press shoe in the loading direction away from the support and toward the backing member. Preferably, the piston includes a passage connecting the two working chambers to enable fluid communication therebetween. One of the press shoe and the support includes a supply passage for supplying pressurized hydraulic fluid into one of the first and second working chambers. Advantageously, the supply passage is in the support for supplying fluid to the second working chamber.

[0009] Various configurations of cylinders and pistons are possible within the scope of the invention. In accordance with one preferred embodiment, the piston comprises a tubular member having generally cylindrical inner and outer surfaces. Each of the first and second ends of the piston has an annular flange which projects radially outward beyond the cylindrical outer surface of the piston, and each flange supports a resilient compressible seal. The radial dimensions of the flanges are sufficiently large in relation to their axial extent and to the axial lengths of the portions of the piston residing within the cylinders, that a substantial degree of pivotal movement of the piston is enabled relative to the cylinders about axes parallel to the machine direction. Preferably, the second cylinder includes a stop member which extends radially inward to a diameter smaller than the flange on the second end of the piston so as to limit movement of the piston in the loading direction away from the support.

[0010] In accordance with yet another preferred em-

bodiment of the invention, a hydraulically operated shoe-retracting actuator is disposed within the interior of the piston of at least one of the loading cylinders. Either the support or the shoe includes a passage adapted to supply hydraulic fluid to the shoe-retracting actuator, the actuator being operable by hydraulic pressure to retract the shoe away from the counter roll and toward the support. The shoe-retracting actuator preferably comprises an actuator piston attached to the support and extending into the interior of the piston of the loading cylinder, and an actuator cylinder sealingly surrounding the actuator piston so as to define a chamber pressurizable by hydraulic fluid to urge the actuator cylinder toward the support. The actuator cylinder engages a projection affixed to the press shoe such that actuation of the shoe-retracting actuator causes the press shoe to be urged toward the support.

[0011] It will thus be appreciated that the invention provides a shoe press in which the press shoe is supported so as to be freely movable in the cross-machine direction without wear, bending, or other undesirable consequences to the loading cylinders. The loading cylinders also can accommodate deformations or translations of the press shoe in the machine direction, as well as pivoting of the press shoe about an axis parallel to the cross-machine direction. Additionally, the articulated loading cylinders prevent the press shoe from assuming a slanted position.

Brief Description of the Drawings

[0012] The above and other objects, features, and advantages of the invention will become more apparent from the following description of certain preferred embodiments thereof, when taken in conjunction with the accompanying drawings in which:

FIG. 1 is a cross-sectional view of a shoe press in accordance with a first preferred embodiment of the invention, taken on a plane parallel to the machine direction through an axis of one of the loading cylinders;

FIG. 2 is a view similar to FIG. 1, showing the press shoe pivoted relative to the support about an axis parallel to the cross-machine direction;

FIG. 3 is a cross-sectional view of the press shoe of FIG. 1 taken on a plane parallel to the cross-machine direction through the axes of the loading cylinders;

FIG. 4 is a cross-sectional view similar to FIG. 1, showing a second preferred embodiment of the invention having two rows of loading cylinders spaced apart in the machine direction for imparting pivotal motion to the press shoe to vary the nip pressure in the machine direction;

FIG. 5 is a view similar to FIG. 3, showing a third preferred embodiment of the invention;

FIG. 6 is a view similar to FIG. 1, showing a fourth

preferred embodiment of the invention having two pistons and a common cylinder;

FIG. 7 is a view similar to FIG. 1, showing one of the loading cylinders of a fifth preferred embodiment of the invention;

FIG. 7A is a top elevation of the shoe of the shoe press of FIG. 7, showing pins and stops along the side and downstream edges of the shoe for restraining motion of the shoe;

FIG. 8 is a view similar to FIG. 7, showing another of the loading cylinders which includes an internal shoe-retracting actuator within the piston of the loading cylinder; and

FIG. 9 is a view similar to FIG. 8, showing a loading cylinder in accordance with a sixth preferred embodiment of the invention.

Detailed Description of the Drawings

[0013] The invention is now explained by reference to certain preferred embodiments thereof as shown in the drawings. It will be understood, however, that the invention is not limited to the embodiments shown and described herein.

[0014] With reference to FIGS. 1-3, a shoe press 10 in accordance with a first preferred embodiment of the invention is illustrated. The shoe press 10 includes a press shoe 12 which is configured on one surface 14 thereof so as to be generally complementary in contour to a backing member such as the counter roll 16 depicted in the drawings. The shoe 12 and counter roll 16 define a nip *N* through which a moving web *W* of paper, paperboard, or the like is carried. The web *W* typically is carried by an endless belt *B* and is in contact with one or more press felts *F* or other absorbent material. The shoe press 10 can be used in the press section and/or calender of a papermaking machine, and can also be used as a prepress in a forming section of a papermaking machine. It will be recognized that when used in a calender or forming section of a machine, the web *W* would be passed through the device 10 without any absorbent felt.

[0015] The shoe press 10 further includes a support 18. The shoe 12 and the support 18 extend lengthwise in the cross-machine direction (as best seen in FIG. 3) along at least the full width of the web *W*, and preferably the shoe 12 is slightly wider than the web *W*. The shoe 12 is supported by the support 18 and is urged toward the backing member 16 for applying pressure to the web *W* by a plurality of articulated hydraulic loading cylinders 20 arranged between the support 18 and the shoe 12 and spaced apart in the cross-machine direction.

[0016] Each loading cylinder 20 comprises a piston member and a cylinder member, one of the members being formed in two parts and the other member forming a coupler between the two parts. More particularly, the two-piece member of the loading cylinder 20 includes a first cylinder 22 that is fixed relative to the shoe 12, a

second cylinder 24 that is fixed relative to the support 18, and a piston 26 slidably received with each of the cylinders. In the embodiment depicted in FIGS. 1-3, the first cylinder 22 comprises a recess formed in the shoe 12. The second cylinder 24 is a member formed separately from the support 18 and affixed thereto.

[0017] A first end 28 of the piston 26 is slidably received within the first cylinder 22 and a second end 30 of the piston is slidably received within the second cylinder 24. A resilient compressible seal 32 surrounds each end of the piston 26 for sealing against the inner surfaces of the cylinders. A first working chamber 34 is thus defined between the first end 28 of the piston 26 and the side and end walls of the first cylinder 22, and a second working chamber 36 is defined between the second end 30 of the piston and the side and end walls of the second cylinder 24. The piston 26 includes a passage 38 connecting the first and second working chambers so that there is fluid communication between them. The support 18 includes a supply passage 40 for supplying pressurized hydraulic fluid into the second working chamber 36. The supply passage 40 connects with a bore 42 in a fastener 44 which is used for securing the second cylinder 24 to the support 18. Thus, pressurized fluid supplied through the passage 40 into the second working chamber 36 causes the first and second cylinders 22 and 24 to be urged away from each other. The shoe 12 is thus urged toward the backing member 16. The first working chamber 34 is also pressurized substantially equal to the second chamber by virtue of the passage 38 in the piston 26. Where the first and second ends 28 and 30 of the piston are essentially equal as shown in FIGS. 1-3, the net axial force on the piston 26 is thus nearly zero.

[0018] The piston 26 preferably includes spherical surfaces 46 which confront the inner surfaces of the cylinders 22 and 24. The resilient compressible seals 32 extend radially outward of the spherical surfaces 46 into contact with the inner surfaces of the cylinders. Accordingly, the piston 26 is able to pivot about axes parallel to the machine and cross-machine directions relative to both of the cylinders while maintaining proper sealing of the working chambers. FIG. 2 depicts the shoe 12 and first cylinder 22 pivoted relative to the piston 26 about an axis parallel to the cross-machine direction. Although only one of the loading cylinders 20 is depicted in FIG. 2, it will be understood that the pistons of all of the cylinders 20 along the cross-machine direction can pivot relative to the shoe 12 so that the shoe can pivot as a unit relative to the support 18. FIG. 3 depicts a pair of the loading cylinders 20 in which the pistons 26 have been pivoted relative to both cylinders 22 and 24 about axes parallel to the machine direction as a result of the shoe 12 being translated in the cross-machine direction (to the left in FIG. 3). Thus, the loading cylinders 20 allow substantial freedom of movement of the shoe 12 in terms of both pivotal and translational movements.

[0019] Because the shoe 12 is capable of translating

in the machine direction relative to the support **18**, the shoe press includes a guide rail or stop **48** for limiting the extent to which the shoe can move. The loading cylinders **20** also include stop rings **50** for limiting the movement of the pistons **26** in the loading direction away from the support **18**. The stop rings **50** are affixed to the outermost ends of the second cylinders **24** and extend radially inward to a diameter smaller than that of the spherical surfaces **46** on the second ends of the pistons **26**. Each piston **26** has an axially extending portion **52** of reduced diameter located about midway along the axial length of the piston between the spherical surfaces **46** at each end. The reduced diameter portion **52** is smaller in diameter than the inner surface of the stop ring **50** over a sufficient axial length of the piston **26** so that the piston is capable of some range of axial movement within the second cylinder **24**.

[0020] The shoe press **10** also includes hydrostatic compartments **54** in the surface **14** facing the counter roll **16** for lubrication purposes, as well known in the art. The compartments **54** are supplied with hydraulic fluid by a pipe **56** attached to the shoe **12** and communicating with the compartments via passages **58** in the shoe.

[0021] FIG. 4 depicts a second preferred embodiment of the invention in the form of a shoe press **10'** having two rows of loading cylinders **20'** generally as described above (the primary differences being the smaller diameters of the loading cylinders **20'**), the two rows being spaced apart in the machine direction for varying the nip pressure in the machine direction.

[0022] FIG. 5 illustrates a third preferred embodiment of the invention. The shoe press **110** of FIG. 5 includes loading cylinders **120** in which the first cylinders **122** are formed not as recesses in the shoe **112** but rather as separate members, similar to the second cylinders **124**. Hydraulic fluid is supplied to the loading cylinders **120** through passages **140** in the shoe **112** and through openings **142** in the first cylinders **122**. The passages **140** may be supplied with fluid via a pipe (not shown) attached to the shoe **112** in a manner similar to that depicted in FIGS. 1-2. It will also be noted that FIG. 5 illustrates the type of deformation of the shoe **112** caused by thermal expansion, whereby the two loading cylinders **120** on the left-hand side which are located on one side of the machine axial centerline have their pistons **126** pivoted in one direction about axes parallel to the machine direction, and the two loading cylinders **120** on the right-hand side of the centerline have their pistons **126** pivoted in the opposite direction about axes parallel to the machine direction. It will also be noted that the pistons **126** are hollow tubular members, as opposed to the generally solid pistons **26** and **26'** of the presses shown in FIGS. 1-4. This construction of the pistons **126** results in savings in material relative to the solid-type pistons.

[0023] FIG. 6 depicts a fourth preferred embodiment of the invention. The shoe press **110'** of FIG. 6 employs loading cylinders **120'** in which the two-piece member

is the piston and the coupler is the cylinder. Thus, the loading cylinder **120'** comprises a first piston **126a** affixed to the shoe **112'**, and second piston **126b** affixed to the support **118'**, and a cylinder **122'** within which both pistons are slidably received. A common working chamber **134'** is defined between the pistons **126a** and **126b**. Pressurized fluid is supplied to the working chamber **134'** by a passage **140'** in the support **118'** which connects with a passage **142'** that extends through a fastener **144'** which secures the second piston **126b** to the support **118'**. A ring **50'**, similar in function to the ring **50** of FIG. 1, is affixed to the end of the cylinder **122'** adjacent the shoe **112'** for preventing the first piston **126a** from being withdrawn from the cylinder **122'**.

[0024] FIG. 7 depicts a fifth preferred embodiment of the invention. The shoe press **210** of FIG. 7 includes hydraulic loading cylinders **220** in which the pistons **226** are formed as hollow tubular members, and the first cylinder **222** and second cylinder **224** are separate members affixed to the press shoe **212** and the support **218**, respectively. The first cylinder **222** has an end wall **223** which abuts the shoe **212** and a hollow tubular portion **225** projecting normally from the end wall **223** toward the second cylinder **224**. Similarly, the second cylinder **224** has an end wall **227** which abuts the support **218** and a hollow tubular portion **229** projecting normally from the end wall **227** toward the first cylinder **222**. Each of the tubular portions **225** and **229** has a cylindrical inner surface.

[0025] The piston **226** includes flanges **231** adjacent each end of the piston. The flanges **231** are generally annular and project radially outward beyond the cylindrical outer surface of the piston. The radially outermost surfaces **233** of the flanges **231** are preferably but not necessarily spherical. Each flange **231** includes a groove **235** continuously encircling the piston and housing a pair of resilient compressible seal rings **237a** and **237b**. The inner seal rings **237a** are preferably rubber or a material having compressibility and resilience properties similar to rubber. The outer seal rings **237b** which make contact with the inner surfaces of the cylinders are preferably made of a material somewhat stiffer than that of the inner seal rings. A suitable material is, for example, a polymer having bronze additives, although other materials may alternatively be used. The outer seal rings **237b** project radially outward of the spherical surfaces **233** of the flanges and are larger in diameter than the inner surfaces of the cylinders **222**, **224** in their undeformed conditions, such that there is an interference fit of the seal rings in the cylinders. The seal rings **237a** and **237b** therefore are compressed, and their resilience keeps them in sealing contact with the cylinders throughout the range of pivotal movement of the piston **226**. Additionally, the lengths of the flanges **231** in the radially outward direction are sufficiently large in relation to the axial lengths of the flanges and the axial length between the two flanges so that the piston **226** is capable of pivoting over a relatively large angular range while

maintain proper sealing contact of the seal rings **237b** with the cylinders.

[0026] To aid in assembling and disassembling the shoe press, the first cylinders **222** are affixed to the shoe **212** by a pair of clamps **239** and **241** adjacent the upstream and downstream sides, respectively, of the shoe. The clamps include ledges **243** which clamp an annular flange **245** of the first cylinder **222** between the shoe **212** and the ledges **243**. It will be noted that the holes **247** in the clamps **239** and **241** through which fasteners are passed for securing the clamps to the shoe are not identically located relative to the ledges **243**. This enables the clamps **239** and **241** to be interchanged so as to alter the location of the first cylinder **222** relative to the shoe **212** in the machine direction. Although not shown, the support **218** also includes an adjustment mechanism for moving the support and the second cylinder **224** in the machine direction. This adjustment mechanism may be, for example, a pair of clamps (not shown) similar to the clamps **239** and **241** for securing the support **218** to a frame structure, or alternatively, a pair of such clamps for securing the second cylinder **224** to the support **218**. Accordingly, the entire loading cylinder **220** can be shifted in the machine direction relative to the shoe **212** for changing the center of load on the shoe.

[0027] With reference to FIGS. 7 and 7A, the shoe press **210** includes features for limiting motion of the shoe **212** in the upstream, downstream, and cross-machine directions. As previously noted in connection with FIGS. 1 and 2, a stop **48** is positioned adjacent the downstream side of the shoe **212** for limiting the extent of downstream motion of the shoe **212**. Additionally, a pin **49** is affixed to the downstream side of the shoe **212** and projects outward therefrom in the machine direction. The stop **48** includes a slot **51** into which the pin **49** extends. The pin **49** is located at a midpoint of the width of the shoe **212** in the cross-machine direction, as shown in FIG. 7A. The slot **51** extends in the loading direction so that the shoe **212** is free to move toward and away from the counter roll. However, the slot **51** is only slightly wider than the pin **49**, and accordingly, the shoe **212** is restrained from moving in the cross-machine direction. Furthermore, the pin **49** engaged in the slot **51** ensures that thermal expansion of the shoe **212** in the cross-machine direction does not all occur in a single direction but rather occurs in opposite directions on either side of the longitudinal centerline of the shoe press **210**.

[0028] The shoe press **210** also includes pins **249** affixed to the opposite side edges of the shoe **212** and projecting outward therefrom in the cross-machine direction. A pair of stops **248** are positioned adjacent the opposite sides of the shoe **212** so that they can be abutted by the pins **249** when the shoe **212** moves in the upstream direction.

[0029] Thus, the stops **248** and pins **249** limit the extent of shoe movement in the upstream direction, and

also help prevent the shoe **212** from assuming a slanted position in which one side is further upstream than the other side. It will of course be appreciated that instead of the stops **248** and pins **249**, a single elongate stop (not shown) could be positioned adjacent the upstream edge of the shoe **212** so as to serve the same purposes as the stops **248** and pins **249**.

[0030] Preferably, at least one and more preferably several of the loading cylinders of the shoe press **210** include internal shoe-retracting actuators operable to retract the shoe **212** away from the counter roll. FIG. 8 shows one of the loading cylinders **220'** having a shoe-retracting actuator **260**. The actuator **260** comprises an actuator piston **262** having a stem **264** secured to the support **218** and projecting normally therefrom toward the shoe **212**. An actuator cylinder **266** surrounds the actuator piston so as to define a working chamber **268** pressurizable with hydraulic fluid to cause the actuator cylinder **266** to be urged toward the support **218**. The stem **264** of the actuator piston includes a passage **270** for supplying fluid into the chamber **268**, and the support **218** includes a fluid passage **272** which connects with the passage **270** in the stem. The chamber **268** is constantly pressurized during operation of the shoe press so that the pressure within the chamber **268** of the shoe-retracting actuator is not substantially less than that in the working chamber **234** of the loading cylinder **220'** in order to avoid damage to the actuator. When the press shoe **212** is to be retracted away from the counter roll, the pressure in the working chamber **234** is decreased below that in the chamber **268**.

[0031] The actuator cylinder **266** at the end adjacent the shoe **212** includes an annular ring **274** which extends radially inward from the cylinder side wall. A projection **276** is affixed to the first cylinder **222'** and extends through the central opening of the annular ring **274**. The projection **276** includes a head **278** larger in diameter than the inner diameter of the ring **274** for engaging the annular ring **274** such that movement of the actuator cylinder **266** toward the support **218** causes the shoe **212** to be pulled toward the support. The annular ring **274** includes holes **275** for equalizing the pressure on both sides of the ring. To aid in disassembling the press, the annular ring **274** is removably threaded into the actuator cylinder **266**. The projection **276** is also removably threaded into the first cylinder **222'**. The first cylinder **222'** includes a reinforced boss **280** into which the projection **276** is threaded. The shoe **212** includes a recess **282** for accommodating the boss **280**. The recess **282** is larger in diameter than the boss **280** so that the first cylinder **222'** can be shifted in the machine direction by interchanging the clamps **239** and **241**, as previously described.

[0032] The shoe-retracting actuator **260** also enables a further advantage in addition to its function of retracting the shoe **212**. Specifically, if the hydraulic pressure within the chamber **268** of the actuator **260** is reduced below the pressure existing in the working chamber **234**,

the net loading force exerted on the shoe **212** is increased above that exerted if the pressures are equal in the chambers **234** and **268**. Accordingly, the actuator **260** can also be used to increase the loading capacity of a loading cylinder without increasing the size of the loading cylinder.

[0033] FIG. 9 shows a sixth preferred embodiment of a loading cylinder **320** in accordance with the invention. The loading cylinder **320** includes a first cylinder **322** which has a thickened end wall **323** which mounts the projection **276** of the shoe-retracting actuator **260'**, and accordingly the shoe **312** does not require a recess for accommodating the projection **276**. The first cylinder **322** can be shifted in the machine direction by interchanging the clamps **239** and **241**, as described above for the loading cylinder **220'**. In addition, the second cylinder **324** can be shifted in the machine direction in a similar manner. To this end, the support **318** includes a recess **319** and the second cylinder **324** includes an end wall **325** upon which the stem **264'** of the actuator piston **262'** is affixed. The stem **264'** extends through a thickened portion **326** of the cylinder end wall **325**, and the thickened portion **326** and a part of the stem **264'** extend into the recess **319** in the support **318**. The recess **319** in the support **318** is wider in the machine direction than the thickened portion **326** of the second cylinder **324** so that the second cylinder **324** can be shifted in the machine direction. The second cylinder **324** is secured on the support **318** by a pair of asymmetric clamps **339** and **341** in similar manner to the attachment of the first cylinder **322** to the shoe **312** by clamps **239** and **241**. Thus, the second cylinder **324** is shifted in the machine direction by interchanging the clamps **339** and **341**.

[0034] Pressurized hydraulic fluid is supplied to the shoe-retracting actuator **260'** by a flexible hose **342** which connects to an end **328** of the stem **264'** projecting from the thickened portion **326** of the second cylinder end wall **325**. This manner of making the fluid connection with the actuator piston **262'** facilitates shifting the second cylinder **324** and the actuator **260'** in the machine direction.

[0035] From the foregoing description of certain preferred embodiments of the invention, it will be appreciated that the invention provides a unique shoe press having significant advantages over prior presses, including the ability to tolerate deformations such as thermal expansion of the shoe without binding or malfunctioning of the loading cylinders. The invention also provides a simple mechanism for adjusting the center of load on the shoe in the machine direction.

[0036] Although the preferred embodiments of the invention have been described in considerable detail, the invention is not limited to these embodiments. Various modifications and substitutions of equivalents will readily be comprehended by persons of ordinary skill in the art, and it is intended that such modifications and substitutions be encompassed within the scope of the invention as set forth in the appended claims.

Claims

1. A shoe press for applying pressure to a web (W) which is carried in a machine direction through a nip (N) between the shoe press and a backing member (16), comprising:

a press shoe (12; 12'; 112; 112'; 212) adapted to be juxtaposed with the backing member (16) such that the web (W) can be carried through the nip (N) defined therebetween, the press shoe extending in a cross-machine direction along substantially a full width of the web (W); a support (18; 18'; 118'; 218, 318) which supports the press shoe such that the press shoe is movable in a loading direction toward the backing member (16) for applying pressure to the web (W);

a plurality of articulated hydraulic loading cylinders (20; 20'; 120; 120'; 220; 220'; 320) spaced apart in the cross-machine direction along the press shoe, each loading cylinder including a piston member (26; 26'; 126; 126a, 126b; 226) disposed within a cylinder member (22, 24; 122, 124; 122'; 222, 224; 222', 224'; 322, 324) so as to define a working chamber (34, 36; 134', 234) pressurizable by hydraulic fluid, one of the piston and cylinder members comprising a two-piece member having a first member fixed relative to the press shoe and a second member fixed relative to the support and spaced from the first member, and the other of the piston and cylinder members comprising a coupler sealingly engaging both the first and second members such that the first member is urged away from the second member in a loading direction by pressurization of the working chamber to cause the press shoe to be urged toward the backing member (16);

each coupler engaging the respective first and second members at seals (32; 237a, 237b) which enable the coupler to pivot relative to the first and second members about axes parallel to the machine direction, whereby the articulated hydraulic loading cylinders enable the press shoe to move in the cross-machine direction relative to the support.

2. The shoe press of claim 1, wherein the two-piece member comprises separately formed first (22; 122; 222; 222') and second cylinders (24; 124; 224; 224') fixed relative to the press shoe and support, respectively, and wherein the coupler comprises a piston (26; 26'; 226), the piston including a first end (28) received within the first cylinder and a second end (30) received within the second cylinder.
3. The shoe press of claim 2, wherein the first end (28)

of the piston (26) and the first cylinder (22) define a first working chamber (34) therebetween, and the second end (30) of the piston (26) and the second cylinder (24) define a second working chamber (36) therebetween, each of the working chambers (34, 36) being pressurizable with hydraulic fluid.

4. The shoe press of claim 3, wherein the piston includes a passage (38) connecting the first working chamber (34) with the second working chamber (36) to permit fluid communication therebetween.

5. The shoe press of claim 4, wherein one of the press shoe (12) and the support (18) includes a supply passage (40) therein for supplying pressurized hydraulic fluid into one of the first and second working chambers (34, 36).

6. The shoe press of claim 5, wherein the supply passage is in the support (18).

7. The shoe press of claim 2, wherein the piston (26) includes spherical surfaces (46) for allowing the piston (26) to pivot relative to both the first (22) and second cylinders (24).

8. The shoe press of claim 2, wherein the first (28) and second ends (30) of the piston (26; 226) each supports a resilient compressible seal (32; 237a, 237b) encircling the piston for sealing against an inner surface of the corresponding cylinder (22, 24; 222, 224).

9. The shoe press of claim 2, wherein each of the pistons is tubular so as to define an open interior therein, and further comprising a hydraulically operated shoe-retracting actuator (260; 260') disposed within the interior of at least one of the pistons, the actuator being operable by hydraulic pressure to urge the shoe away from the counter roll.

10. The shoe press of claim 9, wherein the shoe-retracting actuator comprises an actuator piston (262) attached to the support (218) and extending into the interior of the piston of the loading cylinder (220'), and an actuator cylinder (266) sealingly surrounding the actuator piston (262) so as to define a chamber (268) pressurizable by hydraulic fluid to urge the actuator cylinder (266) toward the support (218), the actuator cylinder (266) engaging a projection (276) affixed to the press shoe such that actuation of the shoe-retracting actuator causes the press shoe to be urged toward the support.

11. The shoe press of claim 10, wherein the actuator piston (262) includes a stem (264) attached to the support and projecting normally therefrom toward the press shoe, the stem (264) including a passage

(270) which opens into the chamber (268) in the shoe-retracting actuator, the support (218) having a hydraulic fluid supply passage (272) which connects with the passage (270) in the stem (264).

12. The shoe press of claim 8, wherein the piston (226) comprises a tubular member having generally cylindrical inner and outer surfaces, each of the first and second ends of the piston having an annular flange (231) which projects radially outward beyond the cylindrical outer surface of the piston, each flange supporting one of the resilient compressible seals (237a, 237b).

13. The shoe press of claim 12, wherein the first and second cylinders (222, 224) comprise cup-shaped members each having an end wall (223, 227) affixed to the press shoe and support, respectively, and a tubular portion (225, 229) connected to the end wall and extending toward the other cylinder, each of the tubular portions defining a cylindrical inner surface which is sealingly engaged by one of the seals on the piston.

14. The shoe press of claim 13, wherein the tubular portion (229) of the second cylinder (224) includes a stop member which extends radially inward to a diameter smaller than the flange (231) on the second end of the piston (226) so as to limit movement of the piston in the loading direction away from the support (218).

15. The shoe press of claim 1, wherein the loading cylinders (20') are arranged in two rows which are spaced apart in the machine direction, the loading cylinders in one of the rows being hydraulically pressurizable independently of the loading cylinders in the other row such that nip pressure can be varied in the machine direction.

16. The shoe press of claim 1, wherein the coupler comprises a cylinder (120') and the two-piece member comprises a first piston (126a) fixed relative to the press shoe and a second piston (126b) fixed relative to the support, the cylinder sealingly surrounding both pistons so as to define a common working chamber (134') between the pistons.

17. The shoe press of claim 1, further comprising an adjustable fastening mechanism (239, 241) which secures the first member to the shoe, the fastening mechanism being operable to adjust the location of the first member relative to the shoe in the machine direction.

18. A shoe press for applying pressure to a web (W) which is carried in a machine direction through a nip (N) defined between the shoe press and a backing

member (16), comprising:

a press shoe (212) adapted to be juxtaposed with the backing member so as to form the nip (N) between the backing member (16) and the press shoe, the press shoe extending in a cross-machine direction along a width of the web (W);
 a support (218; 318) providing support for the press shoe;
 an articulated hydraulic loading cylinder (220; 220'; 320) including a floating piston (226) and first and second cylinders (222, 224; 222', 224'; 322, 324) arranged between the support and the press shoe, the loading cylinder including separately formed first and second cylinders, the first cylinder fixed relative to the press shoe and the second cylinder fixed relative to the support, the floating piston having opposite first and second end portions slidably received within and sealingly engaging the first and second cylinders so as to define first and second working chambers pressurizable by hydraulic fluid for urging the first and second cylinders away from each other in a loading direction to urge the press shoe toward the backing member (16);
 the piston being a tubular member having generally cylindrical inner and outer surfaces, each of the first and second end portions of the piston having an annular flange (231) which projects radially outward beyond the cylindrical outer surface of the piston, each flange supporting a resilient compressible seal (237a, 237b) which engages an inner surface of the respective cylinder, the flanges accommodating pivoting of the piston relative to the cylinders about axes parallel to the machine direction.

19. The shoe press of claim 18, wherein the first cylinder comprises a recess (282) formed in the press shoe.

20. The shoe press of claim 18, wherein the first cylinder is formed separately from the press shoe and is affixed to the press shoe.

21. The shoe press of claim 18, wherein the second cylinder is formed separately from the support and is affixed to the support.

22. The shoe press of claim 18, further comprising a stop ring affixed to the second cylinder and adapted to engage the flange on the second end portion of the piston for limiting movement of the piston away from the support.

23. The shoe press of claim 18, wherein each of the

flanges has spherical surfaces confronting the inner surface of the respective cylinder to facilitate pivoting of the piston within the cylinder.

24. The shoe press of claim 18, further comprising a hydraulically operated shoe-retracting actuator (260; 260') disposed within the interior of the piston, the actuator being operable by hydraulic pressure to urge the shoe toward the support so as to limit movement of the shoe away from the support.



25. The shoe press of claim 24, wherein the shoe-retracting actuator comprises an actuator piston (262; 262') attached to the support and extending into the interior of the piston of the loading cylinder, and an actuator cylinder (266) sealingly surrounding the actuator piston so as to define a chamber (268) pressurizable by hydraulic fluid to urge the actuator cylinder toward the support, the actuator cylinder engaging a projection (276) affixed to the press shoe such that actuation of the shoe-retracting actuator causes the press shoe to be urged toward the support.

26. The shoe press of claim 25 wherein the actuator piston includes a stem (264) attached to the support (218) and projecting normally therefrom toward the press shoe, the stem including a passage (270) which opens into the chamber (268) in the shoe-retracting actuator, the support having a hydraulic fluid supply passage (272) which connects with the passage in the stem.

27. The shoe press of claim 20, further comprising an adjustable fastening mechanism (239, 241) which secures the first cylinder to the shoe, the fastening mechanism being operable to adjust the location of the first cylinder relative to the shoe in the machine direction.

28. The shoe press of claim 27, wherein the fastening mechanism comprises clamps which clamp the first cylinder onto the shoe, the clamps being locatable in multiple positions on the shoe for adjusting the location of the first cylinder on the shoe.

29. The shoe press of claim 28, further comprising a second adjustable fastening mechanism (339, 341) for securing the second cylinder to the support (318), the second adjustable fastening mechanism comprising clamps adapted to clamp the second cylinder onto the support in multiple positions thereon for adjusting the location of the second cylinder in the machine direction.

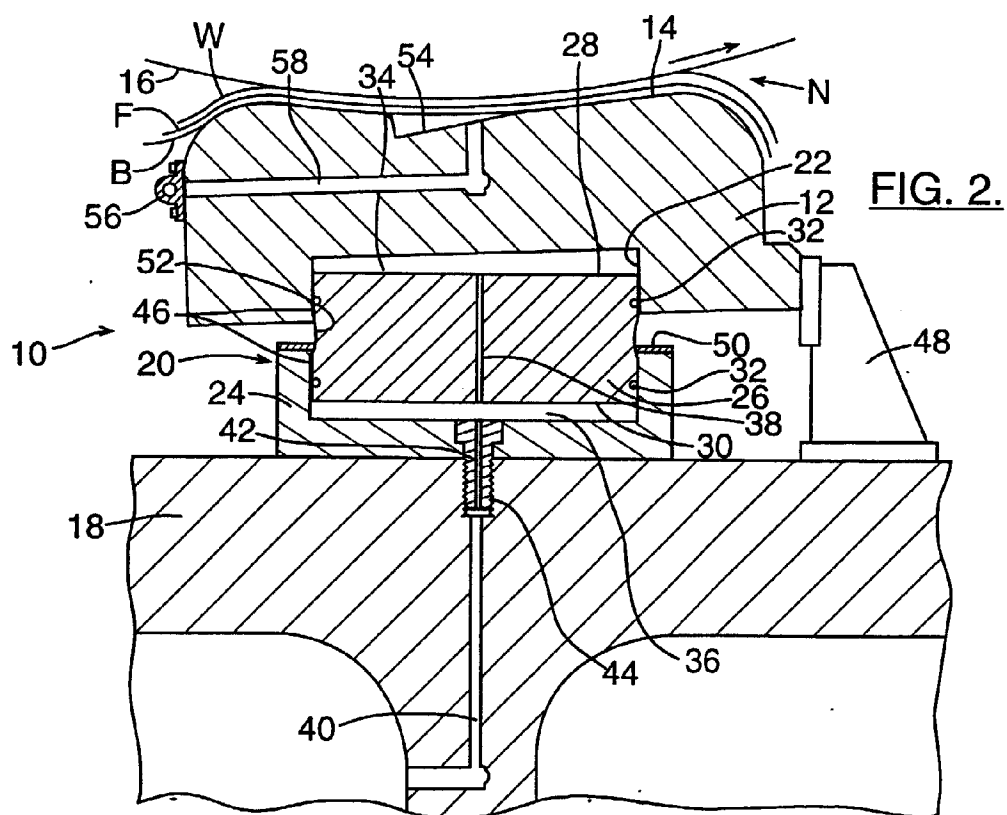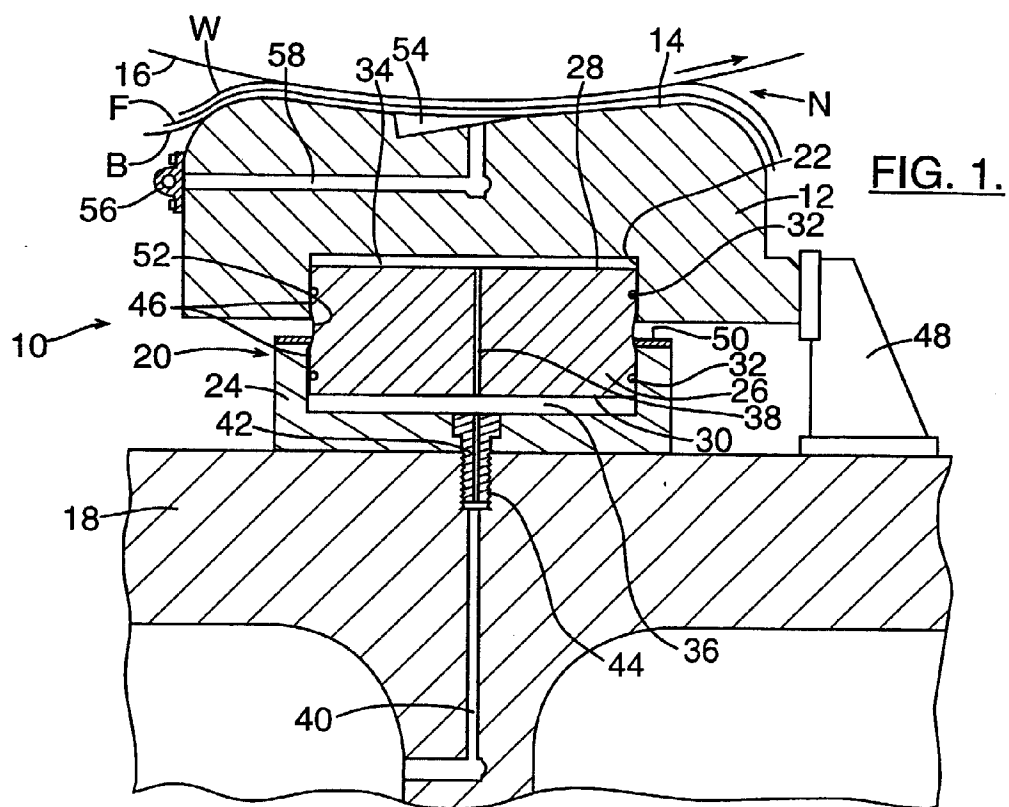

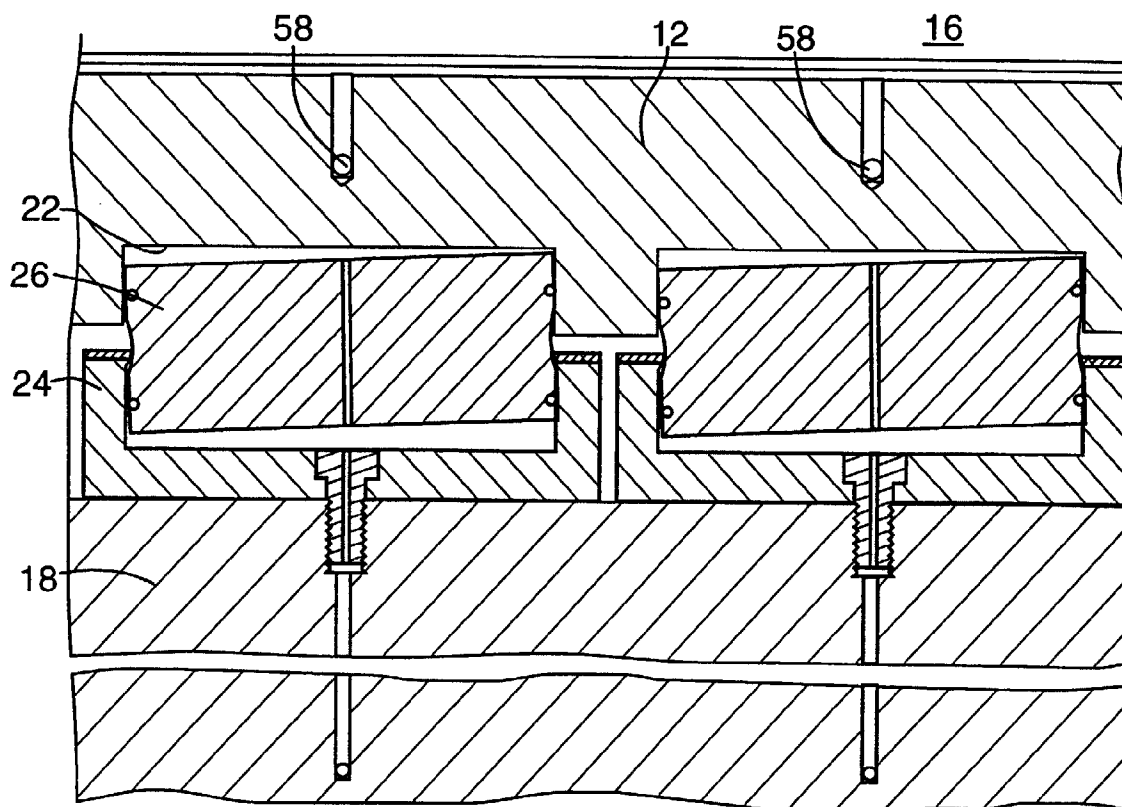


FIG. 3.

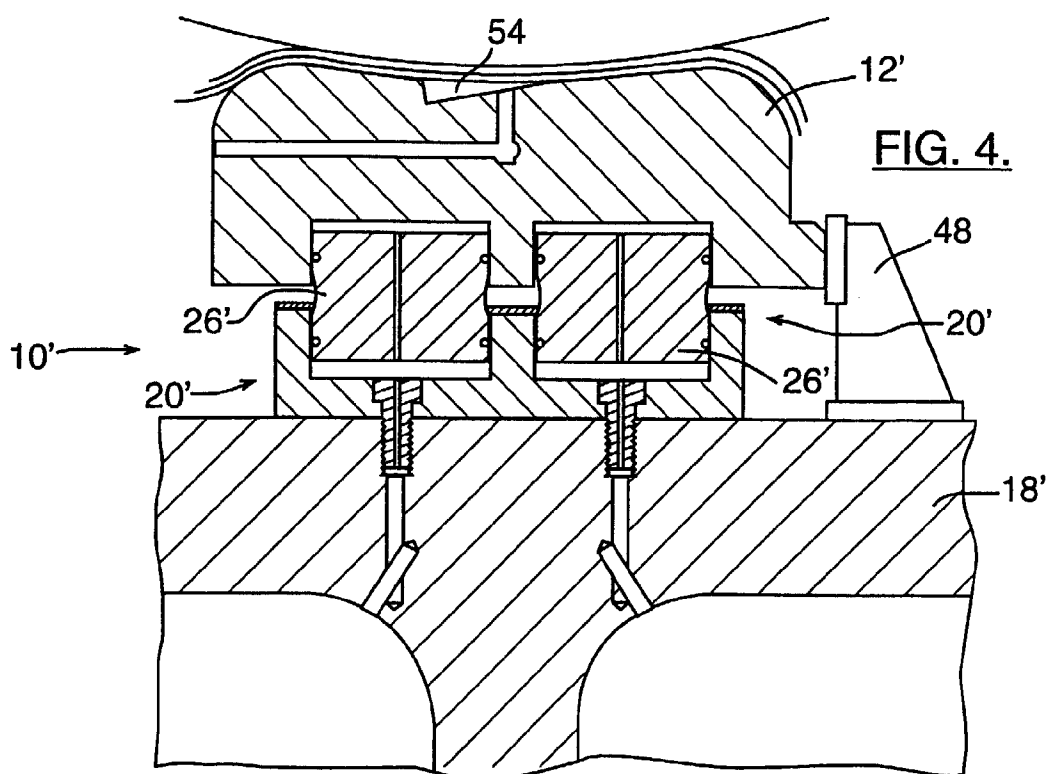


FIG. 4.

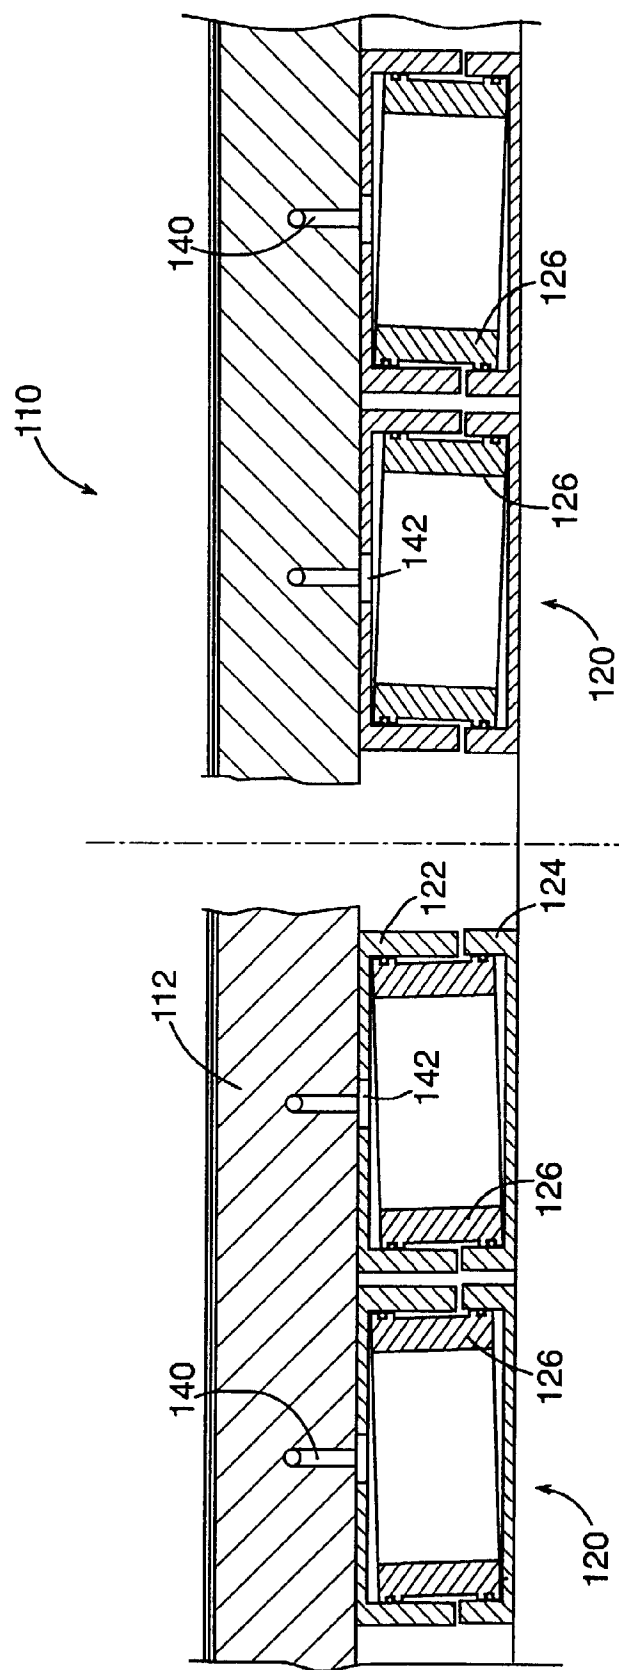


FIG. 5.

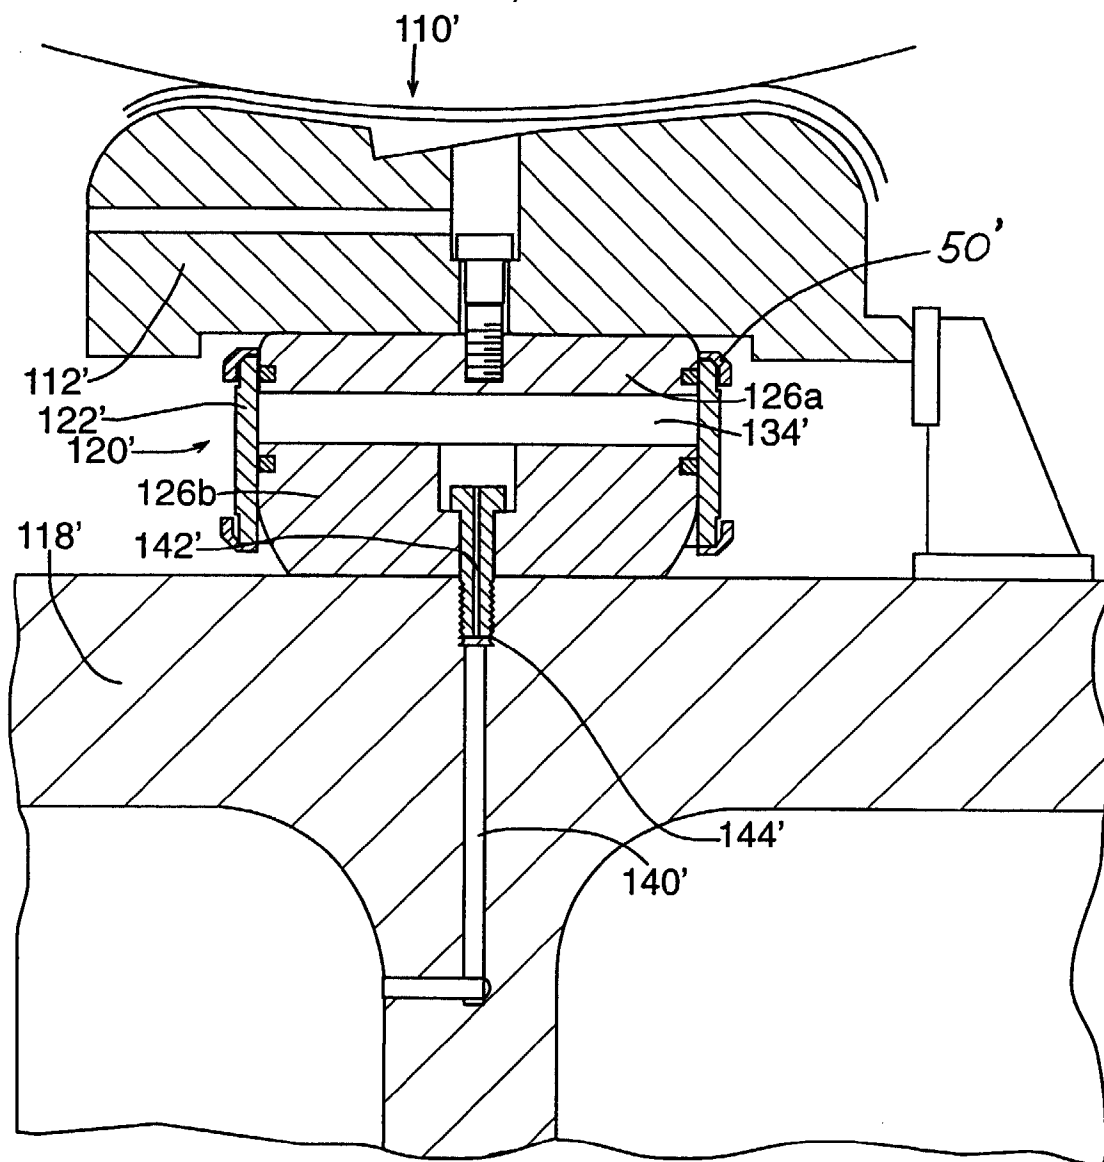
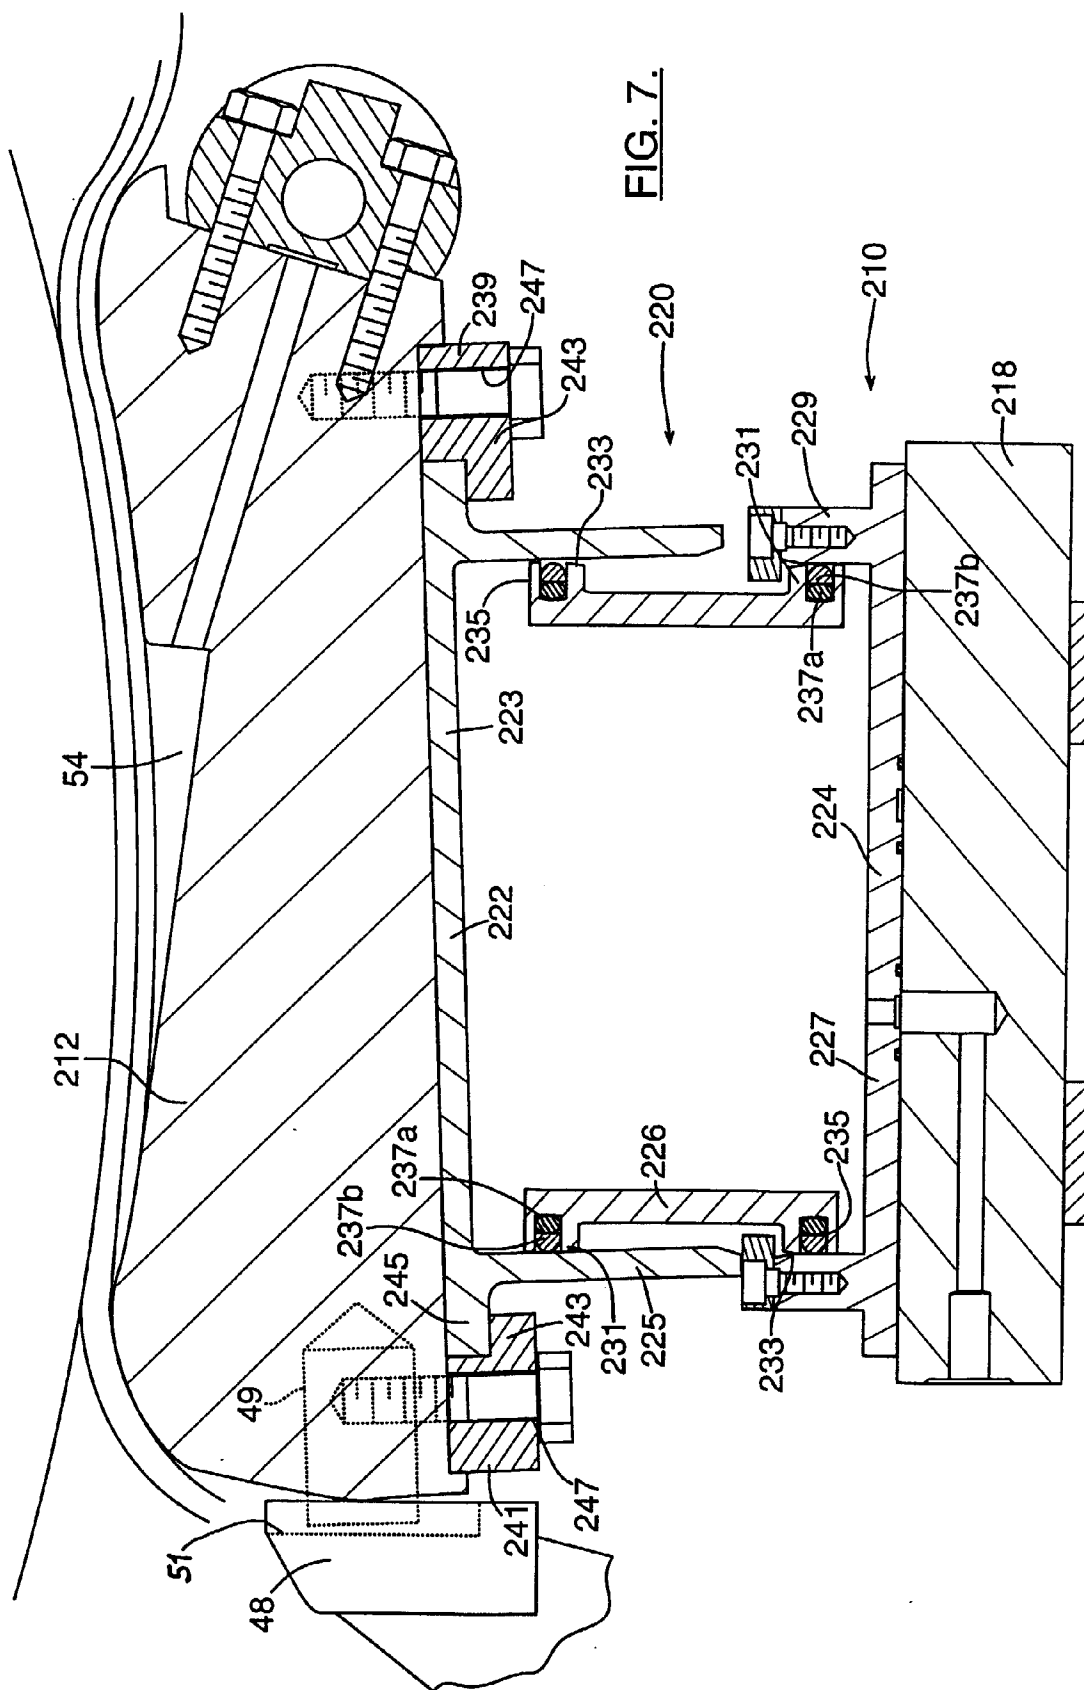


FIG. 6.



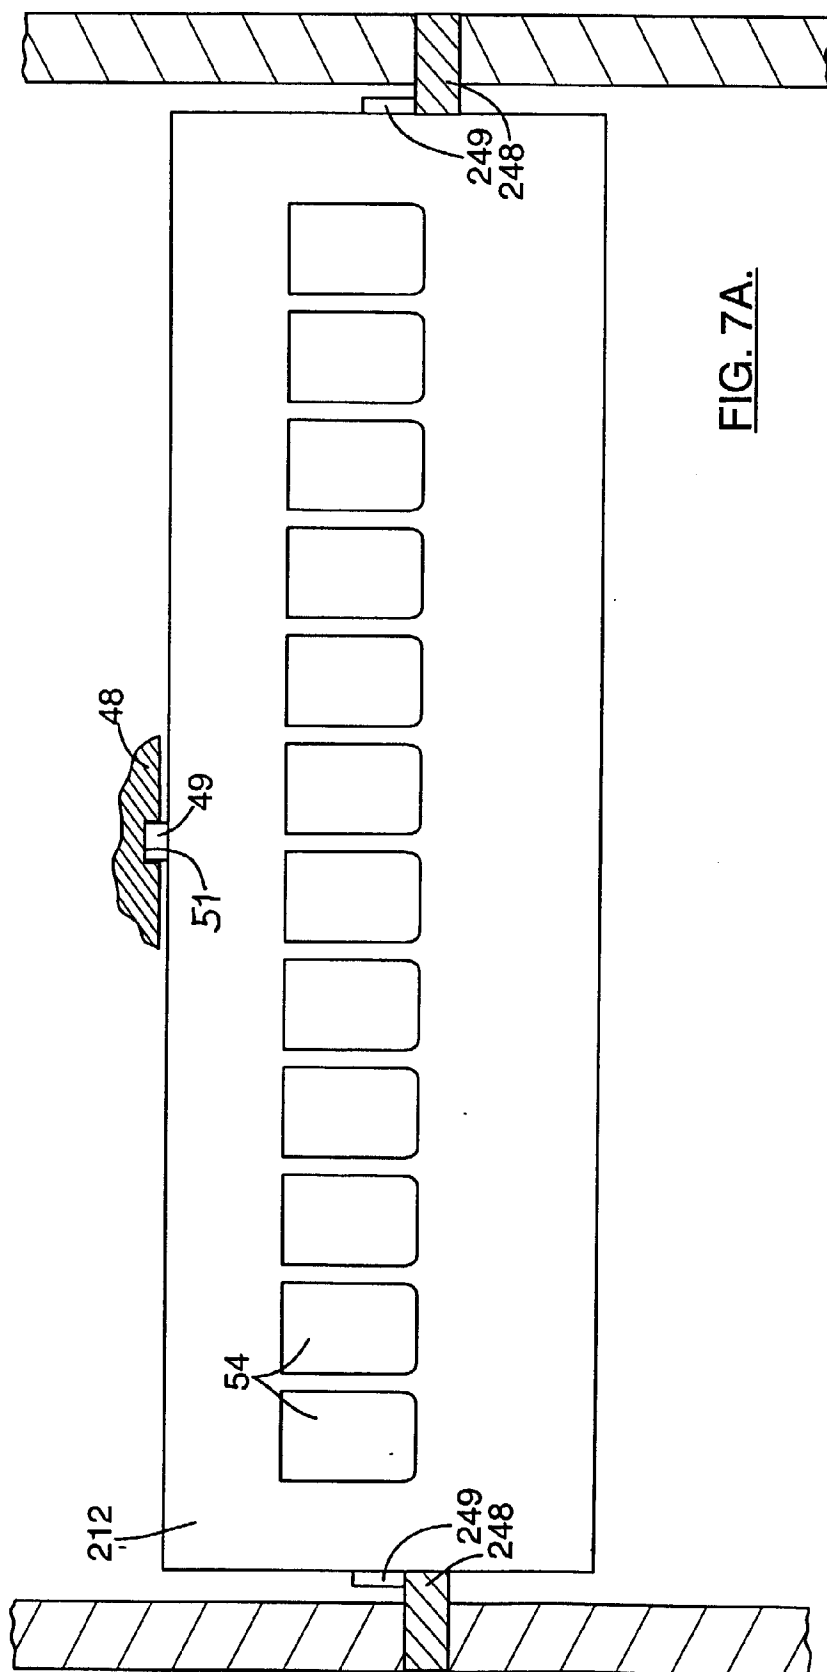


FIG. 7A.

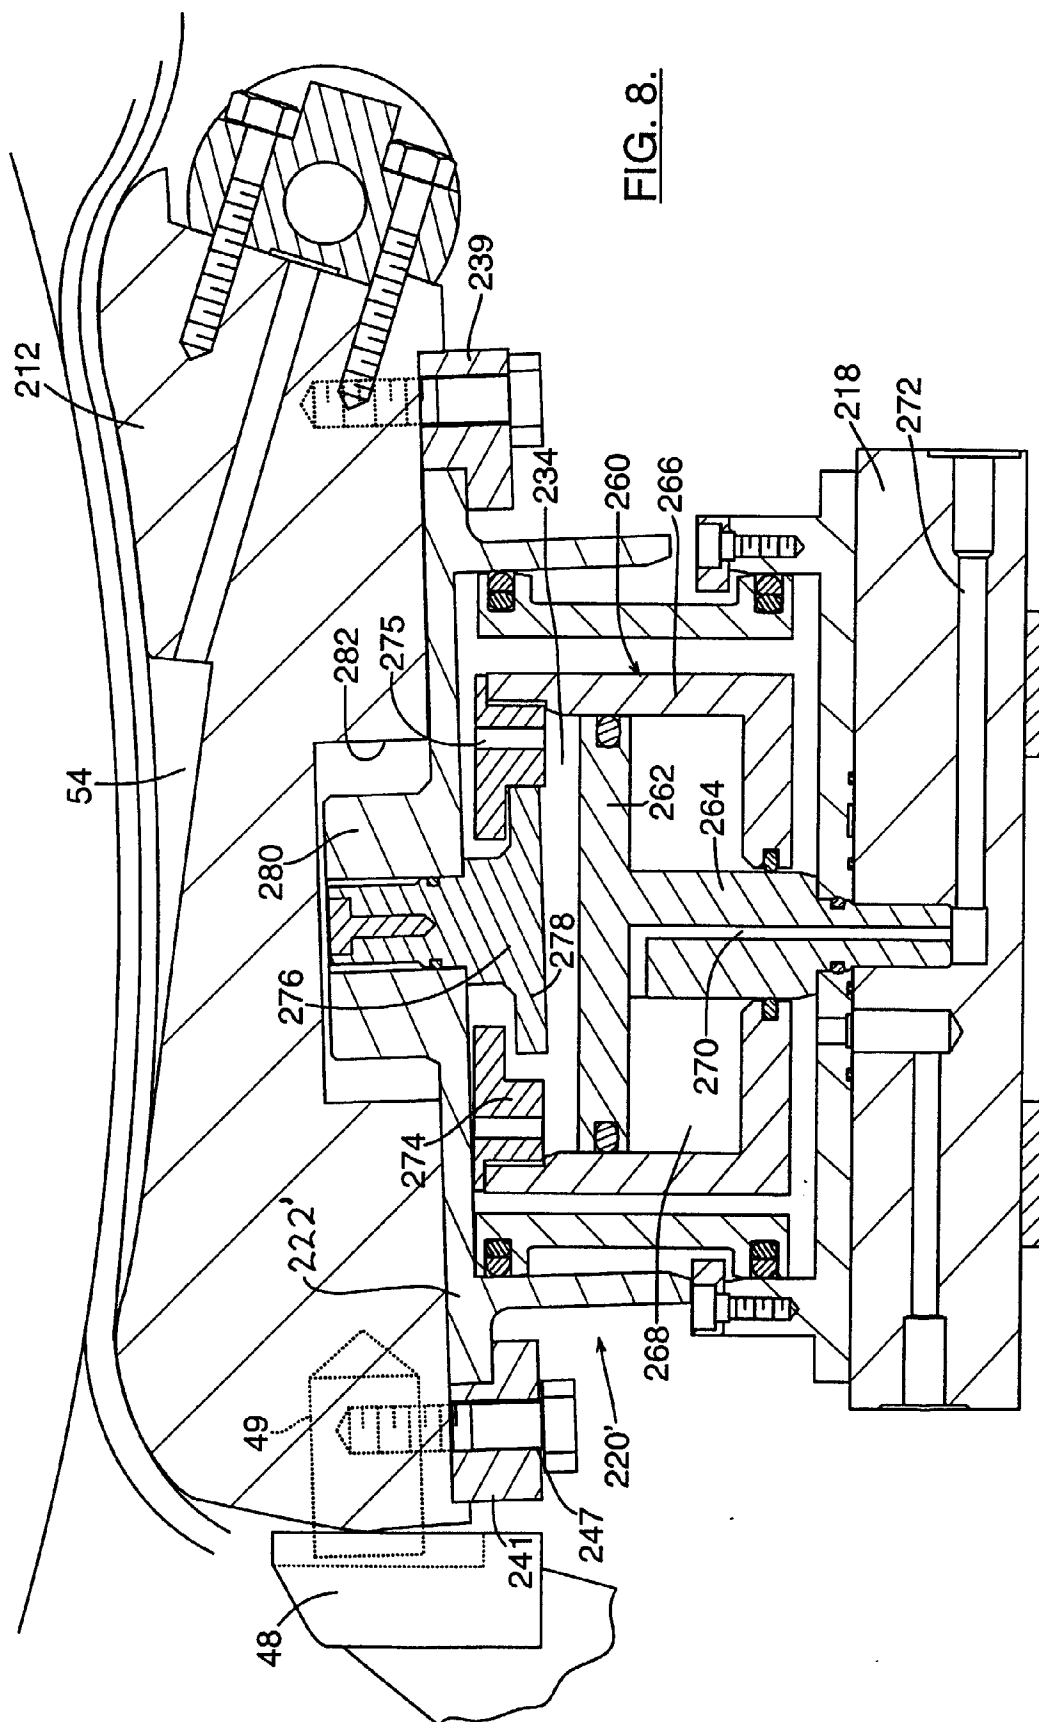


FIG. 8.

