

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 950 765 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

25.06.2003 Bulletin 2003/26

(51) Int Cl.7: **E02D 29/12**

(21) Application number: **99302797.8**

(22) Date of filing: **09.04.1999**

(54) **Access shaft structure**

Schachtanordnung

Puits de regard

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: **09.04.1998 GB 9807897**

(43) Date of publication of application:
20.10.1999 Bulletin 1999/42

(73) Proprietor: **HEPWORTH BUILDING PRODUCTS
LIMITED**
Sheffield S36 4HG (GB)

(72) Inventors:

- **Ellam, Peter G.**
Shepley, Huddersfield HD8 8BB (GB)
- **Brook, Alan**
Hepworth, Huddersfield HD7 1TE (GB)

(74) Representative: **Mouteney, Simon James**
MARKS & CLERK,
57-60 Lincoln's Inn Fields
London WC2A 3LS (GB)

(56) References cited:
DE-U- 29 616 503 **FR-A- 2 560 618**
FR-A- 2 748 285 **GB-A- 2 197 901**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 950 765 B1

Description

[0001] The present invention relates to an access structure. More particularly, but not exclusively, the invention relates to an access structure for use in a sewerage or storm-water network.

[0002] In recent years, it has become commonplace to construct manholes and other access structures from a number of modular components. This practice provides manufacturing benefits, since smaller components are normally easier to manufacture. It also facilitates storage and shipping and provides flexibility at the point of installation.

[0003] Some known modular access structures comprise a shaft formed from a series of axial shaft sections. A typical such structure is shown in Figure 1. Here it can be seen that a shaft 4 is formed from a number of discrete shaft sections 20, which are assembled one-upon-another to form a shaft having an appropriate depth. The shaft is connected to a discrete chamber module 6, which has a main outlet 8 and a branch feed 10. The top of the shaft is provided with a headframe 12 which serves as a seat for a cover 14.

[0004] It should be noted that the headframe 12 is of a rectangular configuration, whereas the shaft 14 is of a generally circular cross-section. The shaft has a circular cross-section because this provides the best possible resistance to compressive forces, by virtue of its hoop strength. However, a rectangular configuration is preferred for the headframe, because this enables it to be installed in close abutment with the surrounding architecture, which is normally comprised of flat surfaces. In Figure 1, for example, it can be seen that the headframe 12 is set against a wall 16.

[0005] For a number of reasons, the subterranean pipework 8, 10 will not always be aligned in a manner that ideally corresponds with the surface-level architecture. Therefore, it is enabled the headframe 12 to be set against any local surface-level architecture, whilst maintaining the ideal orientation of the chamber 6 relative to the subterranean pipework 8, 10.

[0006] Although such a modular structure provides numerous benefits, it does suffer from one significant drawback. Because it has, by its very nature, been assembled from a number of components, it is quite commonly not clear how these components are arranged from the viewpoint of a person standing on the ground surface. In particular, the orientation of the pipework 8, 10 will not be readily apparent from the surface level. One consequence of this is that a person not in possession of appropriate plans will often need to resort to a physical subterranean inspection before the orientation of the local pipework can be understood. If a large network of subterranean components is being investigated, several such inspections will need to be made and this can be extremely time-consuming.

[0007] FR-A-2 748 285 discloses an access shaft structure in which the orientation of various of the com-

ponents can be circumferentially constrained. This does not, however, deal with the problem discussed above.

[0008] GB-A-2 197 901 discloses an access structure in which the top portion can be rotated relative to the bottom portion, rather like the arrangement shown in Figure 1.

[0009] FR-A-2 560 618 discloses an access structure in which bottom and top portions can assume predetermined relative orientations, but this does not solve the problems addressed above.

[0010] DE 29616503 discloses an access structure in which two components may have their relative positions determined by rotation.

[0011] The present invention sets out to provide a modular access structure which can accurately indicate the orientation and configuration of subterranean components at surface level.

[0012] According to a first aspect of the present invention, there is provided an access structure comprising a bottom portion, for location underground, and a headpiece, for location substantially at ground level, wherein the bottom portion and headpiece can only be connected together directly or indirectly with a single relative orientation, the headpiece being provided with indicia means for indicating a condition of the bottom portion and/or a condition of some other component directly or indirectly connected to the bottom portion.

[0013] Such an arrangement enables a person standing at the surface to determine the condition of underground components by making reference to the indicia provided on the headpiece. Because the headpiece can only assume a single orientation relative to the bottom piece, there is no danger of the information provided on the headpiece from being corrupted if it is removed and subsequently re-installed in the access structure.

[0014] The access structure may further comprise a shaftpiece adapted to be connected intermediate the said bottom portion and the said headpiece, wherein the shaftpiece can only be connected to the bottom portion with a single relative orientation and can only be connected to the headpiece with a single relative orientation.

[0015] One or more additional shaftpieces may be provided, the or each said additional shaftpiece being adapted to be connected intermediate the said headpiece and the bottom portion, to form a shaft in conjunction with the said shaftpiece; wherein the or each said additional shaftpiece is adapted to be connected to any of the headpiece, bottom portion, shaftpiece or an additional shaftpiece with only a single relative orientation.

[0016] The headpiece may comprise a radial flange and, in use, the indicia means may be provided on a generally upwardly facing surface of the said flange. The flange may be provided with an aperture and the indicia means may be plugged into the aperture when the access structure is assembled. Preferably, the flange is provided with a plurality of apertures and the indicia means may be plugged into any one of the apertures

when the access structure is assembled. A plurality of indicia means may be provided.

[0017] In one preferred embodiment, the or each said indicia means comprises an indicia plate provided with a rearwardly projecting lug.

[0018] Preferably, each one of the headpiece, the bottom portion and any present shaftpiece is provided with at least one of an axially extending skirt and an axially opening complementary mouth, each mouth being adapted to receive each skirt axially and accommodate it in a close-fitting relationship.

[0019] In a particularly preferred embodiment, the or each said skirt is provided with a radially outwardly projecting member on a radially outer surface thereof and the or each said mouth is provided with a complementary radially outwardly extending recess on a radially inner surface thereof, the or each projecting member and the or each recess being adapted to key together when the or each said skirt is inserted into a respective mouth.

[0020] The or each said projection may take the form of an axially extending rib and the or each said recess may take the form of an axially extending channel.

[0021] The access structure may further comprise a head frame for a cover, the said head frame being adapted to be fitted about the headpiece in use and be capable of rotation relative thereto.

[0022] These and other preferred features of the first aspect of the invention are set out in the appended claims.

[0023] Access structures are often subjected to fairly substantial axial loads or loads having an axial component, when in use. Such axial loads can be particularly damaging and can lead to serious faults in underground drainage networks.

[0024] The present invention also sets out to provide an access shaft which will not be damaged, when experiencing such loads.

[0025] Accordingly, when the access structure comprises a shaft the said shaft may be axially compressed upon application of a predetermined component of axial compressive force.

[0026] With such an arrangement, the shaft can axially compress, so as to absorb compressive axial load components without being damaged.

[0027] Preferably, the shaft is formed from a plurality of shaft sections which assume a first relative axial configuration until the said predetermined axial force component is experienced and which assume a second relative axial configuration after the axial force component has been applied.

[0028] One of the said shaft sections may comprise a mouth and another of the said shaft sections may comprise an axially extending skirt which can be received within, and move axially within, the said mouth. Preferably, the said mouth is provided with a radially projecting lug on a radially inner surface thereof. Preferably, the radially inner surface of the said mouth comprises a plurality of the said radially inwardly projecting lugs. These

may be situated at regular angular intervals about the perimeter of the mouth.

[0029] The shaft may be provided with a head frame, the said headframe being adapted to be axially fixed relative to an uppermost axial end thereof and anchored within a surface portion of the ground during use.

[0030] By such an arrangement, the shaft can be constructed to compress upon the application of a relatively great axial force as a consequence of ground movement, but not compress as a consequence of the application of a relatively smaller axial force as a consequence of, for example, a vehicle travelling over the structure.

[0031] In use, the flanges may be removed prior to assembly of the structure, so that the overall height of the assembly can be adapted to the local requirements during installation, or the compression characteristics can be modified.

[0032] An embodiment of the invention will now be described, by way of example and with reference to the accompanying drawings, in which:

Figure 1 is a perspective schematic view of a modular access structure;

Figure 2 is a plan view of a headframe and associated components forming part of a first embodiment of the invention;

Figure 3 is an indicia plug forming part of an embodiment of the present invention;

Figure 4 shows a headpiece, a shaft section and a chamber roof piece, together forming part of an embodiment of the present invention;

Figure 5 is a schematic perspective view of the headframe of Figure 2;

Figure 6 is a view corresponding to Figure 4, but showing an alternative embodiment of the present invention;

Figure 7 is a view corresponding to Figures 4 and 6, but showing a still further embodiment of the invention;

Figures 8, 9 and 10 respectively show three alternative indicia plugs in accordance with the present invention; and

Figures 11, 12 and 13 show a shaft in accordance with an alternative embodiment of the invention in three different conditions.

[0033] The general structure of the described first embodiment of the present invention is the same as that of Figure 1. Hence, the generality of the structure will not

be described again.

[0034] Referring to Figures 2 to 5, it will be seen that the headframe 12 of the first embodiment is formed from a rectangular base 13 surrounded by four perpendicularly upstanding peripheral walls 15. The centre of the base 13 is provided with a circular aperture 24 having a radius R.

[0035] The aperture 24 serves to accommodate a headpiece 18. The headpiece 18 comprises an annular radially extending flange 21 integrally formed with a depending cylindrical skirt 19, which is joined with the flange 21 about its radially innermost periphery. Once assembled, the skirt 19 extends downwardly through the aperture 24 in the headframe 12 and the radial flange 21 rests on the upper surface of the base 13 of the headframe 12.

[0036] Referring to Figure 4, it will be seen that an axially extending and radially projecting rib 34 is provided on a radially outer surface of the depending cylindrical skirt 19 of the headpiece 18. Figure 4 also shows a shaft section 20 and it will be noted that the lower end of the shaft section 20 is provided with a depending cylindrical skirt 19 identical to the one provided on the headpiece 18. The upper end of the shaft section 20 has an internal diameter only slightly greater than that of the headpiece skirt 19 and is provided with an axially extending groove 36, which extends radially into its radially inner wall surface. The groove 36 has a configuration complementary to that of the rib 34 provided on the skirt 19 of the headpiece 18. During assembly, the skirt 19 of the headpiece 18 is inserted into the upper end of the shaft section 20 and the rib 34 is accommodated in the groove 36. The rib projects sufficiently far in the radial direction that the skirt 19 will not fit inside the shaft section unless the rib 34 and the groove 36 are properly aligned. This arrangement ensures that the headpiece 18 can only be assembled with one circumferential orientation relative to the shaft section.

[0037] The roof 22 of the chamber 6 is provided with an upstanding cylindrical wall 23 having a configuration identical to that of the upper portion of the shaft section 20. Consequently, the skirt 19 of the shaft section can be axially inserted into the upstanding wall 23 in exactly the same manner as the skirt 19 of the headpiece can be inserted into its own upper end. This ensures that the shaft section 20 can only be assembled with one orientation relative to the roof 22 of the chamber 6.

[0038] It will be apparent that, by virtue of the single available orientational relationship between the headpiece 18 and the shaft section 20 and the similar single orientational relationship possible between the shaft section 20 and the chamber 6, the headpiece 18 can only be given a single orientation relative to the chamber 6 once the components are assembled together.

[0039] In practice, more than one shaft section 20 will often be installed between the roof 22 of the chamber 6 and the headpiece 18. However, since all of the sections are provided with an identical rib 34 and groove 36, there

will only ever be one possible relative orientation between two connected components and, hence, the headpiece 18 will always assume the same orientation relative to the chamber 6 in the assembled access structure.

[0040] It will be noted that the radius R of the aperture 24 provided in the base 13 of the headframe 12 is slightly larger than distance r (shown in Figure 2), which is the sum of the radius of the radially outer surface of the wall 19 and the additional radial projection x conferred by the rib 34. Hence, the headframe 12 will still always be capable of rotation about the depending skirt 19, regardless of the existence of the rib 34. Because the headframe 12 rotates relative to the headpiece 18, it can be orientated to conform with local surface architecture, without disturbing or conflicting with the orientation of the headpiece 18.

[0041] The radial flange 21 of the headpiece 18 is provided with a series of axially extending bores 32. In the embodiment shown, four of these bores are provided, at 90° circumferential intervals. In practice, more or fewer of these could be present. Each bore 32 is configured to receive the lug 29 of an indicia plug 26 (shown in Figure 3). Each indicia plug 26 comprises an indicia plate 28 and its lug 29 depends from the rear of this. The lug 29 comprises a generally cylindrical shank 31 and a bullet nose 30.

[0042] The indicia plate is fitted to the headpiece 18 by push-fitting the lug 29 into an appropriate one of the bores 32. The bore and lug can be configured to make it virtually impossible to remove the indicia plug 26 from the headpiece 18, once it has been fitted. In practice the lug may be configured such that it is necessary to hammer each indicia plate into its respective bore 32.

[0043] The upper surface of the indicia plate carries information relating to the configuration of the subterranean components. For example, it may comprise an arrow and the legend "inlet". This could, by its position on the headpiece 18 and its orientation, indicate the circumferential location of the inlet pipe and the feed direction. The indicia plugs may comprise other useful information relating to, for example, the diameter, jetting pressure limits, depth or gradient of the feed or outlet pipes, or even the distance to and direction of the next access structure in the network.

[0044] By providing the single assembly configuration between the headpiece 18 and the chamber 6, even if the headpiece 18 is removed from the top of the structure at some future date and subsequently re-fitted, there will be no danger of losing the information encoded in it, because it can only be replaced in its original position.

[0045] Although the above embodiment includes a shaft section 20 between the headpiece 18 and the chamber 6, in some cases it will be necessary to fit the headpiece directly to the chamber. Even in this case, the invention will still be capable of providing the described advantages, because the orientational relation-

ship between the two will still be fixed and the headpiece will still be able to provide useful information.

[0046] Figure 6 shows a second embodiment of an access structure in accordance with the invention. This structure differs from the structure of Figure 4 in that the shaft section 20 and roof piece 22 each comprise three axially extending channels 36, each having a generally semi-circular cross-section and a fourth axially extending channel 36a, which has a generally triangular cross-section. Correspondingly shaped, co-operating channels are provided on the skirts 19. The channels provided on the skirts have a radially outer size which is slightly smaller than the radially inner dimension of the channels provided on the body portions of the shaft 20 and roof piece 22. In use, the components are assembled together in the same way as the embodiment of Figure 4, however relative circumferential alignment is achieved by virtue of the fact that the triangular channels provided on the skirts 19 must be fitted within a corresponding triangular channel 36a provided on a shaft section 20 or roof piece 22, or axial insertion cannot be achieved. Thus, only one relative circumferential orientation is possible between assembled components.

[0047] Although three semi-circular channels and one triangular channel have been used in this embodiment, many other variations are possible: for example, three square-section channels and one rectangular-section channel could be used.

[0048] Figure 7 shows a variation upon the arrangement of Figure 6. Here it will be seen that all of the channels have the same shape: they are all semi-circular. However, one set of channels 35a, 36a has a larger radius than the other three sets of channels 35, 36. Hence, even though the channels have the same basic shape, only one circumferential alignment is possible.

[0049] It should also be noted that, in the arrangement of Figure 7, two bores 32 are provided at each angular location. This provides greater flexibility as to the amount of information that can be provided regarding the subterranean structure.

[0050] Figures 8, 9 and 10 show three alternative embodiments of indicia plugs 26.

[0051] The plug of Figure 8 has a round head 28. The bullet nose 30 of the plug of Figure 3 is, in this case, replaced by a series of longitudinal projections 33, set at regular angular intervals about the perimeter of the shank 31. These longitudinal projections 33 deform, so as to secure the plug 26 in place within a bore 32.

[0052] Figure 10 shows a further indicia plug 26. This has a shank 31 identical to the plug of Figure 9, but it lacks a head 28. In this case, information is provided upon the indicia surface 27 at the upper end of the shank 31.

[0053] Figures 11, 12 and 13 show part of a shaft of an access structure in accordance with a second embodiment of the invention.

[0054] Referring to Figure 11, it will be seen that the shaft is formed from three shaft sections 120. These are

connected together in generally the same fashion as the shaft sections of the first aspect of the invention. That is to say, each shaft section 120 is provided with a depending skirt 119, which fits within the upper end of a shaft section 120 or roof piece (not shown) situated below.

[0055] Each shaft section 120 is provided with a ring seal 122 about the radially inner surface of the mouth of the shaft section 120. This is compressed when the skirt 119 of a shaft section 120 is inserted into the mouth. In Figure 11, it can be seen that the ring seals 122 in the lower two shaft sections 120 have been compressed in this manner.

[0056] The mouth of each shaft section 120 is provided with a series of radially-inwardly projecting lugs 124, which are situated at regular angular intervals about the perimeter of the shaft section 120 mouth. As can be seen in Figure 11, the lugs 124 are strong enough to support the higher parts of the shaft structure, when the shaft structure does not experience an axial load.

[0057] Figure 12 shows the shaft structure of Figure 11 after the application of a predetermined axial compression force. It will be immediately apparent that the lower two sets of lugs 124 have broken and allowed the shaft to be axially compressed. In this manner, the shaft structure can accommodate an axial load without being damaged.

[0058] Figure 13 shows the shaft sections 120 of Figure 11, but in a condition where the lugs of the lower two shaft sections 120 have been removed prior to assembly of the shaft structure. By doing this, the shaft structure can be made to have a relatively short axial length at the installation stage. By choosing to remove the lugs from only a certain number of the shaft sections 120, the height of the assembly can be chosen with ease. Alternatively, by removing only some of the lugs 124 within a given shaft section 120 or number of sections 120, the resistance of the shaft to axial compressive load can be varied. This has the effect of enabling the compression characteristics of the shaft structure to be set at the installation stage. If more lugs are removed: the shaft can be compressed more easily. If fewer lugs are removed, a relatively greater compressive force will be required before the lugs snap and the shaft can be compressed.

[0059] Although three shaft sections 120 are shown, more or fewer could be used. The appropriate number will depend upon the intended length of the shaft.

[0060] If the access structure is to be used in a roadway, the topmost shaft section 120 can be secured, either directly or via a headframe, to a pad of concrete. If this is done, the shaft will experience compression as a consequence of axial forces applied by the roadway, but not as a consequence of axial forces applied by vehicles travelling over the roadway.

[0061] Although one particular type of compression mechanism has been illustrated, others are possible and the invention is not constrained to the use of skirts, mouths and lugs.

[0062] Many further modifications and variations will suggest themselves to those versed in the art upon making reference to the foregoing illustrative embodiment, which is given by way of example only and which is not intended to limit the scope of the invention, that being determined by the appended claims.

Claims

1. An access structure comprising a bottom portion (6), for location underground, and a headpiece (18), for location substantially at ground level; **characterised in that** the bottom portion (6) and headpiece (18) can only be connected together directly or indirectly with a single relative orientation, the headpiece (18) being provided with indicia means (26) for indicating an orientation and/or configuration of the bottom portion (6) and/or an orientation and/or configuration of some other component adapted to be directly or indirectly connected to the said bottom portion (6) and located underground.
2. An access structure according to Claim 1, further comprising a shaftpiece (20) adapted to be connected intermediate the said bottom portion (6) and the said headpiece (18), wherein the shaftpiece (20) can only be connected to the bottom portion (6) with a single relative orientation and can only be connected to the headpiece (18) with a single relative orientation.
3. An access structure according to Claim 2, further comprising one or more additional shaftpieces (20), the or each said additional shaftpiece (20) being adapted to be connected intermediate the said headpiece (18) and the bottom portion (6), to form a shaft in conjunction with the said shaftpiece (20); wherein the or each said additional shaftpiece (20) is adapted to be connected by any of the headpiece (18), bottom portion (6), shaftpiece (20) or an additional shaftpiece (20) with only a single relative orientation.
4. An access structure according to any preceding claim, wherein the headpiece (18) comprises a radial flange (21) and, in use, the indicia means (28) is provided on a generally upwardly facing surface of the said flange (21).
5. An access structure according to Claim 4, wherein the flange (21) is provided with an aperture (32) and the indicia means (26) can be plugged into the aperture (32) when the access structure is assembled.
6. An access structure according to Claim 5, wherein the flange (21) is provided with a plurality of apertures (32) and the indicia means (26) can be plugged into any one of the apertures (32) when the access structure is assembled.
7. An access structure according to Claim 5 or 6 comprising a plurality of indicia means (26), each of which can be plugged into the said aperture (32) or any one of the said apertures (32).
8. An access structure according to any one of Claims 5 to 7, wherein the or each said indicia means (26) comprises an indicia plate (28) provided with a rearwardly projecting lug (29).
9. An access structure according to any preceding claim, wherein each one of the headpiece (18), the bottom portion (6) and any present shaftpiece (20) is provided with at least one of an axially extending skirt (19) and an axially opening complementary mouth, each mouth being adapted to receive each skirt (19) axially and accommodate it in a close-fitting relationship.
10. An access structure according to Claim 9, wherein the or each said skirt (19) is provided with a radially outwardly projecting member (34) on a radially outer surface thereof and the or each said mouth is provided with a complementary radially outwardly extending recess (36) on a radially inner surface thereof, the or each projecting member (34) and the or each recess (36) being adapted to key together when the or each said skirt (19) is inserted into a respective mouth.
11. An access structure according to Claim 10, wherein the or each said projecting member (34) takes the form of an axially extending rib and the or each said recess (36) takes the form of an axially extending channel.
12. An access structure according to any preceding claim, further comprising a head frame (12) for a cover (14), the said head frame (12) being adapted to be fitted about the headpiece (18) in use and capable of rotation relative thereto.
13. An access structure according to Claim 12, wherein the head frame (12) comprises an aperture (24) and at least part of the headpiece (18) extends through the said aperture (24).
14. An access structure according to Claim 3 or any claim dependent upon Claim 3, wherein the said access shaft may be axially compressed upon application of a predetermined component of axial compressive force.
15. An access structure according to claim 14, wherein the shaft is formed from a plurality of shaft sections

(120) which assume a first relative axial configuration until the said predetermined axial force component is experienced and which assume a second relative axial configuration after the predetermined axial force component has been applied.

16. An access structure according to Claim 15, wherein one of the shaft sections (120) comprises a mouth and another of the shaft sections comprises an axially extending skirt (119), which can be received within, and move axially within, the said mouth. 10
17. An access structure according to Claim 16, wherein the said mouth is provided with a radially projecting lug (124) on a radially inner surface thereof. 15
18. An access structure according to Claim 17, wherein the radially inner surface of the said mouth comprises a plurality of the said radially inwardly projecting lugs (124). 20
19. An access structure according to Claim 18, wherein the said lugs (124) are situated at regular or angular intervals about the perimeter of the mouth. 25
20. An access structure according to any one of Claims 14 to 19, wherein the shaft comprises a headframe (12) which is adapted to be axially fixed relative to an uppermost axial end thereof and anchored within a surface portion of the ground during use. 30

Patentansprüche

1. Schachtkonstruktion, die aufweist einen Bodenabschnitt (6) für eine Anordnung unterhalb der Erdoberfläche; und ein Kopfteil (18) für eine Anordnung im wesentlichen auf Geländehöhe;
dadurch gekennzeichnet, daß der Bodenabschnitt (6) und das Kopfteil (18) nur miteinander direkt oder indirekt bei einer einzigen relativen Ausrichtung verbunden werden können, wobei das Kopfteil (18) mit Kennzeichnungseinrichtungen (26) für das Anzeigen einer Ausrichtung und/oder Konfiguration des Bodenabschnittes (6) und/oder einer Ausrichtung und/oder Konfiguration eines bestimmten anderen Bauteils versehen ist, das so ausgeführt ist, daß es direkt oder indirekt mit dem Bodenabschnitt (6) verbunden und unterhalb der Erdoberfläche angeordnet werden kann. 35 40 45
2. Schachtkonstruktion nach Anspruch 1, die außerdem ein Schachtteil (20) aufweist, das so ausgeführt ist, daß es zwischen dem Bodenabschnitt (6) und dem Kopfteil (18) verbunden werden kann, worin das Schachtteil (20) nur mit dem Bodenabschnitt (6) bei einer einzigen relativen Ausrichtung verbunden werden kann, und wobei es mit dem Kopfteil 50 55

(18) nur bei einer einzigen relativen Ausrichtung verbunden werden kann.

3. Schachtkonstruktion nach Anspruch 2, die außerdem ein oder mehrere zusätzliche Schachtteile (20) aufweist, wobei das oder jedes zusätzliche Schachtteil (20) so ausgeführt ist, daß es zwischen dem Kopfteil (18) und dem Bodenabschnitt (6) verbunden werden kann, um einen Schacht in Verbindung mit dem Schachtteil (20) zu bilden; worin das oder jedes zusätzliche Schachtteil (20) so ausgeführt ist, daß es mittels irgendeines von Kopfteil (18), Bodenabschnitt (6), Schachtteil (20) oder einem zusätzlichen Schachtteil (20) bei nur einer einzigen relativen Ausrichtung verbunden werden kann.
4. Schachtkonstruktion nach vorhergehenden Ansprüchen, bei der das Kopfteil (18) einen radialen Flansch (21) aufweist und bei Benutzung die Kennzeichnungseinrichtung (28) auf einer im allgemeinen nach oben liegenden Fläche des Flansches (21) vorhanden ist
5. Schachtkonstruktion nach Anspruch 4, bei der der Flansch (21) mit einer Öffnung (32) versehen ist und die Kennzeichnungseinrichtungen (26) in die Öffnung (32) gesteckt werden können, wenn die Schachtkonstruktion zusammengebaut wird.
6. Schachtkonstruktion nach Anspruch 5, bei der der Flansch (21) mit einer Vielzahl von Öffnungen (32) versehen ist und die Kennzeichnungseinrichtungen (26) in eine der Öffnungen (32) gesteckt werden können, wenn die Schachtkonstruktion zusammengebaut wird.
7. Schachtkonstruktion nach Anspruch 5 oder 6, die eine Vielzahl von Kennzeichnungseinrichtungen (26) aufweist, von denen eine jede in die Öffnung (32) oder irgendeine der Öffnungen (32) gesteckt werden kann.
8. Schachtkonstruktion nach einem der Ansprüche 5 bis 7, bei der die oder jede Kennzeichnungseinrichtung (26) eine Kennzeichnungsplatte (28) aufweist, die mit einem nach hinten vorstehenden Vorsprung (29) versehen ist
9. Schachtkonstruktion nach vorhergehenden Ansprüchen, bei der ein jedes von Kopfteil (18), Bodenabschnitt (6) und jeglichem vorhandenen Schachtteil (20) mit mindestens einem von sich axial erstreckenden Rand (19) und einer sich axial öffnenden komplementären Öffnung versehen ist, wobei jede Öffnung so ausgeführt ist, daß sie einen jeden Rand (19) axial aufnimmt und ihn in einer eng passenden Beziehung unterbringt.

10. Schachtkonstruktion nach Anspruch 9, bei der der oder jeder Rand (19) mit einem radial nach außen vorstehenden Element (34) auf einer radial äußeren Fläche davon versehen ist, und bei der die oder jede Öffnung mit einer komplementär sich radial nach außen erstreckenden Aussparung (36) auf einer radial inneren Fläche davon versehen ist, wobei das oder jedes vorstehende Element (34) und die oder jede Aussparung (36) so ausgeführt sind, daß sie sich miteinander verkeilen, wenn der oder jeder Rand (19) in eine entsprechende Öffnung eingesetzt wird. 5
11. Schachtkonstruktion nach Anspruch 10, bei der das oder jedes vorstehende Element (34) die Form einer sich axial erstreckenden Rippe annimmt und die oder jede Aussparung (36) die Form eines sich axial erstreckenden Kanals annimmt. 10
12. Schachtkonstruktion nach vorhergehenden Ansprüchen, die außerdem einen Kopffrahmen (12) für einen Deckel (14) aufweist, wobei der Kopffrahmen (12) so ausgeführt ist, daß er um das Kopfteil (18) bei Benutzung herum paßt und relativ dazu gedreht werden kann. 15
13. Schachtkonstruktion nach Anspruch 12, bei der der Kopffrahmen (12) eine Öffnung (24) aufweist und sich mindestens ein Teil des Kopfteils (18) durch die Öffnung (24) hindurch erstreckt. 20
14. Schachtkonstruktion nach Anspruch 3 oder einem Anspruch, der vom Anspruch 3 abhängig ist, bei der der Schacht axial bei Anwendung einer vorgegebenen Komponente der axialen Druckkraft zusammengedrückt werden kann. 25
15. Schachtkonstruktion nach Anspruch 14, bei der der Schacht aus einer Vielzahl von Schachtabschnitten (120) gebildet wird, die eine erste relative axiale Konfiguration annehmen, bis die vorgegebene axiale Kraftkomponente darauf wirkt, und die eine zweite relative axiale Konfiguration annehmen, nachdem die vorgegebene axiale Kraftkomponente angewandt wurde. 30
16. Schachtkonstruktion nach Anspruch 15, bei der einer der Schachtabschnitte (120) eine Öffnung und ein weiterer der Schachtabschnitte einen sich axial erstreckenden Rand (119) aufweist, der innerhalb der Öffnung aufgenommen und sich innerhalb darin axial bewegen kann. 35
17. Schachtkonstruktion nach Anspruch 16, bei der die Öffnung mit einem radial vorstehenden Vorsprung (124) auf einer radial inneren Fläche davon versehen ist 40

18. Schachtkonstruktion nach Anspruch 17, bei der die radial innere Fläche der Öffnung eine Vielzahl der radial nach innen vorstehenden Vorsprünge (124) aufweist. 45

19. Schachtkonstruktion nach Anspruch 18, bei der die Vorsprünge (124) in regelmäßigen oder winkligen Intervallen um den Umfang der Öffnung herum angeordnet sind. 50

20. Schachtkonstruktion nach einem der Ansprüche 14 bis 19, bei der der Schacht einen Kopffrahmen (12) aufweist, der so ausgeführt ist, daß er axial relativ an einem obersten axialen Ende davon befestigt und innerhalb eines Flächenabschnittes des Erdbodens während der Benutzung verankert werden kann. 55

Revendications

1. Structure d'accès comprenant une partie inférieure (6) destinée à être agencée au-dessous du sol, et un élément de tête (18) destiné à être agencé pratiquement au niveau du sol;

caractérisée en ce que la partie inférieure (6) et l'élément de tête (18) ne peuvent être raccordés directement ou indirectement que dans une seule orientation relative, l'élément de tête (18) comportant un moyen de repère (26) destiné à indiquer une orientation et/ou une configuration de la partie inférieure (6) et/ou une orientation et/ou une configuration de certains autres composants destinés à être raccordés directement ou indirectement à ladite partie inférieure (6) agencée au-dessous du sol.

2. Structure d'accès selon la revendication 1, comprenant en outre un élément d'arbre (20) destiné à être raccordé entre ladite partie inférieure (6) et ledit élément de tête (18), l'élément d'arbre (20) pouvant être raccordé uniquement à la partie inférieure (6) dans une seule orientation relative et pouvant uniquement être raccordée à l'élément de tête (18) dans une seule orientation relative.

3. Structure d'accès selon la revendication 2, comprenant en outre un ou plusieurs éléments d'arbre additionnels (20), le ou chaque élément d'arbre additionnel (20) étant destiné à être raccordé entre ledit élément de tête (18) et ladite partie inférieure (6), pour former un arbre en combinaison avec ledit élément d'arbre (20); le ou chaque dit élément d'arbre additionnel (20) étant destiné à être raccordé à un quelconque des éléments, l'élément de tête (18), la partie inférieure (6), l'élément de tête (20) ou un élément d'arbre additionnel (20) dans une seule orientation relative.

4. Structure d'accès selon l'une quelconque des revendications précédentes, dans laquelle l'élément de tête (18) comprend une bride radiale (21), le moyen de repère (28) étant agencé en service sur une surface orientée généralement vers le haut de ladite bride (21). 5
5. Structure d'accès selon la revendication 4, dans laquelle la bride (21) comporte une ouverture (32), le moyen de repère (26) pouvant être enfiché dans l'ouverture (32) lorsque la structure d'accès est assemblée. 10
6. Structure d'accès selon la revendication 5, dans laquelle la bride (21) comporte plusieurs ouvertures (32), le moyen de repère (26) pouvant être entiché dans une quelconque des ouvertures (32) lorsque la structure d'accès est assemblée. 15
7. Structure d'accès selon les revendications 5 ou 6, comprenant plusieurs moyens de repère (26), chacun pouvant être enfiché dans ladite ouverture (32) ou dans une quelconque desdites ouvertures (32). 20
8. Structure d'accès selon l'une quelconque des revendications 5 à 7 dans laquelle le ou chaque moyen de repère (26) comprend une plaque de repère (28) agencée dans une patte débordant vers l'arrière (29). 25
9. Structure d'accès selon l'une quelconque des revendications précédentes, dans laquelle chacun des éléments, l'élément de tête (18), la partie inférieure (6) et un quelconque élément d'arbre présent (20) comporte au moins une bordure à extension axiale (19) et une embouchure à ouverture axiale complémentaire, chaque embouchure étant destinée à recevoir axialement chaque bordure (19) et à assurer son ajustement serré. 30
10. Structure d'accès selon la revendication 9, dans laquelle la ou chaque bordure (19) comporte un élément débordant radialement vers l'extérieur (34) sur une surface radialement externe correspondante, la ou chaque embouchure comportant un évidement complémentaire s'étendant radialement vers l'extérieur (36) sur une surface radialement interne correspondante, le ou chaque élément débordant (34) et le ou chaque évidement (36) étant destiné à s'engager lorsque la ou chaque bordure (19) est insérée dans une embouchure respective. 35
11. Structure d'accès selon la revendication 10, dans laquelle le ou chaque élément débordant (34) a la forme d'une nervure à extension axiale, le ou chaque dit évidement (36) ayant la forme d'un canal à extension axiale. 40
12. Structure d'accès selon l'une quelconque des revendications précédentes, comprenant en outre un cadre de tête (12) pour un couvercle (14), ledit cadre de tête (12) étant destiné à être ajusté en service autour de l'élément de tête (18) et pouvant tourner par rapport à celui-ci. 45
13. Structure d'accès selon la revendication 12, dans laquelle le cadre de tête (12) comprend une ouverture (24), au moins une partie de l'élément de tête (18) s'étendant à travers ladite ouverture (24). 50
14. Structure d'accès selon la revendication 3 ou une quelconque revendication dépendant de la revendication 3, dans laquelle ledit arbre d'accès peut être comprimé axialement lors de l'application d'une composante de force de compression axiale prédéterminée. 55
15. Structure d'accès selon la revendication 14, dans laquelle l'arbre est formé à partir de plusieurs sections d'arbre (120) assumant une première configuration axiale relative jusqu'à l'application de ladite première composante de force axiale prédéterminée et assumant une deuxième configuration axiale relative après l'application de la composante de force axiale prédéterminée.
16. Structure d'accès selon la revendication 15, dans laquelle une des sections d'arbre (120) comprend une embouchure, l'autre des sections d'arbre comprenant une bordure à extension axiale (119) pouvant être reçue dans ladite embouchure et déplacée axialement dans celle-ci.
17. Structure d'accès selon la revendication 16, dans laquelle ladite embouchure comprend une patte à débordement radial (124) sur une surface radialement interne correspondante.
18. Structure d'accès selon la revendication 17, dans laquelle la surface radialement interne de ladite embouchure comprend plusieurs desdites pattes débordant radialement vers l'intérieur (124).
19. Structure d'accès selon la revendication 18, dans laquelle lesdites pattes (124) sont agencées à des intervalles réguliers ou angulaires autour du périmètre de l'embouchure.
20. Structure d'accès selon l'une quelconque des revendications 14 à 19, dans laquelle l'arbre comprend un cadre de tête (12) destiné à être fixé axialement sur une extrémité axiale supérieure extrême correspondante et à être ancré en service dans une partie de surface du sol.

Fig. 1

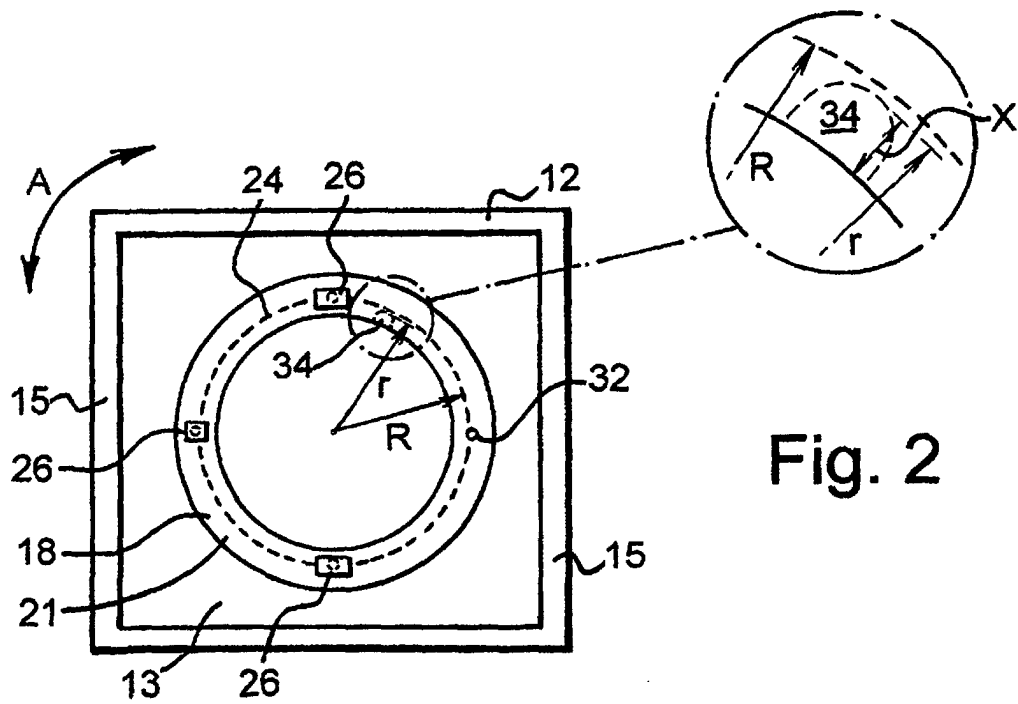
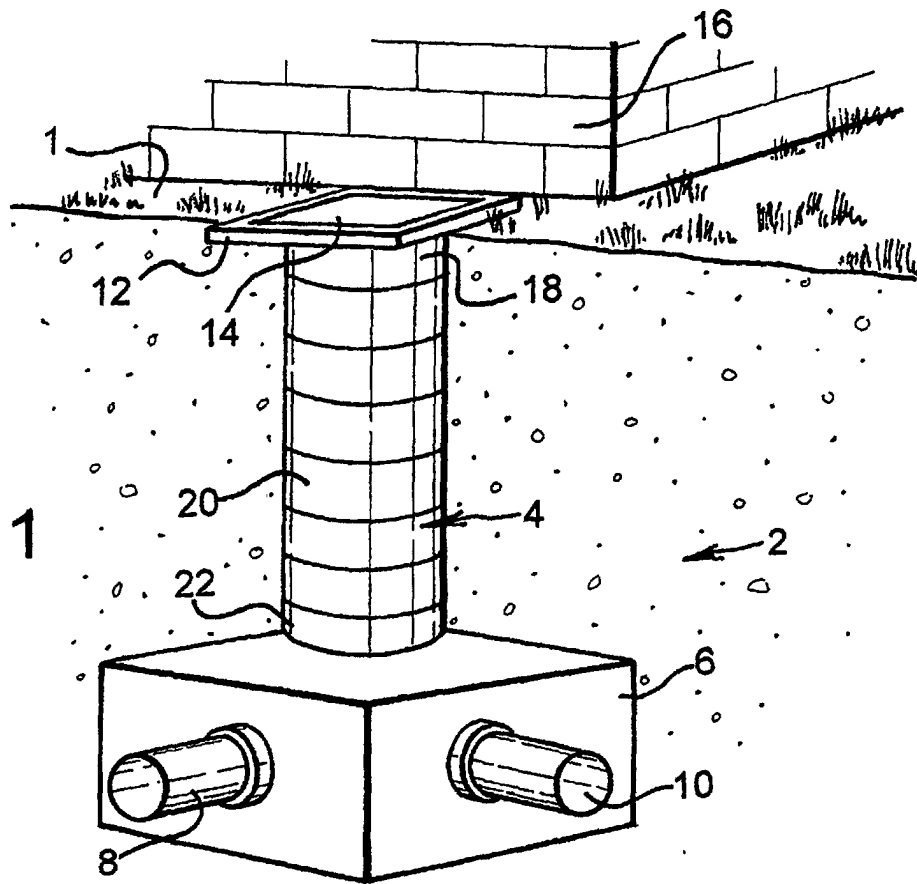


Fig. 2


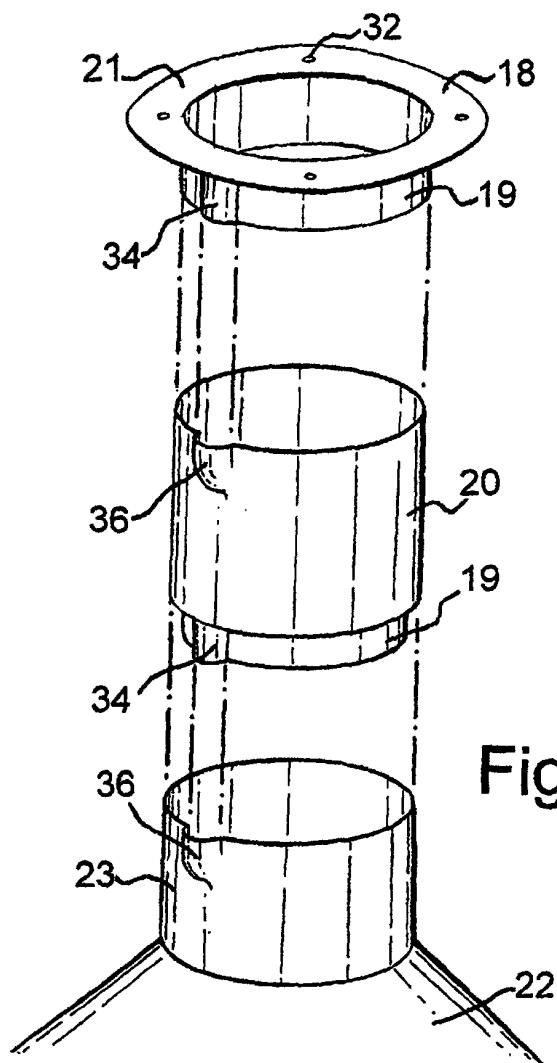


Fig. 3

Fig. 4

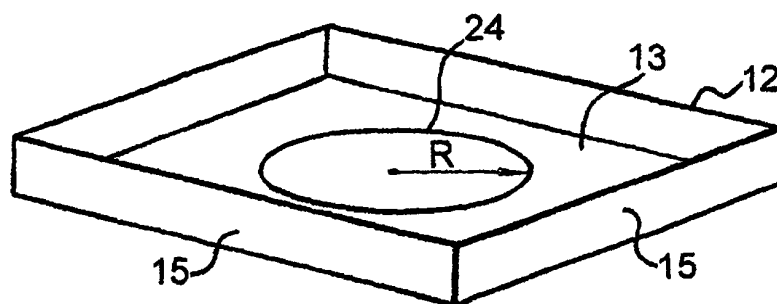


Fig. 5

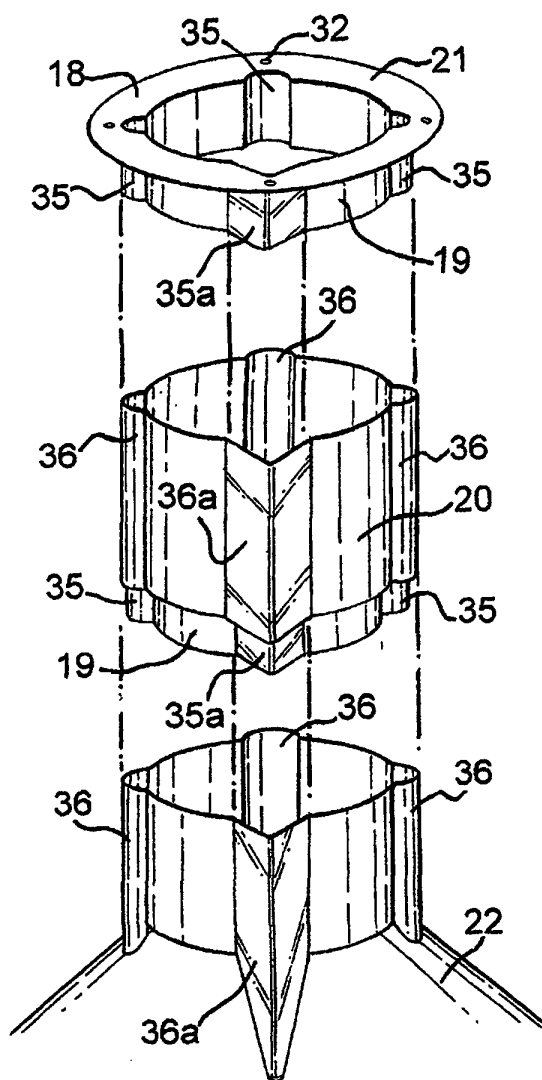


Fig. 6

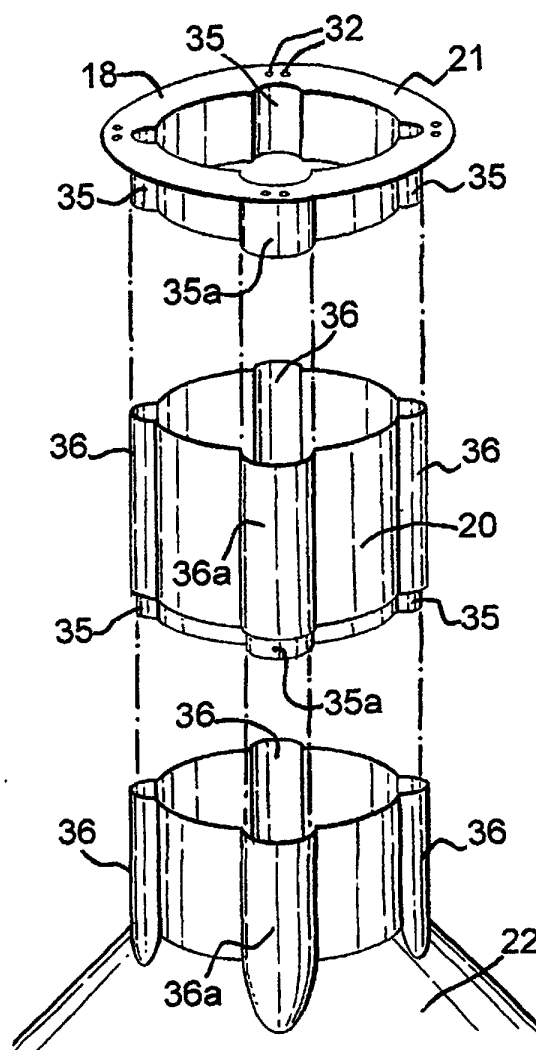


Fig. 7




Fig. 8




Fig. 9




Fig. 10

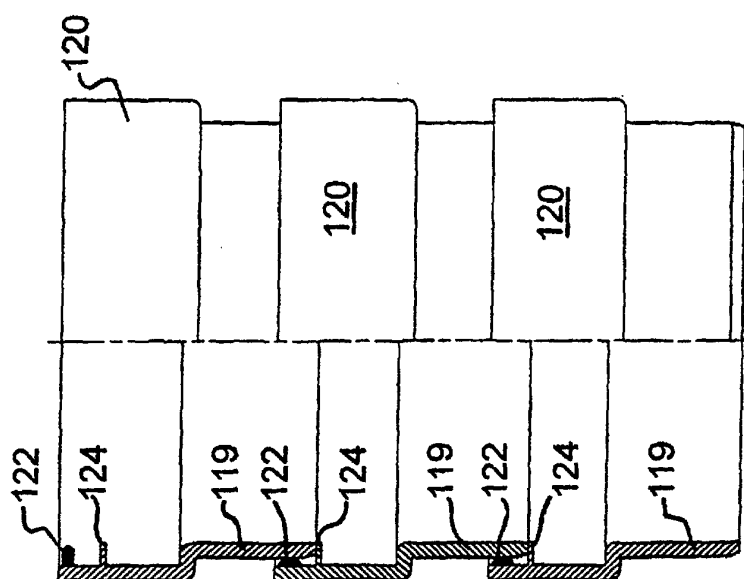


Fig. 11

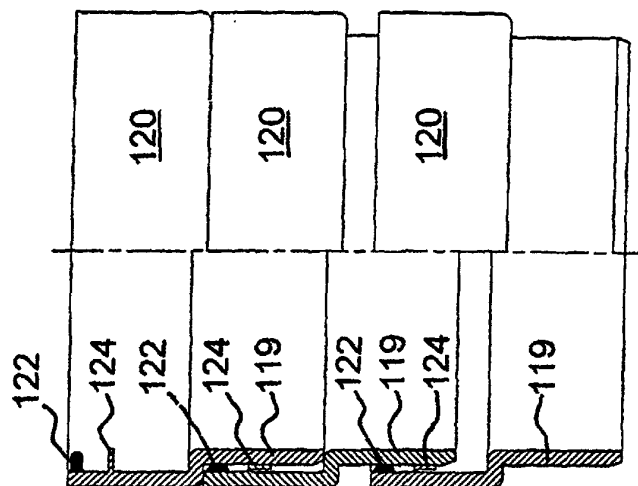


Fig. 12

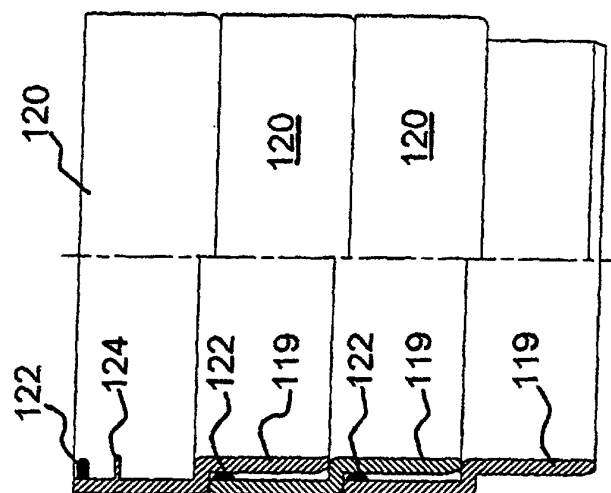


Fig. 13