



(11)

EP 0 952 235 B2

(12)

NEW EUROPEAN PATENT SPECIFICATION

After opposition procedure

(45) Date of publication and mention
of the opposition decision:
30.09.2015 Bulletin 2015/40

(51) Int Cl.:
C22C 38/00 ^(2006.01) **C21D 8/02** ^(2006.01)
C21D 8/04 ^(2006.01)

(45) Mention of the grant of the patent:
12.10.2011 Bulletin 2011/41

(86) International application number:
PCT/JP1997/004359

(21) Application number: **97913471.5**

(87) International publication number:
WO 1998/023785 (04.06.1998 Gazette 1998/22)

(22) Date of filing: **28.11.1997**

(54) **METHOD FOR PRODUCING HIGH-STRENGTH STEELS HAVING HIGH IMPACT ENERGY ABSORPTION PROPERTIES**

VERFAHREN ZUR HERSTELLUNG VON HOCHFESTEN STÄHLE MIT ERHÖCHTEN
EIGENSCHAFTEN ZUR ABSORPTION VON AUFPRALLENERGIE

PROCEDE DE FABRICATION D'ACIERS À HAUTE RESISTANCE MÉCANIQUE AYANT UNE
HAUTE CAPACITE D'ABSORPTION D'ENERGIE DE CHOCK

(84) Designated Contracting States:
DE FR GB NL

(30) Priority: **28.11.1996 JP 33138096**
29.01.1997 JP 2829697
06.08.1997 JP 22300597
24.09.1997 JP 25883497
24.09.1997 JP 25888797

(43) Date of publication of application:
27.10.1999 Bulletin 1999/43

(60) Divisional application:
10181458.0 / 2 314 730

(73) Proprietor: **Nippon Steel & Sumitomo Metal Corporation**
Tokyo 100-8071 (JP)

(72) Inventors:
• **KAWANO, Osamu,**
Nippon Steel Corporation Oita Works
Oita City
Oita 870 (JP)
• **TAKAHASHI, Yuzo,**
Nippon Steel Corp. Oita Works
Oita City
Oita 870 (JP)
• **WAKITA, Junichi,**
Nippon Steel Corp. Oita Works
Oita City
Oita 870 (JP)

- **MABUCHI, Hidesato,**
Nippon Steel Corp. Oita Works
Oita City
Oita 870 (JP)
- **TAKAHASHI, Manabu,**
Nippon Steel Corporation
Technical Development Bureau
Futtsu City
Chiba 299-12 (JP)
- **UENISHI, Akihiro**
Nippon Steel Corporation
Technical Development Bureau
Futtsu City
Chiba 299-12 (JP)
- **OKAMOTO, Riki,**
Nippon Steel Corporation
Technical Development Bureau
Futtsu City
Chiba 299-12 (JP)
- **KURIYAMA, Yukihiro,**
Nippon Steel Corporation
Technical Development Bureau
Futtsu City
Chiba 299-12 (JP)
- **SAKUMA, Yasuharu,**
Nippon Steel Corp. Kimitsu Works
Kimitsu City
Chiba 299-11 (JP)

(74) Representative: **Vossius & Partner**
Patentanwälte Rechtsanwälte mbB
Siebertstrasse 3
81675 München (DE)

EP 0 952 235 B2

(56) References cited:

EP-A- 0 295 500 EP-A- 0 586 704
EP-A- 0 707 087 JP-A- 7 018 372
JP-A- 7 252 592 US-A- 5 470 529

- MATERIA, Vol. 35, No. 3, 20 May 1996, (Sendai Municipal Government) The Japan Institute Metals, KAZUYA MIURA, SHUSAKU TAKAGI, TOSHIYUKI KATO, OSAMU MATSUDA, SHINJI TANIMURA, "Development of Impact-Absorbing High Tensile Strength Steel Plate for Automobiles (in Japanese)", pages 570-572.

Description

[0001] The present invention relates to a method for producing high strength hot rolled and high strength cold rolled steel sheets having high flow stress during dynamic deformation, which can be used for automotive members and the like to provide assurance of safety for passengers by efficiently absorbing the impact energy of a collision.

[0002] In recent years, protection of passengers from automobile collisions has been acknowledged as an aspect of utmost importance for automobiles, and hopes are increasing for suitable materials exhibiting excellent high-speed deformation resistance. For example, by applying such materials to front side members of automobiles, the energy of frontal collisions may be absorbed as the materials are crushed, thus alleviating the impact on passengers.

[0003] Since the strain rate for deformation undergone by each section of an automobile upon collision reaches about 10^3 (1/s), consideration of the impact absorption performance of a material requires knowledge of its dynamic deformation properties in a high strain rate range. Because it is also essential to consider at the same time such factors as energy savings and CO₂ exhaust reduction, as well as weight reduction of the automobile, requirements for effective high-strength steel sheets are therefore increasing.

[0004] For example, in CAMP-ISIJ Vol. 9 (1996), pp.1112-1115 the present inventors have reported on the high-speed deformation properties and impact energy absorption of high-strength thin steel sheets, and in that article it was reported that the dynamic strength in the high strain rate range of about 10^3 (1/s) is drastically increased in comparison to the static strength in the low strain rate of 10^{-3} (1/s), that the strain rate dependence for deformation resistance varies based on the strengthening mechanism for the material, and that TRIP (transformation induced plasticity) steel sheets and DP (ferrite/martensite dual phase) steel sheets possess both excellent formability and impact absorption properties compared to other high strength steel sheets.

[0005] Furthermore, JP-A-7-18372, which provides retained austenite-containing high strength steel sheets with excellent impact resistance and a method for their production, discloses a solution for impact absorption simply by increasing the yield stress brought about by a higher deformation rate; however, it has not been demonstrated what other aspects of the retained austenite should be controlled, apart from the amount of retained austenite, in order to improve impact absorption.

[0006] Thus, although understanding continues to improve with regard to the dynamic deformation properties of member constituent materials affecting absorption of impact energy in automobile collisions, it is still not fully understood what properties should be maximized to obtain steel materials for automotive members with more excellent impact energy absorption properties, and on what criteria the selection of materials should be based. Steel materials for automotive members are formed into the required part shapes by press molding and, after usually undergoing painting and baking, are then incorporated into automobiles and subjected to actual instances of impact. However, it is still not clear what steel-strengthening mechanisms are suitable for improving the impact energy absorption of steel materials against collisions subsequent to such pre-deformation and baking treatment.

[0007] EP-A-0 586 704 discloses a high-yield-ratio hot-rolled high-strength steel sheet which is excellent in formability and spot weldability containing at least 5 % of retained austenite and a process for producing the same.

[0008] EP-A-0 295 500 discloses a hot rolled steel sheet with a high strength and a distinguished formability having a microstructure composed of ferrite, bainite and retained austenite phases with the ferrite phase being in a ratio (VPF/dPF) of polygonal ferrite volume fraction VPF (%) to polygonal ferrite average grain size dPF (μm) of 7 or more and the retained austenite phase being contained in an amount of 5% by volume or more on the basis of the total phases.

[0009] EP-A-0 707 087 discloses a high-strength steel sheet adapted for deep drawing, which contains ferrite as the principal phase (the phase having the highest volume fraction) and has a composite structure containing at least 3 vol. % of austenite, bainite and martensite.

[0010] It is an object of the present invention to provide a method for producing high-strength steel sheets with high impact energy absorption properties as steel materials for shaping and working into such parts as front side members which absorb impact energy upon collision.

[0011] The object above can be achieved by the features specified in the claims.

[0012] The invention is described in detail in conjunction with the drawings, in which:

Fig. 1 is a graph showing the relationship between TS and the difference between the average value σ_{dyn} of the flow stress in the range of 3~10% of equivalent strain when deformed in a strain rate range of $5 \times 10^2 \sim 5 \times 10^3$ (1/s), and TS, as an indicator of the collision impact energy absorption property according to the invention,

Fig. 2 is a graph showing the relationship between the work hardening coefficient and dynamic energy absorption (J) for a steel sheet between 1% and 5% of strain,

Fig. 3 is a graph showing the relationship between the work hardening coefficient at yield strength $\times 1\sim 5\%$ of strain and the dynamic energy absorption (J), for a steel sheet,

Fig. 4a is a perspective view of a part (hat-shaped model) used for an impact crush test for measurement of dynamic energy absorption in Fig. 3,

Fig. 4b is a cross-sectional view of the test piece used in Fig. 4a,

Fig. 4c is a schematic view of the impact crush test method,

Fig. 5 is a graph showing the relationship between ΔT and the metallurgy parameter A for the hot-rolling step according to the invention,

Fig. 6 is a graph showing the relationship between the coiling temperature and the metallurgy parameter A for the hot-rolling step according to the invention,

Fig. 7 is an illustration of the annealing cycle in a continuous annealing step according to the invention, and

Fig. 8 is a graph showing the relationship between the secondary cooling stop temperature (T_e) and the subsequent overaging temperature (T_{oa}) in a continuous annealing step according to the invention.

[0013] Collision impact absorbing members such as front side members in automobiles and the like are produced by subjecting steel sheets to a bending or press forming step. After being worked in this manner they are usually subjected to impact by automobile collision following painting and baking. The steel sheets, therefore, are required to exhibit high impact energy absorption properties after their working into members, painting and baking.

[0014] As a result of years of research on high-strength steel sheets as impact absorbing members satisfying the above-mentioned demands, the present inventors have found that inclusion of appropriate amounts of retained austenite in steel sheets for such shape-formed members is an effective means for obtaining high-strength steel sheets which exhibit excellent impact absorption properties. Specifically, it has been found that high flow stress during dynamic deformation is exhibited when the ideal microstructure is a composite structure including ferrite and/or bainite which are readily solid-solution strengthened by various substitutional elements, either of which as the dominant phase, and a third phase containing a 3-50% volume fraction of retained austenite which is transformed into hard martensite during deformation, while it has further been found that high-strength steel sheets with high flow stress during dynamic deformation can also be obtained with a composite structure wherein martensite is present in the third phase of the initial microstructure, provided that specific conditions are satisfied.

[0015] As a result of further experimentation and study based on these findings, the present inventors then discovered that the amount of pre-deformation corresponding to shape forming of impact absorbing members such as front side members sometimes reaches a maximum of over 20% depending on the section, but that the majority of the sections undergo deformation of greater than 0% and less than or equal to 10% with equivalent strain. Thus, upon determining the effect of the pre-deformation within that range, it is possible to estimate the behavior of the member as a whole after the pre-deformation. Consequently, according to the present invention, deformation of greater than 0% and less than or equal to 10% of equivalent strain was selected as the amount of pre-deformation to be applied to members during their working.

[0016] Fig. 1 is a graph showing the relationship between the average value σ_{dyn} of the flow stress in the range of 3~10% of equivalent strain when deformed in a strain rate range of $5 \times 10^2 \sim 5 \times 10^3$ (l/s), and the static material strength TS (i.e., the maximum stress TS (MPa) in the static tensile test as measured in a strain rate range of $5 \times 10^{-4} \sim 5 \times 10^{-3}$ (l/s)), as an indicator of the collision impact energy absorption property according to the invention.

[0017] Impact absorbing members such as front side members have a hat-shaped cross-section, and as a result of analysis of deformation of such members upon being crushed by high-speed collision, the present inventors have found that despite deformation proceeding up to a high maximum strain of over 40%, at least 70% of the total absorption energy is absorbed in a strain range of 10% or lower in a high-speed stress-strain diagram. Therefore, the flow stress during dynamic deformation with high-speed deformation at 10% or lower was used as the index of the high-speed collision energy absorption property. In particular, since the amount of strain in the range of 3~10% is most important, the index used for the impact energy absorption property was the average stress σ_{dyn} in the range of 3~10% of equivalent strain when deformed in a strain rate range of $5 \times 10^2 \sim 5 \times 10^3$ (l/s) high-speed tensile deformation.

[0018] The average stress σ_{dyn} of 3~10% upon high-speed deformation generally increases with increasing static tensile strength {maximum stress: TS (MPa) in a static tensile test measured in a stress rate range of $5 \times 10^{-4} \sim 5 \times 10^{-3}$ (l/s)} of the steel material without pre-deformation or baking treatment. Consequently, increasing the static tensile strength (synonymous with the static material strength) of the steel material directly contributes to improved impact energy absorption property of the member. However, increased strength of the steel material results in poorer formability into members, making it difficult to obtain members with the necessary shapes. Consequently, steel materials having a high σ_{dyn} with the same tensile strength (TS) are preferred. It was found that, based on this relationship, steel materials wherein the average value σ_{dyn} (MPa) of the flow stress in the range of 3~10% of equivalent strain, when deformed in a strain rate range of $5 \times 10^2 \sim 5 \times 10^3$ (l/s) after pre-deformation at greater than 0% and less than or equal to 10%, satisfy the inequality $\sigma_{dyn} - TS \geq -0.234 \times TS + 250$ as expressed in terms of the maximum stress TS (MPa) in the static tensile test as measured in a strain rate range of $5 \times 10^{-4} \sim 5 \times 10^{-3}$ (l/s) without pre-deformation, have higher impact energy absorption properties as actual members compared to other steel materials, and that the impact energy absorption property is improved without increasing the overall weight of the member, making it possible to provide high-strength steel sheets with high flow stress during dynamic deformation. Incidentally, since the above relational inequality σ_{dyn}

$-TS \geq -0.234 \times TS + 250$ is equivalent to $\sigma_{dyn} \geq 0.766 \times TS + 250$, the inequality $\sigma_{dyn} \geq 0.755 \times TS + 250$ will be used in the explanation which follows.

[0019] The present inventors have also discovered that for improved anti-collision safety, an increased work hardening during pre-working as represented by the work hardening coefficient between 1% and 5% of strain is necessary for greater initial deformation resistance at the initial point of collision, as well as for higher work hardening during collision deformation by the presence of martensite transformed during pre-deformation, and for an increased σ_{dyn} . That is to say, the anti-collision safety may be increased by controlling the microstructure of the steel material as explained above so that, as shown in Fig. 2 and Fig. 3, the work hardening coefficient of the steel is at least 0.080, and preferably at least 0.108, and so that the work hardening coefficient between 1% and 5% of at yield strain x yield strength is at least 40, and preferably at least 54. By viewing the relationship between the dynamic energy absorption, which is an indicator of the anti-collision safety of automobile members, and the work hardening coefficient and yield strength x work hardening coefficient of the steel sheets, it can be seen that the dynamic energy absorption improves as the values increase, suggesting that a proper evaluation can be made based on the work hardening coefficient of the steel sheets as an indicator of anti-collision safety of automobile members, so long as the yield strength level is the same, or based on the yield strength x work hardening coefficient if the yield strength differs.

[0020] The dynamic energy absorption was determined in the following manner by the impact crush test method as shown in Fig. 4a, Fig. 4b and Fig. 4c. A steel sheet is shaped into a test piece (corner R = 5 mm) such as shown in Fig. 4b, and spot welded 3 with a 35 mm pitch at a current of 0.9 times the expulsion current using an electrode with a tip radius of 5.5 mm, to make a part (hat-shaped model) with the test piece 2 set between two worktops 1 as shown in Fig. 4a, and then, after a baking and painting treatment at 170°C for 20 minutes, a weight 4 of approximately 150 Kg, as shown in Fig. 4c, is dropped from a height of about 10 m, the part placed on a frame 5 provided with a shock absorber 6 is crushed in the lengthwise direction, and the deformation work at displacement = 0-150 mm is calculated from the area of the corresponding load displacement diagram to determine the dynamic energy absorption.

[0021] The work hardening coefficient of the steel sheet at a 1~5% strain and the work hardening coefficient between 1% and 5% of at yield strain x yield strength were calculated in the following manner. Specifically, the steel sheet was worked into a JIS-5 test piece (gauge length: 50 mm, parallel part width: 25 mm) and a tensile test at a strain rate of 0.001/sec was carried out to determine the yield strength and work hardening coefficient (n value for strain of 1~5%).

[0022] The microstructure of a steel sheets according to the invention will now be described.

[0023] When a suitable amount of retained austenite is present in steel sheets, the strain undergone during deformation (shaping) results in its transformation into extremely hard martensite, and thus has the effect of increasing the work hardening coefficient and improving the formability by controlling necking. A suitable amount of retained austenite is preferably 3% to 50%. Specifically, if the volume fraction of the retained austenite is less than 3%, the shaped member cannot exhibit its excellent work hardening property upon undergoing collision deformation, the deformation load remains at a low level resulting in a low deformation work and therefore the dynamic energy absorption is lower making it impossible to achieve improved anti-collision safety, and the anti-necking effect is also insufficient, making it impossible to obtain a high tensile strength x total elongation. On the other hand, if the volume fraction of the retained austenite is greater than 50%, working-induced martensite transformation occurs in a concatenated fashion with only slight shape working strain, and no improvement in the tensile strength x total elongation can be expected since the hollow extension ratio instead deteriorates as a result of notable hardening which occurs during punching, while even if shaping of the member is possible, the shaped member cannot exhibit its excellent work hardening property upon undergoing collision deformation; the above-mentioned range for the retained austenite content is determined from this viewpoint.

[0024] In addition to the aforementioned condition of a retained austenite volume fraction of 3~50%, another desired condition is that the mean grain diameter of the retained austenite should be no greater than 5 μm , and preferably no greater than 3 μm . Even if the retained austenite volume fraction of 3-50% is satisfied, a mean grain diameter of greater than 5 μm is not preferred because this will prevent fine dispersion of the retained austenite in the steel, resulting in only local inhibition of the improving effect by the characteristics of the retained austenite. Furthermore, it was shown that excellent anti-collision safety and formability are exhibited when the microstructure is such that the ratio of the aforementioned mean grain diameter of the retained austenite to the average grain diameter of the ferrite or bainite of the dominant phase is no greater than 0.6, and the average grain diameter of the dominant phase is no greater than 10 μm , and preferably no greater than 6 μm .

[0025] The present inventors have further discovered that the average stress: σ_{dyn} at the aforementioned range of 3~10% of equivalent strain with the same level of tensile strength (TS: MPa), varies according to the solid solution carbon content: [C] in the retained austenite contained in the steel sheet prior to its working into a member (wt%), and the average Mn equivalents of the steel material (Mn eq) as expressed by $\text{Mn eq} = \text{Mn} + (\text{Ni} + \text{Cr} + \text{Cu} + \text{Mo})/2$. The carbon concentration in the retained austenite can be experimentally determined by X-ray diffraction and Mossbauer spectrometry, and for example, it can be calculated by the method indicated in the Journal of The Iron and Steel Institute, 206(1968), p60, utilizing the integrated reflection intensity of the (200) plane, (211) plane of the ferrite and the (200) plane, (220) plane and (311) plane of the austenite, with X-ray diffraction using Mo K α rays. Based on experimental results obtained

by the present inventors, it was also found that when the value: M , as defined by $M = 678 - 428 \times [C] - 33 \times Mn$ eq, is at least 70 and no greater than 250, by calculation using the solid solution carbon content $[C]$ in the retained austenite and Mn eq determined from the substitutional alloy elements added to the steel material, both obtained in the manner described earlier, and the difference between the volume fraction of the retained austenite without pre-deformation (V_0) and the volume fraction of the retained austenite after applying pre-deformation of 5% of equivalent strain (V_5): $\{(V_0) - (V_5)\}$ is at least 30% of a volume fraction of the retained austenite without pre-deformation, then a large σ_{dyn} is exhibited at the same static tensile strength (TS). In such cases, since the effect of an increased strength by transformation of the retained austenite during deformation is substantially limited to the low strain region when $M > 250$, virtually all of the retained austenite is wasted during pre-deformation of the member and can no longer provide an increase in σ_{dyn} for high-speed deformation; the upper limit for M was therefore set to be 250. Furthermore, when M is less than 70, transformation of the retained austenite progresses during deformation, but transformation fails to progress to a sufficient degree in the low strain region, and therefore the average stress σ_{dyn} in the range of 3~10% of equivalent strain is kept low, thus failing to satisfy the relationship $\sigma_{dyn} \geq 0.766 \times TS + 250$ with respect to the static tensile strength TS; the lower limit for M was therefore set to be 70.

[0026] In regard to the location of the retained austenite, since soft ferrite usually receives the strain of deformation, the retained γ (austenite) which is not adjacent to ferrite tends to escape the strain and thus fails to be transformed into martensite with deformation of about 1~5%; because of this lessened effect, it is preferred for the retained austenite to be adjacent to the ferrite. For this reason, the volume fraction of the ferrite is desired to be at least 40%, and preferably at least 60%, and the mean grain diameter (corresponding to the mean circle-equivalent diameter) is desired to be no greater than 10 μm , and preferably no greater than 6 μm . As explained above, since ferrite is the softest substance in the constituent composition, it is an important factor in determining the work hardening coefficient between 1% and 5% of strain $\times$ yield strength and the yield ratio. The volume fraction should preferably be within the prescribed values. In addition, increasing the volume fraction and fineness of the ferrite is effective for raising the carbon concentration of the untransformed austenite and finely dispersing it, thus resulting in greater fineness of the martensite produced from the untransformed austenite as well as of the remaining composition, and increasing the volume fraction and fineness of the retained austenite, which will contribute to improved anti-collision safety effects and formability.

[0027] The martensite is at a volume fraction of 3~30% and it is desired to have a mean grain diameter (corresponding to the mean circle-equivalent diameter) of no greater than 10 μm , and preferably no greater than 6 μm . The martensite primarily creates mobile transfer in the surrounding ferrite, contributing to a lower yield rate and improved work hardening coefficient, and therefore results in further improvement in the anti-collision safety effect and formability by satisfying the designated values mentioned above, allowing a more desired level of properties to be achieved, specifically a work hardening coefficient between 1% and 5% of strain more than 54 $\times$ yield strength more than 75%. The relationship between the volume fraction and the mean grain diameter of the martensite is such that even with a low volume fraction and a large mean grain diameter, the effect is limited to local influence, making it impossible to satisfy the aforementioned properties. In regard to the location of the martensite, when the martensite is not adjacent to ferrite, the influence of the mobile transfer, etc. of the martensite barely reaches the ferrite, thus lessening its effect. Consequently, the martensite is preferred to be adjacent to the ferrite.

[0028] The chemical components and their content restrictions in high-strength steel sheets which exhibit the aforementioned microstructure and various characteristics will now be explained. The high-strength steel sheets used according to the invention are high-strength steel sheets containing, in terms of weight percentage, C at from 0.03% to 0.3%, either or both Si and Al at a total of from 0.5% to 3.0% and if necessary one or more from among Mn, Ni, Cr, Cu and Mo at a total of from 0.5% to 3.5%, with the remainder Fe as the primary component, or they are high-strength steel sheets with high dynamic deformation resistance obtained by further addition if necessary to the aforementioned high-strength steel sheets, one or more from among Nb, Ti, V, P, B, Ca and REM, with one or more from among Nb, Ti and V at a total of no greater than 0.3%, P at no greater than 0.3%, S at no greater than 0.01%, Ca at from 0.0005% to 0.01% and REM at from 0.005% to 0.05%, with the remainder Fe as the primary component. These chemical components and their contents (all in weight percentages) will now be discussed.

[0029] C: C is the most inexpensive element for stabilizing austenite at room temperature and thus contributing to the necessary stabilization of austenite for its retention, and therefore it may be considered the most essential element according to the invention. The average carbon content in the steel sheet not only affects the retained austenite volume fraction which can be ensured at room temperature but, by increasing the concentration in the untransformed austenite during the working at the heat treatment of production, it is possible to improve the stability of the retained austenite for working. If the C content is less than 0.03%, however, a final retained austenite volume fraction of at least 3% cannot be ensured, and therefore 0.03% is the lower limit. On the other hand, as the average C content of the steel sheet increases the ensurable retained austenite volume fraction also increases, allowing the stability of the retained austenite to be ensured by ensuring the retained austenite volume fraction. Nevertheless, if the C content of the steel sheet is too great, not only does the strength of the steel sheet exceed the necessary level thus impairing the formability for press working and the like, but the dynamic stress increase is also inhibited with respect to the static strength increase, while

the reduced weldability limits the use of the steel sheet as a member; the upper limit for the C content was therefore determined to be 0.3%.

[0030] Si, Al: Si and Al are both ferrite-stabilizing elements, and they serve to increase the ferrite volume fraction for improved workability of the steel sheet. In addition, Si and Al both inhibit production of cementite, allowing C to be effectively concentrated in the austenite, and therefore addition of these elements, is essential for retention of austenite at a suitable volume fraction at room temperature. Other elements whose addition has this effect of suppressing production of cementite include, in addition to Si and Al, also P, Cu, Cr, Mo, etc. A similar effect can be expected by appropriate addition of these elements as well. However, if the total amount of either or both Si and Al is less than 0.5%, the cementite production-inhibiting effect will be insufficient, thus wasting as carbides most of the added C which is the most effective component for stabilizing the austenite, and this will either render it impossible to ensure the retained austenite volume fraction required for the invention, or else the production conditions necessary for ensuring the retained austenite will fail to satisfy the conditions for volume production processes; the lower limit was therefore determined to be 0.5%. Also, if the total of either or both Si and Al exceeds 3.0%, the primary phase of ferrite or bainite will tend to become hardened and brittle, not only inhibiting increased deformation resistance from the increased strain rate, but also leading to lower workability and lower toughness of the steel sheet, increased cost of the steel sheet, and much poorer surface treatment characteristics for chemical treatment and the like; the upper limit was therefore determined to be 3.0%. In cases where particularly superior surface properties are demanded, Si scaling may be avoided by having $Si \leq 0.1\%$ or conversely Si scaling may be generated over the entire surface, to be rendered less conspicuous, by having $Si \geq 1.0\%$.

[0031] Mn, Ni, Cr, Cu, Mo: Mn, Ni, Cr, Cu and Mo are all austenite-stabilizing elements, and are effective elements for stabilizing austenite at room temperature. In particular, when the C content is restricted from the standpoint of weldability, the addition of appropriate amounts of these austenite-stabilizing elements can effectively promote retention of austenite. These elements also have an effect of inhibiting production of cementite, although to a lesser degree than Al and Si, and act as aids for concentration of C in the austenite. Furthermore, these elements cause solid-solution strengthening of the ferrite and bainite matrix together with Al and Si, thus also acting to increase the flow stress during dynamic deformation at high speeds. However, if the total content of any or more than one of these elements is less than 0.5%, it will become impossible to ensure the necessary retained austenite, while the strength of the steel material will be lowered, thus impeding efforts to achieve effective vehicle weight reduction; the lower limit was therefore determined to be 0.5%. On the other hand, if the total amount of those elements exceeds 3.5%, the primary phase of ferrite or bainite will tend to be hardened, not only inhibiting increased deformation resistance from the increased strain rate, but also leading to lower workability and lower toughness of the steel sheet, and increased cost of the steel material; the upper limit was therefore determined to be 3.5%.

[0032] Nb, Ti or V which are added as necessary can promote higher strength of the steel sheet by forming carbides, nitrides or carbonitrides, but if their total exceeds 0.3%, excess amounts of the nitrides, carbides or carbonitrides will precipitate in the crystal grains or at the grain boundaries of the ferrite or bainite primary phase, becoming a source of mobile transfer during high-speed deformation and making it impossible to achieve high flow stress during dynamic deformation. In addition, production of carbides inhibits concentration of C in the retained austenite which is the most essential aspect of the present invention, thus wasting the C content; the upper limit was therefore determined to be 0.3%.

[0033] B or P are also added as necessary. B is effective for strengthening of the grain boundaries and high strengthening of the steel sheet, but if it is added at greater than 0.01% its effect will be saturated and the steel sheet will be strengthened to a greater degree than necessary, thus inhibiting increased deformation resistance against high-speed deformation and lowering its workability into parts; the upper limit was therefore determined to be 0.01%. Also, P is effective for ensuring high strength and retained austenite for the steel sheet, but if it is added at greater than 0.2% the cost of the steel sheet will tend to increase, while the deformation resistance of the dominant phase of ferrite or bainite will be increased to a higher degree than necessary, thus inhibiting increased deformation resistance against high-speed deformation and resulting in poorer season cracking resistance and poorer fatigue characteristics and tenacity; the upper limit was therefore determined to be 0.2%. From the standpoint of preventing reduction in the secondary workability, tenacity, spot weldability and recyclability, the upper limit is more desirably 0.02%. Also, with regard to the S content as an unavoidable impurity, the upper limit is more desirably 0.01% from the standpoint of preventing reduction in formability (especially the hollow extension ratio) and spot weldability due to sulfide-based inclusions.

[0034] Ca is added to at least 0.0005% for improved formability (especially hollow extension ratio) by shape control (spheroidization) of sulfide-based inclusions, and its upper limit was determined to be 0.01% in consideration of effect saturation and the adverse effect due to increase in the aforementioned inclusions (reduced hollow extension ratio). In addition, since REM has a similar effect as Ca, its added content was also determined to be from 0.005% to 0.05%.

[0035] Production methods for obtaining high-strength steel sheets according to the invention will now be explained in detail, with respect to hot-rolled steel sheets and cold-rolled steel sheets.

[0036] As the production method for both high-strength hot-rolled steel sheets and cold-rolled steel sheets with high flow stress during dynamic deformation according to the invention, a continuous cast slab having the component composition described above is fed directly from casting to a hot rolling step, or is hot rolled after reheating. Continuous

casting for thin gauge strip and hot rolling by the continuous hot rolling techniques (endless rolling) may be applied for the hot rolling in addition to normal continuous casting, but in order to avoid a lower ferrite volume fraction and a coarser mean grain diameter of the thin steel sheet microstructure, the steel sheet thickness at the hot rolling approach side (the initial steel billet thickness) is preferred to be at least 25 mm. Also, the final pass rolling speed for the hot rolling is preferred to be at least 500 mpm and more preferably at least 600 mpm, in light of the problems described above.

[0037] In particular, the finishing temperature for the hot rolling during production of the high-strength hot-rolled steel sheets is preferably in a temperature range of $Ar_3 - 50^\circ\text{C}$ to $Ar_3 + 120^\circ\text{C}$ as determined by the chemical components of the steel sheet. At lower than $Ar_3 - 50^\circ\text{C}$, deformed ferrite is produced, with an inferior flow stress during dynamic deformation σ_{dyn} , 1~5% work hardening property and formability. At higher than $Ar_3 + 120^\circ\text{C}$, the flow stress during dynamic deformation σ_{dyn} , the 1~5% work hardening property, etc. are inferior because of a coarser steel sheet microstructure, while it is also not preferred from the viewpoint of scale defects. The steel sheets which have been hot-rolled in the manner described above are subjected to a coiling step after being cooled on a run-out table. The average cooling rate here is at least $5^\circ\text{C}/\text{sec}$. The cooling rate is decided from the standpoint of ensuring the volume fraction of the retained austenite. The cooling method may be carried out at a constant cooling rate, or with a combination of different cooling rates which include a low cooling rate range during the procedure.

[0038] The hot-rolled steel sheets are then subjected to a coiling step, where they are preferably coiled at a coiling temperature of 500°C or below. A coiling temperature of higher than 500°C will result in a lower retained austenite volume fraction. To obtain martensite, the coiling temperature is set to 350°C or below. The aforementioned coiling conditions are for steel sheets to be directly provided as hot-rolled steel sheets after coiling, and these restricting conditions are unnecessary for cold-rolled steel sheets which have been further cold rolled and subjected to annealing, as such coiling may be carried out under common production conditions.

[0039] According to the invention, it was found particularly that a correlation exists between the finishing temperature in the hot-rolling step, the finishing approach temperature and the coiling temperature. That is, as shown in Fig. 5 and Fig. 6, specific conditions exist which are determined primarily by the finishing temperature, finishing approach temperature and the coiling temperature. In other words, the hot-rolling is carried out so that when the finishing temperature for hot rolling is in the range of $Ar_3 - 50^\circ\text{C}$ to $Ar_3 + 120^\circ\text{C}$, the metallurgy parameter: A satisfies inequalities (1) and (2). The above-mentioned metallurgy parameter: A may be expressed by the following equation.

$$A = \varepsilon^* \times \exp\{(75282 - 42745 \times C_{\text{eq}})/(1.978 \times (FT + 273))\}$$

where FT: finishing temperature ($^\circ\text{C}$)

C_{eq} : carbon equivalents = $C + Mn_{\text{eq}}/6$ (%)

Mn_{eq} : manganese equivalents = $Mn + (Ni + Cr + Cu + Mo)/2$ (%)

ε^* : final pass strain rate (s^{-1})

$$\varepsilon^* = (v/\sqrt{R \times h_1}) \times (1/\sqrt{r}) \times \ln\{1/(1-r)\}$$

h_1 : final pass approach sheet thickness

h_2 : final pass exit sheet thickness

r : $(h_1 - h_2)/h_1$

R : roll radius

v : final pass exit speed

ΔT : finishing temperature (finishing final pass exit temperature) - finishing approach temperature (finishing first pass approach temperature)

Ar_3 : $901 - 325 \text{ C}\% + 33 \text{ Si}\% - 92 \text{ Mn}_{\text{eq}}$

[0040] Thereafter, the average cooling rate on the run-out table is $5^\circ\text{C}/\text{sec}$, and the coiling is preferably carried out under conditions such that the relationship between the metallurgy parameter: A and the coiling temperature (CT) satisfies inequality (3).

$$9 \leq \log A \leq 18 \quad (1)$$

$$\Delta T \geq 21 \times \log A - 178 \quad (2)$$

$$CT \leq 6 \times \log A + 312 \quad (3)$$

[0041] In inequality (1) above, a logA of less than 9 is unacceptable from the viewpoint of production of retained γ and fineness of the microstructure, while it will also result in inferior flow stress during dynamic deformation σ_{dyn} and 1~5% work hardening property. Also, if logA is to be greater than 18, massive equipment will be required to achieve it. If the condition of inequality (2) is not satisfied, the retained γ will be excessively stable, and therefore although transformation of the retained γ will proceed during deformation it will not occur to a sufficient degree in the low strain region, and will result in inferior flow stress during dynamic deformation σ_{dyn} and 1~5% work hardening property, etc. The lower limit for ΔT is more flexible with a lower logA as indicated by inequality (2). Also, the upper limit for ΔT is preferred to be 300°C from the viewpoint of increasing size of facility, lower retained austenite volume fraction and coarseness of the microstructure. Furthermore, if the relationship with the coiling temperature in inequality (3) is not satisfied, there will be an adverse effect on ensuring the amount of retained γ , while the retained γ will be excessively stable even if retained γ can be obtained, and although transformation of the retained γ will proceed during deformation it will not occur to a sufficient degree in the low strain region, and will result in inferior flow stress during dynamic deformation σ_{dyn} and 1~5% work hardening property, etc. The lower limit for the coiling temperature (CT) is more flexible with a higher logA.

[0042] Incidentally, when the initial martensite volume fraction is greater than 3%, the CT may be higher than 350°C. However, it is preferred from CT to be higher than 250°C in order to prevent overproduction of martensite.

[0043] The cold-rolled steel sheets according to the invention are then subjected to the different steps following hot-rolling and coiling and are cold-rolled at a reduction ratio of 40% or greater, after which the cold-rolled steel sheets are subjected to annealing. The annealing is ideally continuous annealing through an annealing cycle such as shown in Fig. 7, and during the annealing of the continuous annealing step to prepare the final product, annealing for 10 seconds to 3 minutes at temperature T_o of from $0.1 \times (Ac_3 - Ac_1) + Ac_1$ °C to $Ac_3 + 50$ °C is followed by cooling to a primary cooling stop temperature T_q in the range of 550~720°C at a primary cooling rate of 1~10°C/sec and then by cooling to a secondary cooling stop temperature T_e at a secondary cooling rate of 10~200°C/sec, after which temperature T_{oa} is held for 15 seconds to 20 minutes prior to cooling to room temperature. If the aforementioned annealing temperature T_o is less than $0.1 \times (Ac_3 - Ac_1) + Ac_1$ °C in terms of the Ac_1 and Ac_3 temperatures determined based on the chemical components of the steel sheets (see, for example, "Iron & Steel Material Science": W.C. Leslie, Maruzen, p.273), the amount of austenite obtained at the annealing temperature will be too low, making it impossible to leave stably retained austenite in the final steel sheets; the lower limit was therefore determined to be $0.1 \times (Ac_3 - Ac_1) + Ac_1$ °C. Also, since no improvement in characteristics of the steel sheets are achieved even if the annealing temperature exceeds $Ac_3 + 50$ °C and the cost merely increases, the upper limit for the annealing temperature was determined to be $Ac_3 + 50$ °C. The required annealing time at this temperature is a minimum of 10 seconds in order to ensure a uniform temperature and an appropriate amount of austenite for the steel sheets, but if the time exceeds 3 minutes the effect described above becomes saturated and costs will thus be increased.

[0044] Primary cooling is necessary for the purpose of promoting transformation of the austenite to ferrite and concentrating the C in the untransformed austenite to stabilize the austenite. If the cooling rate is less than 1°C/sec a longer production line will be necessary, and therefore from the standpoint of avoiding reduced productivity the lower limit is 1°C/sec. On the other hand, if the cooling rate exceeds 10°C/sec, ferrite transformation does not occur to a sufficient degree, and it becomes difficult to ensure the retained austenite in the final steel sheets; the upper limit was therefore determined to be 10°C/sec. If the primary cooling is carried out to lower than 550°C, pearlite is produced during the cooling, the austenite-stabilizing element C is wasted, and thus the final sufficient amount of retained austenite cannot be achieved. Also, if the cooling is carried out to no lower than 720°C, ferrite transformation does not proceed to a sufficient degree.

[0045] The rapid cooling of the subsequent secondary cooling must be carried out at a cooling rate of at least 10°C/sec so as not to cause pearlite transformation or precipitation of iron carbides during the cooling, but cooling carried out at greater than 200°C/sec will create a burden on the equipment. Also, if the cooling stop temperature in the secondary cooling is lower than 150°C, virtually all of the remaining austenite prior to cooling will be transformed into martensite, making it impossible to ensure the final necessary amount of retained austenite. Conversely, if the cooling stop temperature is higher than 450°C the final flow stress during dynamic deformation σ_{dyn} will be lowered.

[0046] For room temperature stabilization of the austenite retained in the steel sheets, a portion thereof is preferably transformed to bainite to further increase the carbon concentration in the austenite. If the secondary cooling stop temperature is lower than the temperature maintained for bainite transformation, it is increased to the maintained temperature.

The final characteristics of the steel sheets will not be impaired so long as this heating rate is from 5°C/sec to 50°C/sec. Conversely, if the secondary cooling stop temperature is higher than the bainite processing temperature, the final characteristics of the steel sheets will not be impaired even with forced cooling to the bainite processing temperature at a cooling rate of 5°C/sec to 200°C/sec and with direct conveyance to a heating zone preset to the desired temperature.

On the other hand, since the sufficient amount of retained austenite cannot be ensured in cases where the steel sheet is held at below 150°C or held at above 500°C, the range for the holding temperature was determined to be 150°C to 500°C. If the temperature is held at 150°C to 500°C for less than 15 seconds, the bainite transformation does not proceed to a sufficient degree, making it impossible to obtain the final necessary amount of retained austenite, while if it is held in that range for more than 20 minutes, precipitation of iron carbides or pearlite transformation will result after bainite transformation, resulting in waste of the carbon which is indispensable for production of the retained austenite and making it impossible to obtain the necessary amount of retained austenite; the holding time range was therefore determined to be from 15 seconds to 20 minutes. The holding at 150°C to 500°C in order to promote bainite transformation may be at a constant temperature throughout, or the temperature may be deliberately varied within this temperature range without impairing the characteristics of the final steel sheets.

[0047] As preferred cooling conditions after annealing according to the invention, annealing for 10 seconds to 3 minutes at a temperature of from $0.1 \times (Ac_3 - Ac_1) + Ac_1$ °C to $Ac_3 + 50$ °C is followed by cooling to a secondary cooling start temperature T_q in the range of 550~720°C at the primary cooling rate of 1-10°C/sec and then by cooling to a secondary cooling stop temperature T_e in the range from the temperature $T_m - 100$ °C to T_m determined by the steel component and annealing temperature T_o at the secondary cooling rate of 10~200°C/sec, after which the temperature T_o is held in a range of $T_e - 50$ °C to 500°C for 15 seconds to 20 minutes prior to cooling to room temperature. This is a method wherein the quenching end point temperature T_e in a continuous annealing cycle as shown in Fig. 8, is represented as a function of the component and annealing temperature T_o , and annealing is carried out at below a given critical value, while the range of the overaging temperature T_o is defined by the relationship with the quenching end point temperature T_e .

[0048] Here, T_m is the martensite transformation start temperature for the retained austenite at the quenching start point T_q . That is, T_m is defined by $T_m = T_1 - T_2$, or the difference between the value excluding the effect of the carbon concentration in the austenite (T_1) and the value indicating the effect of the carbon concentration (T_2). Here, T_1 is the temperature calculated from the solid solution element concentration excluding carbon, and T_2 is the temperature calculated from the carbon concentration in the retained austenite at Ac_1 and Ac_3 determined by the components of the steel sheets and T_q determined by the annealing temperature T_o . C_{eq}^* represents the carbon equivalents in the retained austenite at the annealing temperature T_o .

$$T_1 = 561 - 33 \times \{Mn\% + (Ni + Cr + Cu + Mo)/2\}$$

and T_2 is expressed in terms of:

$$Ac_1 = 723 - 0.7 \times Mn\% - 16.9 \times Ni\% + 29.1 \times Si\% + 16.9 \times Cr\%,$$

$$Ac_3 = 910 - 203 \times (C\%)^{1/2} - 15.2 \times Ni\% + 44.7 \times Si\% + 104 \times V\% + 31.5 \times Mo\% - 30 \times Mn\% - 11 \times Cr\% - 20 \times Cu\% + 70 \times P\% + 40 \times Al\% + 400 \times Ti\%,$$

and the annealing temperature T_o , such that when

$$C_{eq}^* = (Ac_3 - Ac_1) \times C / (T_o - Ac_1) + (Mn + Si/4 + Ni/7 + Cr + Cu + 1.5 Mo) / 6$$

is greater than 0.6, $T_2 = 474 \times (Ac_3 - Ac_1) \times C / (T_o - Ac_1)$,

and when it is 0.6 or less, $T_2 = 474 \times (Ac_3 - Ac_1) \times C / \{3 \times (Ac_3 - Ac_1) \times C + [(Mn + Si/4 + Ni/7 + Cr + Cu + 1.5 Mo)/2 - 0.85] \times (T_o - Ac_1)\}$.

[0049] In other words, when T_e is less than $(T_{em} - 100)^\circ C$, almost all of the austenite is transformed into martensite, making it impossible to obtain the necessary amount of retained austenite. If T_e is higher than T_{em} the steel sheets will be softened, making it impossible to achieve the dynamic strength expected from the static strength (TS); the upper limit for T_e was therefore determined to be T_{em} . Also, if T_e is higher than $500^\circ C$, pearlite or iron carbides are produced resulting in waste of the carbon which is indispensable for production of the retained austenite and making it impossible to obtain the necessary amount of retained austenite. On the other hand, if T_{oa} is less than $T_e - 50^\circ C$, additional cooling equipment may become necessary, and a greater variation will result in the material due to the difference between the temperature of the continuous annealing furnace and the temperature of the steel sheets; this temperature was therefore determined as the lower limit.

[0050] By employing the steel sheet composition and production method described above, it is possible to produce high-strength steel sheets with high flow stress during dynamic deformation, characterized in that the microstructure of the steel sheets in their final form is a composite microstructure of a mixture of ferrite and/or bainite, either of which is the dominant phase, and a third phase including retained austenite at a volume fraction between 3% and 50%, wherein the average value σ_{dyn} (MPa) of the flow stress in the range of 3~10% of equivalent strain when deformed in a strain rate range of $5 \times 10^2 \sim 5 \times 10^3$ (1/s) after pre-deformation of greater than 0% and less than or equal to 10% of equivalent strain, satisfies the inequality: $\sigma_{dyn} \geq 0.766 \times TS + 250$ as expressed in terms of the maximum stress TS (MPa) in the static tensile test as measured in a strain rate range of $5 \times 10^{-4} \sim 5 \times 10^{-3}$ (1/s) without deformation, and the work hardening coefficient between 1% and 5% of strain is at least 0.080. The high-strength steel sheets according to the invention may be made into any desired product by annealing, temper rolling, electroplating or the like.

Examples

[0051] The present invention will now be explained by way of examples.

Example 1

[0052] The 15 steel materials listed in Table 1 were heated to $1050 \sim 1250^\circ C$ and subjected to hot rolling, cooling and coiling under the production conditions listed in Table 2, to produce hot-rolled steel sheets. As shown in Tables 3 and 4, the steel sheets satisfying the component conditions and production conditions according to the invention contain from 3% to 50% of initial retained austenite in terms of volume fraction and had an M value of at least 70 and less than or equal to 250 as determined by the solid solution [C] in the retained austenite and the average Mn eq in the steel sheets, while having suitable stability as represented by a ratio more than 0.3 between the (initial retained austenite volume fraction - retained austenite volume fraction after 5% deformation)/initial retained austenite volume fraction, exhibiting excellent anti-collision safety as represented by $\sigma_{dyn} \geq 0.766 \times TS + 250$, 1~5% work hardening coefficient more than 0.080 and 1~5% work hardening coefficient x yield strength more than 40, as well as suitable formability and spot weldability.

Table 1 Chemical components of steels

Steel No.		1	2	3	4	5	6	7	8
Chemical components (wt%)	C	0.15	0.15	0.15	0.15	0.11	0.16	0.09	0.10
	Si	1.45	1.45	1.45	1.45	1.36	1.60	2.10	2.00
	Mn	0.99	0.79	0.69	0.79	1.54	0.90	1.20	1.10
	P	0.012	0.012	0.012	0.012	0.020	0.020	0.009	0.015
	S	0.002	0.005	0.002	0.002	0.003	0.003	0.001	0.002
	Al	0.02	0.02	0.02	0.02	0.20	0.01	0.02	0.02
	N	0.003	0.002	0.003	0.002	0.003	0.003	0.002	0.003
	Al+Si	1.47	1.47	1.47	1.47	1.56	1.61	2.12	2.02
	Ni		0.4						
	Cr			0.6					
	Cu				0.4				
	Mo					0.4			
	Nb						0.04		
	Ti							0.06	
	V								
	B								
	Ca		0.004						
	REM			0.010					
	*1	0.99	1.19	1.29	1.19	1.94	0.90	1.20	1.10
	Ceq	0.32	0.32	0.32	0.32	0.40	0.31	0.29	0.28
	Mneq	0.99	0.99	0.99	0.99	1.74	0.90	1.20	1.10
Trans-formation temperature (°C)	Ac1	755	750	758	757	746	760	771	759
	Ac3	868	868	871	866	879	875	932	904
	Ar3	809	809	809	809	750	819	831	833
Type		A	A	A	A	A	A	A	B

A: Present invention

B: Comparison example

Underlined data indicate values outside of the range of the invention

*1: Mn + Ni + Cr + Cu + Mo

Table 1 Chemical components of steels (cont.)

Steel No.		9	10	11	12	13	14	15
Chemical components (wt%)	C	0.10	0.10	0.15	0.15	<u>0.35</u>	0.15	0.19
	Si	2.00	2.00	1.98	0.01	1.50	0.30	1.10
	Mn	1.10	1.10	1.76	1.00	1.90	1.48	1.50
	P	0.015	0.015	0.016	0.015	0.015	0.010	0.090
	S	0.002	0.002	0.001	0.002	0.003	0.003	0.003
	Al	0.02	0.02	0.02	1.70	0.03	0.05	0.04
	N	0.003	0.002	0.002	0.002	0.003	0.003	0.005
	Al+Si	2.02	2.02	2.00	1.71	1.53	<u>0.35</u>	1.14
	Ni							
	Cr							
	Cu							
	Mo							
	Nb							
	Ti							
	V			0.06				
	B				0.001			
	Ca							
	REM							
	*1	1.10	1.10	1.76	1.00	1.90	1.48	1.50
	Ceq	0.28	0.28	0.44	0.32	0.67	0.40	0.44
	Mneq	1.10	1.10	1.76	1.00	1.90	1.48	1.50
Trans-formation temperature (°C)	Ac1	769	769	762	713	746	716	739
	Ac3	904	904	875	871	802	803	834
	Ar3	833	833	756	761	662	726	738
Type		A	A	A	A	A	A	A

A: Present invention

B: Comparison example

Underlined data indicate values outside of the range of the invention

*1: Mn + Ni + Cr + Cu + Mo

Table 2 Production conditions

Steel No.		1	2	3	4	5	6	7	8
Hot-rolling conditions	Finishing temperature °C	905	910	800	790	860	840	795	<u>960</u>
	Initial steel sheet thickness	26	27	27	26	28	28	35	20
	Final pass rolling speed (mpm)	600	600	600	600	700	700	500	400
	Final sheet thickness (mm)	1.8	1.8	1.8	1.8	1.4	1.4	2.2	2.2
	Strain rate (1/sec)	150	150	150	160	190	190	100	90
	Calculation (log A)	13.65	13.60	14.77	14.91	13.50	14.46	14.87	13.15
	ΔT (°C)	140	150	160	155	120	140	150	60
	Condition of inequality (2)	o	o	o	o	o	o	o	x
Cooling conditions	Average cooling rate (°C/sec)	40	35	80	90	50	90	60	50
	Note	*1	*1						
Coiling conditions	Coiling temperature (°C)	390	250	390	260	350	380	370	<u>505</u>
	Condition of inequality (2)	o	o	o	o	o	o	o	x

Underlined data indicate values outside of the range of the invention.

*1: 15°C/sec for 750-700°C.

Table 2 Production conditions (cont.)

Steel No.		9	10	11	12	13	14	15
Hot-rolling conditions	Finishing temperature °C	<u>730</u>	900	870	875	780	840	790
	Initial steel sheet thickness	26	25	26	28	30	32	55
	Final pass rolling speed (mpm)	500	500	700	800	800	700	1000
	Final sheet thickness (mm)	2.2	2.2	1.2	1.2	1.2	1.2	1.2
	Strain rate (1/sec)	100	100	200	230	240	210	300
	Calculation (log A)	15.77	13.77	13.07	14.12	12.09	13.78	14.09
	ΔT (°C)	170	130	110	135	100	125	150
	Condition of inequality (2)	o	o	o	o	o	o	o
Cooling conditions	Average cooling rate (°C/sec)	60	50	50	55	60	50	100
	Note							
Coiling conditions	Coiling temperature (°C)	<u>510</u>	<u>550</u>	370	390	375	360	380
	Condition of inequality (2)	x	x	o	o	o	o	o

Underlined data indicate values outside of the range of the invention.

Table 3 Microstructure of steels

Steel No.		1	2	3	4	5	6	7	8
Dominant phase	Name	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	bain-ite
	Circle equivalent diameter (μm)	5.2	5.8	3.5	3.0	4.0	3.9	2.7	11.0
Ferrite	Volume fraction (Z)	77	75	83	85	80	81	84	38
Retained austenite	Circle equivalent diameter (μm)	2.6	2.9	1.7	1.8	2.0	1.6	1.6	5.1
	Grain diameter ratio to dominant phase	0.50	0.50	0.49	0.60	0.50	0.41	0.59	0.46
	C concentration (Z)	1.20	1.10	1.29	1.30	1.21	1.25	1.25	1.40
	Volume fraction	Without pre-deformation V(0)	8	7	9	9	10	11	10
		After 5Z pre-deformation V(5)	4	3	5	6	5	7	6
		$(V(0) - V(5)) / V(0)$	0.50	0.57	0.44	0.33	0.50	0.36	0.40
Martensite	Circle-equivalent diameter (μm)	--	3.3	--	2.6	3.0	--	--	--
	Volume fraction (Z)	0	18	0	6	5	0	0	0
Remaining composition		B	--	B	--	B	B	B	?
M value	Calculated M value	132	175	93	89	103	113	103	<u>43</u>
	Conditions	o	o	o	o	o	o	o	x

Underlined data indicate values outside of the range of the invention.

Remaining composition: B=bainite, P=pearlite

Table 3 Microstructure of steels (cont.)

Steel No.		9	10	11	12	13	14	15
Dominant phase	Name	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite
	Circle equivalent diameter (μm)	<u>de-formed</u>	7.8	3.3	5.0	2.5	3.0	2.7
Ferrite	Volume fraction (%)	88	60	59	79	50	40	70
Retained austenite	Circle equivalent diameter (μm)	--	--	1.9	2.5	1.2	--	1.6
	Grain diameter ratio to dominant phase	--	--	0.58	0.50	0.48	--	0.59
	C concentration (%)	--	--	1.20	1.23	1.01	--	1.23
	Volume fraction							
	Without pre-deformation V(0)	<u>0</u>	<u>0</u>	10	7	5	<u>0</u>	13
	After 5% pre-deformation V(5)	0	0	6	4	3	0	7
	$\{V(0) - V(5)\} / V(0)$	--	--	0.40	0.43	0.40	--	0.46
Martensite	Circle-equivalent diameter (μm)	--	--	--	--	--	--	--
	Volume fraction (%)	0	0	0	0	0	0	0
Remaining composition		P	P	B	B	B+P	B+P	B+P
M value	Calculated M value	--	--	106	119	183	--	102
	Conditions	--	--	0	0	0	--	0

Underlined data indicate values outside of the range of the invention.

Remaining composition: B=bainite, P=pearlite

Table 4 Mechanical properties of steels

Steel No.		1	2	3	4	5	6	7	8
Static tensile test (strain rate = 0.001/sec)	TS (MPa)	625	810	640	780	680	655	645	655
	YS (MPa)	530	560	490	510	510	530	500	560
	T.E1 (Z)	37	28	38	31	37	40	39	29
	1-5Z of n value	0.090	0.115	0.105	0.140	0.120	0.100	0.110	<u>0.070</u>
	YS x n	48	64	51	71	61	53	55	<u>39</u>
	YR (Z)	85	69	77	65	75	81	78	85
	TS x T.E1 (MPa) (Z)	23125	22680	24320	24180	25160	26200	25155	18995
Pre-deformation and BH treatment	Pre-deformation method	C	C	L	C	C	C	C	C
	Pre-deformation equivalent strain Z	5Z	5Z	5Z	3Z	5Z	7Z	5Z	5Z
	BH treatment	yes	no	yes	yes	yes	yes	yes	yes
Dynamic tensile test (strain rate = 1000/sec)	σ_{dyn}	760	901	769	878	810	801	776	701
	Expression *1	31.3	30.5	28.8	30.5	39.1	49.3	31.9	<u>-50.7</u>
Other properties	Welding	ok	ok	ok	ok	ok	ok	ok	ok
	d/d ₀	1.54	1.36	1.45	1.26	1.40	1.45	1.51	1.51

Underlined data indicate values outside of the range of the invention.

*1: $\sigma_{dyn} - (0.755 \times TS + 250)$

C = Uniaxial tension in C direction

L = Uniaxial tension in L direction

Table 4 Mechanical properties of steels (cont.)

Steel No.		9	10	11	12	13	14	15
Static tensile test (strain rate =0.001/sec)	TS (MPa)	570	575	855	610	1005	653	650
	YS (MPa)	525	535	690	500	860	560	494
	T.El (Z)	20	30	30	39	20	23	37
	1-5Z of n value	<u>0.070</u>	<u>0.070</u>	0.105	0.105	0.090	<u>0.070</u>	0.11
	YS x n	<u>37</u>	<u>37</u>	72	53	77	<u>39</u>	54
	YR (Z)	92	93	81	82	86	86	76
	TS x T.El (MPa) (Z)	11400	17250	25650	23790	20100	15019	24050
Pre-deformation and BH treatment	Pre-deformation method	C	C	C	E	C	E	C
	Pre-deformation equivalent strain Z	5Z	5Z	5Z	5Z	5Z	5Z	5Z
	BH treatment	yes	yes	yes	yes	yes	yes	yes
Dynamic tensile test (strain rate =1000/sec)	σ_{dyn}	620	630	954	746	1025	710	777
	Expression *1	<u>-66.6</u>	<u>-60.5</u>	49.1	28.7	5.2	<u>-40.2</u>	29.1
Other properties	Welding	ok	ok	ok	ok	poor	ok	ok
	d/do	1.20	1.51	1.30	1.52	1.09	1.60	1.40

Underlined data indicate values outside of the range of the invention.

*1: $\sigma_{dyn} - (0.766 \times TS + 250)$

C = Uniaxial tension in C direction

E = Equal biaxial tension

Example 2

[0053] The 25 steel materials listed in Table 5 were subjected to a complete hot-rolling process at Ar3 or greater, and after cooling they were coiled and then cold-rolled following acid picking. The Ac1 and Ac3 temperatures were then determined from each steel component, and after heating, cooling and holding under the annealing conditions listed in Table 6, they were cooled to room temperature. As shown in Figs. 7 and 8, the steel sheets satisfying the production conditions and component conditions according to the invention have an M value of at least 70 and no greater than 250 as determined by the solid solution [C] in the retained austenite and the average Mn eq in the steel sheets, and all clearly exhibit excellent anti-collision safety as represented by $\sigma_{dyn} \geq 0.076 \times TS + 250$ and a 1~5% strain work hardening coefficient value of at least 40.

Table 5 Chemical components of steels

Steel No.		16	17	18	19	20	21	22	23
Chemical components (wt%)	C	0.05	0.12	0.20	0.26	0.12	0.12	0.12	0.12
	Si	1.20	1.20	1.20	1.20	2.00	1.80	1.20	1.20
	Mn	1.50	1.50	1.50	1.50	0.50	0.15	1.00	0.15
	P	0.010	0.012	0.008	0.007	0.008	0.007	0.013	0.012
	S	0.003	0.005	0.002	0.003	0.003	0.002	0.003	0.005
	Al	0.04	0.05	0.04	0.05	0.04	0.03	0.05	0.04
	N	0.003	0.002	0.003	0.002	0.003	0.003	0.002	0.003
	Al+Si	0.24	1.25	1.24	1.25	2.04	1.83	1.25	1.24
	Ni					0.8			1.5
	Cr						1.8		
	Cu							0.6	
	Mo								0.2
	Nb								
	Ti								
	V								
	B								
	*1	1.50	1.50	1.50	1.50	1.30	1.95	1.60	1.85
	Ceq	0.30	0.37	0.45	0.51	0.27	0.30	0.34	0.29
	Mneq	1.50	1.50	1.50	1.50	0.90	1.05	1.30	1.00
Trans-formation temperature (°C)	Ac1	742	742	742	742	762	804	747	731
	Ac3	876	851	830	818	904	898	854	875
	Ar3	786	764	738	718	845	825	782	810
Type		A	A	A	A	A	A	A	A

A: Present invention

B: Comparison example

Underlined data indicate values outside of the range of the invention

*1: Mn + Ni + Cr + Cu + Mo

Table 5 Chemical components of steels (cont.)

Steel No.		24	25	26	27	28	29	30	31
Chemical components (wt%)	C	0.12	0.10	0.14	0.25	0.15	0.10	0.10	0.10
	Si	1.20	0.50	0.01	1.50	1.00	1.20	1.20	1.20
	Mn	1.20	1.50	1.50	2.00	1.70	1.50	1.50	1.50
	P	0.010	0.013	0.012	0.012	0.100	0.008	0.008	0.008
	S	0.003	0.005	0.003	0.005	0.003	0.003	0.003	0.003
	Al	0.04	1.20	1.50	0.04	0.05	0.04	0.04	0.04
	N	0.003	0.002	0.002	0.002	0.003	0.003	0.003	0.003
	Al+Si	1.24	1.70	1.51	1.54	1.05	1.24	1.24	1.24
	Ni								
	Cr	2.0							
	Cu								
	Mo								
	Nb						0.01		0.02
	Ti							0.02	
	V								0.01
	B				0.002				
	*1	3.20	1.50	1.50	2.00	1.70	1.50	1.50	1.50
	Ceq	0.49	0.35	0.39	0.58	0.43	0.35	0.35	0.35
	Mneq	2.20	1.50	1.50	2.00	1.70	1.50	1.50	1.50
Trans-formation temperature (°C)	Ac1	779	722	707	745	734	742	742	742
	Ac3	838	872	850	818	834	857	865	858
	A _r 3	699	747	718	685	729	770	770	770
Type		A	A	A	A	B	A	A	A

A: Present invention

B: Comparison example

Underlined data indicate values outside of the range of the invention

*1: Mn + Ni + Cr + Cu + Mo

Table 5 Chemical components of steels (cont.)

Steel No.		32	33	34	35	36	37	38	39	40
Chemical components (wt%)	C	<u>0.02</u>	<u>0.35</u>	0.12	0.12	0.10	0.12	0.10	0.12	0.12
	Si	1.20	1.00	<u>0.20</u>	<u>3.50</u>	1.50	1.20	1.20	1.50	1.20
	Mn	1.50	1.20	1.50	1.50	1.50	1.50	<u>1.50</u>	<u>0.10</u>	1.50
	P	0.010	0.008	0.010	0.010	<u>0.250</u>	0.010	0.010	0.010	0.010
	S	0.003	0.003	0.002	0.003	0.003	0.003	0.003	0.002	0.002
	Al	0.04	0.05	<u>0.04</u>	0.05	0.04	0.04	0.04	0.05	0.04
	N	0.003	0.003	0.002	0.003	0.003	0.003	0.003	0.003	0.003
	Al+Si	1.24	1.05	<u>0.24</u>	<u>3.55</u>	1.54	1.24	1.24	1.55	1.24
	Ni							<u>1.5</u>	<u>0.2</u>	
	Cr									
	Cu							<u>1.0</u>		
	Mo									
	Nb									<u>0.20</u>
	Ti									<u>0.15</u>
	V									
	B						<u>0.012</u>			
	*1	1.50	1.20	1.50	1.50	1.50	1.50	<u>4.00</u>	0.30	1.50
	Ceq	0.27	0.55	0.37	0.37	0.35	0.37	0.56	0.15	0.37
	Mneq	1.50	1.20	1.50	1.50	1.50	1.50	2.75	0.20	1.50
Transformation temperature (°C)	Ac1	742	739	713	809	751	742	717	762	742
	Ac3	892	801	806	954	887	851	814	903	911
	Ar3	796	710	731	840	780	764	655	893	764
Type		B	B	B	B	B	B	B	B	B

A: Present invention

B: Comparison example

Underlined data indicate values outside of the range of the invention

*1: Mn + Ni + Cr + Cu + Mo

Table 6 Production conditions

Steel No.	16	17	18	19	20	21	22	23	24	25	26	27	28
Cold rolling conditions	80	80	80	80	80	80	80	80	80	80	80	80	80
Sheet thickness (mm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
Annealing temperature (To °C)	800	800	800	800	800	800	800	800	790	780	780	780	800
Annealing time (sec)	90	90	90	90	120	120	90	90	90	90	90	90	90
Primary cooling rate (°C/sec)	5	5	5	5	8	8	5	5	5	5	5	5	8
Quenching start temperature (Tq °C)	680	680	700	680	680	680	680	650	650	650	650	680	680
Secondary cooling rate (°C/sec)	100	100	100	80	100	100	100	130	130	100	100	100	100
Quenching end temperature (Te °C)	350	350	350	280	280	350	350	200	300	300	300	200	<u>400</u>
Calculated (T1 °C)	512	512	512	512	531	526	518	528	488	512	512	495	505
Calculated (Ceq*)	0.41	0.53	0.60	0.64	0.64	0.64	0.56	0.41	1.22	0.53	0.53	0.92	0.55
Calculated (T2 °C)	138	147	144	161	214	116	139	310	300	166	179	248	134
Calculated (Tem °C)	374	364	368	351	317	410	379	218	188	345	332	247	371
Holding temperature (Toa °C)	350	350	350	400	400	400	350	300	350	400	400	350	400
Holding time (sec)	150	180	180	250	180	180	180	180	180	180	150	180	180

Underlined data indicate values outside of the range of the invention.

Table 6 Production conditions (cont.)

Steel No.	29	30	31	32	33	34	35	36	37	38	39	40
Cold rolling conditions	68	68	68	80	80	80	80	80	80	70	70	70
Rolling reduction (%)												
Sheet thickness (mm)	1.2	1.2	1.2	0.8	0.8	0.8	0.8	0.8	0.8	1.2	1.2	1.2
Annealing temperature (T ₀ °C)	780	780	780	800	760	780	850	800	800	780	800	800
Annealing time (sec)	90	90	90	90	90	90	90	90	90	90	90	90
Primary cooling rate (°C/sec)	8	5	5	5	5	5	5	5	5	5	5	5
Quenching start temperature (T _q °C)	680	630	680	680	680	680	680	680	680	630	680	680
Secondary cooling rate (°C/sec)	100	150	100	100	100	100	100	100	100	100	100	100
Quenching end temperature (T _e °C)	350	320	350	350	300	300	300	300	300	350	250	300
Calculated (T ₁ °C)	512	512	512	512	521	512	512	512	512	470	554	512
Calculated (C _{eq} *)	0.60	0.62	0.60	0.35	1.29	0.42	0.82	0.59	0.52	0.66	0.53	0.65
Calculated (T ₂ °C)	143	153	144	120	495	186	200	143	147	73	285	165
Calculated (T _{em} °C)	369	359	368	392	26	326	311	369	364	398	270	346
Holding temperature (T _{oa} °C)	330	320	400	400	300	350	300	350	400	400	400	400
Holding time (sec)	180	180	180	180	180	180	150	180	180	180	180	180

Table 7 Microstructure of steels

Steel No.		16	17	18	19	20	21	22	23	24	25	26	27	28
Dominant phase	Name	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	bai-nite	fer-rite
	Circle equivalent diameter (μm)	7.2	6.4	5.3	5.5	8.1	6.9	5.1	5.5	5.1	7.1	5.3	3.8	5.3
Ferrite	Volume fraction (%)	85	65	48	41	80	55	69	82	55	73	66	41	55
Retained austenite	Circle equivalent diameter (μm)	2.8	2.6	1.9	1.2	2.8	2.8	2.9	2.1	1.3	1.8	1.9	1.2	1.3
	Grain diameter ratio to dominant phase	0.39	0.41	0.36	0.22	0.35	0.41	0.57	0.38	0.25	0.25	0.36	0.32	0.25
	C concentration (%)	1.29	1.19	1.21	1.16	1.08	1.10	1.28	1.03	1.04	1.17	1.16	1.05	1.48
	Volume fraction	4	10	15	20	9	10	8	12	10	7	10	21	11
Marten-site	Before pre-deformation V(0)													
	After 5% pre-deformation V(5)	2	5	8	7	3	3	3	4	3	3	4	8	8
	$(V(0)-V(5))/V(0)$	0.50	0.50	0.47	0.65	0.67	0.70	0.63	0.67	0.70	0.57	0.60	0.62	<u>0.27</u>
Remaining composition	Circle-equivalent diameter (μm)	1.6	1.3	--	2.5	3.2	3.1	1.9	2.8	3.1	3.3	2.6	4.2	1.6
	Volume fraction (%)	1	1	0	5	3	4	1	6	4	4	4	15	1
Remaining composition		B	B	B	B	B	B	B	B	B	B	B	B	B
H value	Calculated H value	77	177	113	132	185	171	89	206	160	129	131	164	<u>-12</u>
	Conditions	0	0	0	0	0	0	0	0	0	0	0	0	X

Underlined data indicate values outside of the range of the invention.

Table 7 Microstructure of steels (ont.)

Steel No.		29	30	31	32	33	34	35	36	37	38	39	40
Dominant phase	Name	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	fer-rite	bai-nite
	Circle equivalent diameter (μm)	6.8	7.1	6.6	10.9	4.1	6.2	5.5	6.8	5.9	4.8	10.4	5.9
Ferrite	Volume fraction (%)	71	70	73	92	25	70	55	66	58	32	80	65
	Circle equivalent diameter (μm)	2.5	2.7	2.6	--	2.8	--	2.1	2.6	2.1	1.2	--	1.9
	Grain diameter ² ratio to dominant phase	0.37	0.38	0.39	--	0.68	--	0.38	0.38	0.36	0.25	--	0.32
	C concentration (%)	1.10	1.23	1.19	--	1.42	--	1.38	1.41	1.33	1.35	--	1.42
Retained austenite	Volume fraction	8	7	7	0	18	0	8	7	7	6	0	6
	Before pre-deformation V(0)												
	After SZ pre-deformation V(5)	3	3	3	0	15	0	6	5	5	5	0	5
	(V(0)-V(5))/V(0)	0.63	0.57	0.57	--	0.17	--	0.25	0.29	0.29	0.17	--	0.17
Martensite	Circle-equivalent diameter (μm)	2.9	4.1	2.9	--	4.2	2.9	3.1	2.7	3.6	3.6	--	3.8
	Volume fraction (%)	4	2	4	0	26	6	2	5	3	3	0	6
Remaining composition		B	B	B	B	B+P	B	B	B	B	B	B	B
M value	Calculated M value	159	101	120	--	31	--	38	25	59	9	--	21
	Conditions	0	0	0	X	X	X	X	X	X	X	X	X

Underlined data indicate values outside of the range of the invention.

Table 8 Mechanical properties of steels

Steel No.	16	17	18	19	20	21	22	23	24	25	26	27	28
Static tensile test (strain rate = 0.001/sec)	TS (MPa)	676	653	812	936	681	669	637	732	748	619	1176	752
	YS (MPa)	357	477	609	552	463	435	452	447	471	406	635	647
	T.E1 (Z)	43	35	31	25	33	34	35	32	30	37	23	32
	1-52 of n value	0.117	0.107	0.095	0.095	0.105	0.112	0.116	0.112	0.103	0.122	0.092	0.122
	YS x n	47	51	50	52	49	49	52	50	49	50	47	79
	YR (Z)	0.69	0.73	0.75	0.59	0.68	0.65	0.71	0.61	0.63	0.68	0.65	0.86
	TS x T.E1 (MPa) (Z)	24768	22855	25172	23400	22473	22746	22295	23424	22440	22089	21665	24064
Pre-deformation and BH treatment	Pre-deformation method	C	C	L	C	C	C	C	C	E	C	L	C
	Pre-deformation equivalent strain (Z)	5	5	10	5	5	3	5	5	10	5	5	5
	BH treatment	yes	no	yes	yes	yes	yes	yes	yes	no	yes	no	yes
Dynamic tensile test (strain rate = 1000/sec)	σ _{dyn}	712	771	890	986	823	815	761	842	849	742	765	801
	Expression #1	20.8	20.8	18.0	19.0	51.4	52.5	23.1	31.3	26.0	34.7	40.8	11.2
Welding		ok	ok	ok	ok	ok	ok	ok	ok	ok	ok	ok	ok

Underlined data indicate values outside of the range of the invention.

*1: σ_{dyn} - (0.766 x TS + 250)

C = Uniaxial tension in C direction

L = Uniaxial tension in L direction

E = Equal biaxial tension

Table 8 Mechanical properties of steels (cont.)

Steel No.	29	30	31	32	33	34	35	36	37	38	39	40
Static tensile test (strain rate = 0.001/sec)	TS (MPa)	667	679	703	502	1156	865	849	716	916	515	756
	YS (MPa)	420	475	464	437	694	675	501	437	641	453	514
	T.E1 (Z)	35	34	30	31	17	31	32	34	22	32	26
	1-5Z of n value	0.118	0.112	0.126	0.144	0.079	0.079	0.077	0.086	0.132	0.164	0.142
	YS x n	50	53	58	63	55	53	39	38	85	74	73
Pre-deformation and BH treatment	YR (Z)	0.63	0.70	0.66	0.87	0.60	0.78	0.59	0.61	0.70	0.88	0.68
	TS x T.E1 (MPa) (Z)	23345	23086	21090	15562	19652	26815	27168	24344	20152	16480	19656
	Pre-deformation method	C	E	C	C	C	C	C	C	C	C	C
	Pre-deformation equivalent strain (Z)	5	5	5	5	5	5	5	5	5	5	5
	BH treatment	no	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
Dynamic tensile test (strain rate = 1000/sec)	σ _{dyn}	806	792	810	592	1026	867	855	768	901	598	789
	Expression *1	45.1	21.9	21.5	-42.5	-109.5	-45.6	-45.3	-30.5	-50.7	-46.5	-40.1
Welding		ok	ok	ok	ok	poor	ok	ok	ok	poor	ok	ok

Underlined data indicate values outside of the range of the invention.

*1: σ_{dyn} - (0.766 x TS + 250)

C = Uniaxial tension in C direction

E = Equal biaxial tension

[0054] The microstructure was evaluated by the following methods.

[0055] Identification of the ferrite, bainite, martensite and remaining structure, observation of the location and meas-

urement of the mean grain diameter (circle equivalent diameter) and volume fraction were accomplished using a 1000 magnification optical micrograph with the thin steel sheet rolling direction cross-section etched with a nital reagent and the reagent disclosed in Japanese Unexamined Patent Publication No. 59-219473.

[0056] The mean circle equivalent diameter of the retained austenite was determined from a 1000 magnification optical micrograph, with the rolling direction cross-section etched with the reagent disclosed in Japanese Patent Application No. 3-351209. The position was also observed from the same photograph.

[0057] The volume fraction of the retained austenite (V_γ : percentage unit) was calculated according to the following equation, upon Mo-K α X-ray analysis.

$$V_\gamma = (2/3) \{ 100 / (0.7 \times \alpha(211) / \gamma(220) + 1) \} + (1/3) \{ 100 / (0.78 \times \alpha(211) / \gamma(311) + 1) \}$$

where $\alpha(211)$, $\gamma(220)$, $\alpha(211)$ and $\gamma(311)$ represent pole intensities.

[0058] The C concentration of the retained γ (C_γ : percentage unit) was calculated according to the following equation, upon determining the lattice constant (unit: Angstroms) from the reflection angle on the (200) plane, (220) plane and (311) plane of the austenite using Cu-K α X-ray analysis.

$$C_\gamma = (\text{lattice constant} - 3.572) / 0.033$$

[0059] The properties were evaluated by the following methods.

[0060] A tensile test was conducted according to JIS5 (gauge length: 50 mm, parallel part width: 25 mm) with a strain rate of 0.001/sec, and upon determining the tensile strength (TS), yield strength (YS), total elongation (T.EI) and work hardening coefficient (n value for strain of 1-5%), the YS x work hardening coefficient, the yield rate (YR = YS/TS x 100) and the TS x T.EI were calculated.

[0061] The stretch flanging property was measured by expanding a 20 mm punched hole from the burrless side with a 30° cone punch, and determining the hollow extension ratio (d/do) between the hollow diameter at the moment at which the crack penetrated the sheet thickness and (d) the original hollow diameter (do, 20 mm).

[0062] The spot weldability was judged to be unsuitable if a spot welding test piece bonded at a current of 0.9 times the expulsion current using an electrode with a tip radius of 5 times the square root of the steel sheet thickness underwent peel fracture when ruptured with a chisel.

[0063] As explained above, the present invention makes it possible to provide in an economical and stable manner high-strength hot-rolled steel sheets and cold-rolled steel sheets for automobiles which provide previously unobtainable excellent anti-collision safety and formability, and thus offers a markedly wider range of objects and conditions for uses of high-strength steel sheets.

Claims

1. A method for producing a high-strength hot-rolled steel sheet with high flow stress during dynamic deformation, wherein

the microstructure of the hot-rolled steel sheet is a composite microstructure of a mixture of ferrite and/or bainite, either of which is the dominant phase, and a third phase including retained austenite with a volume fraction between 3% and 50%, and

the average value σ_{dyn} (MPa) of the flow stress in the range of 3 - 10% of equivalent strain when deformed in a strain rate range of 5×10^2 - 5×10^3 (1/sec) after pre-deformation of greater than 0% and less than or equal to 10% of equivalent strain, satisfies the inequality:

$$\sigma_{dyn} \geq 0.766 \times TS + 250 \text{ as expressed in terms of the maximum stress TS (MPa) in the static tensile test as measured in a strain rate range of } 5 \times 10^{-4} - 5 \times 10^{-3} \text{ (1/sec) without deformation, and the work hardening coefficient between 1\% and 5\% of a strain is at least 0.080,}$$

whereby a continuous cast slab containing, in terms of weight percentage, C: 0.03% to 0.3%, either or both Si and Al in a total amount of 0.5% to 3.0%, optionally one or more selected from Mn, Ni, Cr, Cu and Mo in a total amount of 0.5% to 3.5%, further optionally one or more selected from Nb, Ti, V, P, B, Ca and REM, with one or more selected

from Nb, Ti and V in a total amount of no greater than 0.3%, P: no greater than 0.3%, B: no greater than 0.01 %, optionally Ca: 0.0005% to 0.01 % and REM: 0.005% to 0.05%, with the remainder being Fe and unavoidable impurities, is fed directly from casting to a hot rolling step, or is hot rolled after reheating, the hot rolling is completed at a finishing temperature of $Ar_3 - 50^{\circ}\text{C}$ to $Ar_3 + 120^{\circ}\text{C}$, the hot rolling is carried out so that the metallurgy parameter A satisfies inequalities (1) and (2) below, the subsequent average cooling rate in the run-out table is at least 5°C/sec , and the coiling is accomplished so that the relationship between said metallurgy parameter A and the coiling temperature (CT) satisfies inequalities (3) and (4) below:

$$9 \leq \log A \leq 18 \quad (1)$$

$$\Delta T \geq 21 \times \log A - 178 \quad (2)$$

$$CT \leq 6 \times \log A + 312 \quad (3)$$

$$CT \leq 350^{\circ}\text{C} \quad (4)$$

and the pre-deformation is performed to the hot-rolled steel sheet, wherein, metallurgy parameter A is expressed by the following equation:

$$A = \epsilon^* \times \exp \{ (75282 - 42745 \times C_{eq}) / [1.978 \times (FT + 273)] \}$$

wherein:

FT: finishing temperature ($^{\circ}\text{C}$)

C_{eq} : carbon equivalents = $C + Mn_{eq} / 6(\%)$

Mn_{eq} : manganese equivalents = $Mn + (Ni + Cr + Cu + Mo) / 2 (\%)$

ϵ^* : final pass strain rate (s^{-1})

$$\epsilon^* = (v / \sqrt{R \times h_1}) \times (1 / \sqrt{r}) \times \ln \{ 1 / (1 - r) \}$$

h_1 : final pass approach sheet thickness

h_2 : final pass exit sheet thickness

r : $(h_1 - h_2) / h_1$

R : roll radius

v : final pass exit speed

ΔT : finishing temperature (finishing final pass exit temperature) - finishing approach temperature (finishing first pass approach temperature)

$$Ar_3: 901 - 325 C\% + 33 Si\% - 92 Mn_{eq}.$$

2. A method for producing a high-strength cold-rolled steel sheet with high flow stress during dynamic deformation, wherein

the microstructure of the cold-rolled steel sheet is a composite microstructure of a mixture of ferrite and/or bainite, either of which is the dominant phase, and a third phase including retained austenite of a volume fraction between 3% and 50%, and the average value σ_{dyn} (MPa) of the flow stress in the range of 3 - 10% of equivalent strain when deformed in a strain rate range of $5 \times 10^2 - 5 \times 10^3$ (1/sec) after pre-deformation of greater than 0% and less than or equal to 10% of equivalent strain, satisfies the inequality: $\sigma_{dyn} \geq 0.766 \times TS + 250$ as expressed in terms of the maximum stress TS (MPa) in the static tensile test as measured in a strain rate range of $5 \times 10^{-4} - 5 \times 10^{-3}$ (1/sec) without deformation, and the work hardening coefficient between 1% and 5% of a strain is at least 0.080, whereby a continuous cast slab containing, in terms of weight percentage, C: 0.03% to 0.3%, either or both Si and Al in a total amount of 0.5% to 3.0%, optionally one or more selected from Mn, Ni, Cr, Cu and Mo in a total amount of 0.5% to 3.5%, and further optionally one or more selected from Nb, Ti, V, P, B, Ca and REM, with one or more selected from Nb, Ti and V in a total amount of no greater than 0.3%, P: no greater than 0.3%, B: no greater than 0.01%, optionally Ca: 0.0005% to 0.01% and REM: 0.005% to 0.05%, with the remainder being Fe and unavoidable

impurities, is fed directly from casting to a hot rolling step, or is hot rolled after reheating, the coiled hot-rolled steel sheets after hot rolling are subjected to acid pickling and then cold-rolled, and during annealing in a continuous annealing step for preparation of the final product, annealing for 10 seconds to 3 minutes at an annealing temperature (T_o) of from $0.1 \times (Ac_3 - Ac_1) + Ac_1$ °C to $Ac_3 + 50$ °C is followed by cooling with the primary cooling rate of 1-10°C/sec to a secondary cooling start temperature T_q in the range of 550 - 720°C and then by cooling with the secondary cooling rate of 10 - 200°C/sec to a secondary cooling stop temperature T_e in the range from the temperature ($T_{em} - 100$ °C) to T_{em} , after which the steel sheet is heated to and held at a temperature T_{oa} higher than T_e and up to 500°C for 15 seconds to 20 minutes prior to cooling to room temperature, and the pre-deformation is performed to the cold-rolled steel sheet, wherein T_{em} is the martensite transformation start temperature for the retained austenite at the secondary cooling start temperature T_q and defined by $T_{em} = T_1 - T_2$, wherein:

$$T_1 = 561 - 33 \times \{Mn\% + (Ni + Cr + Cu + Mo)/2\},$$

$$T_2 = 474 \times (Ac_3 - Ac_1) \times C / (T_o - Ac_1) \text{ when } Ceq^* = (Ac_3 - Ac_1) \times C / (T_o - Ac_1) +$$

$$(Mn + Si/4 + Ni/7 + Cr + Cu + 1.5Mo) / 6 \text{ is greater than } 0.6, \text{ and}$$

$$T_2 = 474 \times (Ac_3 - Ac_1) \times C / \{3 \times (Ac_3 - Ac_1) \times C + [(Mn - Si/4 + Ni/7 + Cr + Cu + 1.5Mo)/2 - 0.85] \times (T_o - Ac_1)\} \text{ when } Ceq^* \text{ is } 0.6 \text{ or less,}$$

wherein:

$$Ac_1 = 723 - 0.7 \times Mn\% - 16.9 \times Ni\% + 29.1 \times Si\% + 16.9 \times Cr\%,$$

$$Ac_3 = 910 - 203 \times (C\%)^{1/2} - 15.2 \times Ni\% + 44.7 \times Si\% + 104 \times V\% + 31.5 \times Mo\% - 30 \times Mn\% - 11 \times Cr\% - 20 \times Cu\% + 70 \times P\% + 40 \times Al\% + 400 \times Ti\%.$$

Patentansprüche

1. Verfahren zur Herstellung eines hochfesten warmgewalzten Stahlblechs mit hoher Fließspannung bei dynamischer Verformung, wobei die Mikrostruktur des warmgewalzten Stahlblechs eine Verbundmikrostruktur aus einer Mischung aus Ferrit und/oder Bainit, von denen eines die dominante Phase ist, und einer dritten Phase ist, die Restaustenit mit einem Volumenanteil zwischen 3 % und 50 % aufweist, und der Mittelwert σ_{dyn} (MPa) der Fließspannung im Bereich von 3 - 10 % der Vergleichsformänderung bei Verformung in einem Formänderungs-Geschwindigkeitsbereich von $5 \times 10^2 - 5 \times 10^3$ (1/s) nach Vorverformung von über 0 % und höchstens 10 % der Vergleichsformänderung die Ungleichung $\sigma_{dyn} \geq 0,766 \times TS + 250$ im Hinblick auf die maximale Spannung TS (MPa) im statischen Zugversuch in der Messung in einem Formänderungs-Geschwindigkeitsbereich von $5 \times 10^{-4} - 5 \times 10^{-3}$ (1/s) ohne Verformung erfüllt, und der Kaltverfestigungskoeffizient zwischen 1 % und 5 % einer Formänderung mindestens 0,080 beträgt, wobei eine stranggegossene Bramme, die in Gewichtsprozent 0,03 % bis 0,3 % C, eine Gesamtmenge von 0,5 % bis 3,0 % Si und/oder Al, optional eine Gesamtmenge von 0,5 % bis 3,5 % Mn, Ni, Cr, Cu und/oder Mo, ferner optional Nb, Ti, V, P, B, Ca und/oder SEM mit einer Gesamtmenge von höchstens 0,3 % Nb, Ti und/oder V, höchstens 0,3 % P, höchstens 0,01 % B, optional 0,0005 % bis 0,01 % Ca und 0,005 % bis 0,05 % SEM sowie als Rest Fe und unvermeidliche Verunreinigungen enthält, direkt vom Gießen einem Warmwalzschritt zugeführt oder nach Nachwärmen warmgewalzt wird, das Warmwalzen bei einer Endtemperatur von $Ar_3 - 50$ °C bis $Ar_3 + 120$ °C

abgeschlossen wird, das Warmwalzen so durchgeführt wird, dass der Metallurgieparameter A die nachstehenden Ungleichungen (1) und (2) erfüllt, die anschließende mittlere Abkühlungsgeschwindigkeit im Auslaufrollgang mindestens 5 °C/s beträgt und das Wickeln so realisiert wird, dass die Beziehung zwischen dem Metallurgieparameter A und der Wickeltemperatur (CT) die nachstehenden Ungleichungen (3) und (4) erfüllt:

$$9 \leq \log A \leq 18 \quad (1)$$

$$\Delta T \geq 21 \times \log A - 178 \quad (2)$$

$$CT \leq 6 \times \log A + 312 \quad (3)$$

$$CT \leq 350 \text{ °C} \quad (4)$$

und die Vorverformung am warmgewalzten Stahlblech durchgeführt wird, wobei der Metallurgieparameter A durch die folgende Gleichung ausgedrückt ist:

$$A = \varepsilon^* \times \exp\{ (75282 - 42745 \times C_{eq}) / [1,978 \times (FT + 273)] \}$$

wobei:

FT: Endtemperatur (°C)

C_{eq} : Kohlenstoffäquivalente = $C + Mn_{eq}/6$ (%)

Mn_{eq} : Manganäquivalente = $Mn + (Ni + Cr + Cu + Mo) / 2$ (%)

ε^* : Formänderungsgeschwindigkeit im letzten Stich (s^{-1})

$$\varepsilon^* = (v / \sqrt{R \times h_1}) \times (1 / \sqrt{r}) \times \ln\{1 / (1 - r)\}$$

h_1 : Blechdicke am Einlauf des letzten Sticks

h_2 : Blechdicke am Auslauf des letzten Sticks

r : $(h_1 - h_2) / h_1$

R: Walzenradius

v: Geschwindigkeit am Auslauf des letzten Sticks

ΔT : Endtemperatur (Endtemperatur am Auslauf) des letzten Sticks - Endtemperatur am Einlauf (Endtemperatur am Einlauf des ersten Sticks)

$$Ar_3: 901 - 325 C\% + 33 Si\% - 92 Mn_{eq}$$

2. Verfahren zur Herstellung eines hochfesten kaltgewalzten Stahlblechs mit hoher Fließspannung bei dynamischer Verformung, wobei die Mikrostruktur des kaltgewalzten Stahlblechs eine Verbundmikrostruktur aus einer Mischung aus Ferrit und/oder Bainit, von denen eines die dominante Phase ist, und einer dritten Phase ist, die Restaustenit mit einem Volumenanteil zwischen 3 % und 50 % aufweist, und der Mittelwert σ_{dyn} (MPa) der Fließspannung im Bereich von 3 - 10 % der Vergleichsformänderung bei Verformung in einem Formänderungs-Geschwindigkeitsbereich von 5×10^2 - 5×10^3 (1/s) nach Vorverformung von über 0 % und höchstens 10 % der Vergleichsformänderung die Ungleichung $\sigma_{dyn} \geq 0,766 \times TS + 250$ im Hinblick auf die maximale Spannung TS (MPa) im statischen Zugversuch in der Messung in einem Formänderungs-Geschwindigkeitsbereich von 5×10^{-4} - 5×10^{-3} (1/s) ohne Verformung erfüllt, und der Kaltverfestigungskoeffizient zwischen 1 % und 5 % einer Formänderung mindestens 0,080 beträgt,

wobei eine stranggegossene Bramme, die in Gewichtsprozent 0,03 % bis 0,3 % C, eine Gesamtmenge von 0,5 % bis 3,0 % Si und/oder Al, optional eine Gesamtmenge von 0,5 % bis 3,5 % Mn, Ni, Cr, Cu und/oder Mo und ferner optional Nb, Ti, V, P, B, Ca und/oder SEM mit einer Gesamtmenge von höchstens 0,3 % Nb, Ti und/oder V, höchstens 0,3 % P, höchstens 0,01 % B, optional 0,0005 % bis 0,01 % Ca und 0,005 % bis 0,05 % SEM sowie als Rest Fe und unvermeidliche Verunreinigungen enthält, direkt vom Gießen einem Warmwalzschritt zugeführt oder nach Nachwärmen warmgewalzt wird, die gewickelten warmgewalzten Stahlbleche nach Warmwalzen säuregebeizt und dann kaltgewalzt werden, und während des Glühens in einem kontinuierlichen Glühschritt zur Herstellung des Endprodukts für 10-sekündiges bis 3-minütiges Glühen bei einer Glüh­temperatur (T_o) von $0,1 \times (Ac_3 - Ac_1) + Ac_1$ °C bis $Ac_3 + 50$ °C gefolgt wird von Abkühlen mit der primären Abkühlungsgeschwindigkeit von 1 - 10 °C/s auf eine sekundäre Abkühlungsstarttemperatur T_q im Bereich von 550 - 720 °C und dann von Abkühlen mit der sekundären Abkühlungsgeschwindigkeit von 10 - 200 °C/s auf eine sekundäre Abkühlungsstoptemperatur T_e im Bereich von der Temperatur ($T_{em} - 100$ °C) bis T_{em} , wonach das Stahlblech auf eine Temperatur T_{oa} erhitzt wird, die höher als T_e und bis zu 500 °C ist, und für 15 Sekunden bis 20 Minuten vor Abkühlen auf Raumtemperatur bei dieser Temperatur gehalten wird, und die Vorverformung am kaltgewalzten Stahlblech durchgeführt wird, wobei T_{em} die Starttemperatur der Martensitumwandlung für den Restaustenit bei der sekundären Abkühlungsstarttemperatur T_q und durch $T_{em} = T_1 - T_2$ definiert ist, wobei:

$$T_1 = 561 - 33 \times \{Mn\% + (Ni + Cr + Cu + Mo)/2\},$$

$$T_2 = 474 \times (Ac_3 - Ac_1) \times C / (T_o - Ac_1), \text{ wenn } Ceq^* = (Ac_3 - Ac_1) \times C / (T_o - Ac_1) + (Mn + Si/4 + Ni/7 + Cr + Cu + 1,5Mo)/6 \text{ größer als } 0,6 \text{ ist, und}$$

$$T_2 = 474 \times (Ac_3 - Ac_1) \times C / \{3 \times (Ac_3 - Ac_1) \times C + [(Mn + Si/4 + Ni/7 + Cr + Cu + 1,5Mo)/2 - 0,85] \times (T_o - Ac_1)\},$$

wenn Ceq^* höchstens 0,6 beträgt,
wobei:

$$Ac_1 = 723 - 0,7 \times Mn\% - 16,9 \times Ni\% + 29,1 \times Si\% + 16,9 \times Cr\%,$$

$$Ac_3 = 910 - 203 \times (C\%)^{1/2} - 15,2 \times Ni\% + 44,7 \times Si\% + 104 \times V\% + 31,5 \times Mo\% - 30 \times Mn\% - 11 \times Cr\% - 20 \times Cu\% + 70 \times P\% + 40 \times Al\% + 400 \times Ti\%.$$

Revendications

1. Procédé de production d'une tôle d'acier laminée à chaud à haute résistance et contrainte d'écoulement élevée pendant la déformation dynamique, dans lequel la microstructure de la tôle d'acier laminée à chaud est une microstructure composite d'un mélange de ferrite et/ou de bainite, dont l'une ou l'autre est la phase dominante, et d'une troisième phase comprenant de l'austénite retenue d'une part de volume entre 3 % et 50 %, et la valeur moyenne σ_{dyn} (MPa) de la contrainte d'écoulement dans la plage de 3 à 10 % d'une déformation équivalente en cas de déformation dans une plage de vitesse de déformation de 5×10^2 à 5×10^3 (1/s) après une déformation préliminaire

supérieure à 0 % et inférieure ou égale à 10 % de la déformation équivalente, satisfait l'inégalité : $\sigma_{dyn} \geq 0,766 \times TS + 250$, exprimé en termes de la contrainte maximale TS (MPa) lors de l'essai de traction statique, mesurée dans une plage de vitesse de déformation de 5×10^{-4} à 5×10^{-3} (1/s) sans déformation, et le coefficient d'écrouissage entre 1 % et 5 % d'une déformation correspond au moins à 0,080, dans lequel une plaque coulée en continu contenant en termes de pourcentage en poids, C : 0,03 % à 0,3 %, l'un ou l'autre ou bien les deux de Si et Al en quantité totale de 0,5 % à 3,0 %, en option un ou plusieurs sélectionnés parmi Mn, Ni, Cr, Cu et Mo en quantité totale de 0,5 % à 3,5 %, en outre en option un ou plusieurs sélectionnés parmi Nb, Ti, V, P, B, Ca et REM, avec un ou plusieurs sélectionnés parmi Nb, Ti et V en quantité totale de pas plus de 0,3 %, P : pas plus de 0,3 %, B : pas plus de 0,01 %, en option Ca : 0,0005 % à 0,01 % et REM : 0,005 % à 0,05 %, le reste étant Fe et des impuretés inévitables, est amenée directement de la coulée à une étape de laminage à chaud, ou est laminée à chaud après réchauffage, le laminage à chaud est achevé à une température de finition de $Ar_3 - 50^\circ C$ à $Ar_3 + 120^\circ C$, le laminage à chaud est effectué de telle sorte que le paramètre métallurgique A satisfait les inégalités (1) et (2) ci-dessous, la vitesse de refroidissement moyenne consécutive au niveau de la table de sortie est d'au moins $5^\circ C/s$, et le cintrage est réalisé de telle sorte que la relation entre ledit paramètre métallurgique A et la température de cintrage (CT) satisfait les inégalités (3) et (4) ci-dessous :

$$9 \leq \log A \leq 18 \quad (1)$$

$$\Delta T \geq 21 \times \log A - 178 \quad (2)$$

$$CT \leq 6 \times \log A + 312 \quad (3)$$

$$CT \leq 350^\circ C \quad (4)$$

et la pré-déformation est réalisée sur la tôle en acier laminée à chaud, où le paramètre métallurgique A est exprimé par l'équation suivante :

$$A = \varepsilon^* \times \exp\{(75282 - 42745 \times C_{eq}) / [1,978 \times (FT + 273)]\}$$

où :

FT : température de finition ($^\circ C$)

C_{eq} : équivalents en carbone = $C + Mn_{eq}/6$ (%)

Mn_{eq} : équivalents en manganèse = $Mn + (Ni + Cr + Cu + Mo) / 2$ (%)

ε^* : vitesse de déformation de passage final (s^{-1})

$$\varepsilon^* = (v / \sqrt{R \times h_1}) \times (1 / \sqrt{r}) \times \ln \{1 / (1 - r)\}$$

h_1 : épaisseur de tôle d'approche de passage final

h_2 : épaisseur de tôle en sortie de passage final

$r : (h_1 - h_2) / h_1$

R : rayon de laminage

v : vitesse de sortie de passage final

ΔT : température de finition (température de sortie de passage final de finition) - température d'approche de finition (température d'approche du premier passage de finition)

$$Ar_3 : 901 - 325 C\% + 33 Si\% - 92 Mn_{eq}.$$

2. Procédé de production d'une tôle d'acier laminée à froid à haute résistance et contrainte d'écoulement élevée pendant la déformation dynamique, dans lequel la microstructure de la tôle d'acier laminée à froid est une microstructure composite d'un mélange de ferrite et/ou bainite, dont l'une ou l'autre est la phase dominante, et d'une troisième phase comprenant de l'austénite retenue d'une part de volume entre 3 % et 50 %, et la valeur moyenne σ_{dyn} (MPa) de la contrainte d'écoulement dans la plage de 3 à 10 % d'une déformation équivalente en cas de déformation dans une plage de vitesse de déformation de 5×10^2 à 5×10^3 (1/s) après une déformation préliminaire supérieure à 0 % et inférieure ou égale à 10 % de la déformation équivalente, satisfait l'inégalité : $\sigma_{dyn} \geq 0,766 \times TS + 250$, exprimé en termes de la contrainte maximale TS (MPa) lors de l'essai de traction statique, mesurée dans une plage de vitesse de déformation de 5×10^{-4} à 5×10^{-3} (1/s) sans déformation, et le coefficient d'écrouissage entre 1 % et 5 % d'une déformation correspond au moins à 0,080, dans lequel une plaque coulée en continu contenant en termes de pourcentage en poids, C : 0,03 % à 0,3 %, l'un ou l'autre ou bien les deux de Si et Al en quantité totale de 0,5 % à 3,0 %, en option un ou plusieurs sélectionnés parmi Mn, Ni, Cr, Cu et Mo en quantité totale de 0,5 % à 3,5 %, et en outre en option un ou plusieurs sélectionnés parmi Nb, Ti, V, P, B, Ca et REM, avec un ou plusieurs sélectionnés parmi Nb, Ti et V en quantité totale de pas plus de 0,3 %, P : pas plus de 0,3 %, B : pas plus de 0,01 %, en option Ca : 0,0005 % à 0,01 % et REM : 0,005 % à 0,05 %, le reste étant Fe et des impuretés inévitables, est amenée directement de la coulée à une étape de laminage à chaud, ou est laminée à chaud après réchauffage, les tôles d'acier enroulés laminées à chaud après le laminage à chaud sont soumises à un décapage acide et ensuite laminées à froid, et pendant le recuit au cours d'une étape de recuit continu pour la préparation du produit final, un recuit de 10 secondes à 3 minutes à une température de recuit (T_o) de $0,1 \times (Ac_3 - Ac_1) + Ac_1$ °C à $Ac_3 + 50$ °C est suivi d'un refroidissement à la vitesse de refroidissement primaire de 1 à 10 °C/s jusqu'à une température de début de refroidissement secondaire T_q dans la plage de 550 à 720 °C, et ensuite par refroidissement à la vitesse de refroidissement secondaire de 10 à 200 °C/s jusqu'à une température d'arrêt de refroidissement secondaire T_e dans la plage allant de la température ($T_{em} - 100$ °C) à T_{em} , après quoi la tôle d'acier est chauffée et maintenue à une température T_{oa} supérieure à T_e et jusqu'à 500 °C pendant 15 secondes à 20 minutes avant un refroidissement à la température ambiante, et la pré-déformation est réalisée sur la tôle en acier laminée à froid, où T_{em} est la température de début de transformation martensitique pour l'austénite retenue à la température de début de refroidissement secondaire T_q et définie par $T_{em} = T_1 - T_2$,
où :

$$T_1 = 561 - 33 \times \{Mn\% + (Ni + Cr + Cu + Mo)/2\},$$

$$T_2 = 474 \times (Ac_3 - Ac_1) \times C / (T_o - Ac_1) \text{ lorsque } C_{eq}^* = (Ac_3 - Ac_1) \times C / (T_o - Ac_1) + (Mn + Si/4 + Ni/7 + Cr + Cu + 1,5Mo)/6$$

est supérieur à 0,6, et

$$T_2 = 474 \times (Ac_3 - Ac_1) \times C / \{3 \times (Ac_3 - Ac_1) \times C + [(Mn + Si/4 + Ni/7 + Cr + Cu + 1,5Mo)/2 - 0,85] \times (T_o - Ac_1)\} \text{ lorsque } C_{eq}^* \text{ est } 0,6 \text{ ou inférieur,}$$

où :

$$Ac_1 = 723 - 0,7 \times Mn\% - 16,9 \times Ni\% + 29,1 \times Si\% + 16,9 \times Cr\%,$$

EP 0 952 235 B2

$$A_{C_3} = 910 - 203 \times (C\%)^{1/2} - 15,2 \times Ni\% + 44,7 \times Si\% + 104 \\ \times V\% + 31,5 \times Mo\% - 30 \times Mn\% - 11 \times Cr\% - 20 \times Cu\% + 70 \times P\% + \\ 40 \times Al\% + 400 \times Ti\%.$$

10

15

20

25

30

35

40

45

50

55

Fig.1

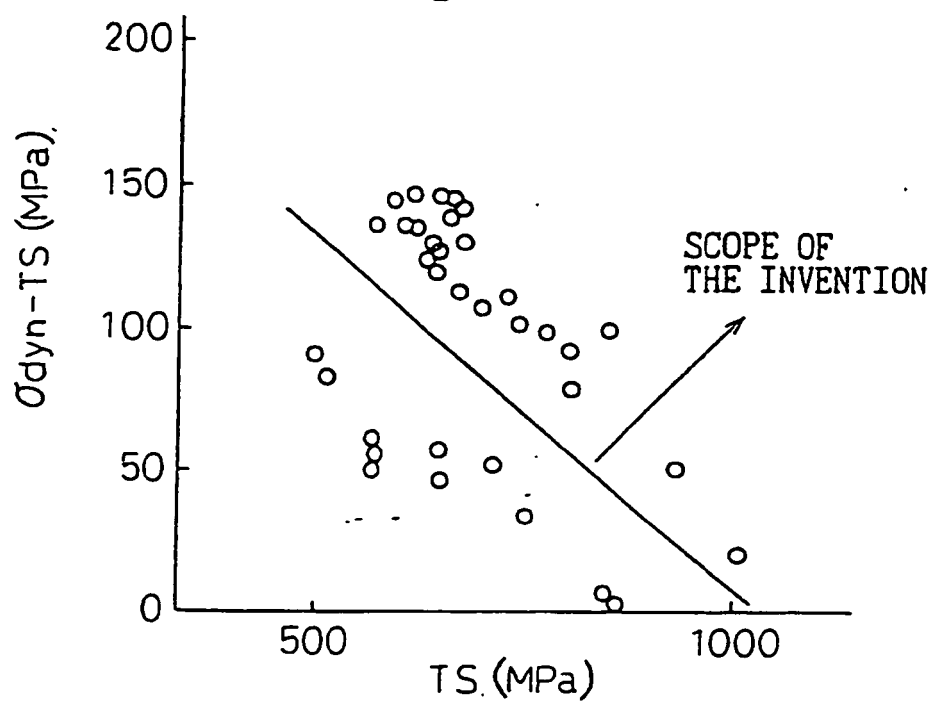


Fig.2

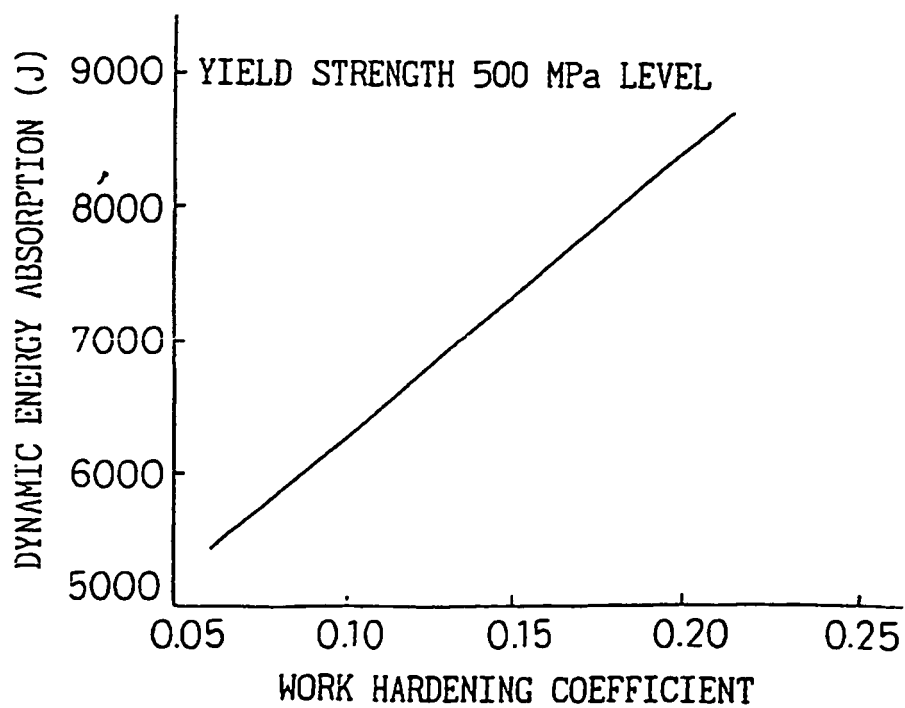


Fig.3

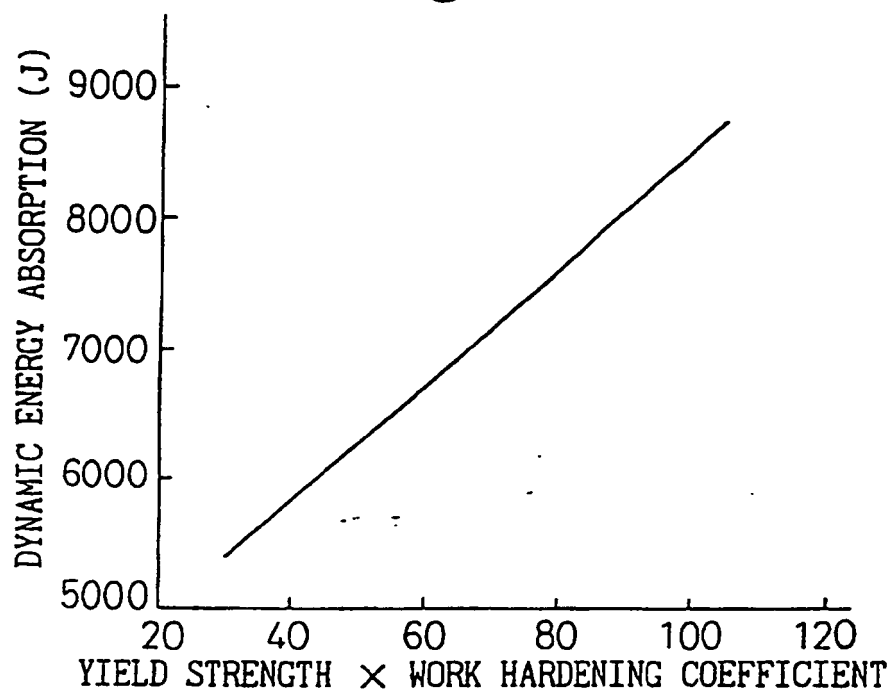


Fig.4 a

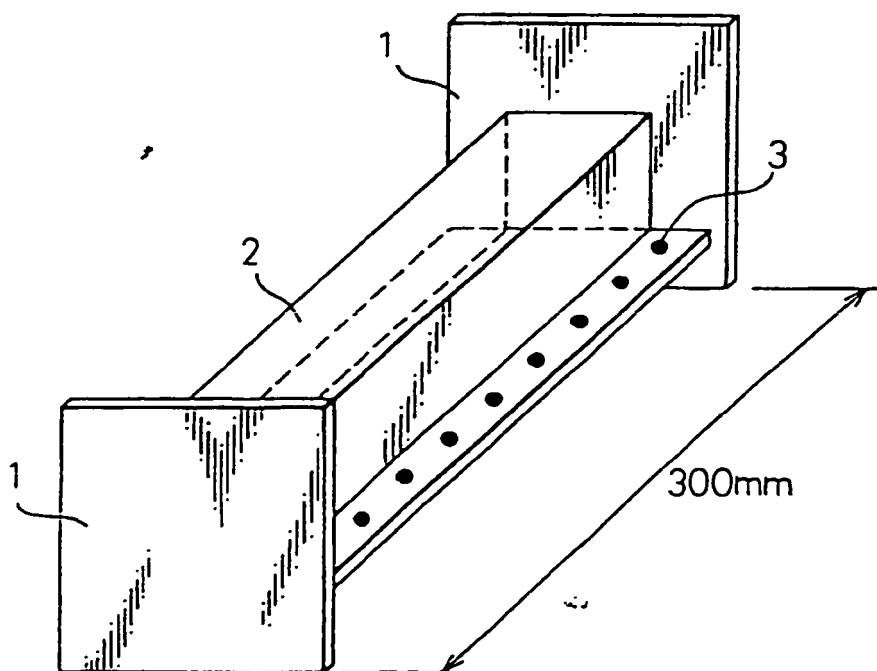


Fig.4 b

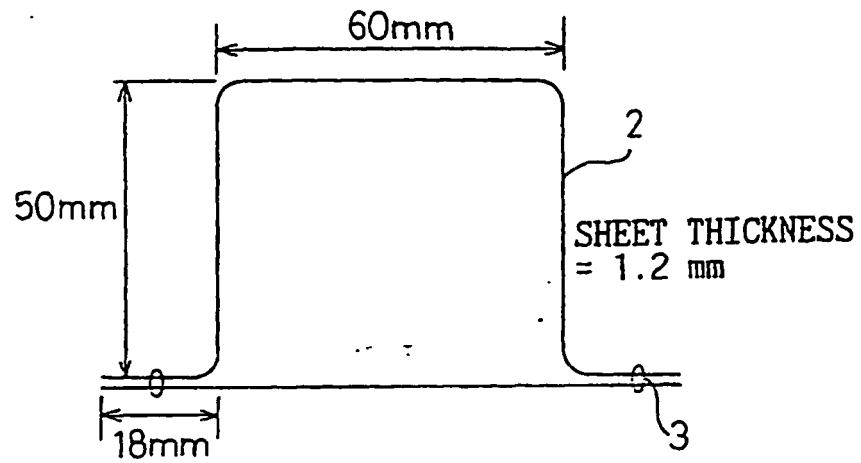


Fig.4 c

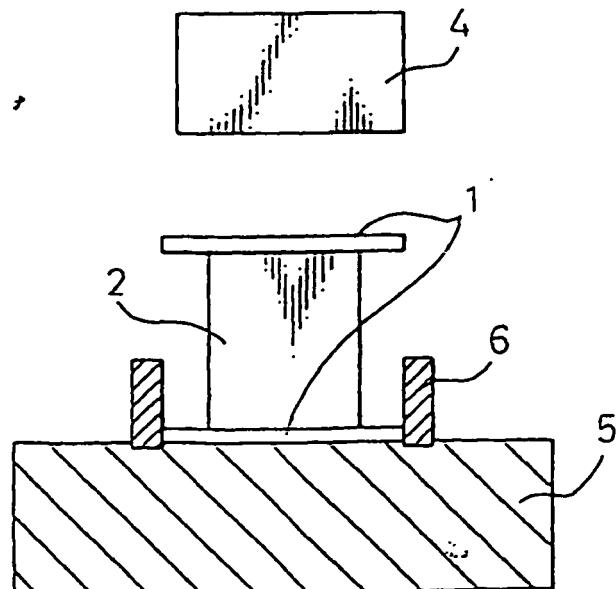


Fig. 5

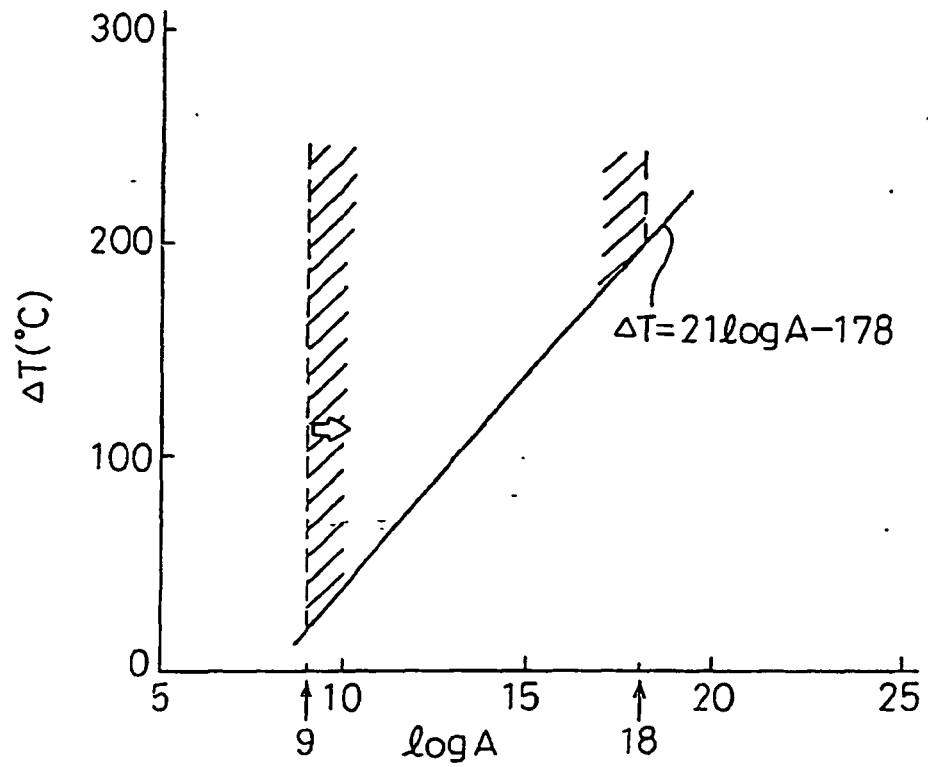


Fig. 6

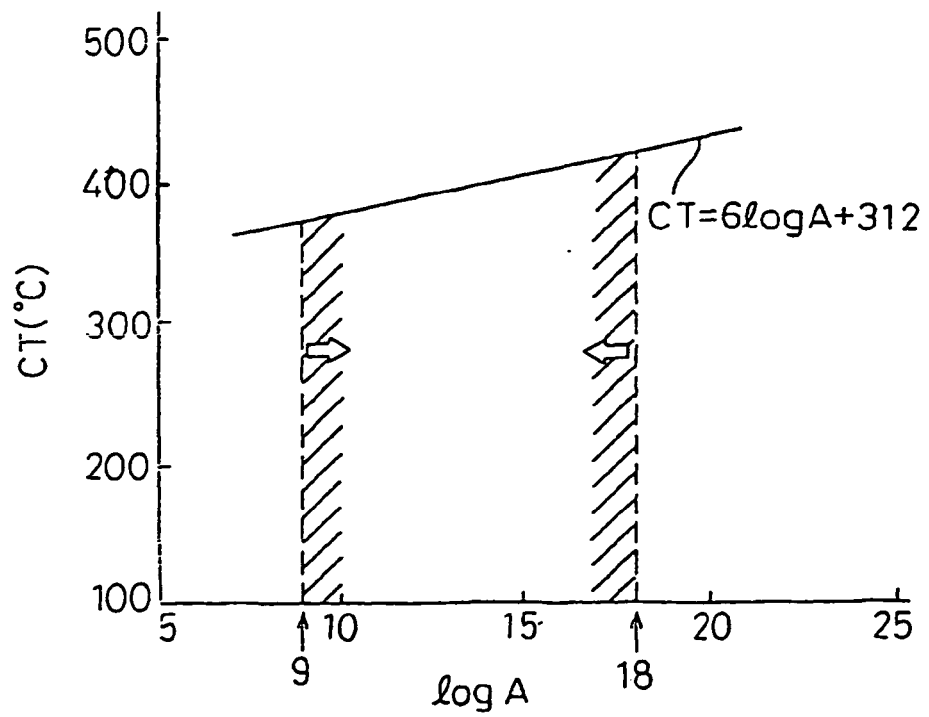


Fig. 7


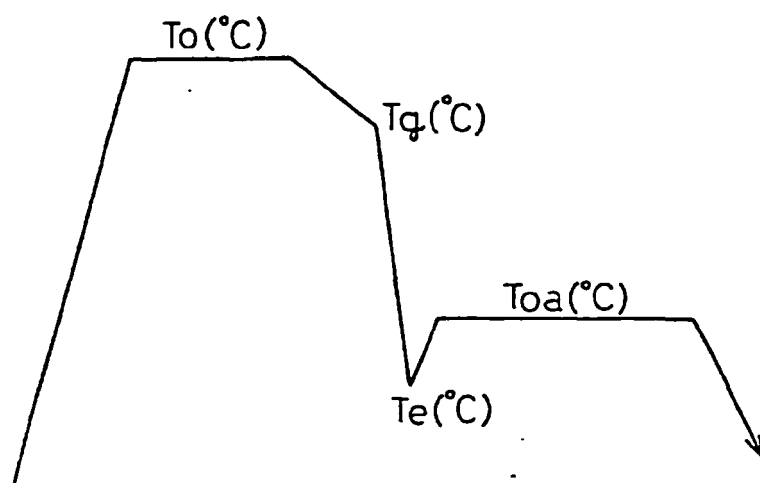


Fig. 8

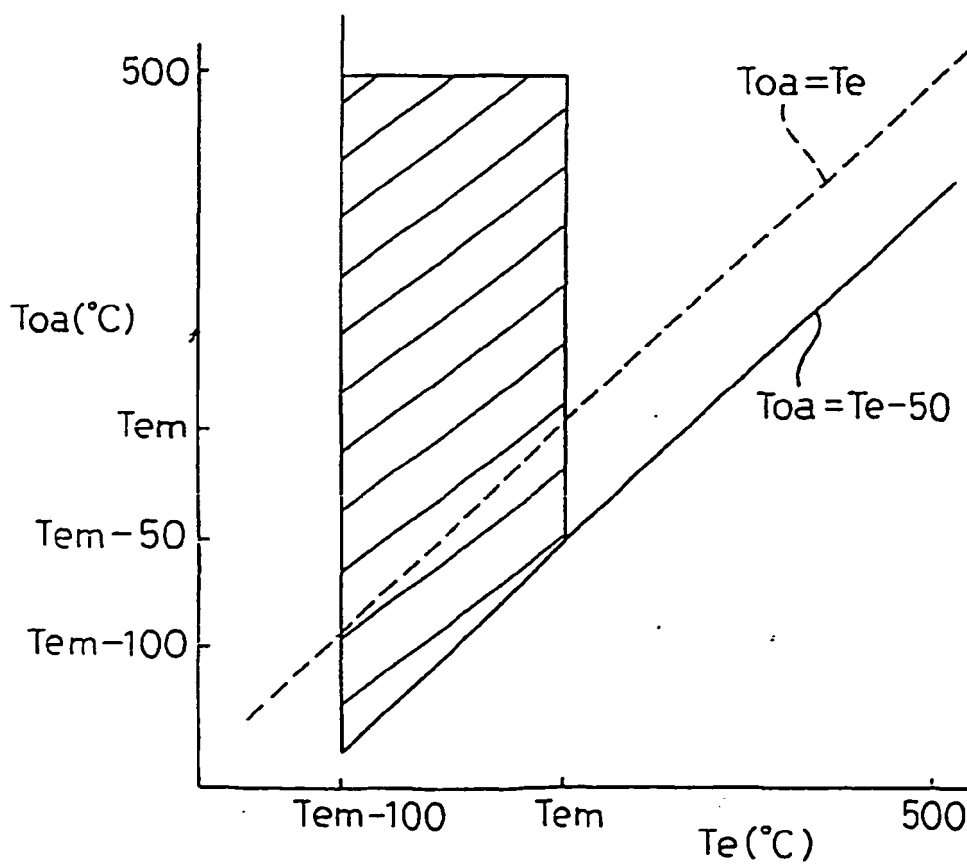

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 7018372 A [0005]
- EP 0586704 A [0007]
- EP 0295500 A [0008]
- EP 0707087 A [0009]
- JP 59219473 A [0055]
- JP 3351209 A [0056]

Non-patent literature cited in the description

- CAMP-ISIJ, 1996, vol. 9, 1112-1115 [0004]
- *the Journal of The Iron and Steel Institute*, 1968, vol. 206, 60 [0025]