



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 971 184 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
11.02.2004 Bulletin 2004/07

(51) Int Cl.7: **F25B 41/06**, F25B 9/00,
G05D 16/06

(21) Application number: **99113518.7**

(22) Date of filing: **05.07.1999**

(54) **Pressure control valve**

Druckregelventil

Robinet régulateur de pression

(84) Designated Contracting States:
DE FR GB

(30) Priority: **07.07.1998 JP 19206998**
09.02.1999 JP 3177699

(43) Date of publication of application:
12.01.2000 Bulletin 2000/02

(73) Proprietors:
• **Denso Corporation**
Kariya-city, Aichi-pref., 448-8661 (JP)
• **Fujikoki Corporation**
Tokyo 158-0082 (JP)

(72) Inventors:
• **Tomatsu, Yoshitaka**
Kariya-shi, Aichi 448-8661 (JP)

• **Ise, Sadatake, c/o Fujikoki Corporation**
Tokyo 158-0082 (JP)

(74) Representative:
Klingseisen, Franz, Dipl.-Ing. et al
Patentanwälte,
Dr. F. Zumstein,
Dipl.-Ing. F. Klingseisen,
Postfach 10 15 61
80089 München (DE)

(56) References cited:
EP-A- 0 438 625 **EP-A- 0 786 632**
EP-A- 0 837 291 **DE-A- 19 631 914**
US-A- 3 638 446 **US-A- 5 245 836**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 971 184 B1

Description

[0001] The present invention relates to a pressure control valve which controls a refrigerant pressure at an outlet side of a radiator based on a refrigerant temperature at the outlet side of the radiator, and it is preferably applicable to a vapor compression type refrigeration cycle in which carbon dioxide (CO₂) is used as a refrigerant.

[0002] EP-A-O 837 291 discloses a pressure control valve for a vapor compression type refrigeration cycle having a radiator for radiating heat of compressed refrigerant, an evaporator for evaporating refrigerant, and a heat exchanger for performing heat exchange, said pressure control valve being located between the outlet side of said radiator and an inlet side of said evaporator. Said pressure control valve comprises: a temperature sensing portion for changing its internal pressure according to a refrigerant temperature at the outlet side of said radiator, a valve port for being controlled according to the refrigerant temperature at the outlet side of said radiator to control a refrigerant pressure at the outlet side of said radiator, and a control valve main body having said temperature sensing portion for adjusting an opening degree of said valve port by reacting mechanically to said internal pressure change of said temperature sensing portion. Said pressure control valve further comprises a casing for accommodating said control valve main body, a temperature sensing chamber formed in said casing for accommodating said temperature sensing portion and for communicating with an inlet side of said heat exchanger, and a pressure introduction passage formed in said casing for introducing a refrigerant from said heat exchanger to an upstream side of said valve port in a refrigerant flowing direction.

[0003] DE-A-196 31 914 discloses a known vapor compression type refrigeration cycle having a radiator for radiating heat of compressed refrigerant, an evaporator for evaporating refrigerant and a heat exchanger for performing heat exchange between the refrigerant at an outlet side of said evaporator and the refrigerant at an outlet side of said radiator.

[0004] Hitherto, there has been known means for attempting to improve a refrigeration performance by means of lowering enthalpy of the refrigerant at an inlet side of an evaporator by performing heat exchange between the refrigerant at an outlet side of the evaporator and that at the outlet side of the radiator.

[0005] Furthermore, as a control valve for adjusting a valve port based on the refrigerant temperature at the outlet side of the radiator, there has been known an invention disclosed in JP-Shou 55-54777 A.

[0006] According to the control valve disclosed in the above prior art, since a temperature sensing portion for sensing the refrigerant temperature at the outlet side of the radiator and the valve port whose opening degree is to be adjusted according to an internal pressure of the temperature sensing portion are provided in the same

flow passage in series, there is a problem that the refrigeration performance cannot be improved by the aforementioned means.

[0007] In order to solve this problem, as disclosed in JP Hei 5-203291 A, there is considered means in which the temperature sensing portion is made into a temperature sensing cylinder using a capillary tube to detect the refrigerant temperature at the outlet side of the radiator. However, in this means, since a heat sensed by the temperature sensing cylinder transmits to a control chamber at a diaphragm side through the capillary tube, the temperature change in the control chamber is lagged with respect to a refrigerant temperature change at the outlet side of the radiator. Therefore, by this means, a response characteristic of the control valve with respect to the refrigerant temperature change at the outlet side of the radiator (hereafter, this response characteristic is referred to as temperature response characteristic) is compromised, so that it is impossible to suitably control the refrigeration cycle.

[0008] Further, since it is necessary to assemble the capillary tube and the temperature sensing cylinder to the outlet side of the radiator, the manufacturing processes for the refrigeration cycle is increased.

[0009] The present invention is made in light of the above-mentioned problems, and it is an object of the present invention to provide a pressure control valve suitable for the refrigeration cycle having a heat exchanger for performing heat exchange between the refrigerant at the outlet side of the evaporator and that at the outlet side of the radiator.

[0010] This object is solved by the features cited in claim 1.

[0011] According to one aspect of a pressure control valve of the present invention, a temperature sensing portion is located in a casing for accommodating a control valve main body, and a temperature sensing chamber communicating with an inlet side of a heat exchanger and an introduction passage for introducing a refrigerant flowing from the heat exchanger to an upstream side of a valve port in a refrigerant flow are formed in the casing.

[0012] Accordingly, it is possible to reduce a lag of temperature change in the temperature sensing portion with respect to a refrigeration temperature change at an outlet side of a radiator in comparison with means for sensing a refrigerant temperature at the outlet side of the radiator by, as described in Japanese Patent Application Laid-Open No. 5-203291, making the temperature sensing portion into the temperature sensing cylinder using the capillary tube.

[0013] Therefore, since it is possible to improve the temperature response characteristic of a pressure control valve, the refrigeration cycle can be suitably controlled.

[0014] Further, since it is not necessary to assemble the capillary tube and the temperature sensing cylinder to the outlet side of the radiator like Japanese Patent

Application Laid-Open No. 5-203291, it is possible to reduce the number of processes for assembling the refrigeration cycle (the number of manufacturing processes), so that it is possible to attempt to reduce a manufacturing prime cost of the refrigeration cycle.

[0015] As described above, by the pressure control valve according to the present invention, it is possible to suitably control the refrigeration cycle while attempting to reduce a manufacturing prime cost of the refrigeration cycle.

[0016] According to the present invention, the pressure control valve includes: a casing in which there are formed a first passage for communicating an outlet side of a radiator with an inlet side of a heat exchanger, and a second passage for introducing a refrigerant flowing from the heat exchanger to an upstream side of a valve port in a refrigerant flow; a temperature sensing portion whose internal pressure changes according to a temperature of the refrigerant flowing through the first passage; and a valve body which penetrates through a separation portion for separating the first and second passages and adjusts an opening degree of the valve port by reacting mechanically to an internal pressure change of the temperature sensing portion.

[0017] Accordingly, it is possible to suitably control the refrigeration cycle while attempting to reduce a manufacturing prime cost of the refrigeration cycle.

[0018] Further, according to the present invention, the heat sensing portion is prevented from being cooled by providing heat insulating members for preventing a heat transfer between the temperature sensing portion and the second passage, so that it is possible to surely control the refrigerant pressure at the outlet side of the radiator.

[0019] other features and advantages of the present invention will be appreciated, as well as methods of operation and the function of the related parts, from a study of the following detailed description, the appended claims, and the drawings, all of which form a part of this application. In the drawings:

Fig. 1 is a sectional view of a pressure control valve according to a first embodiment of the present invention;

Fig. 2 is Mollier diagram of carbon dioxide according to a first embodiment of the present invention;

Fig. 3 is a sectional view of a pressure control valve according to a second embodiment of the present invention;

Fig. 4 is a sectional view of a pressure control valve according to a third embodiment of the present invention;

Fig. 5 is a sectional view of a pressure control valve according to a fourth embodiment of the present invention;

Fig. 6 is a sectional view of a pressure control valve according to a fifth embodiment of the present invention; and

Fig. 7 is a sectional view showing a modified example of the pressure control valve according to the fifth embodiment.

5 DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0020] The pressure control valve is used in a refrigeration cycle in which carbon dioxide (CO₂) is used as a refrigerant (hereafter, referred to as CO₂ cycle), and Fig. 1 is a schematic illustration of the CO₂ cycle.

[0021] In Fig. 1, a compressor 100 compresses the refrigerant (CO₂), and a radiator (gas cooler) 200 cools the refrigerant compressed by the compressor 100. And, at an outlet side of the radiator 200, there is provided a pressure control valve 300 for controlling an outlet side pressure of the radiator 200 based on a refrigerant temperature at an outlet side of the radiator 200, and the pressure control valve body 300 also functions as a pressure reducing device for reducing pressure of the high pressure refrigerant. Incidentally, details of the pressure control valve 300 will be described later.

[0022] An evaporator 400 evaporates the (liquid phase) refrigerant whose pressure has been reduced by the pressure control valve 300. An accumulator (gas/liquid separation means) 500 separates the refrigerant flowing out from the evaporator 400 into a gas phase refrigerant and a liquid phase refrigerant, thereby causing the gas phase refrigerant to flow to a suction side of the compressor 100, and for storing an excessive refrigerant in the CO₂ cycle.

[0023] An internal heat exchanger (hereafter, abbreviated as heat exchanger) 600 executes heat exchange between the refrigerant at an outlet side of the evaporator 400 flowed out from the accumulator 500 and the refrigerant at the outlet side of the radiator 200. Enthalpy of the refrigerant at an inlet side of the evaporator 400 is lowered by the heat exchanger 600, and a refrigeration performance of the CO₂ cycle is improved as shown in Fig. 2.

[0024] Next, the pressure control valve 300 will now be explained based on Fig. 1.

[0025] A control valve main body (element) 310 has a temperature sensing portion 311 whose internal pressure changes according to refrigerant temperature at the outlet side of the radiator 200, and adjusts an opening degree of an valve port 312 of the pressure control valve 300 by reacting mechanically to a change in the internal pressure of the temperature sensing portion 311. A casing 330 accommodates the control valve main body 310.

[0026] Incidentally, the casing 330 is composed of a casing main body portion 332 to which the control valve main body 310 is fixed and in which a first refrigerant outlet 331 connected to the inlet side of the evaporator 400 is formed, and of a lid body 334 which closes an opening part for inserting/incorporating the control valve main body 310 to the casing main body portion 332 and

in which a first refrigerant inlet 333 connected to the outlet side of the radiator 200 is formed.

[0027] And, in the casing 330 (casing main body portion 332), there are formed a second refrigerant outlet 335 connected to a refrigerant inlet side of the heat exchanger 600 and a second refrigerant inlet 336 connected to a refrigerant outlet side of the heat exchanger 600. And, the second refrigerant outlet 335 communicates with the first refrigerant inlet 333, and the second refrigerant inlet 336 communicates with an upstream side of the valve port 312 of the control valve main body 310 in a refrigerant flow.

[0028] Incidentally, hereafter, a refrigerant passage extending from the first refrigerant inlet 333 to the second refrigerant outlet 335 is referred to as a first refrigerant passage (temperature sensing chamber) 337, and a refrigerant passage extending from the second refrigerant inlet 336 to the valve port 312 is referred to as a second refrigerant passage 338.

[0029] By the way, the temperature sensing portion 311 of the control valve main body 310 is positioned in the first refrigerant passage 337 and senses a refrigerant temperature at the outlet side of the radiator 200. The temperature sensing portion 311 comprises a film-like diaphragm (pressure responsive member) 311a, a diaphragm cover 311b for forming a sealed space (control chamber) 311c together with the diaphragm 311a, and a diaphragm support member 311d for fixing the diaphragm 311a so as to interpose the diaphragm 311a together with the diaphragm cover 311b.

[0030] Incidentally, in the sealed space 311c, the refrigerant (CO_2) is filled and sealed under a density (in this embodiment, about 625 kg/m^3) in the range from a saturated liquid density at its temperature of 0°C of the refrigerant to a saturated liquid density at its critical point of the refrigerant. Pressure in the first refrigerant passage 337 is introduced via a pressure introduction passage 311e to an opposite side to the sealed space 311c with respect to the diaphragm 311a.

[0031] Further, 311f is a filling pipe for enclosing the refrigerant into the temperature sensing portion 311 (sealed space 311c). The filling pipe 311f is made of a metal having high thermal conductivity, such as copper or the like, in order to match the refrigerant temperature in the sealed space 311c to that in the first refrigerant passage 337 without time lag.

[0032] A needle valve body 313 (hereafter, abbreviated as valve body) adjusts an opening degree of the valve port 312. The valve body 313 is connected to the diaphragm 311a to move in a direction in which the opening degree of the valve port 312 is reduced mechanically driven by an internal pressure rise in the sealed space 311c.

[0033] A spring 314 (elastic body) applies an elastic force to the valve body 313 in the direction along which the opening degree of the valve port 312 is reduced. The valve body 313 is movable responding to a balance between the elastic force of the spring 314 (hereafter, this

elastic force is referred to as valve closing force) and a force owing to a differential pressure between inside and outside of the sealed space 311c (hereafter, this force is referred to as valve opening force).

[0034] An initial set load for the spring 314 is adjusted by rotating an adjusting nut 315. The initial set load (elastic force under a state that the valve port 312 has been closed) is set such that the refrigerant has a predetermined supercooling degree (in this embodiment, about 10°C) in a condensation region lower than the critical pressure. Concretely, it is about 1 [MPa] calculated in terms of pressure in the sealed space 311c at the initial set load. Incidentally, a spring washer 315a prevents the spring 314 from directly contacting the adjusting nut 315 when the adjusting nut 315 is rotated.

[0035] According to the above described structures, the pressure control valve 300 controls, in a supercritical region, a refrigerant pressure at the outlet side of the radiator 200 based on a refrigerant temperature at the outlet side of the radiator 200 so as to comply with an isopycnic line of 625 Kg/m^3 , and controls, in a condensation region, a refrigerant pressure (opening degree of the pressure control valve 300) at the outlet side of the radiator 200 such that a supercooling degree of the refrigerant at the outlet side of the radiator 200 becomes a predetermined value.

[0036] A valve seat main body 317 of the control valve main body 310 and a valve body holder 316 described later separate the first refrigerant passage 337 from the second refrigerant passage 338, and further constitute a partition wall portion for preventing the refrigerant at a side of the refrigerant passage 338 from being heated by the refrigerant at a side of the first refrigerant passage 337.

[0037] Incidentally, since the valve body 313 extends from side of the first refrigerant passage 337 to the side of the second refrigerant passage 338 (valve port 312) penetrating through the valve body holder 316 for guiding a sliding movement of the valve body 313, a clearance (pressure loss) between the valve body 313 and the valve body holder 316 must be limited to such a degree that a large amount of refrigerant does not flow into the second refrigerant passage 338 from the first refrigerant passage 337 via this clearance.

[0038] Next, characteristics of this valve will now be described.

[0039] In the pressure control valve 300, since the temperature sensing portion 311 is located in the first refrigerant passage (temperature sensing chamber) 337, it is possible to reduce a timelag of temperature change in the sealed space (control chamber) 311c with respect to a refrigerant temperature change at the outlet side of the radiator 200 in comparison with means for sensing a refrigerant temperature at the outlet side of the radiator 200 by, as recited in Japanese Patent Application Laid-Open No. Hei 5-203291, making the temperature sensing portion into a temperature sensing cylinder using a capillary tube.

[0040] Therefore, since the temperature response characteristic of the pressure control valve 300 is improved, it is possible to suitably control the CO₂ cycle.

[0041] Further, in the sealed space 311c, since the refrigerant (CO₂) is enclosed under a density (in this embodiment, about 625 Kg/m³) in the range from a saturated liquid density at its temperature of 0°C to a saturated liquid density at its critical point, it is possible to improve the refrigeration performance of the CO₂ cycle while keeping a coefficient of performance of the CO₂ cycle high.

[0042] Further, since it is not necessary to assemble the capillary tube and the temperature sensing cylinder to the outlet side of the radiator as recited in Japanese Patent Application Laid-Open No. Hei 5-203291, it is possible to reduce the number of processes for assembling the CO₂ cycle (the number of manufacturing processes), so that it is possible to reduce a manufacturing prime cost of the CO₂ cycle.

[0043] In the above design, since the control valve main body 310 (valve seat main body 317) is screw-fixed to the casing main body 332 in which the second refrigerant outlet 335 and the second refrigerant inlet 336 are formed, it is necessary to rotate the control valve main body 310 with respect to the casing main body 332 under a state that the control valve main body 310 is inserted into the casing main body 332, so that a workability for assembling the control valve main body 310 to the casing main body 332 may be bad.

[0044] As shown in Fig. 3, there is adopted a structure in which the control valve main body 310 is screw-fixed to the lid body 334 for closing the casing main body 332, and the lid body 334 to which the control valve main body 310 has been fixed is screw-fixed to the casing main body 332. Incidentally, in this embodiment, the first refrigerant inlet 333 is formed in the casing main body 332, and the first refrigerant outlet 331 is formed in the lid body 334.

[0045] Accordingly, since it is not necessary to rotate the control valve main body 310 under the state that the control valve main body 310 is inserted into the casing main body 332 as described in the first embodiment, the workability for assembling the control valve main body 310 is improved.

[0046] Therefore, since the workability for assembling the pressure control valve 300 is improved, it is possible to attempt to reduce a manufacturing prime cost of the pressure control valve 300.

[0047] In Figure 1, a pressure in the first refrigerant passage 337 is introduced to an opposite side to the sealed space (control chamber) 311c with respect to the diaphragm 311a. However, in case that a pressure loss at the heat exchanger 600 is sufficiently small, it may be constituted in such a manner that, as shown in Fig. 3, a pressure in the second refrigerant passage 338 is introduced to an opposite side to the sealed space (control chamber) 311c with respect to the diaphragm 311a. As shown in Fig. 4, the partition wall portion between the

first refrigerant passage 337 and the second refrigerant passage 338 may be an outer peripheral part of the diaphragm cover 311b.

[0048] Incidentally, in this case, since the refrigerant in the second refrigerant passage 338 is cooled by the heat exchanger 600, a temperature in the sealed space (control chamber) 331c becomes lower than a refrigerant temperature at the outlet side of the radiator 200, so that it is necessary to make an initial set load of the spring 314 larger than that in the above-mentioned embodiments. By way of parenthesis, an increased amount of the initial load is 0.2 - 0.5 [MPa] calculated in terms of pressure in the sealed space 311c, although it differs depending on the capacity of the heat exchanger 600.

[0049] In the above design, since a refrigerant which has passed through the first refrigerant passage 337 and has been cooled by the heat exchanger 600 (hereafter, this refrigerant is referred as low temperature refrigerant) flows being directed from the second refrigerant inlet 336 to the valve port 312, the internal temperature in the sealed space (control chamber) 311c becomes, owing to the low temperature refrigerant, lower than a refrigerant temperature at the outlet side of the radiator 200, so that there is a possibility that it becomes impossible to accurately control a refrigerant pressure at the outlet side of the radiator 200 (hereafter, this phenomenon is referred to as defective control owing to the low temperature refrigerant).

[0050] For this, although the defective control owing to the low temperature refrigerant is corrected by adjusting the initial load of the spring 314 in the above-mentioned embodiments, an object of the invention is to control more accurately the refrigerant pressure at the outlet side of the radiator 200 by reducing the defective control owing to the low temperature refrigerant.

[0051] That is, as shown in Fig. 5, in order to prevent a heat transfer from the temperature sensing portion 311 to the second refrigerant passage 338 side, heat insulating covers 401, 402 made of a material having low thermal conductivity, such as resin, rubber or the like, are fixed to the diaphragm cover 311b and the second refrigerant passage 338 side of the diaphragm support 311d by an adhesive respectively.

[0052] Accordingly, since it is possible to prevent a temperature in the sealed space (control chamber) 311c from becoming, owing to the low temperature refrigerant, lower than a refrigerant temperature at the outlet side of the radiator 200, it is possible to control more accurately the refrigerant pressure at the outlet side of the radiator 200.

[0053] Incidentally, a concave portion 402a is formed at its diaphragm support 311d side of the heat insulating cover 402, and a communication hole 402b is formed in a bottom part of the concave portion 402a, in order to prevent a choke at a pressure introduction port 311g for introducing a pressure of the low temperature refrigerant to the valve body 313 side of the diaphragm 311a.

[0054] The pressure control valve according to the

present invention has been applied to the pressure control valve 300 for the refrigeration cycle in which carbon dioxide is used as the refrigerant. However, the pressure control valve according to the present invention can be applied, of course, to a refrigeration cycle (supercritical refrigeration cycle) in which, for example, ethylene, ethane, nitrogen oxide or the like is used as the refrigerant and a pressure in the radiator 200 exceeds a critical pressure of the refrigerant, and also to a refrigeration cycle in which flon or the like is used as the refrigerant and a pressure in the radiator 200 is lower than a critical pressure of the refrigerant.

[0055] Furthermore, in the above-mentioned embodiments, the film-like diaphragm 311a is used as a pressure responsive member. However, the pressure responsive member may be composed of another one such as accordion-like bellows or the like.

[0056] Although the present invention has been described in connection with the preferred embodiments thereof with reference to the accompanying drawings, it is to be noted that various changes and modifications will be apparent to those skilled in the art. Such changes and modifications are to be understood as being included within the scope of the present invention as defined in the appended claims.

Claims

1. A pressure control valve for a vapor compression type refrigeration cycle having a radiator (200) for radiating heat of compressed refrigerant, an evaporator (400) for evaporating refrigerant and a heat exchanger (600) for performing heat exchange between the refrigerant at an outlet side of said evaporator and the refrigerant at an outlet side of said radiator, said pressure control valve being located between the outlet side of said radiator and an inlet side of said evaporator, said pressure control valve comprising:

a first temperature sensing chamber (311) which changes its internal pressure according to the refrigerant temperature in said chamber (311) at the outlet side of said radiator (200), a valve port (312) being controlled according to the refrigerant temperature in said chamber (311) at the outlet side of said radiator (200) to control the refrigerant pressure in said chamber (311) at the outlet side of said radiator (200); a control valve main body (310) having said first temperature sensing chamber (311) for adjusting an opening degree of said valve port by reacting mechanically to said internal pressure change of said first temperature sensing chamber (311); a casing (332, 334) for accommodating said control valve main body;

a second temperature sensing chamber (337) formed in said casing accommodating said first temperature sensing chamber and for communicating with an inlet side of said heat exchanger;

a pressure introduction passage (338) formed in said casing for introducing a refrigerant from said heat exchanger to an upstream side of said valve port in a refrigerant flowing direction;

wherein the pressure control valve includes a heat insulating member (401, 402) for preventing a heat transfer between said first temperature sensing chamber (311) and said pressure introduction passage (338).

2. A pressure control valve according to claim 1, wherein

the second temperature sensing chamber (337) is formed as a first refrigerant passage, the pressure introduction chamber (338) is formed as a second refrigerant passage and a separation portion (316, 317) is provided in the casing (332, 334), said first refrigerant passage (337) being for making a communication between the outlet side of said radiator (200) and an inlet side of said heat exchanger (600), said second refrigerant passage being for introducing a refrigerant from said heat exchanger (600) to an upstream side of said valve port (312) in a refrigerant flowing direction, said separation portion being for separating said first refrigerant passage and said second refrigerant passage;

the first temperature sensing chamber (311) changing its internal pressure according to a refrigerant temperature in said first refrigerant passage; and wherein

said pressure control valve comprises

a valve body (313) penetrating through said separation portion for controlling an opening degree of said valve port by reacting mechanically to the internal pressure change of said first temperature sensing chamber.

Patentansprüche

1. Drucksteuerventil für einen Dampfdruck-Kältemittelkreislauf mit einem Abstrahler (200) zum Abstrahlen von Wärme von komprimiertem Kältemittel, einem Verdampfer (400) zum Verdampfen von Kältemittel und einem Wärmetauscher (600) zum Ausführen eines Wärmetausches zwischen dem Kältemittel und einer Auslassseite des Verdampfers und des Kältemittels an einer Auslassseite des Abstrahlers, wobei das Drucksteuerventil zwischen der Auslassseite des Abstrahlers und der Einlassseite des Verdampfers angeordnet ist, und wobei das Drucksteuerventil umfasst:

eine erste Temperaturfühlerkammer (311), welche ihren inneren Druck in Übereinstimmung mit der Kältemitteltemperatur in der Kammer (311) an der Auslassseite des Abstrahlers (200) ändert,

eine Ventilöffnung (312), die in Übereinstimmung mit der Kältemitteltemperatur in der Kammer (311) an der Auslassseite des Abstrahlers (200) zur Steuerung des Kältemitteldrucks in der Kammer (311) an der Auslassseite des Abstrahlers (200) gesteuert wird;

ein Steuerventil-Hauptkörper (310), welcher die erste Temperaturfühlerkammer (311) zum Einstellen eines Öffnungsgrades der Ventilöffnung aufweist, indem er mechanisch auf die innere Druckänderung der ersten Temperaturfühlerkammer (311) reagiert;

ein Gehäuse (332, 334) zum Aufnehmen des Steuerventil-Hauptkörpers;

eine zweite Temperaturfühlerkammer (337), die in dem Gehäuse ausgebildet ist, welches die erste Temperaturfühlerkammer aufnimmt, und zur Verbindung mit einer Einlassseite des Wärmetauschers ausgebildet ist;

ein Druckeinleitungsdurchgang (338), der in dem Gehäuse zum Einleiten eines Kältemittels von dem Wärmetauscher zu einer stromaufwärtigen Seite der Ventilöffnung in einer Kältemittelströmungsrichtung ausgebildet ist;

wobei das Drucksteuerventil ein wärmeisolierendes Element (401, 402) zur Verhinderung einer Wärmeübertragung zwischen der ersten Temperaturfühlerkammer (311) und dem Druckeinleitungsdurchgang (338) enthält.

2. Drucksteuerventil gemäß Anspruch 1, wobei die zweite Temperaturfühlerkammer (337) als ein erster Kältemitteldurchgang ausgebildet ist, die Druckeinleitungskammer (338) als ein zweiter Kältemitteldurchgang ausgebildet ist und ein Abtrennungsabschnitt (316, 317) in dem Gehäuse (332, 334) vorgesehen ist, wobei der erste Kältemitteldurchgang (337) zur Herstellung einer Verbindung zwischen der Auslassseite des Abstrahlers (200) und einer Einlassseite des Wärmetauschers (600) vorgesehen ist, wobei der zweite Kältemitteldurchgang zum Einleiten eines Kältemittels aus dem Wärmetauscher (600) an eine stromaufwärtige Seite der Ventilöffnung (312) in einer Kältemittelströmungsrichtung vorgesehen ist, wobei der Abtrennungsabschnitt zum Abtrennen des ersten Kältemitteldurchgangs und des zweiten Kältemitteldurchgangs vorgesehen ist; die erste Temperaturfühlerkammer (311) ihren inneren Druck in Übereinstimmung mit einer Kältemitteltemperatur in dem ersten Kältemitteldurchgang ändert; und wobei das Drucksteuerventil

einen Ventilkörper (313) umfasst, der den Abtrennungsabschnitt durchdringt, zur Steuerung eines Öffnungsgrades der Ventilöffnung, indem er auf die innere Druckänderung der ersten Temperaturfühlerkammer mechanisch reagiert.

Revendications

1. Robinet à régulateur de pression pour cycle frigorifique de type à thermocompression comportant un radiateur (200) destiné à rayonner la chaleur du fluide frigorigène compressé, un évaporateur (400) destiné à évaporer le fluide frigorigène et un échangeur de chaleur (600) destiné à effectuer un échange de chaleur entre le fluide frigorigène au niveau du passage latéral de sortie dudit évaporateur et le fluide frigorigène au niveau du passage latéral de sortie dudit radiateur, ledit robinet à régulateur de pression étant situé entre le passage latéral de sortie dudit radiateur et un passage latéral d'entrée dudit évaporateur, ledit robinet à régulateur de pression comprenant :

une première chambre de détection de température (311) laquelle modifie sa pression interne conformément à la température du fluide frigorigène dans ladite chambre (311) au niveau du passage latéral de sortie dudit radiateur (200),

un passage du robinet (312) est contrôlé conformément à la température du fluide frigorigène dans ladite chambre (311) au niveau du passage latéral de sortie dudit radiateur (200) pour contrôler la pression du fluide frigorigène dans ladite chambre (311) au niveau du passage latéral de sortie dudit radiateur (200) ;

un corps principal du robinet à régulateur (310) comportant ladite première chambre de détection de température (311) destinée à ajuster un degré d'ouverture dudit passage du robinet en réagissant de façon mécanique à ladite modification de la pression interne de ladite première chambre de détection de température (311) ;

une enveloppe (302, 334) destinée à contenir ledit corps principal du robinet à régulateur ;

une seconde chambre de détection de température (337) conçue dans ladite enveloppe contenant ladite première chambre de détection de température et destinée à communiquer avec un passage latéral d'entrée dudit échangeur de chaleur ;

un conduit d'introduction de la pression (338) conçu dans ladite enveloppe afin d'introduire un fluide frigorigène depuis ledit échangeur de chaleur vers un côté en amont dudit passage du robinet dans la direction du fluide frigorigène circulant ;

dans lequel le robinet à régulateur de pression inclut un élément isolant (401, 402) destiné à empêcher un transfert de chaleur entre ladite première chambre de détection de température (311) et ledit conduit d'introduction de la pression (338). 5

2. Robinet à régulateur de pression selon la revendication 1, dans lequel la seconde chambre de détection de température (337) est conçue en tant que premier conduit à fluide frigorigène, la chambre d'introduction de la pression (338) est conçue en tant que second conduit à fluide frigorigène et une partie de séparation (316, 317) est prévue dans l'enveloppe (332, 334), ledit premier conduit à fluide frigorigène étant destiné à effectuer une communication entre le passage latéral de sortie dudit radiateur (200) et un passage latéral d'entrée dudit échangeur de chaleur (600) dudit second conduit à fluide frigorigène étant destiné à introduire un fluide frigorigène depuis ledit échangeur de chaleur (600) vers un côté amont dudit passage du robinet (312) dans la direction du fluide frigorigène circulant, ladite partie de séparation étant destinée à séparer ledit premier conduit à fluide frigorigène et ledit second conduit à fluide frigorigène ; 10 15 20 25

la première chambre de détection de température (311) modifiant sa pression interne conformément à une température du fluide frigorigène dans ledit premier conduit à fluide frigorigène ; et dans laquelle 30

ledit robinet régulateur de pression comprend un corps de robinet (313) pénétrant dans ladite partie de séparation afin de réguler un degré d'ouverture dudit passage de robinet en réagissant de façon mécanique à la modification de la pression interne de ladite première chambre de détection de la température. 35 40 45 50 55

FIG. 1

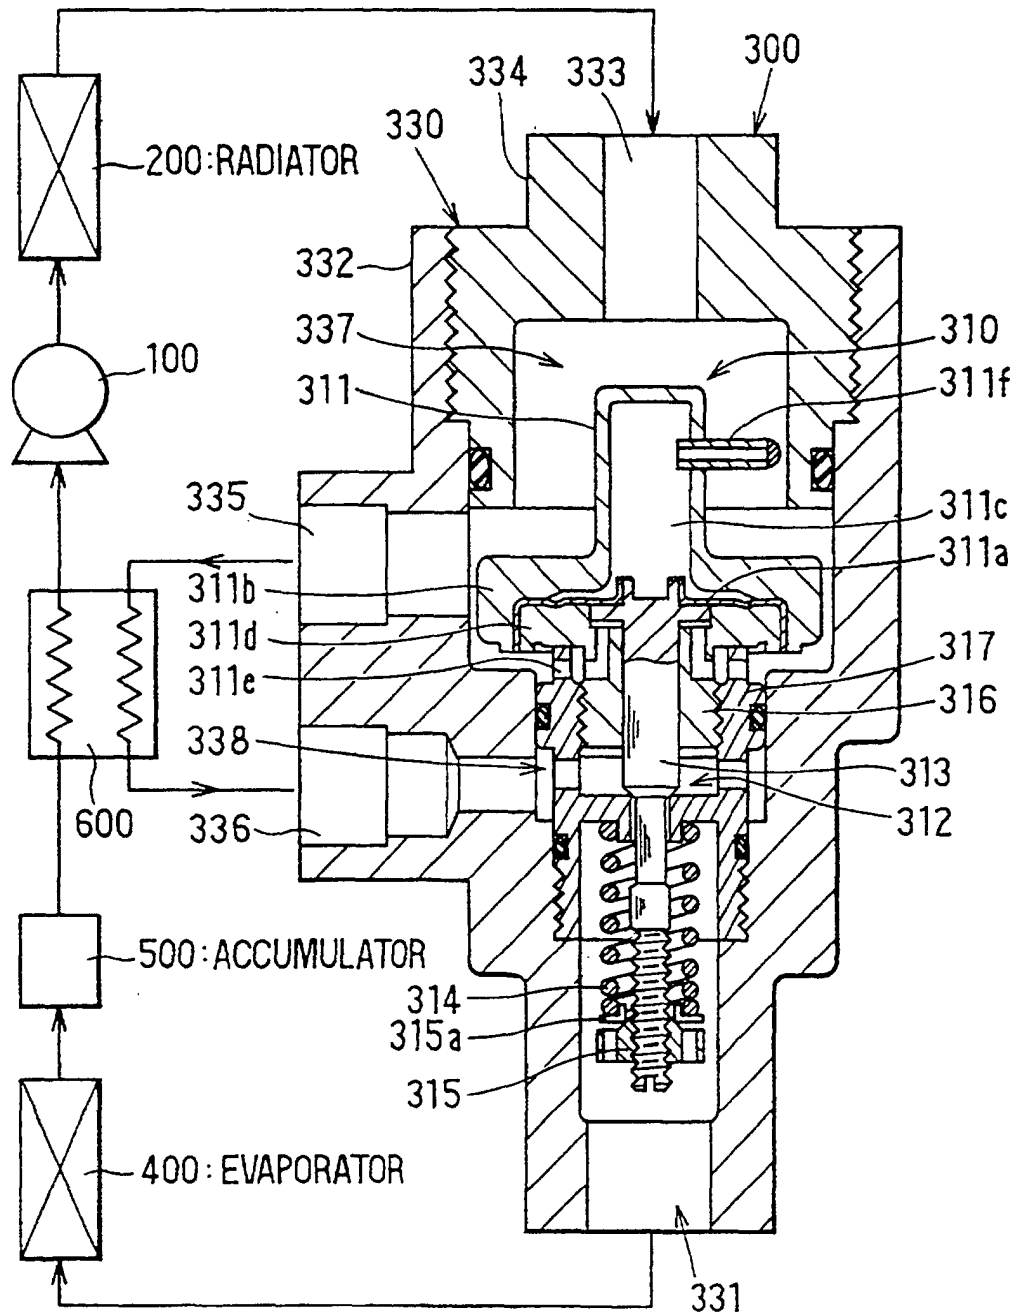


FIG. 2

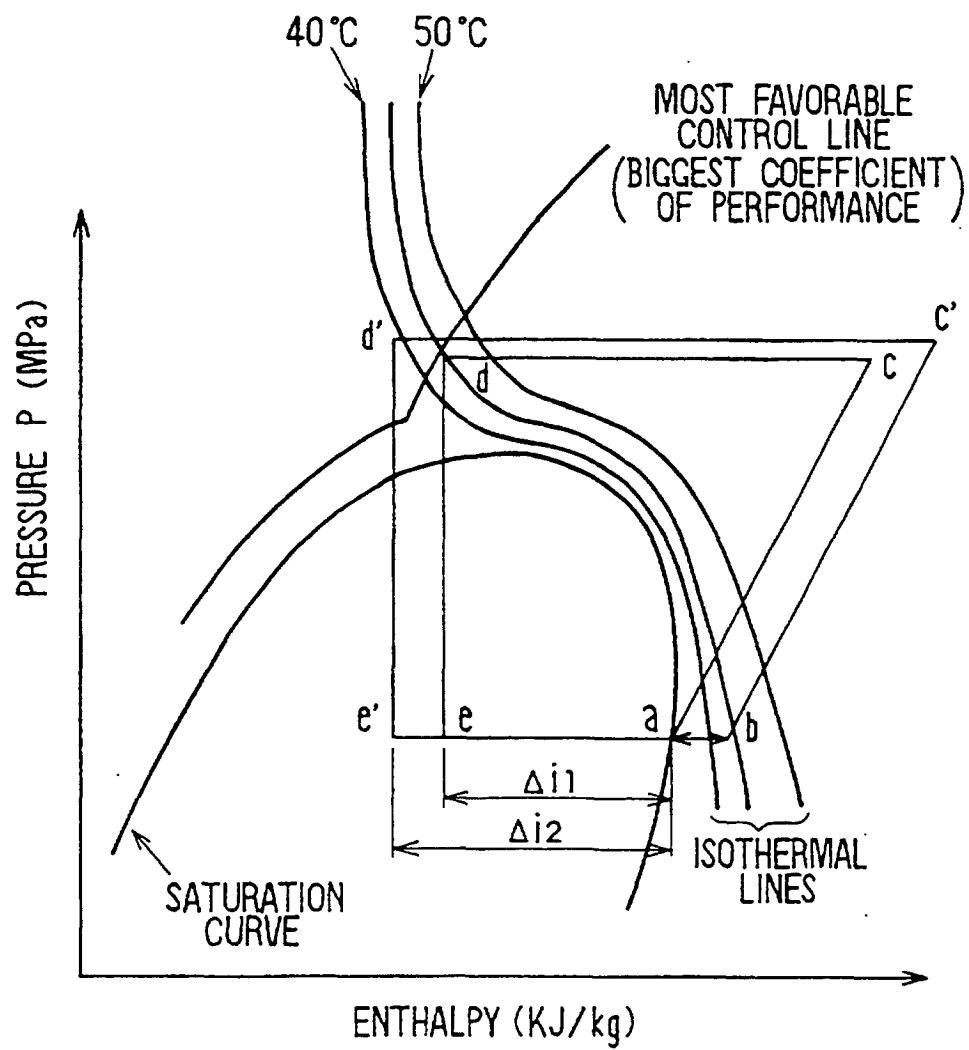


FIG. 3

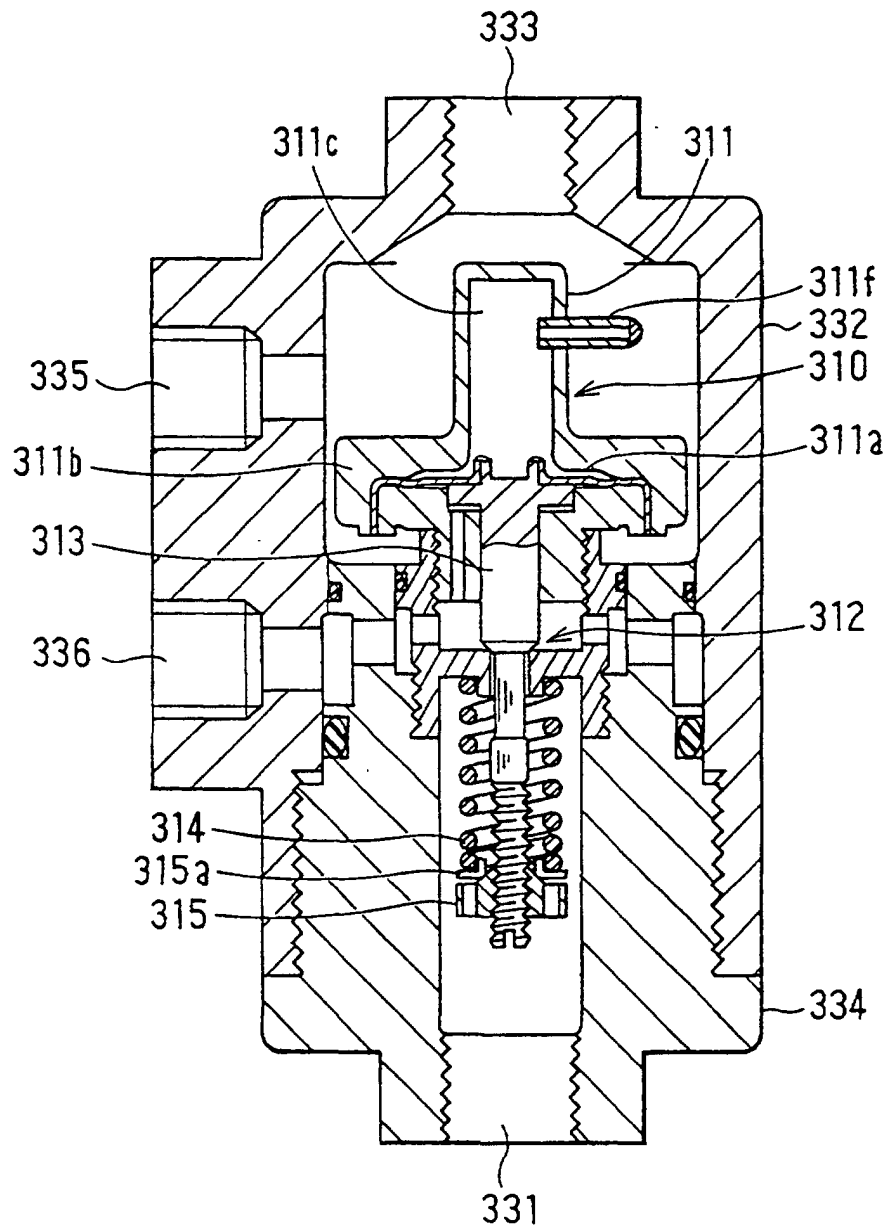


FIG. 4

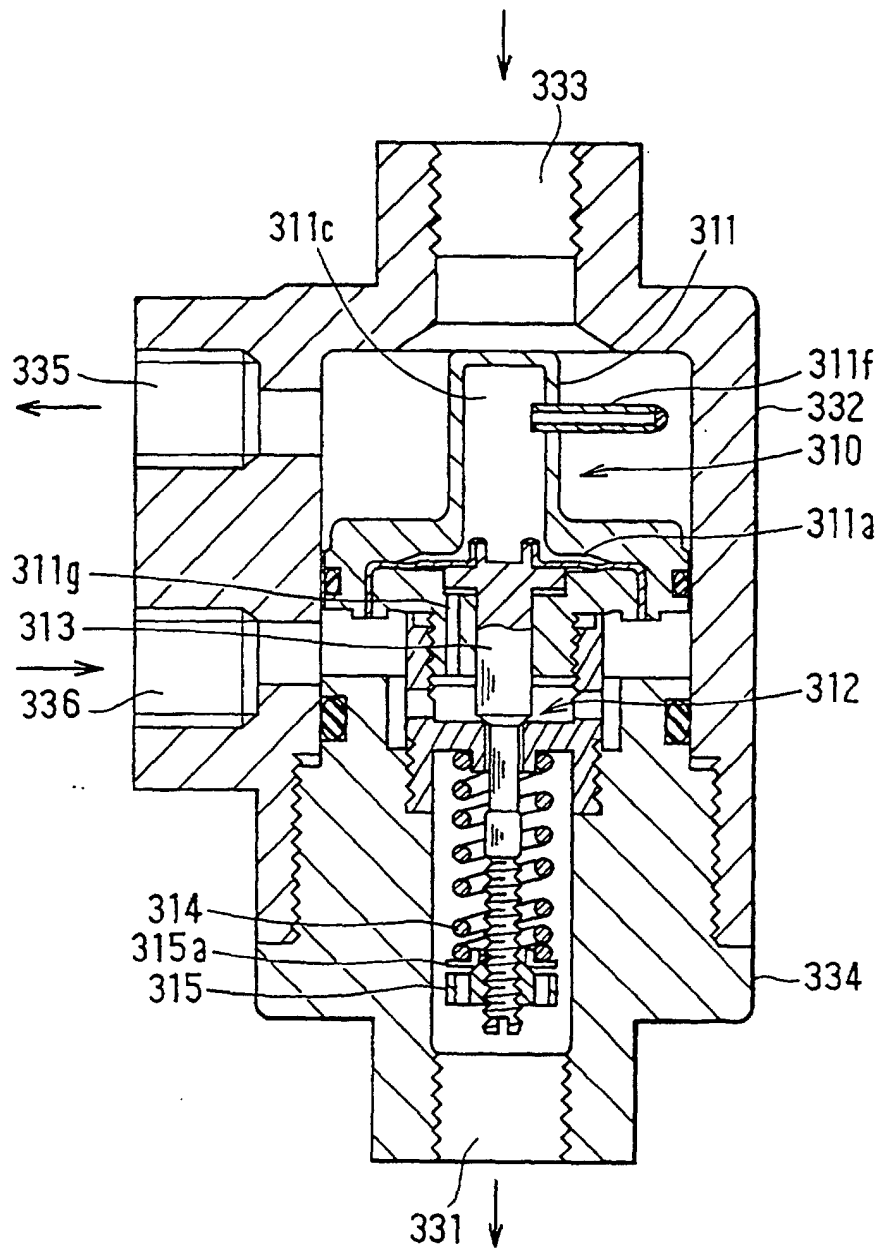


FIG. 5

